

Produkta datu lapa

Specifikācijas



RED STROBE/OFF-WHITE RING 0.6J 120VAC

XVPC6G4W

- ❗ Paziņojuma datums par preces pārtraukšanu 2015. gada 30. jūn.
- ❗ Pakalpojuma beigu datums: 2015. gada 31. dec.

❗ Pārtraukts

Galvenā

Produkta Sērija	Harmony XVP Universal
Produkta Vai Sastāvdaļas Veids	Indicator bank
Bākas Vai Indikatoru Vienības Veids	Illuminated unit with cream clamping ring
Signāla Veids	Zibēņo
Mounting Diamete	50 mm
Component Name	XVPC
Materiāls	Polycarbonate and polyamide
Gaismas Avots	Integral flash discharge tube, sarkans
Bulb Type	Flash discharge tube
[Us] Nominālais Barošanas Spriegums	120 V AC
Flash Energy	0,6 Dž

Papildinošs

Montāžas Stils	Customer assembly, up to 5 units
Connections - Terminals	Screw clamp terminals, <= 1 x 1.5 mm² with cable end
Marķējums	CE
[Ui] Rated Insulation Voltage	250 V IEC 60947-1
Nominal Voltage Limit	0.85...1.1 Un IEC 60947-5-1
Current Consumption	<= 20 mA AC
[Uimp] Rated Impulse Withstand Voltage	4 kV IEC 60947-1
Mirgošanas Biežums	0,6...2 Hz
Service Life In Hours	1000 h -25...50 °C
Cad Overall Width	56 mm
Cad Overall Height	65 mm
Cad Overall Depth	56 mm
Neto Svārs	0,115 kg

Vide

Produkta Sertifikācija	cULus
Standarti	EN/IEC 60947-5-1

Ir sasniegts maksimālais salīdzināmo produktu skaits. Lūdzu, atveriet sadaļu Salīdzināt produktus #SAITE# un izdzēsiet kādu produktu, lai turpinātu.

Aizsargparklājumus	TC
Apkārtejā Gaisa Temperatūra Uzglabāšanai	-40...70 °C
Electrical Shock Protection Class	Class I on support tube IEC 61140 II klase on base unit IEC 61140
Ip Degree Of Protection	IP65 IEC 60529

Līguma garantija


Garantija	18 months
-----------	-----------

Dimensions Drawings

Indicator Bank without Audible Unit

Dimensions

Below drawing shows the minimum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

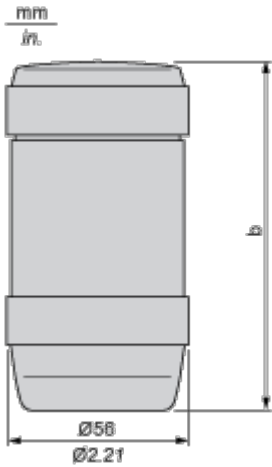

Number of illuminated units	b in mm	b in in.
1	108	4.25
2	170	6.69
3	232	9.13
4	294	11.57
5	356	14.02