

ASL09 ... ASL16 2-stack 3-pole contactors

4 to 7.5 kW

DC operated



ASL09-30-32

Description

ASL09 ... ASL16 contactors are mainly used for controlling 3-phase motors and power circuits up to 690 V AC and 220 V DC.

These contactors are of the block type design with:

- 1st stack with 3 main poles and 1 N.O. built-in auxiliary contact
- 2nd stack with permanently fixed 2 N.O. + 2 N.C. auxiliary contact block. The auxiliary contact elements are mechanically linked (side-marked symbol) and the N.C. auxiliary contacts are mirror contacts
- control circuit: low consumption (3 W at pull-in and holding) DC operated with solid core magnet. Suitable for direct control by PLC outputs (the polarity on the coil terminals A1+ and A2- must be respected)
- a comprehensive range of accessories.


Ordering details

IEC Rated power 400 V AC-3 kW	operational current $\theta \leq 40^\circ\text{C}$ AC-1 A	UL/CSA 3-phase motor rating 480 V hp	General use rating 600 V AC A	Rated control voltage U_c (1) V DC	Auxiliary contacts fitted I L	Type	Order code	Weight Pkg (1 pce) kg
4	22	5	20	24	3 2	ASL09-30-32-81	1SBL103001R8132	0.320
				48	3 2	ASL09-30-32-83	1SBL103001R8332	0.320
				110	3 2	ASL09-30-32-86	1SBL103001R8632	0.320
				220	3 2	ASL09-30-32-88	1SBL103001R8832	0.320
5.5	24	7.5	20	24	3 2	ASL12-30-32-81	1SBL113001R8132	0.320
				48	3 2	ASL12-30-32-83	1SBL113001R8332	0.320
				110	3 2	ASL12-30-32-86	1SBL113001R8632	0.320
				220	3 2	ASL12-30-32-88	1SBL113001R8832	0.320
7.5	24	10	20	24	3 2	ASL16-30-32-81	1SBL123001R8132	0.320
				48	3 2	ASL16-30-32-83	1SBL123001R8332	0.320
				110	3 2	ASL16-30-32-86	1SBL123001R8632	0.320
				220	3 2	ASL16-30-32-88	1SBL123001R8832	0.320

Note: for multiple packaging, please contact your ABB local sales organization.

(1) Other control voltages see voltage code table.

Main dimensions mm, inches

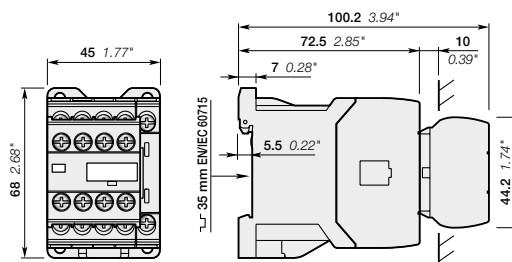

ASL09, ASL12, ASL16

Voltage code table

The below tables indicate the available coil voltages and corresponding digits for order codes. When placing an order, please give either type or order code. Select a standard contactor from ordering detail pages. Change the **coil voltage code** in the type or in the order code according to the table below. Example: for contactor AS09-30-10 and coil 42 V 50/60 Hz, type is AS09-30-10-**21** and order code is 1SBL101001R**21**10.

3-pole contactors

4

Type

AS16 - 30 - 10 - 26

AS

ASL

Contactor type

AC operated

DC operated

Auxiliary contacts

N.O.

N.C.

Main contacts

N.O.

N.C.

Order code

1SBL121001R

26

10

AC coil code

50 Hz

60 Hz

20

24 V

24 V

21

42 V

42 V

22

48 V

48 V

23

110 V

110 V

24

115 V

115 V

16

-

120 V

25

220 V

220 V

26

230 V

230 V

27

240 V

240 V

17

-

277 V

13

380 V

-

28

400 V

400 V

29

415 V

415 V

DC coil code

80

12 V

81

24 V

83

48 V

84

60 V

86

110 V

87

125 V

88

220 V

89

240 V

3-pole reversing contactors

VAS12

S

EM

26

M

VAS

VASL

Contactor type

AC operated

DC operated

Surge suppressor

Order code

1SBK113800M

26

00

AC coil code

50 Hz

60 Hz

20

24 V

24 V

21

42 V

42 V

22

48 V

48 V

23

110 V

110 V

24

115 V

115 V

16

-

120 V

25

220 V

220 V

26

230 V

230 V

27

240 V

240 V

17

-

277 V

13

380 V

-

28

400 V

400 V

29

415 V

415 V

DC coil code

80

12 V (1)

81

24 V

83

48 V

84

60 V

86

110 V

87

125 V

88

220 V

89

240 V

(1) Not for VASL...SEM

Contactor relays

NS

40

E

26

NS

NSL

Contactor type

AC operated

DC operated

Number contacts

N.O.

N.C.

Order code

1SBH101001R

26

40

AC coil code

50 Hz

60 Hz

20

24 V

24 V

21

42 V

42 V

22

48 V

48 V

23

110 V

110 V

24

115 V

115 V

16

-

120 V

25

220 V

220 V

26

230 V

230 V

27

240 V

240 V

17

-

277 V

13

380 V

-

28

400 V

400 V

29

415 V

415 V

DC coil code

80

12 V

81

24 V

83

48 V

84

60 V

86

110 V

87

125 V

88

220 V

89

240 V