Specifications





variable speed drive ATV71 -37kW-50HP - 240V - w/o EMC filter-graphic terminal

ATV71HD37M3X

() Discontinued on: 01-Jun-2021

() To be end-of-service on: 01-Jan-2026

Main

Mann	
Range Of Product	Altivar 71
Product Or Component Type	Variable speed drive
Product Specific Application	Complex, high-power machines
Component Name	ATV71
Motor Power Kw	37 kW, 3 phases at 200240 V
Motor Power Hp	50 hp, 3 phases at 200240 V
Maximum Motor Cable Length	100 m shielded cable 200 m unshielded cable
Power Supply Voltage	200240 V - 1510 %
Network Number Of Phases	3 phases
Line Current	127 A for 240 V 3 phases 37 kW / 50 hp 141 A for 200 V 3 phases 37 kW / 50 hp
Emc Filter	Without EMC filter
Assembly Style	With heat sink
Apparent Power	52.8 kVA at 240 V 3 phases 37 kW / 50 hp
Prospective Line Isc	22 kA for 3 phases
Nominal Output Current	144 A at 2.5 kHz 230 V 3 phases 37 kW / 50 hp
Maximum Transient Current	216 A for 60 s 3 phases 37 kW / 50 hp 238 A for 2 s 3 phases 37 kW / 50 hp
Output Frequency	0.1599 Hz
Nominal Switching Frequency	2.5 kHz
Switching Frequency	116 kHz adjustable 2.516 kHz with derating factor
Asynchronous Motor Control Profile	ENA (Energy adaptation) system for unbalanced loads Sensorless flux vector control (SFVC) (voltage or current vector) Flux vector control (FVC) with sensor (current vector) Voltage/frequency ratio (2 or 5 points)
Type Of Polarization	No impedance for Modbus

Complementary

Product Destination	Synchronous motors Asynchronous motors
Power Supply Voltage Limits	170264 V

Power Supply Frequency Limits 47.563 Hz Speed Range 1100 for asynchronous motor in open-loop mode, without speed feedback 150 for synchronous motor in open-loop mode, without speed feedback 150 for synchronous motor in open-loop mode, without speed feedback 2.59 for synchronous motor in open-loop mode, without speed feedback 0.2 Tn t 461 % in open-loop mode, without speed feedback 0.2 Tn to Tn Torque Accuracy 461 % in open-loop mode, without speed feedback 7.10 % of nominal speed in closed-stop mode with encoder feedback 7.17 % of nominal motor torque 410 % for 60 s every 10 minutes 220 % of nominal motor torque 410 % for 60 s every 10 minutes 200 % without braking resistor 30 % without braking resistor 30 % without braking resistor Synchronous Motor Control Profile Regulation Loop Adjustable P1 regulator Motor Stip Compensation Adjustable in voltage/requency ratio (2 or 5 points) Suppressable Diagnostic 1 LED (red) for drive voltage Diagnostic 1 LED (red) for drive voltage 1 KT, RAZ, RAB, LL, LIB, PWR With a NEMA Type1 K13 wire(SJUE Coable at 45 °C, copper 70 °C / PVC Without mounting k1: 1 wire(SJUE Coabl					
Speed Range 1100 for asynchronous motor in open-loop mode, without speed feedback Speed Range 1100 for asynchronous motor in open-loop mode, without speed feedback Speed Accuracy +/011 % of nominal speed in obset-loop mode with encoder feedback Torque Accuracy +/05 % of nominal speed in obset-loop mode, without speed feedback Transient Overtorque 170 % of nominal motor torque +/- 10 % for 80 s every 10 minutes 220 % of nominal motor torque +/- 10 % for 80 s every 10 minutes 220 % of nominal motor torque +/- 10 % for 80 s every 10 minutes 230 % without braking ro hold resistor 30 % without braking ro hold resistor 30 % without braking ro hold resistor 30 % without speed feedback Synchronous Motor Control Vector control without speed feedback Profile Adjustable PI regulator Motor Slip Compensation Adjustable PI regulator Motor Slip Compensation Adjustable PI regulator Motor Slip Conspensation Adjustable PI regulator Type Of Cable For Mounting In An With a NEMA Type 1 kit: 3 wire(s)/EC cable at 40 °C, copper 75 °C / PVC With an IP21 or an IP31 kit: 3 wire(s)/EC cable at 40 °C, copper 75 °C / PVC With an IP21 or an IP31 kit: 3 wire(s)/EC cable at 40 °C, copper 70 °C / PVC With an IP21	Power Supply Frequency	5060 Hz - 55 %			
11000 for asynchronous motor in open-loop mode, without speed feedback Speed Accuracy +: 0.01 % of nominal speed in closed-loop mode, without speed feedback Torque Accuracy +: 10 % of nominal sign without speed feedback -: 10 % of nominal sign without speed feedback -: 10 % of nominal motor torque +: 10 % for 60 severy 10 minutes 220 % of nominal motor torque +: 10 % for 60 severy 10 minutes -: 10 % of nominal motor torque +: 10 % for 2 s Braking Torque -: 50 % with braking or hold residor 30 % without having residor -: 50 % with braking or hold residor Synchronous Motor Control Vector control without speed feedback Regulation Loop Adjustable Autoralic whatever the load Not available in voltage/frequency ratio (2 or 5 points) Suppressable Diagnostic Diagnostic 1 LED (red) for drive voltage Output Voltage -: power supply voltage Insulation Electrical between power and control Type Of Cable For Mounting In An Image capacity: 2.5 mm², AWG 14 (Al1-Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, L11L16, PWR) Tightening Torque 0.8 N.m (Al1-Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, L11L16, PWR) Tightening Torque 0.8 N.m (Al1-Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, L11L16, PWR) At N.m, 300 lb.m (Power Supply Frequency Limits	47.563 Hz			
+/: 10 % of nominal slip without speed feedback 4.2. Th to Tn Torque Accuracy +/: 15 % in open-loop mode, without speed feedback +/: 5 % in closed-loop mode with encoder feedback Transient Overtorque 170 % of nominal motor torque +/: 10 % for 60 s every 10 minutes 220 % of nominal motor torque +/: 10 % for 60 s every 10 minutes 220 % of nominal motor torque +/: 10 % for 60 s every 10 minutes 220 % of nominal motor torque +/: 10 % for 60 s every 10 minutes 220 % of nominal motor torque +/: 10 % for 60 s every 10 minutes Synchronous Motor Control Vector control without speed feedback Synchronous Motor Control Vector control without speed feedback Regulation Loop Adjustable PI regulator Motor Slip Compensation Adjustable PI regulator Motor Slip Compensation Adjustable PI regulator Motor Slip Compensation Adjustable PI regulator Insulation Electrical between power and control Type Of Cable For Mounting In Am With a NEMA Type 1 kit: 3 wire(s)/EC cable at 40 °C, copper 70 °C / PVC Without mounting kit: 1 wire(s)/EC cable at 40 °C, copper 70 °C / PVC Without mounting kit: 1 wire(s)/EC cable at 40 °C, copper 70 °C / PVC Without mounting kit: 1 wire(s)/EC cable at 40 °C, copper 70 °C / PVC Without mounting kit: 1 wire(s)/EC cable at 40 °C, copper	Speed Range	11000 for asynchronous motor in closed-loop mode with encoder feedback			
+/- 5 % in closed-loop mode with encoder feedback Transient Overtorque 170 % of nominal motor torque +/- 10 % for 60 s every 10 minutes 220 % of nominal motor torque +/- 10 % for 60 s every 10 minutes 220 % of nominal motor torque +/- 10 % for 62 s Braking Torque <= 150 % withbacking or holds resistor	Speed Accuracy	+/- 0.01 % of nominal speed in closed-loop mode with encoder feedback 0.2 Tn to Tn +/- 10 % of nominal slip without speed feedback 0.2 Tn to Tn			
220 % of nominal motor torque +/- 10 % for 2 s Braking Torque <= 150 % with braking or holst resistor	Torque Accuracy				
30 % without braking resistor Synchronous Motor Control Vector control without speed feedback Profile Adjustable P1 regulator Motor Slip Compensation Adjustable Automatic whatever the load Not available in voltage/frequency ratio (2 or 5 points) Suppressable Diagnostic Diagnostic 1 LED (red) for drive voltage Output Voltage <= power supply voltage	Transient Overtorque				
Profile Regulation Loop Adjustable P1 regulator Motor Slip Compensation Adjustable P1 regulator Motor Slip Compensation Adjustable P1 regulator Automatic whatever the load Not available in voltage/frequency ratio (2 or 5 points) Suppressable Diagnostic 1 LED (red) for drive voltage Dutput Voltage <= power supply voltage	Braking Torque				
Motor Slip Compensation Adjustable Automatic whatever the load Not available in voltage/frequency ratio (2 or 5 points) Suppressable Diagnostic 1 LED (red) for drive voltage Insulation Electrical between power and control Type Of Cable For Mounting In An Enclosure With a NEMA Type1 kit: 3 wire(s)UL 508 cable at 40 °C, copper 70 °C / PVC Without mounting kit: 1 wire(s)EC cable at 45 °C, copper 70 °C / PVC Without mounting kit: 1 wire(s)EC cable at 45 °C, copper 70 °C / ZLPE/EPR Electrical Connection Terminal, clamping capacity: 2.5 mm², AWG 14 (Al1-/Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, L11L16, PWR) Tightening Torque 0.6 N.m (Al1-/Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, L11L16, PWR) Tightening Torque 0.6 N.m (Al1-/Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, L11L16, PWR) Supply Internal supply for reference potentiometer (1 to 10 KOhm): 10.5 V DC +/- 5 %, < mA, protection type: overload and short-circuit protection Internal supply: 24 V DC (2127 V), <200 mA, protection type: overload and short-circuit protection		Vector control without speed feedback			
Automatic whatever the load Not available in voltage/frequency ratio (2 or 5 points) Suppressable Diagnostic 1 LED (red) for drive voltage Insulation Electrical between power and control Type Of Cable For Mounting In An With a NEMA Type1 kit: 3 wire(s)UL 508 cable at 40 °C, copper 75 °C / PVC With an IP21 or an IP31 kit: 3 wire(s)IEC cable at 40 °C, copper 70 °C / PVC Without mounting kit: 1 wire(s)IEC cable at 45 °C, copper 90 °C / LPVC Without mounting kit: 1 wire(s)IEC cable at 45 °C, copper 90 °C / LPVE/EPR Electrical Connection Terminal, clamping capacity: 25 mm², AWG 14 (Al1-/Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, L11L16, PWR) Terminal, clamping capacity: 150 mm² (L1/R, L2/S, L3/T, U/T1, V/T2, W/T3, PC/- PO, PA+, PA, PB) Supply Internal supply for reference potentiometer (1 to 10 kDhm): 10.5 V DC +/- 5 %, < mA, protection type: overload and short-circuit protection Internal supply: 24 V DC (2127 V), <200 mA, protection type: overload and short circuit protection Analogue Input Number 2 Analogue Input Type Al1-/Al1+ bipolar differential voltage: +/- 10 V DC 24 V max, resolution 11 bits Al2 software-configurable current: 020 mA, impedance: 30000 Oh resolution 11 bits Input Sampling Time 2 ms +- 0.5 ms (Al1-/Al1+) - analog input(s) 2 ms +- 0.5 ms (Al2) - analog input(s) 2 ms +- 0.5 ms (Al2) - otis malog output(s) R1A, R1B, R1C 7 ms, tolerance +- 0.5 ms for discrete output(s) R2A, R2B 7 ms, tolerance +- 0.5 ms for discrete output(s) R2A, R2B 7 ms, tolerance +- 0.5 ms for discrete output(s) R2A, R2B 7 ms, tolerance +- 0.5 ms for discrete output(s) R2A, R2B 7 ms, tolerance +- 0.5 ms for discrete outp	Regulation Loop	Adjustable PI regulator			
Output Voltage <= power supply voltage	Motor Slip Compensation	Automatic whatever the load Not available in voltage/frequency ratio (2 or 5 points)			
Insulation Electrical between power and control Type Of Cable For Mounting In An Enclosure With a NEMA Type1 kit: 3 wire(s)IEC cable at 40 °C, copper 75 °C / PVC Without mounting kit: 1 wire(s)IEC cable at 40 °C, copper 70 °C / ZLPE/EPR Electrical Connection Terminal, clamping capacity: 2.5 mm², AWG 14 (Al1-/Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, L11L6, PWR) Terminal, clamping capacity: 2.5 mm², AWG 14 (Al1-/Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, L11L6, PWR) Terminal, clamping capacity: 150 mm² (L1/R, L2/S, L3/T, U/T1, V/T2, W/T3, PC/-PO, PA/+, PA, PB) Tightening Torque 0.6 N.m (Al1-/Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, L11L16, PWR) A11 N.m, 360 lb.in (L1/R, L2/S, L3/T, U/T1, V/T2, W/T3, PC/-PO, PA/+, PA, PB) Supply Internal supply for reference potentiometer (1 to 10 kOhm): 10.5 V DC +/- 5 %, <	Diagnostic	1 LED (red) for drive voltage			
Type Of Cable For Mounting In An Enclosure With a NEMA Type1 kit: 3 wire(s)!LC cable at 40 °C, copper 70 °C / PVC Without mounting kit: 1 wire(s)!EC cable at 45 °C, copper 70 °C / PVC Without mounting kit: 1 wire(s)!EC cable at 45 °C, copper 90 °C / XLPE/EPR Electrical Connection Terminal, clamping capacity: 2.5 mm², AWG 14 (Al1-/Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, L11L16, PWR) Terminal, clamping capacity: 2.5 mm², AWG 14 (Al1-/Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, L11L16, PWR) Terminal, clamping capacity: 50 mm² (L1/R, L2/S, L3/T, U/T1, V/T2, W/T3, PC/- PO, PA/+, PA, PB) Supply 0.6 N.m (Al1-/Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, L11L16, PWR) 41 N.m, 360 lb.in (L1/R, L2/S, L3/T, U/T1, V/T2, WT3, PC/- PO, PA/+, PA, PB) Supply Internal supply for reference potentiometer (1 to 10 kOhm): 10.5 V DC +/- 5 %, < mA, protection type: overload and short-circuit protection Internal supply: 24 V DC (2127 V), <200 mA, protection type: overload and short-circuit protection	Output Voltage	<= power supply voltage			
Enclosure With an IP21 or an IP31 kit: 3 wire(s)IEC cable at 40 °C, copper 70 °C / PVC Without mounting kit: 1 wire(s)IEC cable at 45 °C, copper 90 °C / XLPZ/EPR Electrical Connection Terminal, clamping capacity: 2.5 mm², AWG 14 (Al1-/Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, L11L1G, PWR) Terminal, clamping capacity: 150 mm² (L1/R, L2/S, L3/T, U/T1, V/T2, W/T3, PC/-PO, PA/+, PA, PB) Tightening Torque 0.6 N.m (Al1-/Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, L11L1G, PWR) At N.m, 360 lb.in (L1/R, L2/S, L3/T, U/T1, V/T2, W/T3, PC/-PO, PA/+, PA, PB) Supply Internal supply for reference potentiometer (1 to 10 kOhm): 10.5 V DC +/-5 %, < mA, protection type: overload and short-circuit protection	Insulation	Electrical between power and control			
R1C, R2A, R2B, L11LI6, PWR) Terminal, clamping capacity: 150 mm² (L1/R, L2/S, L3/T, U/T1, V/T2, W/T3, PC/-PO, PA/+, PA, PB) Tightening Torque 0.6 N.m (Al1-/Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, L11LI6, PWR) 41 N.m, 360 lb.in (L1/R, L2/S, L3/T, U/T1, V/T2, W/T3, PC/-PO, PA/+, PA, PB) Supply Internal supply for reference potentiometer (1 to 10 kOhm): 10.5 V DC +/- 5 %, <		With an IP21 or an IP31 kit: 3 wire(s)IEC cable at 40 °C, copper 70 °C / PVC Without mounting kit: 1 wire(s)IEC cable at 45 °C, copper 70 °C / PVC			
41 N.m, 360 Ib.in (L1/R, L2/S, L3/T, U/T1, V/T2, W/T3, PC/-, PO, PA/+, PA, PB) Supply Internal supply for reference potentiometer (1 to 10 kOhm): 10.5 V DC +/- 5 %, <	Electrical Connection	Terminal, clamping capacity: 150 mm² (L1/R, L2/S, L3/T, U/T1, V/T2, W/T3, PC/-,			
mA, protection type: overload and short-circuit protection Internal supply: 24 V DC (2127 V), <200 mA, protection type: overload and short-circuit protection	Tightening Torque				
Analogue Input Type Al1-/Al1+ bipolar differential voltage: +/- 10 V DC 24 V max, resolution 11 bits + s Al2 software-configurable current: 020 mA, impedance: 242 Ohm, resolution 11 bits Al2 software-configurable voltage: 010 V DC 24 V max, impedance: 30000 Ohr resolution 11 bits Input Sampling Time 2 ms +/- 0.5 ms (Al1-/Al1+) - analog input(s) 2 ms +/- 0.5 ms (Al1-/Al1+) - analog input(s) 2 ms +/- 0.5 ms (Al1-/Al1+) - analog input(s) 2 ms +/- 0.5 ms (Al2) - analog input(s) 2 ms +/- 0.5 ms (L10) f configured as logic input - discrete input(s) Response Time <= 100 ms in STO (Safe Torque Off)	Supply	Internal supply: 24 V DC (2127 V), <200 mA, protection type: overload and short-			
Al2 software-configurable current: 020 mA, impedance: 242 Ohm, resolution 11 bits Al2 software-configurable voltage: 010 V DC 24 V max, impedance: 30000 Ohr resolution 11 bits Input Sampling Time 2 ms +/- 0.5 ms (Al1-/Al1+) - analog input(s) 2 ms +/- 0.5 ms (Al2) - analog input(s) 2 ms +/- 0.5 ms (Al2) - analog input(s) 2 ms +/- 0.5 ms (L10) - discrete input(s) 2 ms +/- 0.5 ms (L10) if configured as logic input - discrete input(s) Response Time <= 100 ms in STO (Safe Torque Off)	Analogue Input Number	2			
2 ms +/- 0.5 ms (Al2) - analog input(s) 2 ms +/- 0.5 ms (L11L15) - discrete input(s) 2 ms +/- 0.5 ms (L16)if configured as logic input - discrete input(s) Response Time <= 100 ms in STO (Safe Torque Off)	Analogue Input Type	Al2 software-configurable voltage: 010 V DC 24 V max, impedance: 30000 Ohm,			
AO1 2 ms, tolerance +/- 0.5 ms for analog output(s) R1A, R1B, R1C 7 ms, tolerance +/- 0.5 ms for discrete output(s) R2A, R2B 7 ms, tolerance +/- 0.5 ms for discrete output(s) Absolute Accuracy Precision +/- 0.6 % (Al1-/Al1+) for a temperature variation 60 °C +/- 0.6 % (Al2) for a temperature variation 60 °C +/- 1 % (AO1) for a temperature variation 60 °C +/- 0.15 % of maximum value (Al1-/Al1+, Al2)	Input Sampling Time	2 ms +/- 0.5 ms (Al2) - analog input(s) 2 ms +/- 0.5 ms (LI1LI5) - discrete input(s)			
+/- 0.6 % (Al2) for a temperature variation 60 °C +/- 1 % (AO1) for a temperature variation 60 °C Linearity Error +/- 0.15 % of maximum value (Al1-/Al1+, Al2)	Response Time	AO1 2 ms, tolerance +/- 0.5 ms for analog output(s) R1A, R1B, R1C 7 ms, tolerance +/- 0.5 ms for discrete output(s)			
	Absolute Accuracy Precision	+/- 0.6 % (Al2) for a temperature variation 60 °C			
	Linearity Error				
Analogue Output Number 1	Analogue Output Number				

Analogue Output Type	AO1 software-configurable logic output 10 V 20 mA
	AO1 software-configurable current 020 mA, impedance: 500 Ohm, resolution 10 bits
	AO1 software-configurable voltage 010 V DC, impedance: 470 Ohm, resolution 10
	bits
Discrete Output Number	2
Discrete Output Type	Configurable relay logic: (R1A, R1B, R1C) NO/NC - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles
Minimum Switching Current	3 mA at 24 V DC for configurable relay logic
Maximum Switching Current	R1, R2: 2 A at 250 V AC inductive load, cos phi = 0.4
	R1, R2: 2 A at 30 V DC inductive load, cos phi = 0.4
	R1, R2: 5 A at 250 V AC resistive load, cos phi = 1 R1, R2: 5 A at 30 V DC resistive load, cos phi = 1
Discrete Input Number	7
-	
Discrete Input Type	Ll1Ll5: programmable 24 V DC with level 1 PLC, impedance: 3500 Ohm Ll6: switch-configurable 24 V DC with level 1 PLC, impedance: 3500 Ohm
	LI6: switch-configurable PTC probe 06, impedance: 1500 Ohm
	PWR: safety input 24 V DC, impedance: 1500 Ohm conforming to ISO 13849-1 level
	d
Discrete Input Logic	Negative logic (sink) (LI1LI5), > 16 V (state 0), < 10 V (state 1) Positive logic (source) (LI1LI5), < 5 V (state 0), > 11 V (state 1)
	Negative logic (sink) (LI6)if configured as logic input, > 16 V (state 0), < 10 V (state 1)
	Positive logic (source) (LI6)if configured as logic input, < 5 V (state 0), > 11 V (state
	1)
Acceleration And Deceleration	Automatic adaptation of ramp if braking capacity exceeded, by using resistor
Ramps	S, U or customized Linear adjustable separately from 0.01 to 9000 s
Braking To Standstill	By DC injection
Protection Type	Against exceeding limit speed: drive
	Against input phase loss: drive
	Break on the control circuit: drive
	Input phase breaks: drive
	Line supply overvoltage: drive
	Line supply undervoltage: drive Overcurrent between output phases and earth: drive
	Overheating protection: drive
	Overvoltages on the DC bus: drive
	Short-circuit between motor phases: drive
	Thermal protection: drive
	Motor phase break: motor
	Power removal: motor Thermal protection: motor
Insulation Resistance	> 1 mOhm 500 V DC for 1 minute to earth
Frequency Resolution	Analog input: 0.024/50 Hz
	Display unit: 0.1 Hz
Communication Port Protocol	CANopen
	Modbus
Connector Type	1 RJ45 (on front face) for Modbus
	1 RJ45 (on terminal) for Modbus Male SUB-D 9 on RJ45 for CANopen
Physical Interface	2-wire RS 485 for Modbus
Transmission Frame	RTU for Modbus
Transmission Rate	
nanomiosion nate	4800 bps, 9600 bps, 19200 bps, 38.4 Kbps for Modbus on terminal 9600 bps, 19200 bps for Modbus on front face
	20 kbps, 50 kbps, 125 kbps, 250 kbps, 500 kbps, 1 Mbps for CANopen
Data Format	8 bits, 1 stop, even parity for Modbus on front face
	8 bits, odd even or no configurable parity for Modbus on terminal
Number Of Addresses	1127 for CANopen 1247 for Modbus
Mallad Of Assess	
Method Of Access	Slave CANopen

Marking	CE
Operating Position	Vertical +/- 10 degree
Height	550 mm
Depth	266 mm
Width	320 mm
Net Weight	37 kg
Option Card	Communication card for CC-Link Controller inside programmable card Communication card for DeviceNet Communication card for EtherNet/IP Communication card for Fipio I/O extension card Communication card for Interbus-S Interface card for encoder Communication card for Modbus Plus Communication card for Modbus TCP Communication card for Modbus/Uni-Telway Overhead crane card Communication card for Profibus DP Communication card for Profibus DP

Environment

Noise Level	64 dB conforming to 86/188/EEC				
Dielectric Strength	2830 V DC between earth and power terminals 4230 V DC between control and power terminals				
Electromagnetic Compatibility	1.2/50 μs - 8/20 μs surge immunity test level 3 conforming to IEC 61000-4-5 Conducted radio-frequency immunity test level 3 conforming to IEC 61000-4-6 Electrical fast transient/burst immunity test level 4 conforming to IEC 61000-4-4 Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test level 3 conforming to IEC 61000-4-3 Voltage dips and interruptions immunity test conforming to IEC 61000-4-11				
Standards	IEC 60721-3-3 class 3S2 IEC 60721-3-3 class 3C1 UL Type 1				
Product Certifications	GOST UL NOM 117 CSA C-Tick				
Pollution Degree	2 conforming to EN/IEC 61800-5-1 3 conforming to UL 840				
lp Degree Of Protection	IP20 on upper part without blanking plate on cover conforming to EN/IEC 60529 IP20 on upper part without blanking plate on cover conforming to EN/IEC 61800-5-1 IP21 conforming to EN/IEC 60529 IP21 conforming to EN/IEC 61800-5-1 IP41 on upper part conforming to EN/IEC 60529 IP41 on upper part conforming to EN/IEC 61800-5-1 IP54 on lower part conforming to EN/IEC 60529 IP54 on lower part conforming to EN/IEC 61800-5-1				
Vibration Resistance	1 gn (f= 13200 Hz) conforming to EN/IEC 60068-2-6 1.5 mm peak to peak (f= 313 Hz) conforming to EN/IEC 60068-2-6				
Shock Resistance	15 gn for 11 ms conforming to EN/IEC 60068-2-27				
Relative Humidity	595 % without condensation conforming to IEC 60068-2-3 595 % without dripping water conforming to IEC 60068-2-3				
Ambient Air Temperature For Operation	-1050 °C (without derating)				
Ambient Air Temperature For Storage	-2570 °C				
Operating Altitude	<= 1000 m without derating				

1000...3000 m with current derating 1 % per 100 m

Packing Units

O	
Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	29 cm
Package 1 Width	73.5 cm
Package 1 Length	59.5 cm
Package 1 Weight	49.2 kg
Unit Type Of Package 2	P06
Number Of Units In Package 2	1
Package 2 Height	77 cm
Package 2 Width	80 cm
Package 2 Length	60 cm
Package 2 Weight	57.7 kg
Unit Type Of Package 3	S06
Number Of Units In Package 3	1
Package 3 Height	73.5 cm
Package 3 Width	60 cm
Package 3 Length	80 cm
Package 3 Weight	49.2 kg

Contractual warranty

Warranty

18 months

Sustainability Screen

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Yes

Learn more about Green Premium >

Guide to assess a product's sustainability >



RoHS/REACh

Well-being performance

Mercury Free

Rohs Exemption Information


Certifications & Standards

Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)		
	EU RoHS Declaration		
China Rohs Regulation	China RoHS declaration		
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins		
Circularity Profile	End of Life Information		

Dimensions Drawings

UL Type 1/IP 20 Drives

Dimensions without Option Card

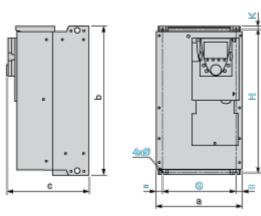


Dimensions in mm

а	b	с	G	Н	к	Ø
320	550	266	280	524	20	9

Dimensions in in.

а	b	с	G	Н	K	Ø
12.60	21.65	10.47	11.02	20.63	0.79	0.35

Dimensions with 1 Option Card (1)

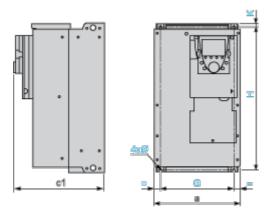

Dimensions in mm


а	c1	G	Н	К	Ø
320	289	280	524	20	9

Dimensions in in

а	c1	G	Н	К	Ø
12.60	11.38	11.02	20.63	0.79	0.35

(1) Option cards: I/O extension cards, communication cards or "Controller Inside" programmable card.

Dimensions with 2 Option Cards (1)

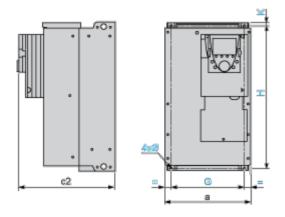

Dimensions in mm

а	c2	G	Н	К	Ø
320	312	280	524	20	9

Dimensions in in.

а	c2	G	Н	К	Ø
12.60	12.28	11.02	20.63	0.79	0.35

(1) Option cards: I/O extension cards, communication cards or "Controller Inside" programmable card.

ATV71HD37M3X

Mounting and Clearance


Mounting Recommendations

Depending on the conditions in which the drive is to be used, its installation will require certain precautions and the use of appropriate accessories.


Install the unit vertically:

- Avoid placing it close to heating elements
- Leave sufficient free space to ensure that the air required for cooling purposes can circulate from the bottom to the top of the unit.


Clearance




Mounting Types



Type B Mounting



Type C Mounting



By removing the protective blanking cover from the top of the drive, the degree of protection for the drive becomes IP 20.

The protective blanking cover may vary according to the drive model (refer to the user guide).

ATV71HD37M3X

The protective blanking cover must be removed from ATV 71P••••N4Z drives when they are mounted in a dust and damp proof enclosure.


ATV71HD37M3X

Specific Recommendations for Mounting the Drive in an Enclosure

Ventilation

To ensure proper air circulation in the drive:

- Fit ventilation grilles.
- Ensure that there is sufficient ventilation. If there is not, install a forced ventilation unit with a filter. The openings and/or fans must provide a flow rate at least equal to that of the drive fans (refer to the product characteristics).



- Use special filters with IP 54 protection.
- Remove the blanking cover from the top of the drive.


Dust and Damp Proof Metal Enclosure (IP 54)

The drive must be mounted in a dust and damp proof enclosure in certain environmental conditions: dust, corrosive gases, high humidity with risk of condensation and dripping water, splashing liquid, etc. This enables the drive to be used in an enclosure where the maximum internal temperature reaches 50°C.

Connections and Schema

Wiring Diagram Conforming to Standards EN 954-1 Category 1, IEC/EN 61508 Capacity SIL1, in Stopping Category 0 According to IEC/EN 60204-1

Three-Phase Power Supply with Upstream Breaking via Contactor

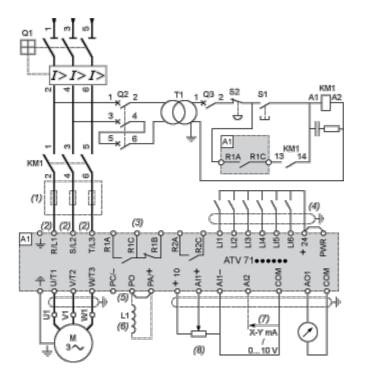

A1 ATV71 drive

KM1 Contactor

L1 DC choke

Q1 Circuit-breaker

Q2 GV2 L rated at twice the nominal primary current of T1

Q3 GB2CB05

S1, S2 XB4 B or XB5 A pushbuttons

T1 100 VA transformer 220 V secondary

(1) Line choke (three-phase); mandatory for ATV71HC11Y...HC63Y drives (except when a special transformer is used (12-pulse)).

(2) For ATV71HC40N4 drives combined with a 400 kW motor, ATV71HC50N4 and ATV71HC40Y...HC63Y, refer to the power terminal connections diagram.

(3) Fault relay contacts. Used for remote signalling of the drive status.

(4) Connection of the common for the logic inputs depends on the positioning of the SW1 switch. The above diagram shows the internal power supply switched to the "source" position (for other connection types, refer to the user guide).

(5) There is no PO terminal on ATV71HC11Y...HC63Y drives.

(6) Optional DC choke for ATV71H•••M3, ATV71HD11M3X...HD45M3X, ATV71•075N4...•D75N4 and ATV71P•••N4Z drives. Connected in place of the strap between the PO and PA/+ terminals. For ATV71HD55M3X, HD75M3X, ATV71HD90N4...HC50N4 drives, the choke is supplied with the drive; the customer is responsible for connecting it.

(7) Software-configurable current (0...20 mA) or voltage (0...10 V) analog input.


(8) Reference potentiometer.

ATV71HD37M3X

ATV71HD37M3X

Wiring Diagram Conforming to Standards EN 954-1 Category 1, IEC/EN 61508 Capacity SIL1, in Stopping Category 0 According to IEC/EN 60204-1

Three-Phase Power Supply with Downstream Breaking via Switch Disconnector

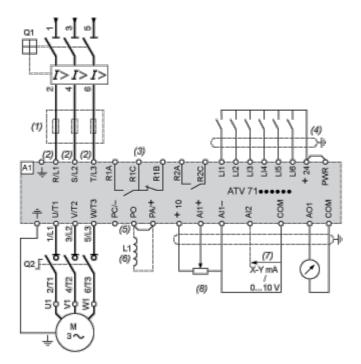

- A1 ATV71 drive
- L1 DC choke
- Q1 Circuit-breaker
- Q2 Switch disconnector (Vario)

(1) Line choke (three-phase), mandatory for ATV71HC11Y...HC63Y drives (except when a special transformer is used (12-pulse)).

(2) For ATV71HC40N4 drives combined with a 400 kW motor, ATV71HC50N4 and ATV71HC40Y...HC63Y, refer to the power terminal connections diagram.

(3) Fault relay contacts. Used for remote signalling of the drive status.

(4) Connection of the common for the logic inputs depends on the positioning of the SW1 switch. The above diagram shows the internal power supply switched to the "source" position (for other connection types, refer to the user guide).

(5) There is no PO terminal on ATV71HC11Y...HC63Y drives.


(6) Optional DC choke for ATV71H•••M3, ATV71HD11M3X...HD45M3X, ATV71•075N4...•D75N4 and ATV71P•••N4Z drives. Connected in place of the strap between the PO and PA/+ terminals. For ATV71HD55M3X, HD75M3X, ATV71HD90N4...HC50N4 drives, the choke is supplied with the drive; the customer is responsible for connecting it.

(7) Software-configurable current (0...20 mA) or voltage (0...10 V) analog input.

(8) Reference potentiometer.

Wiring Diagram Conforming to Standards EN 954-1 Category 3, IEC/EN 61508 Capacity SIL2, in Stopping Category 0 According to IEC/EN 60204-1

Three-Phase Power Supply, Low Inertia Machine, Vertical Movement

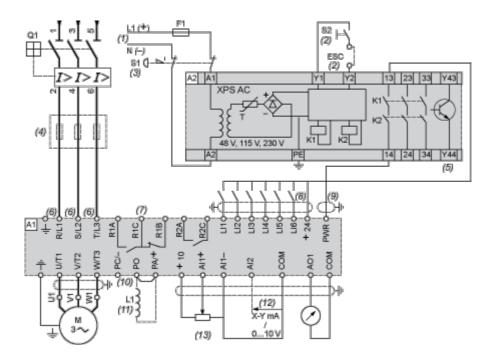

A1 ATV71 drive

A2 Preventa XPS AC safety module for monitoring emergency stops and switches. One safety module can manage the "Power Removal" function for several drives on the same machine. In this case, each drive must connect its PWR terminal to its + 24 V via the safety contacts on the XPS AC module. These contacts are independent for each drive.

F1 Fuse

L1 DC choke

Q1 Circuit-breaker

S1 Emergency stop button with 2 contacts

S2 XB4 B or XB5 A pushbutton

(1) Power supply: 24 Vdc or Vac, 48 Vac, 115 Vac, 230 Vac.

(2) S2: resets XPS AC module on power-up or after an emergency stop. ESC can be used to set external starting conditions.

(3) Requests freewheel stopping of the movement and activates the "Power Removal" safety function.

(4) Line choke (three-phase), mandatory for and ATV71HC11Y...HC63Y drives (except when a special transformer is used (12-pulse)).

(5) The logic output can be used to signal that the machine is in a safe stop state.

(6) For ATV71HC40N4 drives combined with a 400 kW motor, ATV71HC50N4 and ATV71HC40Y...HC63Y, refer to the power terminal connections diagram.

(7) Fault relay contacts. Used for remote signalling of the drive status.

(8) Connection of the common for the logic inputs depends on the positioning of the SW1 switch. The above diagram shows the internal power supply switched to the "source" position (for other connection types, refer to the user guide).

(9) Standardized coaxial cable, type RG174/U according to MIL-C17 or KX3B according to NF C 93-550, external diameter 2.54 mm /0.09 in., maximum length 15 m / 49.21 ft. The cable shielding must be earthed.

(10) There is no PO terminal on ATV71HC11Y...HC63Y drives.

(11) Optional DC choke for ATV71H•••M3, ATV71HD11M3X...HD45M3X, ATV71•075N4...•D75N4 and ATV71P•••N4Z drives. Connected in place of the strap between the PO and PA/+ terminals. For ATV71HD55M3X,

Life Is On Schneider

ATV71HD37M3X


HD75M3X, ATV71HD90N4...HC50N4 drives, the choke is supplied with the drive; the customer is responsible for connecting it.

- (12) Software-configurable current (0...20 mA) or voltage (0...10 V) analog input.
- (13) Reference potentiometer.

ATV71HD37M3X

Wiring Diagram Conforming to Standards EN 954-1 Category 3, IEC/EN 61508 Capacity SIL2, in Stopping Category 1 According to IEC/EN 60204-1

Three-Phase Power Supply, High Inertia Machine

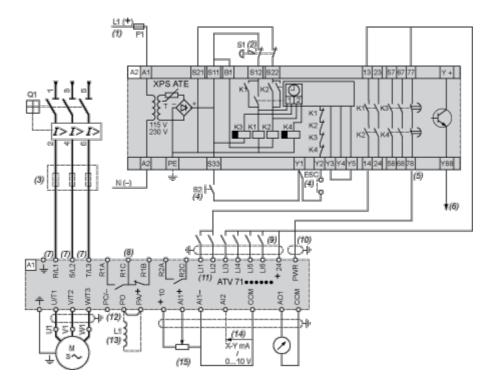

A1 ATV71 drive

A2 (5) Preventa XPS ATE safety module for monitoring emergency stops and switches. One safety module can manage the "Power Removal" safety function for several drives on the same machine. In this case the time delay must be adjusted on the drive controlling the motor that requires the longest stopping time. In addition, each drive must connect its PWR terminal to its + 24 V via the safety contacts on the XPS ATE module. These contacts are independent for each drive.

- F1 Fuse
- L1 DC choke
- Q1 Circuit-breaker
- S1 Emergency stop button with 2 N/C contacts
- S2 Run button
- (1) Power supply: 24 Vdc or Vac, 115 Vac, 230 Vac.
- (2) Requests controlled stopping of the movement and activates the "Power Removal" safety function.

(3) Line choke (three-phase), mandatory for ATV71HC11Y...HC63Y drives (except when a special transformer is used (12-pulse)).

(4) S2: resets XPS ATE module on power-up or after an emergency stop. ESC can be used to set external starting conditions.

(5) For stopping times requiring more than 30 seconds in category 1, use a Preventa XPS AV safety module which can provide a maximum time delay of 300 seconds.

(6) The logic output can be used to signal that the machine is in a safe state.

(7) For ATV71HC40N4 drives combined with a 400 kW motor, ATV71HC50N4 and ATV71HC40Y...HC63Y, refer to the power terminal connections diagram.

(8) Fault relay contacts. Used for remote signalling of the drive status.

ATV71HD37M3X

(9) Connection of the common for the logic inputs depends on the positioning of the SW1 switch. The above diagram shows the internal power supply switched to the "source" position (for other connection types, refer to the user guide).

(10) Standardized coaxial cable, type RG174/U according to MIL-C17 or KX3B according to NF C 93-550, external diameter 2.54 mm/0.09 in., maximum length 15 m/49.21 ft. The cable shielding must be earthed.

(11) Logic inputs LI1 and LI2 must be assigned to the direction of rotation: LI1 in the forward direction and LI2 in the reverse direction.

(12) There is no PO terminal on ATV71HC11Y...HC63Y drives.

(13) Optional DC choke for ATV71H•••M3, ATV71HD11M3X...HD45M3X, ATV71•075N4...•D75N4 and ATV71P•••N4Z drives. Connected in place of the strap between the PO and PA/+ terminals. For ATV71HD55M3X, HD75M3X, ATV71HD90N4...HC50N4 drives, the choke is supplied with the drive; the customer is responsible for connecting it.


(14) Software-configurable current (0...20 mA) or voltage (0...10 V) analog input.

(15) Reference potentiometer.

Performance Curves

Derating Curves

The derating curves for the drive nominal current (In) depend on the temperature, the switching frequency and the mounting type. For intermediate temperatures (e.g. 55°C), interpolate between 2 curves.

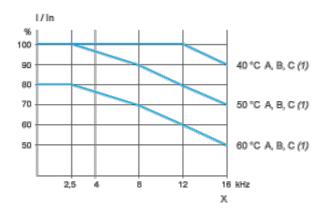

X Switching frequency

(1) Mounting type

Above 50°C, the drive should be fitted with a control card fan kit.