

https://www.phoenixcontact.com/us/products/0825027



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Zack Marker strip, flat, Strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, Number of individual labels: 10

Your advantages

- · Labeling service: Phoenix Contact can custom-label all zack marker strip markers according to your requirements
- · Other pitches available on request
- · The ZBF zack marker strip system with flat marker groove is a marking solution for modular terminal blocks and electronics modules
- · The multi-section marking strips are easy to fit and can be easily separated if required

Commercial data

| Item number | 0825027 |
|--------------------------------------|--------------------------------|
| Packing unit | 1 pc |
| Minimum order quantity | 50 pc |
| Note | Made to order (non-returnable) |
| Sales key | BG24 |
| Product key | BG8112 |
| Catalog page | Page 77 (C-5-2013) |
| GTIN | 4046356357616 |
| Weight per piece (including packing) | 0.26 g |
| Weight per piece (excluding packing) | 0.26 g |
| Customs tariff number | 49119900 |
| Country of origin | DE |



https://www.phoenixcontact.com/us/products/0825027



Technical data

Product properties

| Product type | Labeled terminal marker |
|-------------------------------------|-------------------------|
| Pitch | 6.2 mm |
| Туре | flat |
| Oata management status | |
| Article revision | 02 |
| Marking | |
| Number of individual labels | 10 |
| Number of individual labels per row | 10 |
| Number of marker strips | 10 |

Mounting

Material specifications

| Color | white (RAL 9010) |
|--|--------------------------------|
| Material | PA |
| Flammability rating according to UL 94 | V2 |
| Components | free from silicone and halogen |

Environmental and real-life conditions

Ambient conditions

| Ambient temperature (operation) | -40 °C 100 °C |
|---------------------------------|---------------|
|---------------------------------|---------------|

Dimensions

| Width | 6 mm |
|-------|--------|
| Pitch | 6.2 mm |

Standards and regulations


| | N EN 61010-1 (VDE 0411-1) |
|--|---------------------------|
|--|---------------------------|



https://www.phoenixcontact.com/us/products/0825027



Drawings

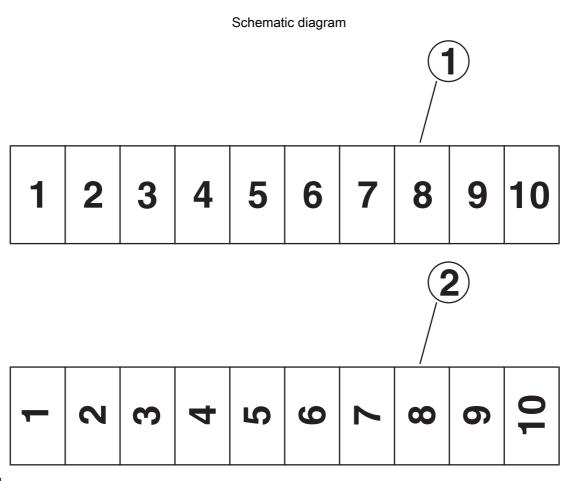

① Horizontal

② Vertical



0825027

https://www.phoenixcontact.com/us/products/0825027

Classifications

UNSPSC 21.0

ECLASS

| | ECLASS-11.0 | 27281101 |
|------|-------------|----------|
| | ECLASS-12.0 | 27281101 |
| | ECLASS-13.0 | 27281101 |
| ETIM | | |
| | ETIM 9.0 | EC000761 |
| UN | SPSC | |

39131500



https://www.phoenixcontact.com/us/products/0825027



Environmental product compliance

EU RoHS

| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|
| | |
| | |
| EU REACH SVHC | |

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com