

Key Switches 2-Position (Assembled)



2-Position Key Switches

Contact	Mounting	Operator Position		Maintained	Spring Return from Right
		L	R	L	R
Operator Only				HW®K-2A	HW®K-21B
1NO	1	0	X	HW®K-2AF10	HW®K-21BF10
1NO-1NC	1	0	X	HW®K-2AF11	HW®K-21BF11
2NO	1	0	X	HW®K-2AF20	HW®K-21BF20
	2	0	X		
2NO-2NC	1	0	X	HW®K-2AF22	HW®K-21BF22
	2	X	0		
	3	0	X		
	4	X	0		

1 1. In place of ® enter 1 for plastic bezel or 4 for metal bezel.
 2. Key is removable in all maintained positions. Other key removable options available.
 3. Two keys are supplied with all switches.
 4. All standard operators are keyed alike.
 5. Other key removable options available. See table below.
 6. For nameplates, see page 677.
 7. For contact assembly part numbers, see page 682.
 8. Key is retained in "Spring Return" position.
 9. All assembled part numbers in catalog include finger-safe spring-up (HW-U...) contacts.
 10. Additional contact configurations available (up to 6 total contacts).
 11. For Truth Tables see page 682.


⑤ Bezel Type

Type	Code
Plastic	1
Metal	4

Key Removable Option Codes

Code	Description
A	Key not retained in any position (removable in all positions)
B	Key retained in right position only (removable LEFT)
C	Key retained in left position only (removable RIGHT)

Part Number Structure

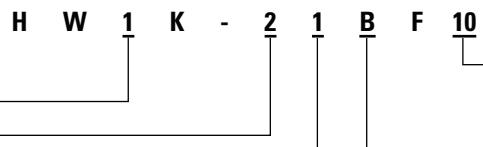

Bezel

1: Plastic
4: Metal# of Positions
2: 2-Position

Operator

blank: Maintained
1: Spring Return from RightNote: Use only for interpreting part numbers.
Do not use for developing part numbers.

Contact Arrangement

10: 1NO 20: 2NO
11: 1NO-1NC 22: 2NO-2NC

Key Retained Position

A: Key not retained in any position (removable in all positions)
B: Key retained in right position only (removable LEFT)
C: Key retained in left position only (removable RIGHT)

Key Switches 2-Position (Replacement Parts)

Contact Assembly + Mounting Adaptor + Safety Lever Lock + Anti-Rotation Ring + Operator = Completed Unit



Contact Blocks

Style	Contacts	1NO	1NC
	Finger-Safe Spring-Up Terminal	HW-U10-F	HW-U01-F
		HW-U10R-F (early make)	HW-U01R-F (late break)
	Dummy Block	HW-DB	

Safety Lever Lock

Style	Part Number
	HW9Z-LS

Anti-Rotation Ring

Style	Part Number
	HW9Z-RL

Use with notched panel cutout to prevent unit rotation.

Contact Block Mounting Adaptor

Style	Part Number
	HW-CB2C

1. Used to mount contact blocks to operator (first pair only).
2. IDEC strongly recommends using the safety lever lock to prevent heavy vibration or maintenance personnel from inadvertently unlocking contacts.

Operators

Style	Description	Plastic Bezel	Metal Bezel
	Maintained	HW1K-2A	HW4K-2A
	Maintained, key removed left only	HW1K-2B	HW4K-2B
	Spring Return from Right	HW1K-21B	HW4K-21B
	Maintained, key removed right only	HW1K-2C	HW4K-2C

1. Operator includes two keys.
2. All standard operators are keyed alike.

Key Switches 3-Position (Assembled)



3-Position Key Switches

Contact	Mounting	Operator Position			Maintained	Spring Return from Right	Spring Return from Left	Spring Return Two Way	
		L	C	R					
Operator Only						HW®K-3A*	HW®K-31B	HW®K-32C	HW®K-33D
1NO-1NC	1	0	X	X	HW®K-3AF11	HW®K-31BF11	HW®K-32CF11	HW®K-33DF11	
2NO	1	X	0	0	HW®K-3AF20	HW®K-31BF20	HW®K-32CF20	HW®K-33DF20	
2NC	1	0	X	X	HW®K-3AF02	HW®K-31BF02	HW®K-32CF02	HW®K-33DF02	
2NO-1NC	1	X	0	0	HW®K-3JAF21N1	-	-	-	
	2	0	0	X					
	3	0	X	0					
2NO-2NC	1	X	0	0					
	2	0	0	X	HW®K-3AF22	HW®K-31BF22	HW®K-32CF22	HW®K-33DF22	
	3	0	X	X					
	4	X	X	0					
2NO-2NC	1	0	0	X					
	2	X	0	0	HW®K-3SAF22N9	-	-	-	
	3	X	X	0					
	4	0	0	X					
4NO	1	X	0	0					
	2	0	0	X	HW®K-3AF40	HW®K-31BF40	HW®K-32CF40	HW®K-33DF40	
	3	X	0	0					
	4	0	0	X					
4NO	1	X	0	0					
	2	0	X	X	HW®K-3SAF40N2	-	-	-	
	3	X	0	0					
	4	0	0	X					
4NC	1	0	X	X					
	2	X	X	0	HW®K-3AF04	HW®K-31BF04	HW®K-32CF04	HW®K-33DF04	
	3	0	X	X					
	4	X	X	0					



- In place of ⑤ enter 1 for plastic bezel or 4 for metal bezel.
- Key is removable in all maintained positions. Other key removable options available.
- Two keys are supplied with all switches.
- All standard operators are keyed alike.
- Other key removable options available. See table to the right.
- * Operator is available with three different cams.
HW®K-3A: Maintained (standard cam)
HW®K-3SA: Maintained (Cam S)
HW®K-3JA: Maintained (Cam J)
- For nameplates, see page 677.
- For contact assembly part numbers, see page 682.
- All assembled part numbers in catalog include standard Finger-Safe spring-up (HW-U..) contacts.
- Additional contact configurations available (up to 6 total contacts).
- For Truth Tables see page 690.


⑤ Bezel Type

Type	Code
Plastic	1
Metal	4

Key Removable Option Codes

Code	Description
A	Key not retained in any position (removable in all positions)
B	Key retained in right position only
C	Key retained in left position only
D	Key retained in left and right (3 position only)
E	Key retained in center only (3 position only)
G	Key retained right and center (3 position only)
H	Key retained left and center (3 position only)

Part Number Structure

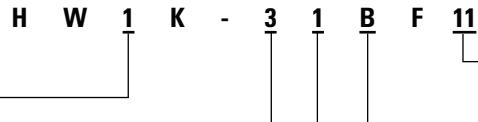

Bezel

1: Plastic
4: Metal# of Positions
3: 3-Position

Operator

blank: Maintained
1: Spring Return from Right
2: Spring Return from Left
3: Spring Return Two Way

Contact Arrangement

11: 1NO-1NC 40: 4NO
20: 2NO 04: 4NC
22: 2NO-2NC

Key Removable Option Code

(see chart on previous page)



Note: Use only for interpreting part numbers.
Do not use for developing part numbers.

Key Switches 3-Position (Replacement Parts)

Contact Assembly + Mounting Adaptor + Safety Lever Lock + Anti-Rotation Ring + Operator = Completed Unit



Contact Blocks

Style	Contacts	1NO	1NC
	Finger-Safe Spring-Up Terminal	HW-U10-F	HW-U01-F
		HW-U10R-F (early make)	HW-U01R-F (late break)
	Dummy Block	HW-DB	

Safety Lever Lock

Style	Part Number
	HW9Z-LS

Anti-Rotation Ring

Style	Part Number
	HW9Z-RL

Use with notched panel cutout to prevent unit rotation.

Contact Block Mounting Adaptor

Style	Part Number
	HW-CB2C

1. Used to mount contact blocks to operator (first pair only).
2. IDEC strongly recommends using the safety lever lock to prevent heavy vibration or maintenance personnel from inadvertently unlocking contacts.

Operators

Style	Description	Plastic Bezel	Metal Bezel
	Maintained (standard cam)	HW1K-3A	HW4K-3A
	Maintained (S cam)	HW1K-3SA	HW4K-3SA
	Maintained (J cam)	HW1K-3JA	HW4K-3JA
	Spring Return from Right (standard cam)	HW1K-31B	HW4K-31B
	Spring Return from Left (standard cam)	HW1K-32C	HW4K-32C
	2-Way Spring Return (standard cam)	HW1K-33D	HW4K-33D

1. Operator includes two keys.
2. All standard operators are keyed alike.
3. Other key removable options available. See table on previous page.
4. Key not removable from spring-retured position