Specifications

#### Green Premium™



# multifunction relay, Harmony Timer Relays, 8A, 2CO, 0.05s to 999h asymmetrical on delay and off delay 24 to 240V AC DC

RENF22R2MMW

### Main

Range Of Product	Harmony Timer Relays
Product Or Component Type	NFC timer relay
Device Short Name	RENF22
App For Product	Ecostruxure Industrial Device downloadable from Google Play store or Apple Store)

# Complementary

Discrete Output Type	Relay
Nominal Output Current	8 A
Contacts Type And Composition	2 C/O timed contact, cadmium free 1 C/O timed and instantaneous contact, cadmium free
Time Delay Type	Power on-delay On-delay and off-delay Pulse delay Asymmetrical on-delay and off-delay Interval Off-delay Symmetrical flashing Safe-guard Star-delta Asymmetrical flashing Bistable
Time Delay Range	0.05 s999 h
Product Compatibility	NFC enabled mobile device
Control Type	Without test button
[Us] Rated Supply Voltage	24240 V AC/DC
Release Input Voltage	<= 2.4 V
Voltage Range	0.851.1 Un
Maximum Rf Power Transmitted	0.0002 mW
Nfc Operating Frequency	13.56 MHz
Supply Frequency	5060 Hz +/- 5 %
Connections - Terminals	Screw terminals, 1 x 0.51 x 3.3 mm <sup>2</sup> AWG 20AWG 12) solid without cable end Screw terminals, 2 x 0.52 x 2.5 mm <sup>2</sup> AWG 20AWG 14) solid without cable end Screw terminals, 1 x 0.21 x 2.5 mm <sup>2</sup> AWG 24AWG 14) flexible with cable end Screw terminals, 2 x 0.22 x 1.5 mm <sup>2</sup> AWG 24AWG 16) flexible with cable end
Tightening Torque	5.318.85 lbf.in (0.61 N.m) IEC 60947-1 5.38.8 lbf.in (0.600.99 N.m) IEC 60947-1
Housing Material	Self-extinguishing
Repeat Accuracy	+/- 0.2 % 10 s999 h +/- 0.5 % 100 ms10 s +/- 0.7 % 50100 ms

Temperature Drift	+/- 0.05 %/°C
Voltage Drift	+/- 0.2 %/V
Setting Accuracy Of Time Delay	+/- 1 % 1999 h 77 °F (25 °C) +/- 2 % 13600 s 77 °F (25 °C) +/- 20 ms 100 ms10 s 77 °F (25 °C) +/- 30 ms 50100 ms 77 °F (25 °C)
Control Signal Pulse Width	100 ms with load in parallel 60 ms no-load
Insulation Resistance	100 MOhm 500 V DC IEC 60664-1
Recovery Time	120 ms on de-energisation
Power Consumption In Va	3 VA 240 V AC
Power Consumption In W	1.5 W 240 V DC 0.6 W 24 V DC
Switching Capacity In Va	2000 VA
Minimum Switching Current	10 mA 5 V
Maximum Switching Current	8 A
Maximum Switching Voltage	250 V
Electrical Durability	100000 cycles resistive, 8 A 250 V, AC
Mechanical Durability	1000000 cycles
Rated Impulse Withstand Voltage	5 kV 1.2/50 μs IEC 60664-1
Power On Delay	100 ms
Creepage Distance	4 kV/3 IEC 60664-1
Overvoltage Category	III IEC 60664-1
Safety Reliability Data	MTTFd = 227.5 years 100 % duty cycle continuous operating condition at 30 $^\circ\mathrm{C}$
Mounting Position	Any position
Mounting Support	35 mm DIN rail IEC 60715
Status Led	Un, green LED steady)power ON R1, amber LED steady)relay energised R2, amber LED steady)relay energised Pairing, green LED steady)communication status Un, green LED fast blinking)diagnosis mode R1, amber LED blinking)timing in progress R2, amber LED blinking)timing in progress
Maximum Communication	10 mm

Maximum Communication Distance

Function Available	A- Power on-delay relay-2 C/O
	Ac- On-delay and off-delay relay w/ control signal-2 C/O
	Ad- Pulse delayed relay w/ control signal-2 C/O
	Ah- Pulse delayed relay (single cycle) w/ control signal-2 C/O
	Ak- Asymmetrical on-delay and off -delay relay w/ control signal-2 C/O
	At- Power on-delay relay w/ pause/summation (Y1)-2 C/O
	B- Single interval relay w/ control signal-2 C/O
	Bw- Double interval relay w/ control signal 2 C/O
	C- Off-delay relay w/ control signal-2 C/O
	D- Symmetrical flashing relay (starting pulse-off)-2 C/O
	Di- Symmetrical flashing relay (starting pulse-on)-2 C/O
	Dt- Symmetrical flashing relay (starting pulse-off) w/ pause/summation (Y1)-2 C/O
	Dit- Symmetrical flashing relay (starting pulse-on) w/ pause/summation (Y1)-2 C/O
	H- Interval relay-2 C/O
	Ht- Interval relay w/ pause/summation (Y1)-2 C/O
	Li- Asymmetrical flashing relay (starting pulse-on)-2 C/O
	Lt- Asymmetrical fl ashing relay (starting pulse-off) w/ pause/summation (Y1)-2 C/O
	Lit- Asymmetrical flashing relay (starting pulse-on) w/ pause/summation (Y1)-2 C/O
	N- Safe-guard relay-2 C/O
	O- Delayed Safe-guard relay-2 C/O
	P- Pulse delayed relay w/ fixed pulse length-2 C/O
	Pt- Pulse delayed relay w/ fixed pulse length and pause/summation-2 C/O
	Qt- Star-delta relay (2 CO outputs w/ split common)-2 C/O
	Qtt- Star-delta relay (2 CO outputs w/ split common) w/ pause/summation (Y1)-2 C/O
	TI- Bistable relay w/ control signal on-2 C/O
	Tt- Retriggerable bistable relay w/ control signal on-2 C/O
	W- Interval relay w/ control signal off-2 C/O
	L- Asymmetrical flashing relay (starting pulse-off)-2 C/O
Dperating System	Androidversion >= V7.0
	IOSversion >= V14.5
Vidth	0.89 in (22.5 mm)
Net Weight	0.20 lb(US) (0.0904 kg)
Number Of Functions	28
	20

#### Number Of Functions

## Environment

Immunity To Microbreaks	10 ms
Dielectric Strength	2.5 kV 1 mA/1 minute 50 Hz between relay output and power supply with basic insulation basic insulation
Standards	IEC 61000-6-1 IEC 61000-6-2 IEC 61000-6-4 EN 61812-1 IEC 61000-6-3
Directives	2014/35/EU - low voltage directive 2014/53/EU - radio equipment directive 2014/30/EU - electromagnetic compatibility
Product Certifications	CE CSA KC UL CCC EAC DNV-GL
Ambient Air Temperature For Operation	-4140 °F (-2060 °C)
Ambient Air Temperature For Storage	-40158 °F (-4070 °C)
Ip Degree Of Protection	IP40 housing: conforming to IEC 60529 IP40 front face: conforming to IEC 60529 IP20 terminals: conforming to IEC 60529
Pollution Degree	3 IEC 60664-1
Vibration Resistance	20 m/s <sup>2</sup> 10150 Hz)IEC 60068-2-6
Shock Resistance	15 gn not operating 11 ms IEC 60068-2-27 5 gn in operation 11 ms IEC 60068-2-27

Relative Humidity	95 % 77131 °F (2555 °C)
Relative Humidity Electromagnetic Compatibility	<ul> <li>95 % 77131 °F (2555 °C)</li> <li>Electrostatic discharge immunity test - test level: 6 kV level 3 (contact discharge) conforming to IEC 61000-4-2</li> <li>Electrostatic discharge immunity test - test level: 8 kV level 3 (air discharge) conforming to IEC 61000-4-2</li> <li>Fast transients immunity test - test level: 1 kV level 3 (capacitive connecting clip) conforming to IEC 61000-4-4</li> <li>Fast transients immunity test - test level: 2 kV level 3 (direct contact) conforming to IEC 61000-4-4</li> <li>Surge immunity test - test level: 1 kV level 3 (differential mode) conforming to IEC 61000-4-5</li> <li>Surge immunity test - test level: 2 kV level 3 (common mode) conforming to IEC 61000-4-5</li> <li>Radiated radio-frequency electromagnetic field immunity test - test level: 10 V level 3 (0.1580 MHz) conforming to IEC 61000-4-6</li> <li>Electromagnetic field immunity test - test level: 10 V/m level 3 (80 MHz1 GHz) conforming to IEC 61000-4-3</li> <li>Immunity to microbreaks and voltage drops - test level: 30 % (500 ms) conforming to IEC 61000-4-11</li> <li>Immunity to microbreaks and voltage drops - test level: 10 % (20 ms) conforming to IEC 61000-4-11</li> <li>Radiated emission class B conforming to EN 55022</li> <li>Conducted emission class A conforming to EN 55022</li> <li>Electromagnetic field immunity test - test level: 3 V/m level 2 (1.4 GHz2 GHz) conforming to IEC 61000-4-3</li> </ul>
	Conforming to IEC 61000-4-3 Electromagnetic field immunity test - test level: 1 V/m level 1 (22.7 GHz) conforming to IEC 61000-4-3

# **Packing Units**

PCE 1
1
0.94 in (2.4 cm)
3.17 in (8.05 cm)
3.72 in (9.45 cm)
3.66 oz (103.635 g)
S02
40
5.91 in (15.0 cm)
11.81 in (30.0 cm)
15.75 in (40.0 cm)
10.18 lb(US) (4.616 kg)
P06
640
27.56 in (70.0 cm)
23.62 in (60.0 cm)
31.50 in (80.0 cm)
185.48 lb(US) (84.13 kg)

# Sustainability Screen

**Green Premium<sup>TM</sup> label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Yes

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

### Well-being performance




Rohs Exemption Information

### **Certifications & Standards**

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information


### **Dimensions Drawings**

#### Dimensions

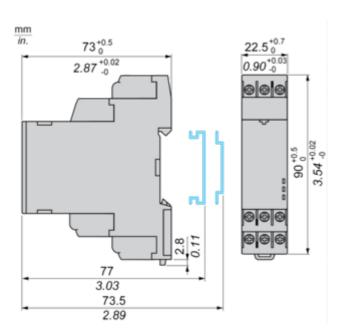


Connections and Schema

#### Internal Wiring Diagram



#### Wiring Diagram




#### **Technical Description**

#### Function A: Power On-Delay Relay

#### Description

On energisation of power supply, the timing period T starts. After timing, the output(s) R close(s). The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").




### RENF22R2MMW

#### Function At: Power On-Delay Relay with Pause / Summation Control Signal

#### Description

On energisation of power supply, the timing period T starts. Timing can be interrupted / paused each time Y1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R close(s). The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").




**T =** t1 + t2 +...

### RENF22R2MMW

#### Function Ac: On-Delay and Off-Delay Relay with Control Signal

#### Description

After energisation of power supply and energization of Y1 causes the timing period T to start. At the end of this timing period, the output(s) R close(s). When deenergization of Y1, the timing T starts. At the end of this timing period T,the output(s) R revert(s) to its/their initial position. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").




#### Function Ad : Pulse Delayed Relay with Control Signal

#### Description

After energisation of power supply, pulsing or maintaining of energization of Y1 starts the timing T.

At the end of this timing period T, the output(s) R close(s).

The output(s) R reverts to its initial position the next time Y1 is energized in pulsation or permanent energized manner. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").



### RENF22R2MMW


#### Function Ah : Pulse Delayed Relay (Single Cycle) with Control Signal

#### Description

After energisation of power supply, pulsing or maintaining of energization of Y1 starts the timing T.

A single flashing cycle then starts with 2 timing periods T of equal duration (start with output(s) R in initial position). Output(s) R closes at the end of the first timing period T and reverts to its initial position at the end of the second timing period T.

. Re-energizing of Y1, either in pulsation or permanent energized manner, will re-start the single flashing cycle again. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").




### RENF22R2MMW

#### Function Ak: Asymmetrical On-Delay and Off-Delay Relay With Control Signal

#### Description


After energisation of power supply and energization of Y1, timing starts for a period Ta. At the end of this timing period Ta, the output(s) R closes. Deenergization of Y1 causes a second timing period Tr to start. At the end of this timing period Tr, the output(s) R reverts to its initial state. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").



#### Function B: Single Interval Relay with Control Signal

#### Description


After energisation of power supply, pulsing or maintaining of energization of Y1 starts the timing T. The output(s) R close(s) for the duration of the timing period T then revert(s) to its/their initial state. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").



#### Function Bw : Double Interval Relay with Control Signal

#### Description


After energisation of power supply, transition of Y1 (either from energization to deenergization or vice-versa) will cause the output(s) R close(s) for the duration of the timing period T then revert(s) to its/their initial state. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").



#### Function C: Off-Delay Relay with Control Signal

#### Description


After energisation of power supply and energization of Y1 causes output(s) R close(s). When Y1 deenergizes, timing T starts. At the end of this timing period T, the output(s) R revert(s) to its/their initial position. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").



#### Function D: Symmetrical Flashing Relay (Starting Pulse-Off)

#### Description


On energisation of power supply, output(s) R starts at its/their initial state for timing duration T then change(s) to output(s) R close(s) for the same timing duration T.This cycle is repeated indefinitely until power supply removal. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").



#### Function Di: Symmetrical Flashing Relay (Starting Pulse-On)

#### Description

On energisation of power supply, output(s) R starts at output(s) R close(s) for timing duration T then revert(s) to its/their initial state for the same timing duration T.This cycle is repeated indefinitely until power supply removal. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").




# Function Dt: Symmetrical Flashing Relay (Starting Pulse-Off) With Pause / Summation Control Signal

#### Description

On energisation of power supply, output(s) R starts at its/their initial state for timing duration T and the timing can be interrupted / paused each time Y1 energizes.When the cumulative total of time periods elapsed reaches the pre-set value T, then changes to output(s) R close(s).The output(s) R close state will remain for the same timing duration T and the timing can be interrupted / paused each time Y1 energizes.When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R revert(s) to its/their initial state.This cycle is repeated indefinitely until power supply removal.The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

#### Function: 2 Output




T = t1 + t2 +... T = t'1 + t'2 +...

# Function Dit: Symmetrical Flashing Relay (Starting Pulse-On) With Pause / Summation Control Signal

#### Description

On energisation of power supply, output(s) R starts at output(s) R close(s) for timing duration T and the timing can be interrupted / paused each time Y1 energizes.When the cumulative total of time periods elapsed reaches the pre-set value T, then revert(s) to its/their initial state.The output(s) R at initial state will remain for the same timing duration T and the timing can be interrupted / paused each time Y1 energizes.When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R close(s) to close state.This cycle is repeated indefinitely until power supply removal.The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

#### Function: 2 Output




T = t1 + t2 +... T = t'1 + t'2 +...

#### Function H: Interval Relay

#### Description

On energisation of power supply, output(s) R close(s) and timing period T starts. At the end of the timing period T, the output(s) R revert(s) to its/their initial state. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").




### RENF22R2MMW

#### Function Ht: Interval Relay With Pause / Summation Control Signal

#### Description

On energisation of power supply, output(s) R close(s) and timing period T starts. The timing can be interrupted / paused each time Y1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R revert(s) to its/their initial state. The second output (R2) can be either timed (when set to "TIMED" or instantaneous (when set to "INST").

#### Function: 2 Output



**T =** t1 + t2 +...

### **RENF22R2MMW**


#### Function L: Asymmetrical Flashing Relay (Starting Pulse-Off)

#### Description

On energisation of power supply, output(s) R starts at its/their initial state for timing duration Tr then change(s) to output(s) R close(s) for the another timing duration Ta.

This cycle is repeated indefinitely until power supply removal.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").



### **RENF22R2MMW**


#### Function Li: Asymmetrical Flashing Relay (Starting Pulse-On)

#### Description

On energisation of power supply, output(s) R starts at output(s) R close(s) for timing duration Ta then change(s) to its/ their initial state for timing duration Tr.

This cycle is repeated indefinitely until power supply removal.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").



# Function Lt: Asymmetrical Flashing Relay (Starting Pulse-Off) With Pause / Summation Control Signal


#### Description

On energisation of power supply, output(s) R starts at its/their initial state for timing duration Tr and the timing can be interrupted / paused each time Y1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value Tr, then changes to output(s) R close(s).

The output(s) R close state will remain for the same timing duration Ta and the timing can be interrupted / paused each time Y1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value Ta, the output(s) R revert(s) to its/their initial state.

This cycle is repeated indefinitely until power supply removal.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").



Tr = t1 + t2 +... Ta = t'1 + t'2 +...

# Function Lit: Asymmetrical Flashing Relay (Starting Pulse-On) With Pause / Summation Control Signal


#### Description

On energisation of power supply, output(s) R starts at output(s) R close(s) for timing duration Ta and the timing can be interrupted / paused each time Y1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value Ta, the output(s) R revert(s) to its/their initial state.

The output(s) R at initial state will remain for timing duration Tr the timing can be interrupted / paused each time Y1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value Tr, then changes to output(s) R close(s)

This cycle is repeated indefinitely until power supply removal.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").



Ta = t1 + t2 + ...Tr = t'1 + t'2 +...


#### Function N : Safe-Guard Relay

#### Description

After energisation of power supply and on energization of Y1 cause the output(s) R close(s) and starts the timing T. If the duration interval between 2 consecutive energization of Y1 is greater than the pre-set value T, the output(s) R close(s) at the end of the timing period.

If the duration interval between 2 consecutive energization of Y1 is less than the pre-set value T, the output(s) R remain(s) closed and timing restarted base on the last energization of Y1.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").



#### Function O : Delayed Safe-Guard Relay

#### Description

On energisation of power supply, the timing T starts.

At the end of this timing period, the output(s) R close(s).


On energization of Y1, the output(s) R revert(s) to its/their initial state and the timing T restarts.

If the duration interval between 2 consecutive energization of Y1 is greater than the pre-set value T, the output(s) R

close(s) at the end of the timing period.

If the duration interval between 2 consecutive energization of Y1 is less than the pre-set value T, the output(s) R remain(s) at its/their initial state and timing restarted base on the last energization of Y1.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").




#### Function P : Pulse Delayed Relay with Fixed Pulse Length

#### Description

On energisation of power supply, the timing T starts. At the end of this period, the output(s) R close(s) for a fixed time P then revert(s) to its/their initial state. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

#### Function: 2 Output



**P =** 500ms

### **RENF22R2MMW**

# Function Pt : Pulse Delayed Relay With Fixed Pulse Length and Pause / Summation Control Signal

#### Description


On energisation of power supply, the timing T starts.

The timing can be interrupted / paused each time Y1 energizes.

When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R close(s) for a fixed time P then revert(s) to its/their initial state.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

#### Function: 2 Output




**T** = t1 + t2 + ... **P** = 500ms

#### Function Qt: Star-Delta Relay (2 CO Outputs with Split Common)

#### Description

On energisation of power supply, the output R3 & R4 initializes at its initial state such that energizes STAR CONTACTOR + MAIN CONTACTOR and the timing T starts (STAR connection time duration starts).At the end of the timing period T, the output R3 closes such that deenergizes STAR CONTACTOR and causes t transition time starts.At the end of the transition time, the output R4 closes such that energizes DELTA CONTACTOR. Diagnostic feature not available.




**T =** 50, 60... ms

### **RENF22R2MMW**

# Function Qtt: Star-Delta Relay (2 CO Outputs With Split Common) with Pause / Summation Control Signal

#### Description

On energisation of power supply, the output R3 & R4 initializes at its initial state such that energizes STAR CONTACTOR + MAIN CONTACTOR and the timing T starts (STAR connection time duration starts).During STAR connection time, the timing can be interrupted / paused each time Y1 energizes.When the cumulative total of time periods elapsed reaches the pre-set value T, the output R3 closes such that deenergizes STAR CONTACTOR and causes t transition time starts.At the end of the transition time, the output R4 closes such that energizes DELTA CONTACTOR. Diagnostic feature not available.




**T** = t1 + t2 +... **t** = 50, 60 ... ms

#### Function TL : Bistable Relay with Control Signal On

#### Description

After energisation of power supply and on energization of Y1 cause the output(s) R close(s). The subsequent on energization of Y1 cause the output(s) R revert(s) to its/their initial state. This cycle is repeated indefinitely until power supply removal. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").



### RENF22R2MMW


#### Function Tt : Retriggerable Bistable Relay with Control Signal On

#### Description

After energisation of power supply and on energization of Y1 cause the output(s) R close(s) and starts the timing T. If the duration interval between 2 consecutive energization of Y1 is greater than the pre-set value T, the output(s) R will toggle from its/their present status the end of the timing period.

If the duration interval between 2 consecutive energization of Y1 is less than the pre-set value T, the output(s) R toggle from its/their present status as soon as Y1 energizes without completing T duration.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").




#### Function W: Interval Relay with Control Signal Off

#### Description

After energisation of power supply and on energization of Y1 following by denergization of Y1, the output(s) R close(s) and starts the timing T.At the end of the timing period, the output(s) R revert(s) to its/their initial state. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

#### Function: 2 Output



#### Legend

Relay energised         Output open         Output closed         U -       Supply         R1/R2 -       2 timed outputs         Ta -       Adjustable On-delay         Tr -       Adjustable Off-delay         Y1 -       Retrigger / Restart control         R2 inst       The second output is instantaneous if the right position is selected         T -       Timing period         R4 -       Delta contact output         R3 -       Star-Delta contact output	Relay de-energised	
Output closed         U -       Supply         R1/R2 -       2 timed outputs         Ta -       Adjustable On-delay         Tr -       Adjustable Off-delay         Y1 -       Retrigger / Restart control         R2 inst       The second output is instantaneous if the right position is selected         T -       Timing period         R4 -       Delta contact output         t -       Delay to switch ON Delta contact output	Relay energised	
U -       Supply         R1/R2 -       2 timed outputs         Ta -       Adjustable On-delay         Tr -       Adjustable Off-delay         Y1 -       Retrigger / Restart control         R2 inst       The second output is instantaneous if the right position is selected         T -       Timing period         R4 -       Delta contact output         t -       Delay to switch ON Delta contact output		
R1/R2 -       2 timed outputs         Ta -       Adjustable On-delay         Tr -       Adjustable Off-delay         Y1 -       Retrigger / Restart control         R2 inst       The second output is instantaneous if the right position is selected         T -       Timing period         R4 -       Delta contact output         t -       Delay to switch ON Delta contact output	Οι	itput closed
Ta -       Adjustable On-delay         Tr -       Adjustable Off-delay         Y1 -       Retrigger / Restart control         R2 inst       The second output is instantaneous if the right position is selected         T -       Timing period         R4 -       Delta contact output         t -       Delay to switch ON Delta contact output	U -	Supply
Tr -       Adjustable Off-delay         Y1 -       Retrigger / Restart control         R2 inst       The second output is instantaneous if the right position is selected         T -       Timing period         R4 -       Delta contact output         t -       Delay to switch ON Delta contact output	R1/R2 -	2 timed outputs
Y1 -       Retrigger / Restart control         R2 inst       The second output is instantaneous if the right position is selected         T -       Timing period         R4 -       Delta contact output         t -       Delay to switch ON Delta contact output	Ta -	Adjustable On-delay
R2 inst       The second output is instantaneous if the right position is selected         T -       Timing period         R4 -       Delta contact output         t -       Delay to switch ON Delta contact output	Tr -	Adjustable Off-delay
T -     Timing period       R4 -     Delta contact output       t -     Delay to switch ON Delta contact output	Y1 -	Retrigger / Restart control
R4 -     Delta contact output       t -     Delay to switch ON Delta contact output	R2 inst	The second output is instantaneous if the right position is selected
t - Delay to switch ON Delta contact output	Т-	Timing period
	R4 -	Delta contact output
R3 - Star-Delta contact output	t -	Delay to switch ON Delta contact output
	R3 -	Star-Delta contact output