
ACS255 IP66 micro drive

Ratings and types

Type designation

This is the unique reference number (shown above and in the first column, below) that clearly identifies your drive by power rating and frame size. Once the drive's type designation has been selected, the frame size (column 7) can be used to determine the drive dimensions, shown on the next page.

Voltages

ACS255 is available in two voltage ranges:

- 1 = 110 to 120 V
- 2 = 200 to 240 V
- 4 = 380 to 480 V
- 6 = 500 to 600 V

Insert either "1", "2", "4" or "6", depending on your chosen voltage, into the type designation shown above.

Construction

"01U" within the type designation (shown above) varies depending on the drive phase and EMC filtering. Choose below the one you need.

- 01 = 1-phase
- 03 = 3-phase
- U = No EMC filter
- F278 = Operator controls: Disconnect, FWD/
REV/OFF selector, Speed Potentiometer

ACS255 IP66 micro drive

Ratings and types

Type code		Braking chopper (included)	P _N	P _N	Output current I _{2N} A	Weight	Frame size
			HP	kW		lb	
1-phase supply voltage 110 to 120V, +/-10%, 3-phase output 200 to 240 V							
ACS255-01U-02A3-1+B068(+F278)	-		0.5	0.37	2.3	6.5	E1
ACS255-01U-04A3-1+B068(+F278)	-		1.0	0.75	4.3	6.5	E1
ACS255-01U-05A8-1+B068(+F278)	X		1.5	1.1	5.8	9.3	E2
1-phase supply voltage 200 to 240V, +/-10%, 3-phase output 200 to 240 V							
ACS255-01U-02A3-2+B068(+F278)	-		0.5	0.37	2.3	6.5	E1
ACS255-01U-04A3-2+B068(+F278)	-		1.0	0.75	4.3	6.5	E1
ACS255-01U-06A1-2+B068(+F278)	-		1.5	1.1	6.1	6.5	E1
ACS255-01U-07A0-2+B068(+F278)	-		2.0	1.5	7.0	6.5	E1
ACS255-01U-10A5-2+B068(+F278)	X		3.0	2.2	10.5	9.3	E2
ACS255-01U-15A3-2+B068(+F278)	X		5.0	3.7	15.3	17.0	E3
3-phase supply voltage 200 to 240 V, +/-10%							
ACS255-03U-02A3-2+B068(+F278)	-		0.5	0.37	2.3	6.5	E1
ACS255-03U-04A3-2+B068(+F278)	-		1.0	0.75	4.3	6.5	E1
ACS255-03U-06A1-2+B068(+F278)	-		1.5	1.10	6.1	6.5	E1
ACS255-03U-07A0-2+B068(+F278)	X		2.0	1.5	7.0	9.3	E2
ACS255-03U-10A5-2+B068(+F278)	X		3.0	2.2	10.5	9.3	E2
ACS255-03U-18A0-2+B068(+F278)	X		5.0	4.0	18.0	17.0	E3
ACS255-03U-24A0-2+B068(+F278)	X		7.5	5.5	24.0	17.0	E3
ACS255-03U-30A0-2+B068(+F278)	X		10	7.5	30.0	19.8	E4
ACS255-03U-04A6-2+B068(+F278)	X		15	11	46.0	19.8	E4
3-phase supply voltage 380 to 480 V, +/-10%							
ACS255-03U-01A2-4+B068(+F278)	-		0.5	0.37	1.2	6.5	E1
ACS255-03U-02A2-4+B068(+F278)	-		1.0	0.75	2.2	6.5	E1
ACS255-03U-03A3-4+B068(+F278)	-		1.5	1.1	3.3	6.5	E1
ACS255-03U-04A1-4+B068(+F278)	-		2.0	1.5	4.1	6.5	E1
ACS255-03U-05A8-4+B068(+F278)	X		3.0	2.2	5.8	9.3	E2
ACS255-03U-09A5-4+B068(+F278)	X		5.0	4.0	9.5	9.3	E2
ACS255-03U-14A0-4+B068(+F278)	X		7.5	5.5	14.0	17.0	E3
ACS255-03U-18A0-4+B068(+F278)	X		10.0	7.5	18.0	17.0	E3
ACS255-03U-24A0-4+B068(+F278)	X		15	11	24.0	17.0	E3
ACS255-03U-30A0-4+B068(+F278)	X		20	15	30.0	19.8	E4
ACS255-03U-39A0-4+B068(+F278)	X		25	18.5	39.0	19.8	E4
ACS255-03U-46A0-4+B068(+F278)	X		30	22	46.0	19.8	E4
3-phase supply voltage 500 to 600 V, +/-10%							
ACS255-03U-02A1-6+B068(+F278)	X		1.0	0.75	2.1	10.6	P2
ACS255-03U-03A1-6+B068(+F278)	X		2.0	1.5	3.1	10.6	P2
ACS255-03U-04A1-6+B068(+F278)	X		3.0	2.2	4.1	10.6	P2
ACS255-03U-06A5-6+B068(+F278)	X		5.0	4.0	6.5	10.6	P2
ACS255-03U-09A0-6+B068(+F278)	X		7.5	5.5	9.0	10.6	P2
ACS255-03U-12A0-6+B068(+F278)	X		10.0	7.5	12.0	16.1	P3
ACS255-03U-17A0-6+B068(+F278)	X		15.0	11.0	17.0	16.1	P3

P_N for kW = Typical motor power in 400 V at normal use

P_N for hp = Typical motor power in 460 V at normal use

I_{2N} for A = Continuous rms current. 50% overload is allowed for one minute in ten minutes.

Fuses and cable sizes

The following table provides the output current rating information for the various ACS255 models. ABB Drives always recommend that selection of the correct ACS255 is based upon the motor full load current at the incoming supply voltage.

Cable dimensioning for nominal rated currents is shown in the table below together with the corresponding fuse types for short-circuit protection of the input power cable.

The rated fuse currents given in the table are the maximums for the mentioned fuse types. If smaller

fuse ratings are used, check that the fuse rms current rating is larger than the nominal input current. If 150% output power is needed, multiply nominal input current by 1.5.

Check that the operating time of the fuse is below 0.5 seconds. The operating time depends on the fuse type, the supply network impedance as well as the cross-sectional area, material and length of the supply cable. In case the 0.5 seconds operating time is exceeded with the gG or T fuses, ultra rapid (aR) fuses in most cases reduce the operating time to an acceptable level.

Type Code	Power	Fuse	Maximum Supply and PE Cable Size		Nominal Output Current A	Motor Cable Size		Max Motor Cable Length	Frame Size
	HP	A	UL Class CC or J	mm ²	AWG	mm ²	AWG	m	
1-phase 110V...115V AC (+/-10%) - 3 Phase 230V Output									
ACS255-01U-02A3-1	0.5	10	10	8	8	2.3	1.5	14	E1
ACS255-01U-04A3-1	1	25	20	8	8	4.3	1.5	14	E1
ACS255-01U-05A8-1	1.5	32	30	8	8	5.8	1.5	14	E2
1-phase 200...240V AC (+/-10%) - 3 Phase Output									
ACS255-01U-02A3-2	0.5	10	6	8	8	2.3	1.5	14	E1
ACS255-01U-04A3-2	1	10	10	8	8	4.3	1.5	14	E1
ACS255-01U-06A1-2	1.5	16	15	8	8	6.1	1.5	14	E1
ACS255-01U-07A0-2	2	16	17.5	8	8	7	1.5	14	E2
ACS255-01U-10A5-2	3	25	25	8	8	10.5	1.5	14	E2
ACS255-01U-15A3-2	5	40	40	8	8	15.3	4	10	E3
3-phase 200...240V AC (+/-10%) - 3 Phase Output									
ACS255-03U-02A3-2	0.5	6	6	8	8	2.3	1.5	14	E1
ACS255-03U-04A3-2	1	10	10	8	8	4.3	1.5	14	E1
ACS255-03U-06A1-2	1.5	10	15	8	8	6.1	1.5	14	E1
ACS255-03U-07A0-2	2	16	15	8	8	7	1.5	14	E2
ACS255-03U-10A5-2	3	16	17.5	8	8	10.5	1.5	14	E2
ACS255-03U-18A0-2	5	32	30	8	8	18	2.5	10	E3
ACS255-03U-24A0-2	7.5	40	35	8	8	24	4	10	E4
ACS255-03U-30A0-2	10	40	45	16	5	30	6	8	E4
ACS255-03U-46A0-2	15	63	70	16	5	46	10	6	E4

Notes:

- 1) Larger fuses must not be used when the input power cable is selected according to this table.
- 2) For UL compliant installation, use Copper wire with a minimum insulation temperature rating of 70°C, UL Class CC or Class J Fuses
- 3) Other fuse types can be used if they meet the ratings and the melting curve of the fuse does not exceed the melting curve of the fuse mentioned in this table.
- 4) The maximum motor cable length stated applies to using a shielded motor cable. When using an unshielded cable, the maximum cable length limit may be increased by 50%. When using the ABB Drives recommended output choke, the maximum cable length may be increased by 100%
- 5) The PWM output switching from any inverter when used with a long motor cable length can cause an increase in the voltage at the motor terminals, depending on the motor cable length and inductance. The rise time and peak voltage can affect the service life of the motor. ABB Drives recommend using an output choke for motor cable lengths of 50m or more to ensure good motor service life

Fuses and cable sizes

Type Code	Power	Fuse		Maximum Supply and PE Cable Size		Nominal Output Current A	Motor Cable Size		Max Motor Cable Length	Frame Size
	HP	A								
		gG	UL Class CC or J	mm ²	AWG		mm ²	AWG	m	
3-phase 380...480V AC (+/-10%) - 3 Phase Output										
ACS255-03U-01A2-4	0.5	6	6	8	8	1.2	1.5	14	100	E1
ACS255-03U-02A2-4	1	6	6	8	8	2.2	1.5	14	100	E1
ACS255-03U-03A3-4	1.5	10	10	8	8	3.3	1.5	14	100	E1
ACS255-03U-04A1-4	2	10	10	8	8	4.1	1.5	14	100	E2
ACS255-03U-05A8-4	3	16	10	8	8	5.8	1.5	14	100	E2
ACS255-03U-09A5-4	5	16	15	8	8	9.5	1.5	14	100	E2
ACS255-03U-14A0-4	7.5	25	25	8	8	14	1.5	12	100	E3
ACS255-03U-18A0-4	10	32	30	8	8	18	2.5	10	100	E3
ACS255-03U-24A0-4	15	40	35	8	8	24	4	10	100	E4
ACS255-03U-30A0-4	20	40	45	16	5	30	6	8	100	E4
ACS255-03U-39A0-4	25	50	60	16	5	39	10	8	100	E4
ACS255-03U-46A0-4	30	63	70	16	5	46	10	6	100	E4
3-phase 500...600V AC (+/-10%) - 3 Phase Output										
ACS255-03U-02A1-6	1	10	6	1.5	14	2.1	1.5	14	100	P2
ACS255-03U-03A1-6	2	10	6	1.5	14	3.1	1.5	14	100	P2
ACS255-03U-04A1-6	3	10	10	1.5	14	4.1	1.5	14	100	P2
ACS255-03U-06A5-6	5	10	10	1.5	14	6.5	1.5	14	100	P2
ACS255-03U-09A0-6	7.5	16	15	2.5	12	9	1.5	14	100	P2
ACS255-03U-12A0-6	10	25	20	4	10	12	1.5	14	100	P3
ACS255-03U-17A0-6	15	25	25	4	8	17	2.5	10	100	P3
ACS255-03U-22A0-6	20	40	35	10	8	22	4	10	100	P3

Notes:

1) Larger fuses must not be used when the input power cable is selected according to this table.

2) For UL compliant installation, use Copper wire with a minimum insulation temperature rating of 70°C, UL Class CC or Class J Fuses

3) Other fuse types can be used if they meet the ratings and the melting curve of the fuse does not exceed the melting curve of the fuse mentioned in this table.


4) The maximum motor cable length stated applies to using a shielded motor cable. When using an unshielded cable, the maximum cable length limit may be increased by 50%. When using the ABB Drives recommended output choke, the maximum cable length may be increased by 100%

5) The PWM output switching from any inverter when used with a long motor cable length can cause an increase in the voltage at the motor terminals, depending on the motor cable length and inductance. The rise time and peak voltage can affect the service life of the motor. ABB Drives recommend using an output choke for motor cable lengths of 50m or more to ensure good motor service life

Control connections


115, 240, 480 V drives

IP66 (NEMA 4X) Switched Units

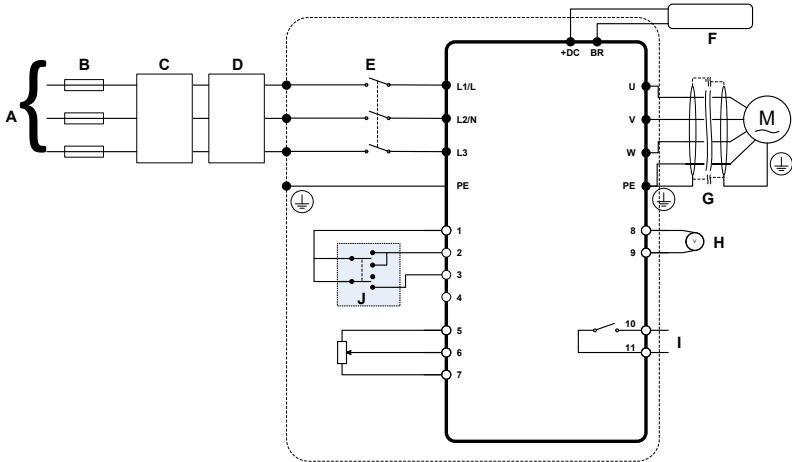

Power Connections	
A	Incoming Power Source
B	External Fuse
C	Optional Input Choke
D	Optional Input Filter
E	Internal Mains Disconnect
F	Optional Brake Resistor
G	Shielded Motor Cable
I	Relay Output
Control Connections	
J	Internal Forward / Off / Reverse Switch
K	Internal Speed Control Pot
8	Analog Output: 0 – 10 Volts
9	0 Volt
10	Relay Output
11	'Drive READY' = Closed

IP20 & IP66 (NEMA 4X) Non-Switched Units

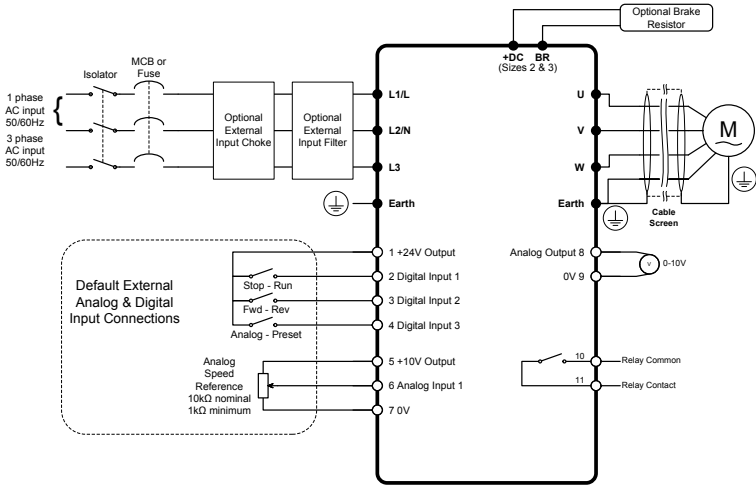

Power Connections	
A	Incoming Power Source
B	External Mains Disconnect
C	External Fuse
D	Optional Input Choke
E	Optional Input Filter
F	Optional Brake Resistor
G	Shielded Motor Cable
I	Relay Output
Control Connections	
1	+ 24 Volt (100mA) User Output
2	Digital Input 1: Drive Run / Stop
3	Digital Input 2: Forward / Reverse
4	Digital Input 3: Analog / Preset Speed
5	+ 10 Volt Output
6	Analog Input 1: 0 – 10 Volt
7	0 Volt
8	Analog Output: 0 – 10 Volts
9	0 Volt
10	Relay Output
11	'Drive READY' = Closed


Typical I/O Connections

	<table><tr><td>1</td><td>+24 Volt</td></tr><tr><td>2</td><td>Run (Enable)</td></tr><tr><td>3</td><td>For / Rev</td></tr><tr><td>4</td><td>Analog / Preset</td></tr><tr><td>5</td><td>+ 10 Volts</td></tr><tr><td>6</td><td>Reference</td></tr><tr><td>7</td><td>0 Volts</td></tr></table>	1	+24 Volt	2	Run (Enable)	3	For / Rev	4	Analog / Preset	5	+ 10 Volts	6	Reference	7	0 Volts
1	+24 Volt														
2	Run (Enable)														
3	For / Rev														
4	Analog / Preset														
5	+ 10 Volts														
6	Reference														
7	0 Volts														
	<table><tr><td>1</td><td>+24 Volt</td></tr><tr><td>2</td><td>Run (Enable)</td></tr><tr><td>3</td><td>Analog / Preset</td></tr><tr><td>4</td><td>Preset 1 / Preset 2</td></tr><tr><td>5</td><td>+ 10 Volts</td></tr><tr><td>6</td><td>Reference</td></tr><tr><td>7</td><td>0 Volts</td></tr></table>	1	+24 Volt	2	Run (Enable)	3	Analog / Preset	4	Preset 1 / Preset 2	5	+ 10 Volts	6	Reference	7	0 Volts
1	+24 Volt														
2	Run (Enable)														
3	Analog / Preset														
4	Preset 1 / Preset 2														
5	+ 10 Volts														
6	Reference														
7	0 Volts														
	<table><tr><td>1</td><td>+24 Volt</td></tr><tr><td>2</td><td>Run (Enable)</td></tr><tr><td>3</td><td>Preset Speeds 1-4 Select</td></tr><tr><td>4</td><td></td></tr><tr><td>5</td><td></td></tr><tr><td>6</td><td>Preset / Max</td></tr><tr><td>7</td><td></td></tr></table>	1	+24 Volt	2	Run (Enable)	3	Preset Speeds 1-4 Select	4		5		6	Preset / Max	7	
1	+24 Volt														
2	Run (Enable)														
3	Preset Speeds 1-4 Select														
4															
5															
6	Preset / Max														
7															
Analog speed input with 1 preset speed and fwd/rev switch															
Analog speed input with 2 preset speeds															
4 preset speeds and max speed select switch. Effectively giving 5 preset speeds															


Control connections

600V drives


Power Terminal Designations

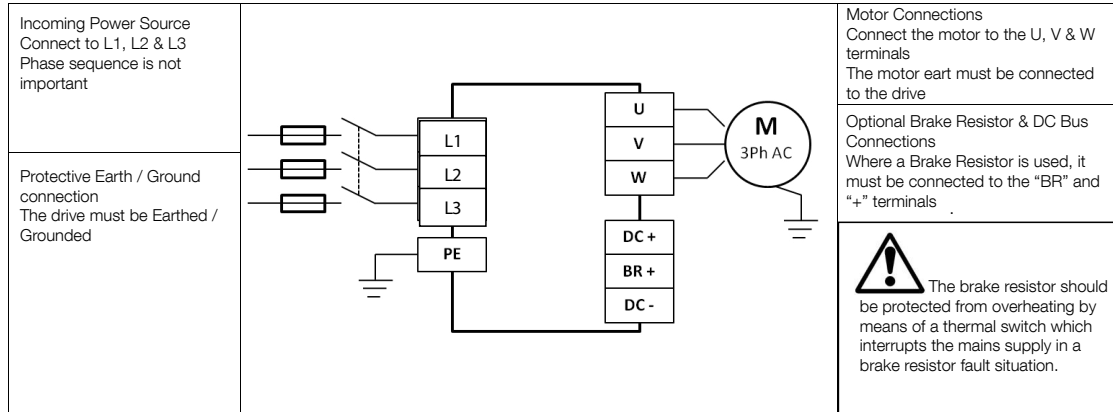

Control Terminal Connections & Factory Settings

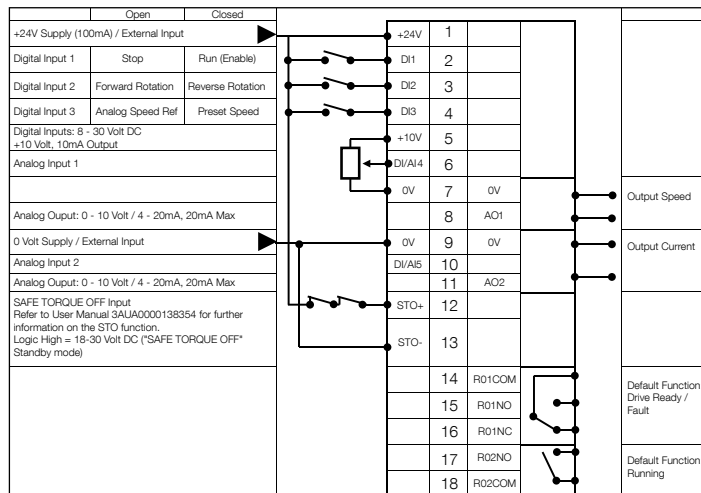


Typical I/O Connections

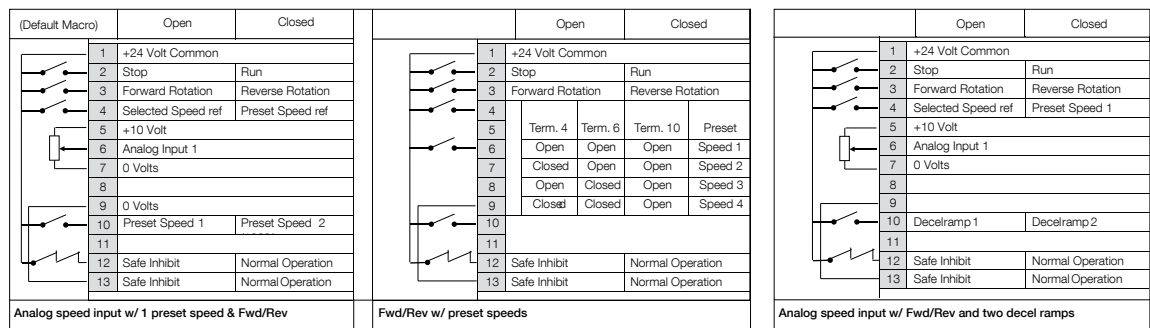

ACS255 IP20 micro drive


Dimensions and weights

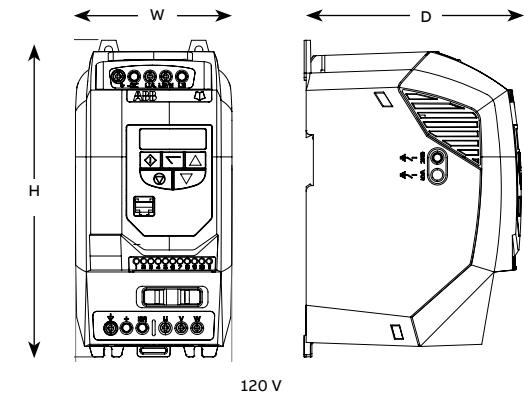

IP20 120V

Frame size	Height		Width		Depth		Weight		Dimension drawing
	in	mm	in	mm	in	mm	lb	kg	
E1	6.81	173	3.23	82	4.84	123	2.20	1	3AXD10000598750
E2	8.70	221	4.29	109	5.91	150	3.75	1.70	3AXD10000598752

H = Height
W = Width
D = Depth

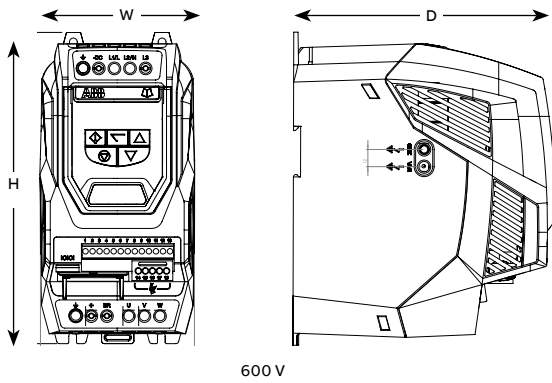


IP20 600V

Frame size	Height		Width		Depth		Weight		Dimension drawing
	in	mm	in	mm	in	mm	lb	kg	
P2	8.70	221	4.41	112	7.28	185	4	1.80	3AXD10000598764
P3	10.28	261	5.16	131	8.07	205	7.70	3.50	3AXD10000598766

H = Height
W = Width
D = Depth

ACS255 IP66 micro drive

Dimensions and weights

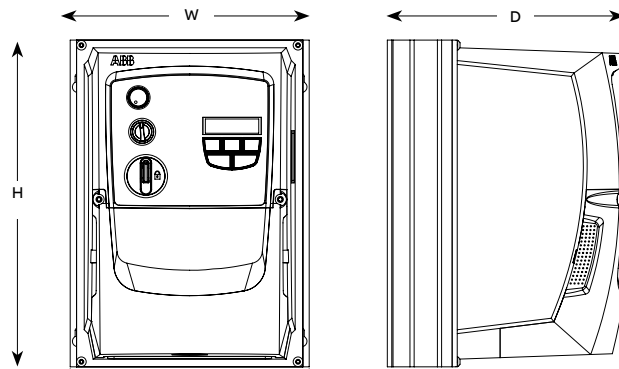

120, 240, 480 V


IP66 120, 240, 480V

Frame size	Height		Width		Depth		Weight		Dimension drawing
	in	mm	in	mm	in	mm	lb	kg	
E1	9.13	232	6.34	161	7.05	179	6.50	2.95	3AXD10000598754
E2	10.12	257	7.40	188	7.34	186	9.26	4.20	3AXD10000598755
E3	12.20	310	8.29	210	9.00	229	16.97	7.70	3AXD10000598756
E4	14.17	360	9.45	240	10.63	270	19.84	9.0	3AXD10000598757

H = Height

W = Width

D = Depth

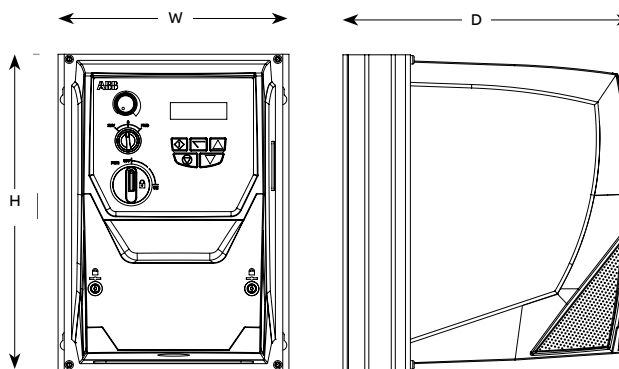

600 V

IP66 600V

Frame size	Height		Width		Depth		Weight		Dimension drawing
	in	mm	in	mm	in	mm	lb	kg	
P2	10.12	257	7.40	188	9.41	239	10.60	4.80	3AXD10000274017
P3	12.20	310	8.29	211	9.88	251	16.10	7.30	3AXD10000274018

H = Height

W = Width

D = Depth