

VBST 4-FS(6-2,8-0,8)ST4 - Feed-through terminal block

0852067
<https://www.phoenixcontact.com/pc/products/0852067>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Feed-through terminal block, nom. voltage: 800 V, nominal current: 24 A, 1st level connection right, connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.2 mm² - 4 mm², connection method: Spade connection, mounting: NS 35/7,5, NS 35/15, color: gray

Commercial data

Item number	0852067
Packing unit	50 pc
Minimum order quantity	50 pc
Product key	BE511X
GTIN	4017918197599
Weight per piece (including packing)	9.857 g
Weight per piece (excluding packing)	9.772 g
Customs tariff number	85369010
Country of origin	PL

VBST 4-FS(6-2,8-0,8)ST4 - Feed-through terminal block



0852067

<https://www.phoenixcontact.com/pc/products/0852067>

Technical data

Product properties

Product type	Feed-through terminal block
Number of connections	4
Number of rows	1
Potentials	1

Data management status

Article revision	08
------------------	----

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	8 kV
Maximum power dissipation for nominal condition	0.77 W

Connection data

Number of connections per level	4
Nominal cross section	2.5 mm ²

1st level connection right

Screw thread	M3
Tightening torque	0.6 ... 0.8 Nm
Stripping length	8 mm
Conductor cross section rigid	0.2 mm ² ... 4 mm ²
Cross section AWG	24 ... 12 (converted acc. to IEC)
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section, flexible [AWG]	24 ... 14 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.25 mm ² ... 4 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.25 mm ² ... 2.5 mm ²
Cross-section with insertion bridge, rigid	2.5 mm ²
Cross-section with insertion bridge, flexible	2.5 mm ²
2 conductors with same cross section, solid	0.2 mm ² ... 1.5 mm ²
2 conductors with same cross section, flexible	0.2 mm ² ... 1.5 mm ²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.25 mm ² ... 1 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 1.5 mm ²
Nominal current	24 A
Maximum load current	32 A (with 4 mm ² conductor cross section)
Nominal voltage	800 V
Nominal cross section	2.5 mm ²

VBST 4-FS(6-2,8-0,8)ST4 - Feed-through terminal block



0852067

<https://www.phoenixcontact.com/pc/products/0852067>

Dimensions

Width	6.2 mm
End cover width	2.2 mm
Height	72 mm
Depth on NS 35/7,5	39.5 mm
Depth on NS 35/15	47 mm

Material specifications

Color	gray (RAL 7042)
Flammability rating according to UL 94	V2
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

Mounting

Mounting type	NS 35/7,5
	NS 35/15

VBST 4-FS(6-2,8-0,8)ST4 - Feed-through terminal block




0852067

<https://www.phoenixcontact.com/pc/products/0852067>

Drawings

Circuit diagram

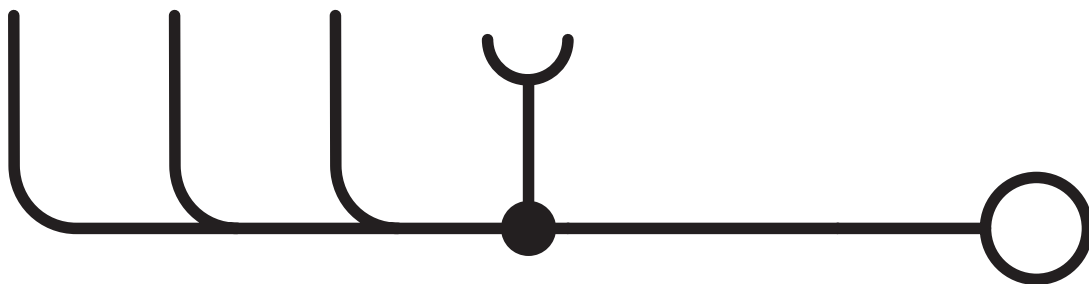

VBST 4-FS(6-2,8-0,8)ST4 - Feed-through terminal block



0852067

<https://www.phoenixcontact.com/pc/products/0852067>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/0852067>

 CSA Approval ID: 13631				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B	300 V	20 A	30 - 10	-
Use group C	300 V	20 A	30 - 10	-
Use group D	600 V	5 A	30 - 10	-

 EAC Approval ID: RU C-DE.BL08.B.00541				
---	--	--	--	--

 cULus Recognized Approval ID: E60425				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B	300 V	20 A	30 - 10	-
Use group C	300 V	20 A	30 - 10	-

VBST 4-FS(6-2,8-0,8)ST4 - Feed-through terminal block



0852067

<https://www.phoenixcontact.com/pc/products/0852067>

Classifications

ECLASS

ECLASS-11.0	27141120
ECLASS-13.0	27250101

ETIM

ETIM 9.0	EC000897
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

VBST 4-FS(6-2,8-0,8)ST4 - Feed-through terminal block



0852067
<https://www.phoenixcontact.com/pc/products/0852067>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com