

# HC-M-01-AT-F-40 - Contact insert module



1417379

<https://www.phoenixcontact.com/ca/products/1417379>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact insert module, number of positions: 1, power contacts: 1, control contacts: 0, Socket, Axial screw connection, 1000 V, 200 A, 6 mm<sup>2</sup> ... 70 mm<sup>2</sup>, application: Power

## Commercial data

Item number	1417379
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF27
Product key	BF7ACE
Catalog page	Page 573 (C-2-2019)
GTIN	4055626112602
Weight per piece (including packing)	62.75 g
Weight per piece (excluding packing)	61.4 g
Customs tariff number	85366990
Country of origin	PL

## Technical data

### Notes

General	For HEAVYCON HC-B6 to B48 housing (housing height: min. 72 mm), HC-M-B...-MF-... module carrier frame required, axial connection for 5 mm Allen key
General	Connectors may be operated only when there is no load/voltage.
General	The axial screw connection must be established using a 5 mm Allen key (for stranded conductors only)

### Mounting

Assembly note	To ensure correct use, installation in housing with IP54 protection or better is required
	<p><b>Note regarding axial connection technology:</b></p> <p>Only for stranded wires. The specified conductor cross sections refer to the geometric cross section of the cable used. Cables with a geometric cross section which deviates significantly from the nominal cable cross section must be checked before use.</p> <p>The axial connection technology connection space is designed for fine strand cables according to VDE 0295 Class 5. Deviating cable structures (e.g., Class 6 cables) must be checked before use.</p> <p><b>Assembly instructions</b></p> <p>Before assembly, ensure that the tapered screw is fully loosened (chamber is open). Cables must not be twisted. The wires must be pushed into the contact chamber as far as they will go (until the insulation touches the contact). Hold the wires in position and tighten using an Allen key. The used wire end must be cut off before reconnection. The terminal screw must only be retightened once to prevent the litz wires from breaking. To prevent damage to the contact, the wire/cable must be mechanically held at an appropriate distance from the connection point (e.g., when used in a plate cut out). For notes on correct execution, see DIN VDE 0100-520:2003-06. Unused connections must be tightened with maximum torque.</p>
Hexagonal socket	SW 5

### Product properties

Product type	Modular contact insert
Series	HC-M-HS
Application	Power
Number of positions	1
Connection profile	1
Number of module slots	2
No. of power contacts	1
No. of control contacts	0

### Insulation characteristics

Overvoltage category	III
----------------------	-----

# HC-M-01-AT-F-40 - Contact insert module



1417379

<https://www.phoenixcontact.com/ca/products/1417379>

Degree of pollution	3
---------------------	---

## Connection data


### Connection technology

Connection technology	Axial screw connection
-----------------------	------------------------

### Conductor connection

Conductor cross section	6 mm² ... 70 mm² (The cross section specification refers to the geometric cross section of the cable used)
Connection cross section AWG	10 ... 0
Tightening torque	4 Nm ... 6 Nm (6 mm² ... 10 mm²)
	6 Nm ... 8 Nm (16 mm² ... 25 mm²)
	8 Nm ... 10 Nm (35 mm² ... 70 mm²)
Stripping length of the individual wire	15 mm (with an outside conductor diameter up to 12 mm)
	19 mm (with an outside conductor diameter up to 16 mm)

## Dimensions

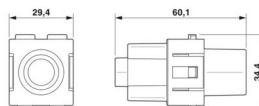Dimensional drawing	
Width	34.2 mm
Height	60 mm
Length	29.4 mm

### Mechanical characteristics

Minimum housing height	72 mm
Contact diameter	9.5 mm

## Electrical properties

Rated voltage (III/3)	1000 V
Rated surge voltage	8 kV
Rated current	200 A

## Mechanical properties

### Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

## Material specifications

Flammability rating according to UL 94	V0
Contact material	Copper alloy
Contact surface material	Ag
Contact carrier material	PC

# HC-M-01-AT-F-40 - Contact insert module



1417379

<https://www.phoenixcontact.com/ca/products/1417379>

Standards/regulations	PC: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)
-----------------------	---

## Environmental and real-life conditions


Ambient conditions	
Ambient temperature (operation)	-40 °C ... 125 °C

## Standards and regulations


Testing	
Standards/regulations	PC: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)

## Drawings

Schematic diagram

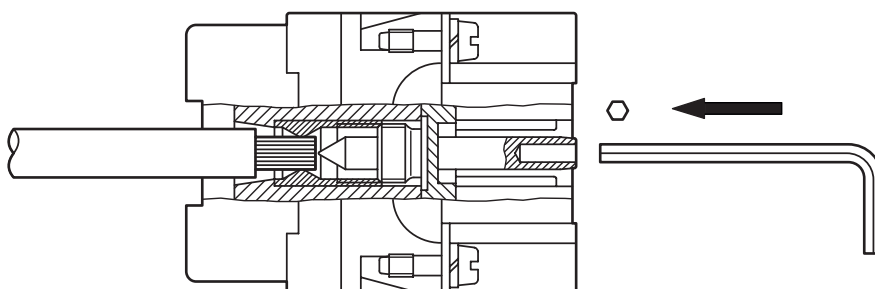


Schematic diagram

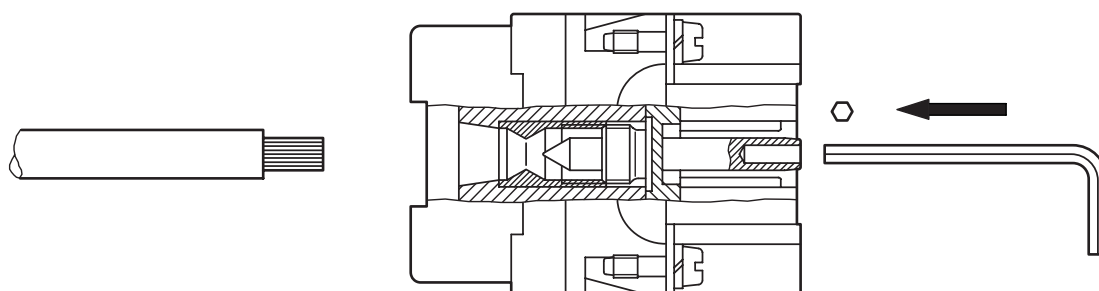

Axial connection

Diagram

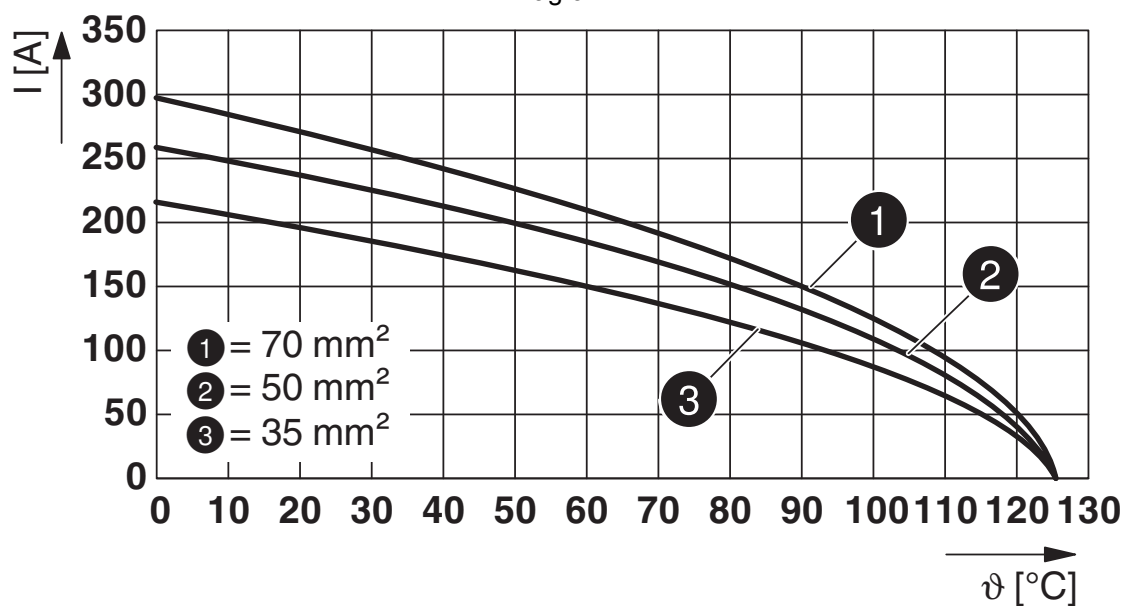

Derating diagram



# HC-M-01-AT-F-40 - Contact insert module



1417379

<https://www.phoenixcontact.com/ca/products/1417379>

Dimensional drawing

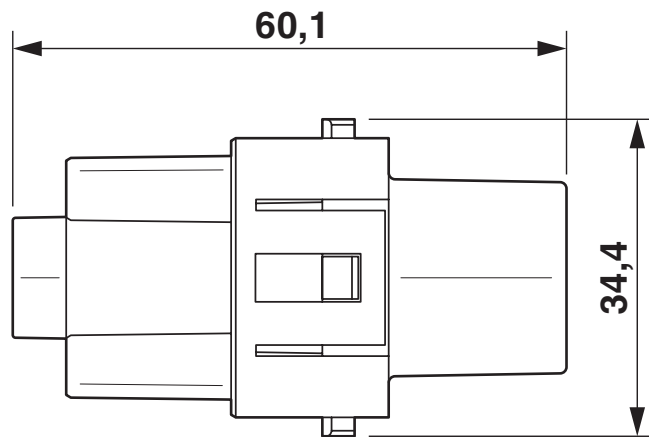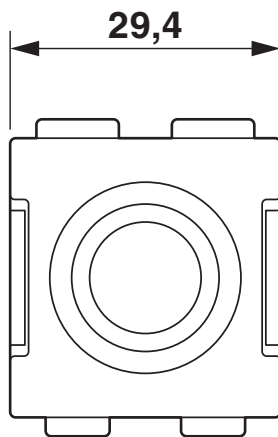

Female insert

# HC-M-01-AT-F-40 - Contact insert module



1417379

<https://www.phoenixcontact.com/ca/products/1417379>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/ca/products/1417379>

### DNV

Approval ID: TAE000037S



### CSA

Approval ID: 13631

	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	600 V	116 A	- 00	-



### UL Recognized

Approval ID: E118976

	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	600 V	146 A	- 00	-



### EAC

Approval ID: RU C-DE.BL08.B.00511



### UL Recognized

Approval ID: E468743

	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	600 V	146 A	-	-

# HC-M-01-AT-F-40 - Contact insert module



1417379

<https://www.phoenixcontact.com/ca/products/1417379>

## Classifications

### ECLASS

ECLASS-11.0	27440217
ECLASS-12.0	27440217
ECLASS-13.0	27440217

### ETIM

ETIM 9.0	EC000438
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------



# HC-M-01-AT-F-40 - Contact insert module



1417379

<https://www.phoenixcontact.com/ca/products/1417379>

## Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd  
8240 Parkhill Drive  
Milton, Ontario L9T 5V7  
1-800-890-2820  
[cdinfo@phoenixcontact.ca](mailto:cdinfo@phoenixcontact.ca)