

ECP 3-6 - Electronic circuit breaker



0916536
<https://www.phoenixcontact.com/pc/products/0916536>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Selective circuit breaker, can be plugged in TMCP socket, signaling by two-color LED, floating signal contact, on/off pushbutton, width: 12.5 mm, color: black

Commercial data

Item number	0916536
Packing unit	5 pc
Minimum order quantity	1 pc
Product key	CLA132
Catalog page	Page 325 (C-4-2017)
GTIN	4017918927226
Weight per piece (including packing)	75.92 g
Weight per piece (excluding packing)	65.5 g
Customs tariff number	85362010
Country of origin	DE

ECP 3-6 - Electronic circuit breaker



0916536

<https://www.phoenixcontact.com/pc/products/0916536>

Technical data

Notes

General	When mounted in rows without convection cooling, the nominal device current should only be led to a maximum of 80 % due to the thermal effect during continuous operation (100 % operating factor). Parallel connection of multiple load outputs is not permitted.
---------	---

Product properties

Product type	Device circuit breakers
Product family	ECP
Type	Male
Number of positions	1
No. of channels	1

Insulation characteristics

Overvoltage category	II
Degree of pollution	2

Electrical properties

Fuse type	Automatic device
Switch-on delay	300.00 ms
Short-circuit current	Active current limitation, max. $1.8 \times I_N$
Service life electrical	10000 cycles in the case of $1 \times I_N$
Maximum power dissipation for nominal condition	$\leq 1.66 \text{ VA}$
Switching capacity I_{CN}	Active current limitation
Fuse	electronic

General

Operating voltage	24 V DC
	18 V DC ... 32 V DC
Nominal current I_N	3 A (adjustable)
	6 A (adjustable)
Rated surge voltage	0.5 kV
Required backup fuse	not required, integrated failsafe element
Dielectric strength	1000 V AC (Actuation area)
	500 V AC (Installation area)
	500 V AC (Load circuit signal contact)
Switch off	Typ. $1.8 \times I_N$
Active current limitation	active
Fuse	electronic
Closed circuit current I_0	typ. 13 mA
Voltage drop	140 mV (or 280 mV)

Load circuit

ECP 3-6 - Electronic circuit breaker



0916536

<https://www.phoenixcontact.com/pc/products/0916536>

Shutdown time	typ. 5 s (for electrical insulation when $I_{\text{Load}} > 1.1 \times I_N$)
Max. capacitive load	20000 μF

Auxiliary contact

Contact connection type	floating signal contact
Minimum operating voltage U_{min} DC	10 V DC
Maximum operating voltage U_{max} DC	30 V DC
Minimum operating current I_{min}	10 mA
Max. operating current I_{max}	0.5 A

Dimensions

Width	12.5 mm
Height	60 mm
Height NS 35/15	151.5 mm
Height NS 35/7,5	144 mm
Depth	70 mm
Complete module width	38 mm
Complete module height	115 mm
Complete module depth	147.5 mm

Material specifications

Flammability rating according to UL 94	V0
Insulating material group	IIIa
Insulating material	PPS

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP30 (Actuation area)
Ambient temperature (operation)	0 °C ... 50 °C (non-condensing)
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Humidity test	96 h, 95 % RH, 40 °C

Mounting

Mounting type	on base element
---------------	-----------------


ECP 3-6 - Electronic circuit breaker

0916536



<https://www.phoenixcontact.com/pc/products/0916536>

Drawings

Functional drawing

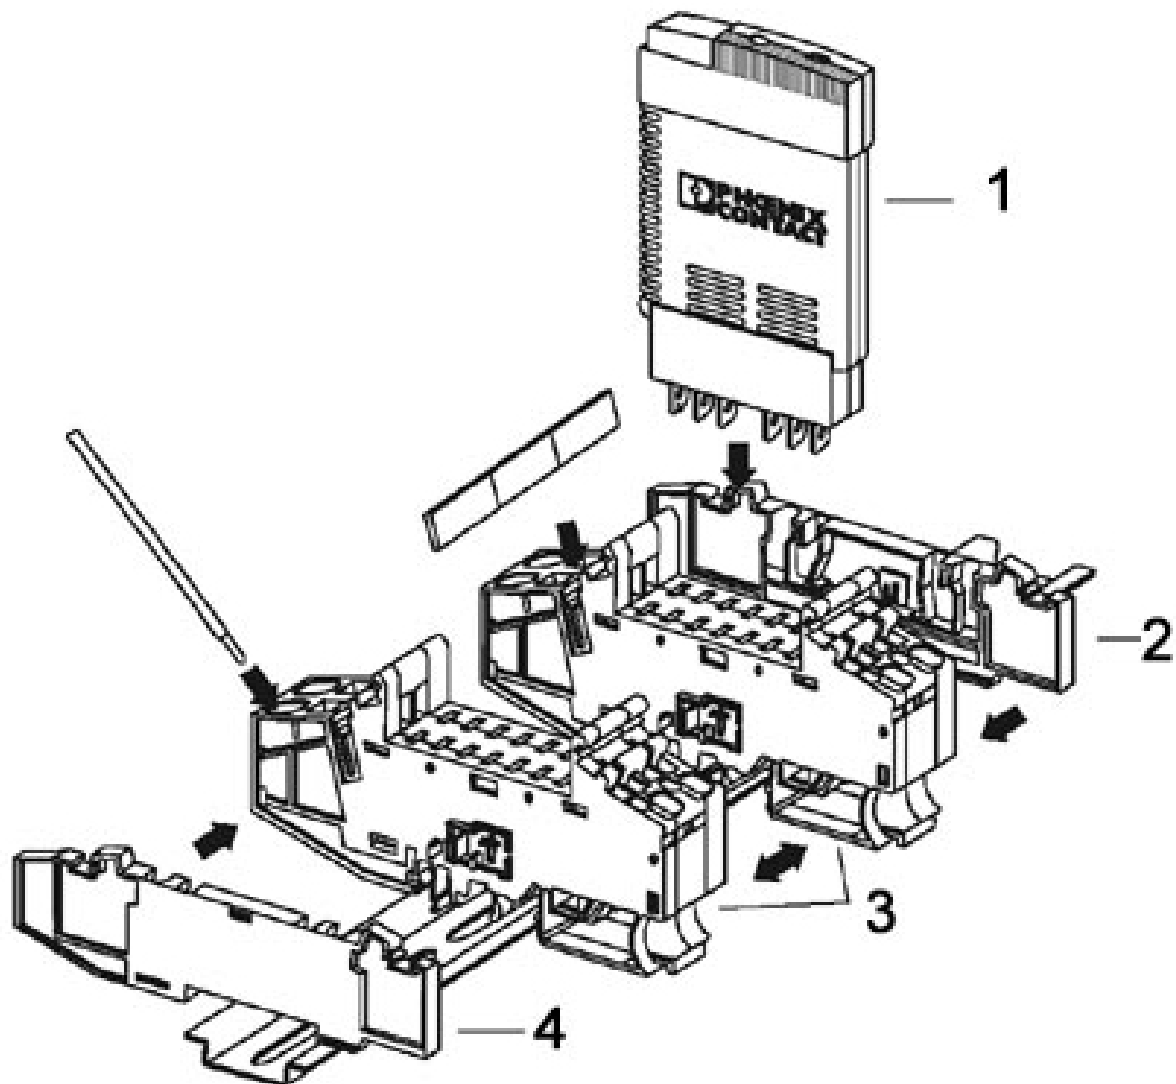


- 1 = Selective circuit breaker
- 2 = Socket termination element
- 3 = Modular socket element
- 4 = Socket termination element

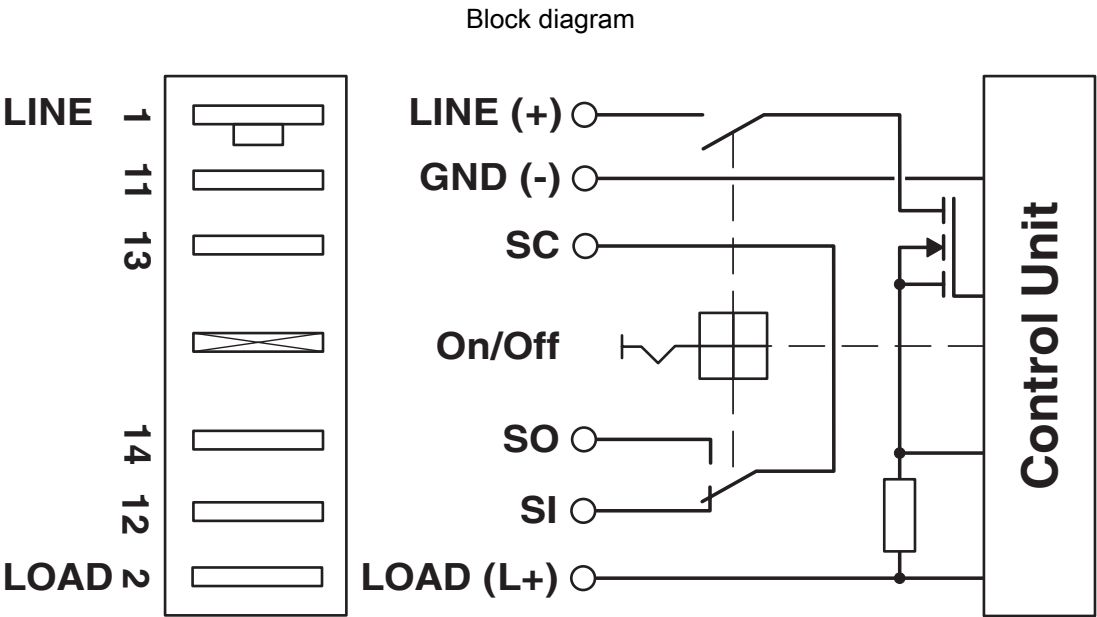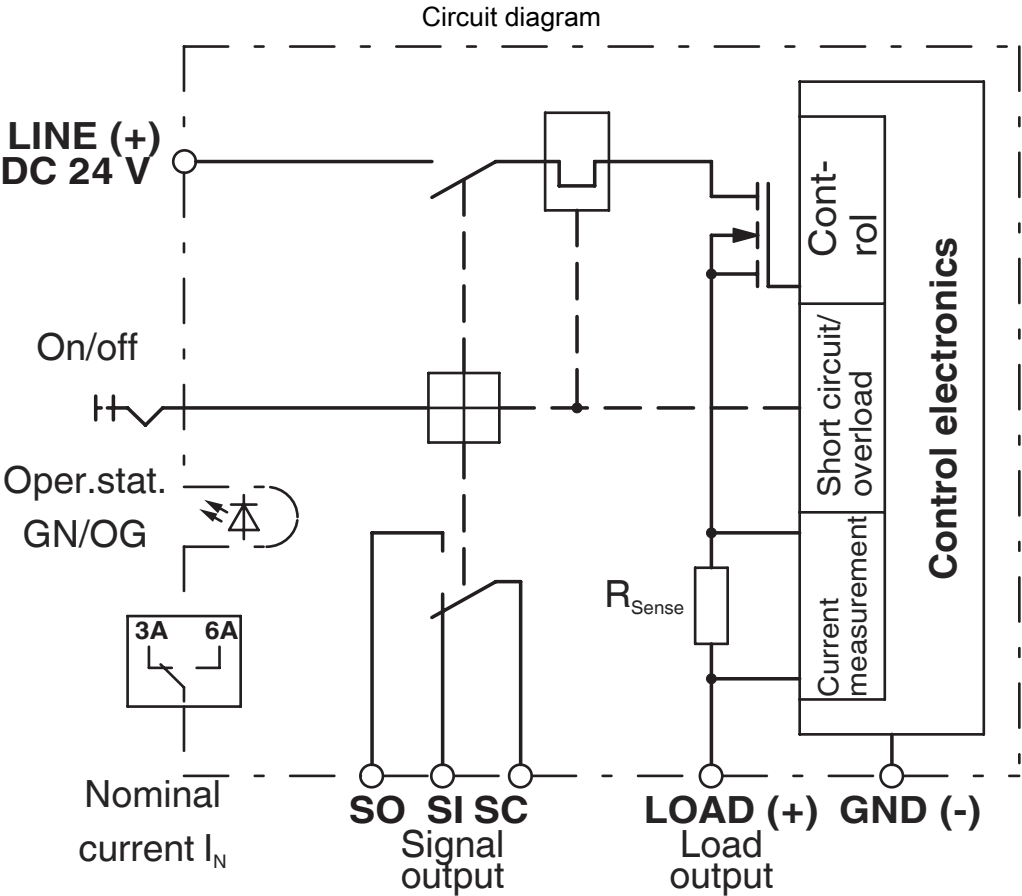

0916536

<https://www.phoenixcontact.com/pc/products/0916536>

Diagram

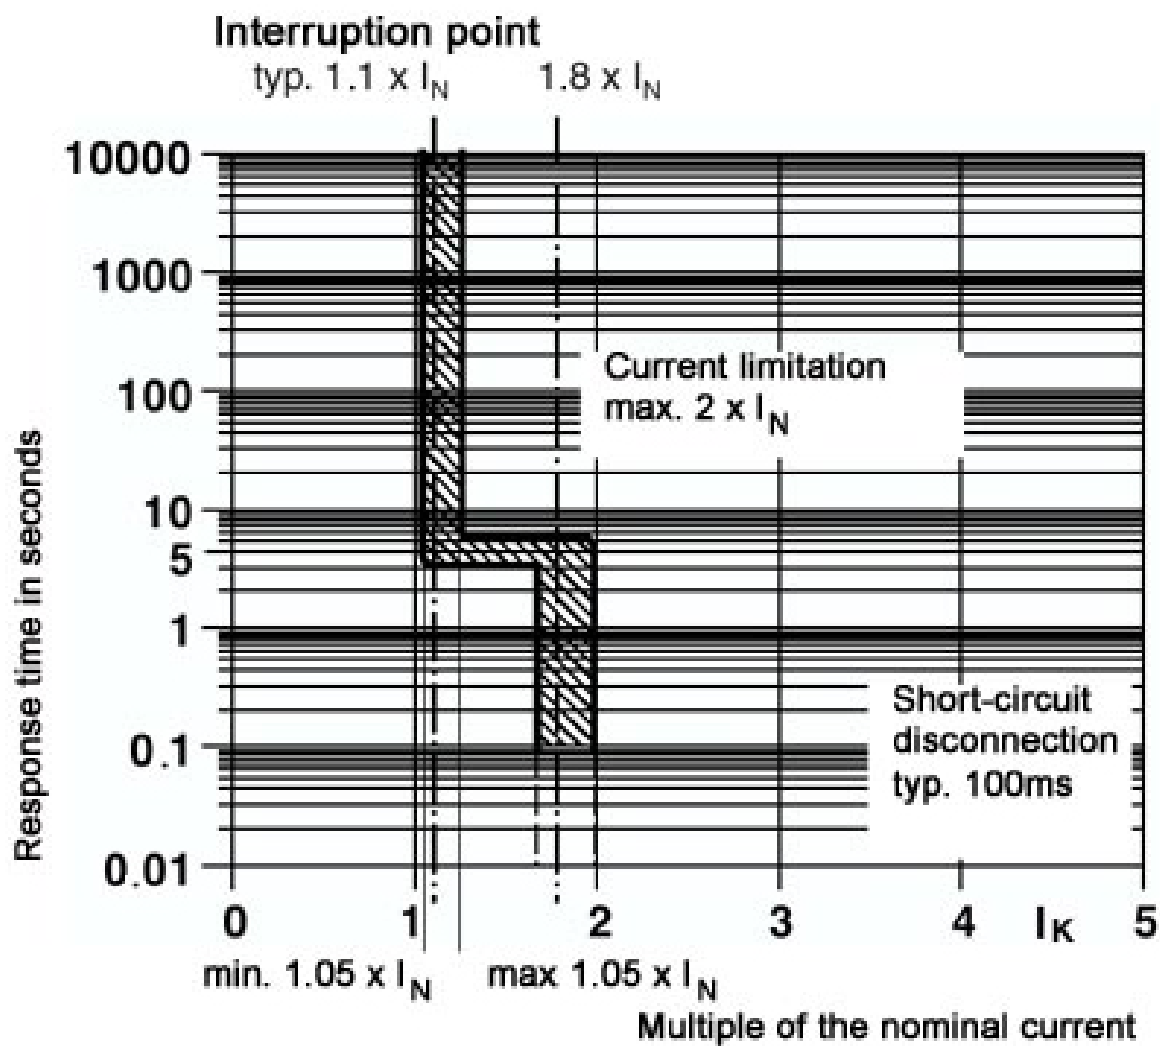

ECP 3-6 - Electronic circuit breaker



0916536

<https://www.phoenixcontact.com/pc/products/0916536>

Classifications

UNSPSC

UNSPSC 21.0	39121410
-------------	----------

ECP 3-6 - Electronic circuit breaker



0916536
<https://www.phoenixcontact.com/pc/products/0916536>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c), 7(a)
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com