

## Box terminal, 3 poles up to 160A

Part no.





NZM2-160-XKC

Article no.

262240



### Delivery programme

Space requirement			
Rated current	$I_n$	A	 160
For use with			
For use with			NZM2(-4), PN2(-4), N(S)2(-4)
For use with			Three- and four-pole
Terminal capacities			
Type of conductor			
Cu/Al cable			Copper conductors Cu cable
Terminal capacities			
flexible		mm <sup>2</sup>	1 x 10 - 185 2 x 4 - 70
AWG/kcmil			
flexible		mm <sup>2</sup>	1 x 11 - 350 2 x 12 - 2/0
Terminal capacities			
Cu strip (number of segments x width x segment thickness)			
flexible		mm <sup>2</sup>	 2 x 9 x 0.8
<b>Notes</b>			
Type suffix and type contain parts for a circuit-breaker side at top or bottom for 3 or 4 pole circuit-breakers.			
Conversion kit for circuit-breaker with screw connection.			
Fitted within the switch housing			
0 = for fitting at the top			
U = for fitting at the bottom			
$U_g$  525 V AC:			
<ul style="list-style-type: none"> <li>Use cover NZM2(4)-XKSA.</li> </ul>			
Use ferrules with flexible and highly flexible conductors. Max. cross section shown can only be connected when flexible and without ferrules.			
<b>Notes</b>			
1) up to 240 mm depending on cable manufacturer <sup>2</sup> can be connected depending on the cable manufacturer.			

### Approbationen

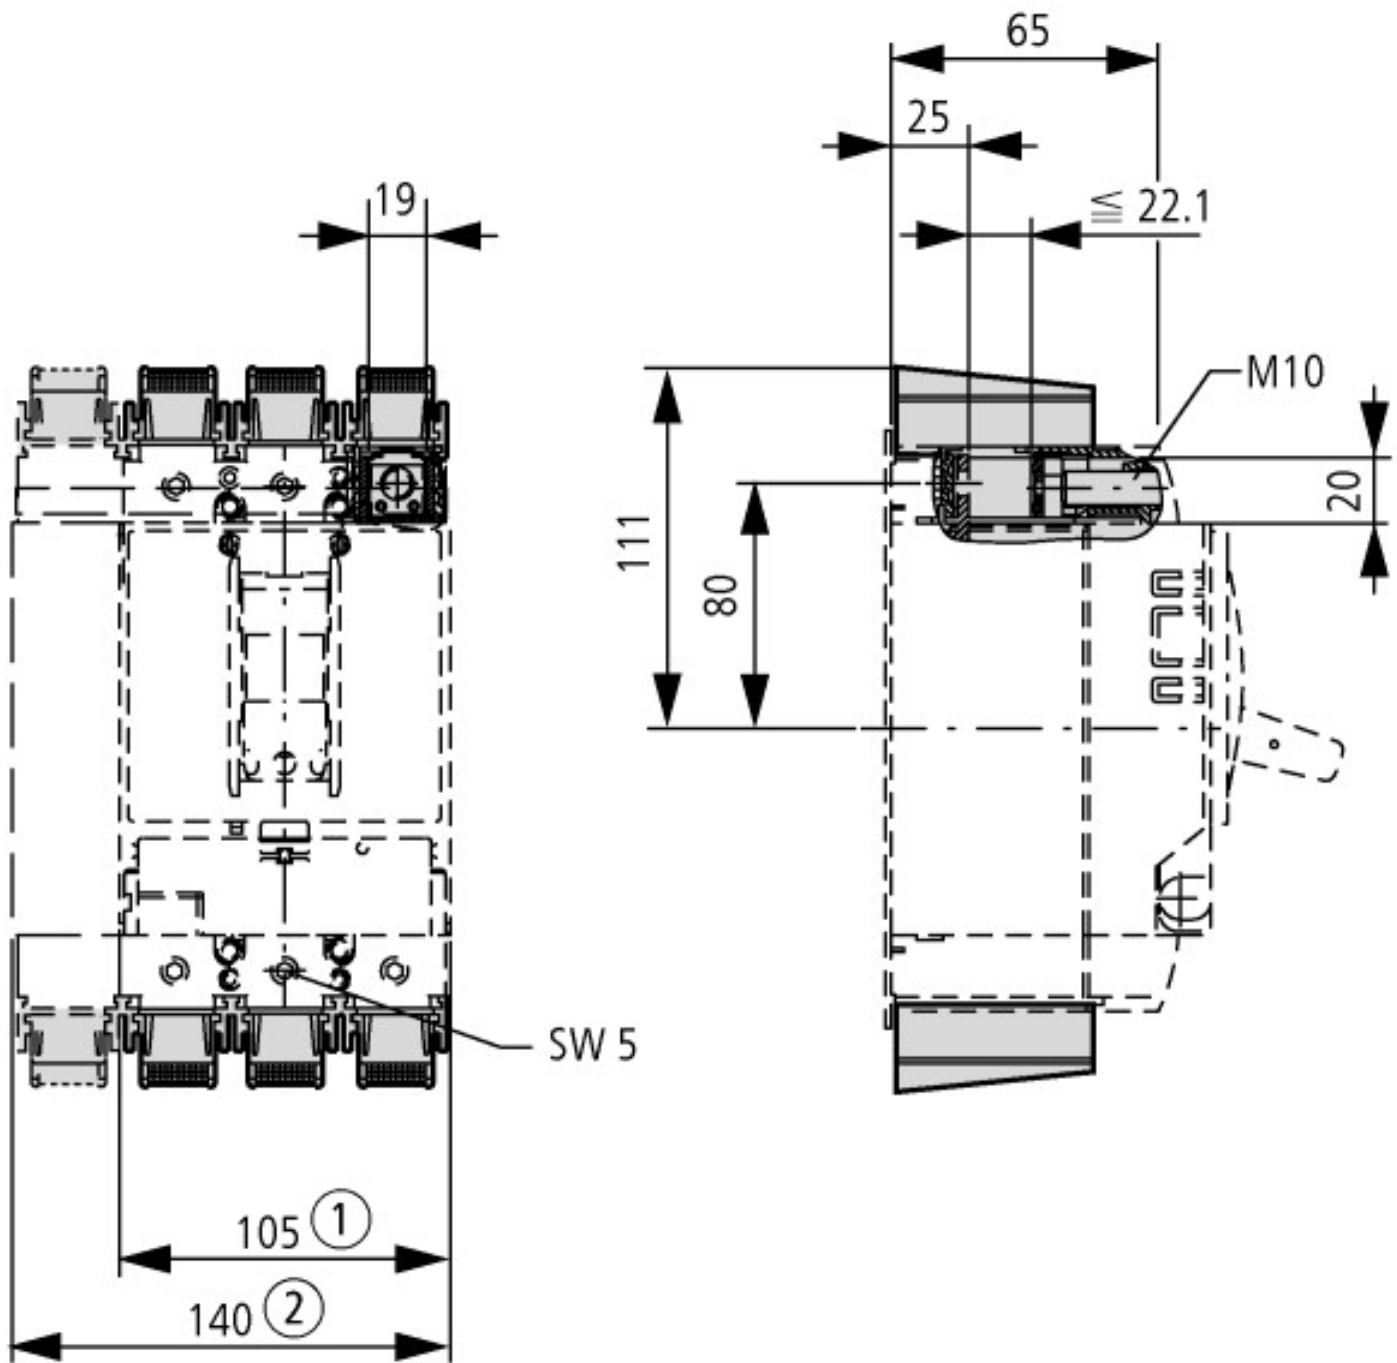
Product Standards  
UL File No.  
UL CCN  
CSA File No.  
CSA Class No.  
NA Certification  
Suitable for

UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking  
E31593  
DIHS  
022086  
1432-01  
UL Listed, CSA certified  
Refer to main component information

### Technische Daten nach ETIM 4.0

Suitable for number of poles			3
Type			-

### Dimensions



- ① 3-pole
- ② 4-pole

**Additional product information (links)**

IL01206005Z (AWA1230-1917) Box terminal block

[ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL01206005Z2010\\_11.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL01206005Z2010_11.pdf)