

ELR H5-ES-SC- 24DC/500AC-9 - Hybrid motor starter



2900561

<https://www.phoenixcontact.com/pc/products/2900561>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Hybrid motor starter for reversing 3~ AC motors up to 550 V AC, with 24 V DC input, 9 A output current, and emergency stop function.

Your advantages

- 22.5 mm wide
- Safety level in accordance with IEC 61508-1: SIL 3, ISO 13849: PL e
- Space saving
- Reduction in wiring
- Long service life
- 3-phase loop bridges
- Low-wear switching

Commercial data

Item number	2900561
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	CK7414
Catalog page	Page 179 (IF-2011)
GTIN	4046356527842
Weight per piece (including packing)	311 g
Weight per piece (excluding packing)	217.18 g
Customs tariff number	85371098
Country of origin	DE

ELR H5-ES-SC- 24DC/500AC-9 - Hybrid motor starter



2900561

<https://www.phoenixcontact.com/pc/products/2900561>

Technical data

Product properties

Product type	Hybrid motor starters
Product family	CONTACTRON
Operating mode	100% operating factor

Electrical properties

Number of phases	3
Motor starter type	Reversing starter
Maximum power dissipation for nominal condition	13.5 W
Switching frequency	≤ 2 Hz (Load-dependent)
Maximum power dissipation	14.6 W
Minimum power dissipation	1.1 W
Coordination type	1

Supply

Rated control circuit supply voltage U_S	24 V DC
Control supply voltage range	19.2 V DC ... 30 V DC
Rated control supply current I_S	40 mA
Protective circuit	Surge protection
	Reverse polarity protection

Insulation characteristics

Rated insulation voltage	500 V
Rated surge voltage	6 kV
Overvoltage category	III
Degree of pollution	2
Insulation characteristics between the control input and control supply voltage, and auxiliary circuit to the main circuit	Safe isolation (IEC 60947-1/EN 50178) at operating voltage ≤ 300 V AC
	Basic insulation (IEC 60947-1) at operating voltage 300 V AC ... 500 V AC
	Safe isolation (EN 50178) at operating voltage 300 ... 500 V AC
Isolation characteristics between the control input and control supply voltage to auxiliary circuit	Safe isolation (IEC 60947-1) in the auxiliary circuit ≤ 300 V AC
	Safe isolation (EN 50178) in the auxiliary circuit ≤ 300 V AC

Emergency tripping

Operate threshold	> 45 A
Response time	< 2 s

Input data

Control

Input name	Control input right/left
Rated actuating voltage U_C	24 V DC
Triggering voltage range	19.2 V DC ... 30 V DC

ELR H5-ES-SC- 24DC/500AC-9 - Hybrid motor starter



2900561

<https://www.phoenixcontact.com/pc/products/2900561>

Rated actuating current I_C	5 mA
Switching threshold	9.6 V ("0" signal)
	19.2 V ("1" signal)
Switching level	< 5 V DC (For EMERGENCY STOP)
Typical turn-off time	< 30 ms
Protective circuit	Reverse polarity protection

Output data

AC output

Rated operating voltage U_e	500 V AC
Operating voltage range	42 V AC ... 550 V AC
Rated operating current I_e	9 A (AC-51)
	6.5 A (AC-53a)
Mains frequency	50/60 Hz
Load current range	1.5 A ... 9 A (see to derating)
Trigger characteristic in acc. with IEC 60947-4-2	Class 10A
Cooling time	20 min. (for auto reset)
Leakage current	0 mA
Protective circuit	Surge protection

Acknowledge output

Note	Confirmation: floating change-over contact, signal contact
Contact switching type	1 changeover contact
Switching capacity in accordance with IEC 60947-5-1	3 A (230 V, AC15)
	2 A (24 V, DC13)

Connection data

Control circuits

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section rigid	0.2 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 14
Tightening torque	0.5 Nm ... 0.6 Nm
	5 lb _f -in. ... 7 lb _f -in.

Load circuit

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section rigid	0.2 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 14

ELR H5-ES-SC- 24DC/500AC-9 - Hybrid motor starter



2900561

<https://www.phoenixcontact.com/pc/products/2900561>

Tightening torque	0.5 Nm ... 0.6 Nm
	5 lb _F in. ... 7 lb _F in.

Signaling

Status display	Yellow LED
Operating voltage display	Green LED
Error indication	Red LED

Dimensions

Width	22.5 mm
Height	107 mm
Depth	114 mm

Material specifications

Flammability rating according to UL 94	V0 (Housing)
--	--------------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 70 °C (observe derating)
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	≤ 2000 m

Approvals

ATEX

Identification	Ⓔ II (2) G [Ex e] [Ex d] [Ex px]
	Ⓔ II (2) D [Ex t] [Ex p]
Certificate	PTB 07 ATEX 3145

UL approval

Certificate	NLDX.E228652
-------------	--------------

Safety Integrity Level (SIL, IEC 61508)

Identification	≤ 3
Note	Safe shutdown

Performance Level (ISO 13849)

Identification	≤ e
Note	Safe shutdown

Category (ISO 13849)

Identification	≤ 3
Note	Safe shutdown

UL data

SCCR	100 kA (500 V AC (fuse: 30 A class CC/30 A class J (high fault)))
------	---

ELR H5-ES-SC- 24DC/500AC-9 - Hybrid motor starter



2900561

<https://www.phoenixcontact.com/pc/products/2900561>

	5 kA (500 V AC (fuse: 20 A RK5 (standard fault)))
FLA	6.5 A (500 V AC)
Group installation	20 A (class RK5, SCCR 5kA, #24 - 14 AWG max. solid and stranded)
	30 A (class CC or J, SCCR 100kA, #24 - 14 AWG max, solid and stranded)
Category code	NLDX / NRNT

Standards and regulations

Standards/regulations


Standards/regulations	IEC 60947-1
	EN 60947-4-2
	IEC 61508
	ISO 13849

Mounting


Mounting type	DIN rail mounting
Assembly instructions	alignable, for spacing see derating
Mounting position	vertical (horizontal DIN rail, motor output below)

Drawings


Circuit diagram

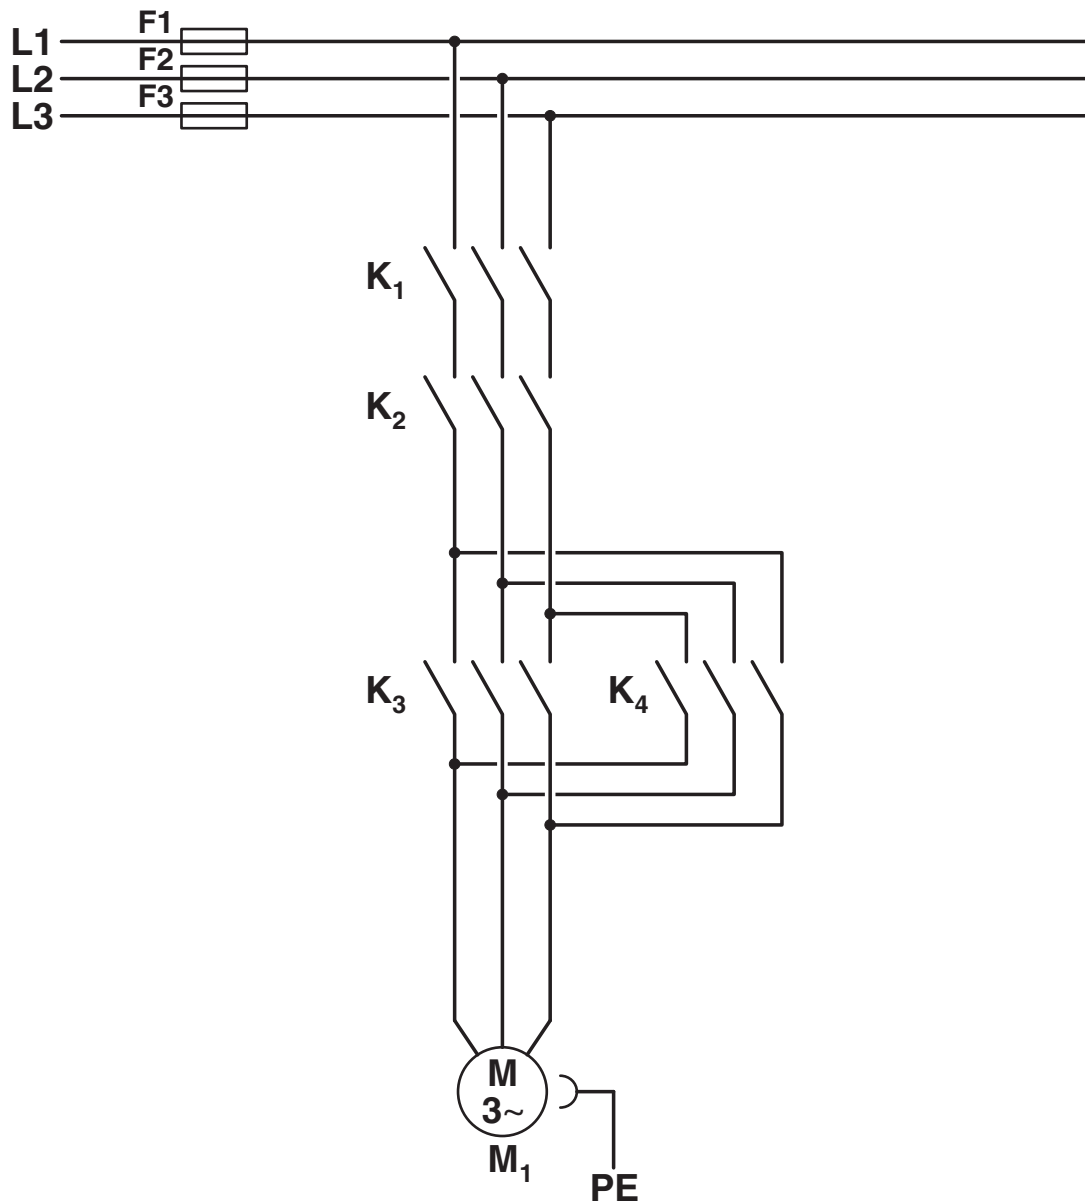

The diagram illustrates a three-phase motor control system. The main power supply consists of three phases (L1, L2, L3) and a neutral line (N), all rated at 300V. Each phase line is equipped with a fuse (F1, F2, F3). The motor (M) is a three-phase motor (3~) with terminals L1, L2, and L3, and a protective earth (PE) terminal. The motor is controlled by a three-phase contactor (K1) and a thermal relay (T1, T2, T3). The control circuit is powered by a 24V DC source. It includes a fuse (F4), a stop button (S1), a forward start button (S2), a reverse start button (S3), and a stop button (S4). The control circuit is protected by a fuse (F5) and a thermal relay (T3). The contactor (K1) is controlled by a stop button (S1) and a forward start button (S2). The thermal relay (T1, T2, T3) is controlled by a stop button (S4) and a forward start button (S2). The thermal relay (T3) is controlled by a stop button (S4) and a forward start button (S2). The thermal relay (T3) is controlled by a stop button (S4) and a forward start button (S2).

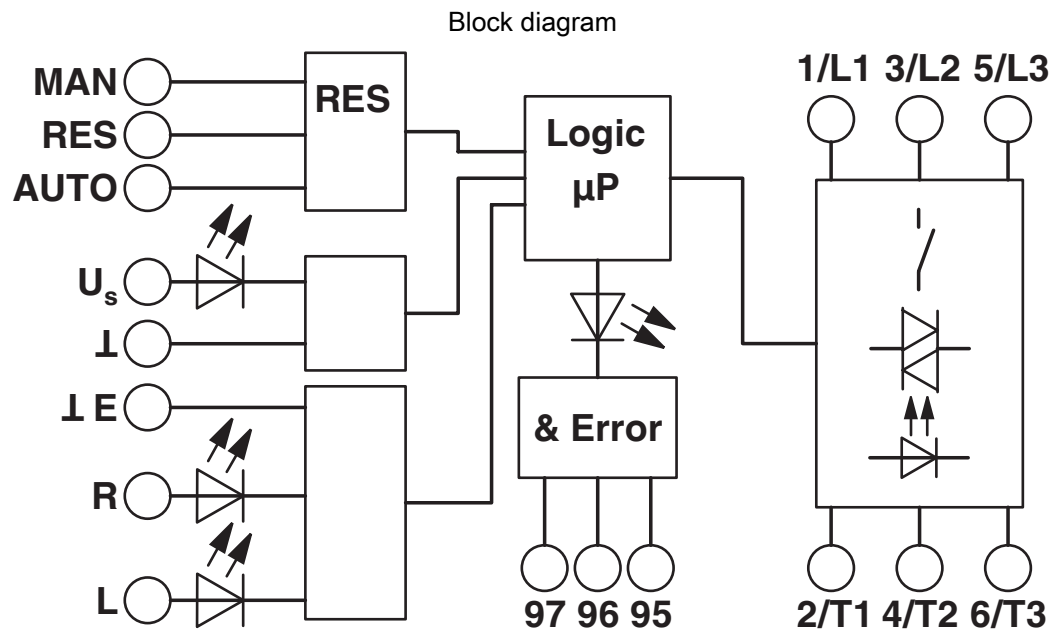

Circuit diagram

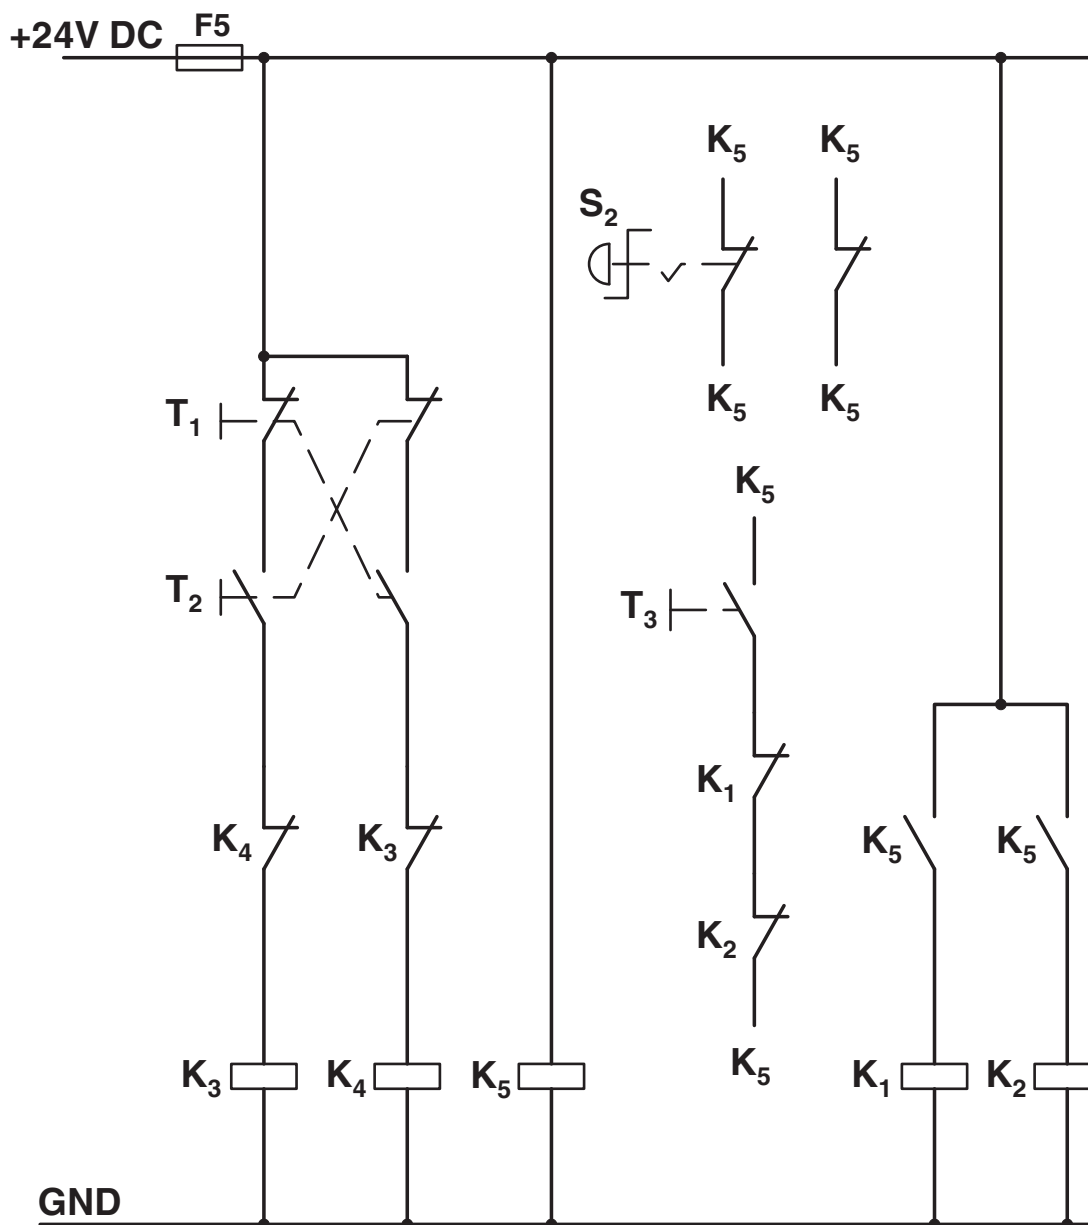

ELR H5-ES-SC- 24DC/500AC-9 - Hybrid motor starter



2900561

<https://www.phoenixcontact.com/pc/products/2900561>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/2900561>

	IECEE CB Scheme Approval ID: DE1-55728
	EAC Approval ID: RU*C-DE.*08.B.00520*
	UL Listed Approval ID: FILE E 323771
	CCC Approval ID: 2016010304871315
	cUL Listed Approval ID: FILE E 323771
	cUL Listed Approval ID: FILE E 228652
	UL Listed Approval ID: FILE E 228652
	ATEX Approval ID: PTB 07 ATEX 3145

ELR H5-ES-SC- 24DC/500AC-9 - Hybrid motor starter



2900561

<https://www.phoenixcontact.com/pc/products/2900561>

Classifications

ECLASS

ECLASS-11.0	27370905
ECLASS-12.0	27370905
ECLASS-13.0	27370905

ETIM

ETIM 9.0	EC001037
----------	----------

UNSPSC

UNSPSC 21.0	25173900
-------------	----------

ELR H5-ES-SC- 24DC/500AC-9 - Hybrid motor starter



2900561

<https://www.phoenixcontact.com/pc/products/2900561>

Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com