SIEMENS

Data sheet 3RA2115-0JD15-1AP6

| | Fuseless motor starter Direct start 600VAC Size S00 0.7-1A 220/240VAC 50/60HZ screw connection For snapping onto 60 mm busbar systems Type of coordination 2 |
|---|--|
| | IQ = 150 KA Also full fills type Of coordination 1 1NO+1NC (MSP) 1NO (contactor) |
| product brand name | SIRIUS |
| product designation | non-fused motor starter 3RA2 |
| design of the product | direct starter |
| manufacturer's article number | |
| of the supplied contactor | 3RT2015-1AP61 |
| of the supplied circuit-breakers | 3RV2011-0JA15 |
| of the supplied busbar adapter | 8US1251-5DS10 |
| of the supplied link module | 3RA1921-1DA00 |
| General technical data | |
| size of the circuit-breaker | S00 |
| size of load feeder | S00 |
| product extension auxiliary switch | Yes |
| insulation voltage with degree of pollution 3 at AC rated value | 690 V |
| degree of pollution | 3 |
| surge voltage resistance rated value | 6 kV |
| shock resistance according to IEC 60068-2-27 | 6g / 11 ms |
| mechanical service life (operating cycles) of contactor typical | 30 000 000 |
| type of assignment | 2 |
| Ambient conditions | |
| ambient temperature | |
| during operation | -20 +60 °C |
| during operation during storage | -50 +80 °C |
| during storage during transport | -55 +80 °C |
| Main circuit | -53 100 °C |
| | 3 |
| | |
| number of poles for main current circuit | |
| design of the switching contact | electromechanical |
| | |
| design of the switching contact adjustable current response value current of the current- | electromechanical |
| design of the switching contact adjustable current response value current of the current- dependent overload release | electromechanical |
| design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage | electromechanical 0.7 1 A |
| design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value | electromechanical 0.7 1 A 690 V |
| design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum | electromechanical 0.7 1 A 690 V 690 V |
| design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current at AC-3 at 400 V rated value | electromechanical 0.7 1 A 690 V 690 V 50 60 Hz |
| design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value | electromechanical 0.7 1 A 690 V 690 V 50 60 Hz |
| design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current at AC-3 at 400 V rated value operating power at AC-3 | electromechanical 0.7 1 A 690 V 690 V 50 60 Hz 0.85 A |
| design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value | electromechanical 0.7 1 A 690 V 690 V 50 60 Hz 0.85 A |
| design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage | electromechanical 0.7 1 A 690 V 690 V 50 60 Hz 0.85 A 250 W 370 W |
| design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value | electromechanical 0.7 1 A 690 V 690 V 50 60 Hz 0.85 A 250 W 370 W |
| design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage | electromechanical 0.7 1 A 690 V 690 V 50 60 Hz 0.85 A 250 W 370 W |
| design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value Control circuit/ Control control supply voltage at AC | electromechanical 0.7 1 A 690 V 690 V 50 60 Hz 0.85 A 250 W 370 W 550 W |
| design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value Control circuit/ Control control supply voltage at AC • at 50 Hz rated value | electromechanical 0.7 1 A 690 V 690 V 50 60 Hz 0.85 A 250 W 370 W 550 W |
| design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value Control circuit/ Control control supply voltage at AC • at 50 Hz rated value • at 50 Hz rated value • at 50 Hz rated value | electromechanical 0.7 1 A 690 V 690 V 50 60 Hz 0.85 A 250 W 370 W 550 W |
| design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value Control circuit/ Control control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value • at 60 Hz rated value • at 60 Hz rated value | electromechanical 0.7 1 A 690 V 690 V 50 60 Hz 0.85 A 250 W 370 W 550 W |
| design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value Control circuit/ Control control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value • at 60 Hz rated value apparent holding power of magnet coil at AC | electromechanical 0.7 1 A 690 V 690 V 50 60 Hz 0.85 A 250 W 370 W 550 W |
| design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value Control circuit/ Control control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value • at 60 Hz rated value • at 60 Hz rated value apparent holding power of magnet coil at AC inductive power factor with the holding power of the coil | electromechanical 0.7 1 A 690 V 690 V 50 60 Hz 0.85 A 250 W 370 W 550 W 220 V 187 242 V 240 V 192 264 V 4.8 VA |
| design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage | electromechanical 0.7 1 A 690 V 690 V 50 60 Hz 0.85 A 250 W 370 W 550 W 220 V 187 242 V 240 V 192 264 V 4.8 VA 0.25 |
| design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value Control circuit/ Control control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value • at 60 Hz rated value apparent holding power of magnet coil at AC inductive power factor with the holding power of the coil Auxiliary circuit number of NC contacts for auxiliary contacts | electromechanical 0.7 1 A 690 V 690 V 50 60 Hz 0.85 A 250 W 370 W 550 W 220 V 187 242 V 240 V 192 264 V 4.8 VA 0.25 |
| design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage | electromechanical 0.7 1 A 690 V 690 V 50 60 Hz 0.85 A 250 W 370 W 550 W 220 V 187 242 V 240 V 192 264 V 4.8 VA 0.25 |
| design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage | electromechanical 0.7 1 A 690 V 690 V 50 60 Hz 0.85 A 250 W 370 W 550 W 220 V 187 242 V 240 V 192 264 V 4.8 VA 0.25 |

| design of the overload release | thermal (bimetallic) |
|--|--|
| response value current of instantaneous short-circuit trip unit | 13 A |
| _/CSA ratings | |
| yielded mechanical performance [hp] | |
| • for 3-phase AC motor | |
| — at 575/600 V rated value | 0.5 hp |
| nort-circuit protection | |
| product function short circuit protection | Yes |
| design of the short-circuit trip | magnetic |
| conditional short-circuit current (Iq) | |
| at 690 V according to IEC 60947-4-1 rated value | 100 000 A |
| • at 400 V according to IEC 60947-4-1 rated value | 153 000 A |
| at 500 V according to IEC 60947-4-1 rated value | 100 000 A |
| stallation/ mounting/ dimensions | |
| mounting position | vertical |
| fastening method | for snapping onto 60 mm busbar systems |
| height | 200 mm |
| width | 45 mm |
| depth | 155.1 mm |
| required spacing | |
| for grounded parts | |
| — forwards | 0 mm |
| — backwards | 0 mm |
| — upwards | 20 mm |
| — at the side | 9 mm |
| — downwards | 10 mm |
| for live parts | |
| — forwards | 0 mm |
| — backwards | 0 mm |
| — upwards | 20 mm |
| — downwards | 10 mm |
| — at the side | 9 mm |
| onnections/ Terminals | |
| type of electrical connection for main current circuit | screw-type terminals |
| type of connectable conductor cross-sections for main contacts stranded | 0.5 4 mm², 2x (0.75 2.5 mm²) |
| connectable conductor cross-section for main contacts finely stranded with core end processing | 0.5 2.5 mm² |
| afety related data | 4 000 000 |
| B10 value with high demand rate according to SN 31920 | 1 000 000 |
| proportion of dangerous failures with high demand rate according to SN 31920 | 73 % |
| protection class IP on the front according to IEC 60529 | IP20 |
| touch protection on the front according to IEC 60529 | finger-safe, for vertical contact from the front |
| ertificates/ approvals | |
| General Product Approval | For use in hazard- ous locations Declaration of Conformity |

Confirmation











Test Certificates Marine / Shipping

Special Test Certificate

Type Test Certificates/Test Report









Marine / Shipping other Railway







Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2115-0JD15-1AP6

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2115-0JD15-1AP6

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RA2115-0JD15-1AP6

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA2115-0JD15-1AP6&lang=en

Characteristic: Tripping characteristics, I2t, Let-through current

https://support.industry.siemens.com/cs/ww/en/ps/3RA2115-0JD15-1AP6/char

Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2115-0JD15-1AP6&objecttype=14&gridview=view1

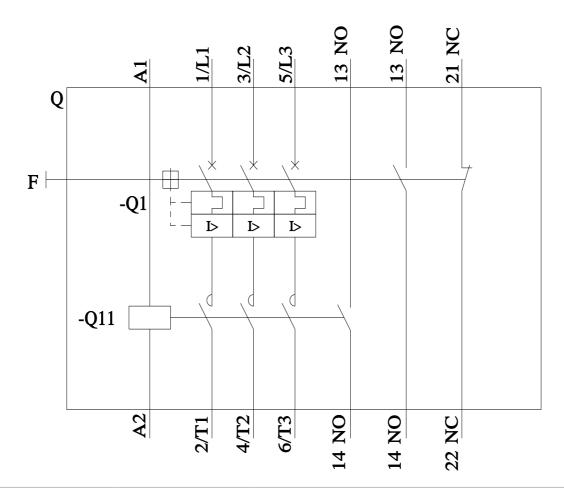

last modified:

12/15/2020