SIEMENS

Data sheet

3RA2831-1DH10



electronic timing relay, ON-delay, with semiconductor output, time range 0.05-100 s, 90-240 V AC/DC, 50/60 Hz, varistor for attenuation of the contactor coils integrated, screw terminal, can be snapped on at the front on contactors 3RT2.3 / 3RT2.4

product brand name	SIRIUS
product designation	function module
product type designation	3RA28
General technical data	
size of contactor can be combined company-specific	S2, S3
product component semi-conductor output	Yes
product extension required remote control	No
product extension optional remote control	No
insulation voltage for overvoltage category III according to IEC 60664 with degree of pollution 3 rated value	300 V
test voltage for isolation test	1.5 kV
degree of pollution	3
surge voltage resistance rated value	4 kV
test voltage for surge voltage test	4 800 V
consumed current at 24 V	24 mA
protection class IP of the terminal	IP20
shock resistance according to IEC 60068-2-27	15g / 11 ms
vibration resistance according to IEC 60068-2-6	10 59 Hz: 0.35 mm, 60 150 Hz: 2g
mechanical service life (operating cycles) typical	100 000 000
mechanical service life (operating cycles)	
 with contactor 3R.2 of frame size S2 	5 000 000
with contactor 3R.2 of frame size S3	3 000 000
electrical endurance (operating cycles) at AC-15 at 230 V typical	10 000 000
electrical endurance (operating cycles)	
 with contactor 3R.2 of frame size S2 	5 000 000
 with contactor 3R.2 of frame size S3 	3 000 000
adjustable time	0.05 100 s
relative setting accuracy relating to full-scale value	15 %
recovery time	50 ms
reference code according to IEC 81346-2	К
relative repeat accuracy	1 %
influence of the surrounding temperature	±1 %
power supply influence	±1 %
Substance Prohibitance (Date)	10/01/2009
Product Function	
product function star-delta circuit	No
Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
control supply voltage 1 at AC	
• at 50 Hz	90 240 V

control supply voltage frequency 1 60 60 Hz control supply voltage 1 90 240 V operating range factor control supply voltage rated value at CC 0.85 · Initial value 0.85 · Ot-delay Vestiching function · Ot-delay Yes · Ot-delay No · Ot-delay No · Switching function No · Infashing symmetrically with interval start/instantaneous No · Inshing symmetrically with pulse start No · Inshing symmetrically with pulses start No <ti< th=""><th>• at 60 Hz</th><th>90 240 V</th></ti<>	• at 60 Hz	90 240 V
control supply voltage 1 90 240 V operating range factor control supply voltage rated value at DC 90 240 V operating range factor control supply voltage rated value at DC 0.85 • initial value 0.85 • full-scale value 1.1 design of the surge suppressor with varistor Switching Function • Switching Function • • ON-delay Yes • ON-delay No • opasing make contact No • opasing make contact No • opasing make contact No • opasing symmetrically with interval start/instantaneous No • flashing symmetrically with ulses start No • flashing symmetrically with pulse start No • flashing symmetrically with pulse start No • switching function <t< td=""><td></td><td></td></t<>		
• et DC 90 240 V operating range factor control supply voltage rated value at CC 0.85 • Initial value 0.85 • Ob/ clealy with variator Switching function Yes • Ob/ clealy No • Dob clealy/instantaneous contact No • Ob/ clealy No • Ob/ clealy No • Ob/ clealy No • Instaing symmetrically with interval start/instantaneous No • Instaing symmetrically with interval start No • Instaing symmetrically with interval start No • Instaing asymmetrically with pules start No • Instaing asymmetricaly with pules start No<		
operating range factor control supply voltage rated value at DC 0.85 • Initial value 0.85 • Ob-Veleay Veleav • Ob-Veleay Yes • Ob-Veleay Yes • Ob-Veleay No • Switching function No • Inishing symmetrically with interval start No </td <td></td> <td>90 240 V</td>		90 240 V
bit 0.85 • Initial value 0.85 • ON-delay instantaneous contact No • OFF delay No • OFF delay No • Inshing symmetrically with interval start/instantaneous No • Inshing symmetrically with interval start No • Inshing symmetrically with pulse start No • Inshing symmetrically with pulse start No • Inshing symmetrically with pulse start No <t< td=""><td></td><td></td></t<>		
• full-scale value 1.1 operating range factor control supply voltage rated value at AC at 50 Hz 0.85 • full-scale value 1.1 design of the surge suppressor With varistor Switching function - • ON-delay Yes • ON-delay No • ON-delay Yes • ON-delay No • passing make contact No • oFF delay No • oFF delay No switching symmetrically with interval start/instantaneous No • flashing symmetrically with pulse start No • flashing symmetrically with pulse start No • flashing asymmetrically with pulse start No • flashing asymmetrically with pulse start No • flashing asymmetrically with pulse start No • constart clock cycle with interval start No		
operating range factor control supply voltage rated value at AC at 50 Hz 0.85 • Initial value 0.85 • Initial value 1.1 operating range factor control supply voltage rated value at AC at 60 Hz 0.85 • Initial value 0.85 • ON-delay instantaneous contact No • OPS delay No • OFF delay No • Inshing symmetrically with interval start/instantaneous No • Inshing symmetrically with pulse start No • Inshing symmetrically with pulse start No • Inshing asymmetrically with pulse start No • constant clock cycl	• initial value	
AC at 50 Hz 0.85 • initial value 0.85 • full-scale value 1.1 operating range factor control supply voltage rated value at AC at 60 Hz 0.85 • initial value 1.1 design of the surge suppressor with variator Switching Function ************************************		1.1
• initial value 0.85 • full-scale value 1.1 operating range factor control supply voltage rated value at AC at 60 Hz 0.85 • initial value 0.85 • full-scale value 1.1 design of the surge suppressor with variator Switching Function - switching function - • ON-delay/instantaneous contact No • passing make contact/instantaneous contact No • oB-delay/instantaneous contact No • oB-fediay/instantaneous contact No • oB-fishing symmetrically with interval start/instantaneous No • flashing symmetrically with interval start No • flashing symmetrically with interval start No • flashing asymmetrically with interval start No • flashing asymmetrically with pulse start No • flashing asymmetrically with interval start No • flashing asymmetrically with interval start No • start-delta circuit with interval start No • uratably clocked with interval start No • vari		
• full-scale value 1.1 operating range factor control supply voltage rated value at AC at 60 Hz 0.85 • initial value 0.85 • full-scale value 1.1 design of the surge suppressor with variator Switching Function 1.1 switching function Ves • ON-delay Yes • ON-delay Yes • ON-delay No • ON-delay No • ON-delay No • ON-delay Yes • ON-delay No • Inshing symmetrically with interval start/instantaneous No • Inshing asymmetrically with pulse start No • constant clock cycle with pulse start No <td></td> <td>0.85</td>		0.85
AC at 60 hz 0.85 • initial value 0.85 • full-scale value 1.1 design of the surge suppressor with variator Switching Function - • ON-delay Yes • ON-delay instantaneous contact No • passing make contact No • passing make contact instantaneous contact No • flashing symmetrically with interval start/instantaneous No • flashing symmetrically with pulse start/instantaneous No • flashing symmetrically with pulse start No • flashing asymmetrically with pulse start No • flashing asymmetrically with pulse start No • onstant clock cycle with pulse start No • onstant clock cycle with pulse start No • variably clocked with pulse start No • variably clocked with pulse start No • variably clocked with pulse start No <	• full-scale value	
• initial value 0.85 • iuli-scale value 1.1 design of the surge suppressor with variator Switching Function • • ON-delay Yes • ON-delay instantaneous contact No • passing make contact/instantaneous contact No • ofFr delay No • switching function No • ofFr delay No • alshing symmetrically with interval start/instantaneous No • flashing symmetrically with interval start No • flashing symmetrically with pulse start No • flashing symmetrically with pulse start No • constant clock cycle with interval start No • constant clock cycle with interval start No • variably clocked with pulse start No • variably clocked with interval start No • variably clocked with interval start No • variably clocked with interval sta	operating range factor control supply voltage rated value at	
• full-scale value 1.1 design of the surge suppressor with variator Switching Function - • ON-delay Yes • ON-delay/instantaneous contact No • passing make contact/instantaneous contact No • passing make contact/instantaneous contact No • of Ff delay No • of ff delay No • flashing symmetrically with interval start/instantaneous No • flashing symmetrically with pulse start No • starting symmetrically with pulse start No • constant clock cycle with interval start No • constant clock cycle with interval start No • variably clocked with pulse start No • variably clocked with pulse start No		
design of the surge suppressor with variator Switching Function		
Switching Function • ON-delay Yes • ON-delay/instantaneous contact No • passing make contact/instantaneous contact No • passing make contact/instantaneous contact No • OFF delay No switching function No • flashing symmetrically with interval start/instantaneous No • flashing symmetrically with pulse start No • flashing symmetrically with pulse start No • flashing asymmetrically with pulse start No • switching function • • constant clock cycle with interval start No • switching function • • variably clocked with interval start No • variably clocked with interval start No • star-delta circuit with delay time No • star-delta circuit with d		
switching function Yes • ON-delay/instantaneous contact No • passing make contact/instantaneous contact No • passing make contact/instantaneous contact No • OFF delay No switching function No • flashing symmetrically with interval start/instantaneous No • flashing symmetrically with pulse start/instantaneous No • flashing symmetrically with pulse start/instantaneous No • flashing symmetrically with pulse start No • flashing asymmetrically with pulse start No • constant clock cycle with interval start No • variably clocked with interval start No • star-delta circuit with delay time No • passing		with varistor
• ON-delayYes• ON-delay/instantaneous contactNo• passing make contact/instantaneous contactNo• OFF delayNoswitching functionNo• flashing symmetrically with interval start/instantaneousNo• flashing symmetrically with interval startNo• flashing symmetrically with interval startNo• flashing symmetrically with pulse start/instantaneousNo• flashing symmetrically with pulse startNo• flashing symmetrically with pulse startNo• flashing symmetrically with pulse startNo• flashing asymmetrically with pulse startNo• variably clocked with pulse startNo• variably clocked with interval startNo• variably clocked with interval startNo• star-delta circuit with delay timeNo• star-delta circuit with delay timeNo• additive ON-delayNo• passing break contactNo• passing break contactNo• passing break contactNo• oFF delayNo• OFF delayNo <td></td> <td></td>		
• ON-delay/instantaneous contact No • passing make contact/instantaneous contact No • opssing make contact/instantaneous contact No • OFF delay No switching function No • flashing symmetrically with interval start/instantaneous No • flashing symmetrically with pulse start/instantaneous No • flashing symmetrically with pulse start No • flashing asymmetrically with pulse start No • constant clock cycle with pulse start No • constant clock cycle with interval start No • variably clocked with interval start No • variably clocked with interval start No • star-delta circuit No • star-delta circuit with delay time No • star-delta circuit No • additive ON-delay No • passing break contact No • passing break contact No • oFF delay/instantaneous No • OFF delay N	-	N
• passing make contactNo• passing make contact/instantaneous contactNo• OFF delayNoswitching function• flashing symmetrically with interval start/instantaneousNo• flashing symmetrically with interval startNo• flashing symmetrically with pulse start/instantaneousNo• flashing symmetrically with pulse startNo• flashing asymmetrically with pulse startNo• constant clock cycle with pulse startNo• constant clock cycle with pulse startNo• variably clocked with pulse startNo• variably clocked with pulse startNo• star-delta circuitNo• star-delta circuitNo• additive ON-delayNo• passing break contactNo• OFF delayNo• OFF delayNo• OFF delayNo• OFF delayNo• OFF delayNo• OFF delay/instantaneousNo• OFF delay/instantaneousNo	-	
 passing make contact/instantaneous contact OFF delay No switching function flashing symmetrically with interval start/instantaneous flashing symmetrically with pulse start flashing symmetrically with pulse start flashing asymmetrically with pulse start constant clock cycle with pulse start constant clock cycle with pulse start variably clocked with interval start variably clocked with interval start switching function star-delta circuit star-delta circuit variably clocked vith delay time star-delta circuit No switching function with control signal additive ON-delay passing break contact No OFF delay OFF delay No OFF delay No OFF delay No OFF delay/instantaneous No OFF delay/instantaneous No	-	
• OFF delayNoswitching functionI• flashing symmetrically with interval start/instantaneousNo• flashing symmetrically with pulse startNo• flashing symmetrically with pulse start/instantaneousNo• flashing asymmetrically with pulse startNo• flashing asymmetrically with interval startNo• flashing asymmetrically with pulse startNo• flashing asymmetrically with pulse startNo• flashing asymmetrically with pulse startNo• constant clock cycle with pulse startNo• constant clock cycle with pulse startNo• variably clocked with pulse startNo• variably clocked with interval startNo• variably clocked with interval startNo• variably clocked with interval startNo• star-delta circuitNo• star-delta circuitNo• passing break contactNo• passing break contactNo• oFF delayNo• OFF delayNo• OFF delay/instantaneousNo		
switching function No • flashing symmetrically with interval start/instantaneous No • flashing symmetrically with pulse start/instantaneous No • flashing symmetrically with pulse start No • flashing asymmetrically with pulse start No • constant clock cycle with pulse start No • constant clock cycle with interval start No • variably clocked with pulse start No • variably clocked with interval start No • variably clocked with interval start No • variably clocked with delay time No • star-delta circuit No • star-delta circuit No • star-delta circuit No • passing break contact No • passing break contact No • passing break contact No		
fashing symmetrically with interval start/instantaneousNoflashing symmetrically with pulse startNoflashing symmetrically with pulse startNoflashing symmetrically with pulse startNoflashing asymmetrically with pulse startNoflashing asymmetrically with pulse startNoflashing asymmetrically with pulse startNoswitching functionNoconstant clock cycle with pulse startNoswitching functionNoswitching functionNoswitching functionNoswitching functionNoswitching functionNoswitching functionNoswitching functionNoswitching functionNoswitching functionNoswitching functionNostar-delta circuit with delay timeNostar-delta circuit with delay timeNostar-delta circuit with control signalNoswitching function with control signalNosign break contact/instantaneousNooCPF delayNooCPF delayNooCPF delay/instantaneousNooCPF delay/instantaneousNooCPF delay/instantaneousNooCPF delay/instantaneousNooCPF delay/instantaneousNo		
• flashing symmetrically with interval start No • flashing symmetrically with pulse start/instantaneous No • flashing symmetrically with pulse start No • flashing asymmetrically with interval start No • flashing asymmetrically with pulse start No • constant clock cycle with pulse start No • constant clock cycle with interval start No • constant clock cycle with interval start No • switching function	-	No
• flashing symmetrically with pulse start/instantaneous No • flashing symmetrically with pulse start No • flashing asymmetrically with nerval start No • flashing asymmetrically with pulse start No • flashing asymmetrically with pulse start No • flashing asymmetrically with pulse start No • flashing function		
• flashing symmetrically with pulse start No • flashing asymmetrically with interval start No • flashing asymmetrically with pulse start No • flashing asymmetrically with pulse start No • flashing asymmetrically with pulse start No • switching function • • constant clock cycle with pulse start No • constant clock cycle with interval start No • constant clock cycle with pulse start No • constant clock de with pulse start No • constant clock de with pulse start No • variably clocked with pulse start No • variably clocked with interval start No • variably clocked with interval start No • star-delta circuit with delay time No • star-delta circuit No • star-delta circuit No • additive ON-delay No • passing break contact No • passing break contact No • OFF delay No • OFF delay No • OFF delay/instantaneous No		No
• flashing asymmetrically with pulse startNoswitching functionNo• constant clock cycle with pulse startNo• constant clock cycle with interval startNoswitching functionNo• variably clocked with pulse startNo• variably clocked with interval startNoswitching functionNo• variably clocked with interval startNoswitching functionNo• star-delta circuit with delay timeNo• star-delta circuitNoswitching function with control signalNo• additive ON-delayNo• passing break contact/instantaneousNo• OFF delayNo• OFF delayNo• OFF delay/instantaneousNo		No
switching functionNo• constant clock cycle with pulse startNo• constant clock cycle with interval startNoswitching function• variably clocked with pulse startNo• variably clocked with interval startNoswitching function• variably clocked with interval startNoswitching function• variably clocked with interval startNoswitching function• star-delta circuit with delay timeNo• star-delta circuitNoswitching function with control signal• additive ON-delayNo• passing break contactNo• oFF delayNo• OFF delay/instantaneousNo• OFF delay/instantaneousNo		No
switching functionNo• constant clock cycle with pulse startNo• constant clock cycle with interval startNoswitching function• variably clocked with pulse startNo• variably clocked with interval startNoswitching function• variably clocked with interval startNoswitching function• variably clocked with interval startNoswitching function• star-delta circuit with delay timeNo• star-delta circuitNoswitching function with control signal• additive ON-delayNo• passing break contactNo• oFF delayNo• OFF delay/instantaneousNo• OFF delay/instantaneousNo	 flashing asymmetrically with pulse start 	No
• constant clock cycle with interval startNoswitching functionNo• variably clocked with pulse startNo• variably clocked with interval startNoswitching functionNoswitching functionNo• star-delta circuit with delay timeNo• star-delta circuit with delay timeNo• star-delta circuitNoswitching function with control signalNo• additive ON-delayNo• passing break contactNo• OFF delayNo• OFF delayNo• OFF delay/instantaneousNo• OFF delay/instantaneousNo	switching function	
switching function• variably clocked with pulse startNo• variably clocked with interval startNoswitching function• star-delta circuit with delay timeNo• star-delta circuitNoswitching function with control signal• additive ON-delayNo• passing break contactNo• oFF delayNo• OFF delayNo• OFF delay/instantaneousNo• OFF delay/instantaneousNo	 constant clock cycle with pulse start 	No
• variably clocked with pulse startNo• variably clocked with interval startNoswitching function• star-delta circuit with delay timeNo• star-delta circuitNoswitching function with control signal• additive ON-delayNo• passing break contactNo• oFF delayNo• OFF delay/instantaneousNo• OFF delay/instantaneousNo	 constant clock cycle with interval start 	No
• variably clocked with interval startNoswitching functionNo• star-delta circuit with delay timeNo• star-delta circuitNoswitching function with control signalNo• additive ON-delayNo• passing break contactNo• passing break contact/instantaneousNo• OFF delayNo• OFF delay/instantaneousNo	-	
switching functionNo• star-delta circuit with delay timeNo• star-delta circuitNoswitching function with control signalImage: Star-delay• additive ON-delayNo• passing break contactNo• passing break contact/instantaneousNo• OFF delayNo• OFF delay/instantaneousNo• OFF delay/instantaneousNo		
• star-delta circuit with delay timeNo• star-delta circuitNoswitching function with control signal-• additive ON-delayNo• passing break contactNo• passing break contact/instantaneousNo• OFF delayNo• OFF delay/instantaneousNo		No
• star-delta circuitNoswitching function with control signal• additive ON-delayNo• passing break contactNo• passing break contact/instantaneousNo• OFF delayNo• OFF delay/instantaneousNo	-	Na
switching function with control signalNo• additive ON-delayNo• passing break contactNo• passing break contact/instantaneousNo• OFF delayNo• OFF delay/instantaneousNo	-	
• additive ON-delayNo• passing break contactNo• passing break contact/instantaneousNo• OFF delayNo• OFF delay/instantaneousNo		INU
• passing break contactNo• passing break contact/instantaneousNo• OFF delayNo• OFF delay/instantaneousNo	-	No
 passing break contact/instantaneous OFF delay OFF delay/instantaneous No 	-	
OFF delay/instantaneous No		
OFF delay/instantaneous No		
	-	
pulse delayed No	-	
pulse delayed/instantaneous No		
• pulse-shaping No		No
pulse-shaping/instantaneous No	 pulse-shaping/instantaneous 	No
additive ON-delay/instantaneous	 additive ON-delay/instantaneous 	No
• ON-delay/OFF-delay No	ON-delay/OFF-delay	No
ON-delay/OFF-delay/instantaneous No	 ON-delay/OFF-delay/instantaneous 	No
passing make contact No		
passing make contact/instantaneous contact No		No
switching function of interval relay with control signal		
retrotriggerable with deactivated control signal/instantaneous contact		No
retrotriggerable with switched-on control signal No	C C	No
retrotriggerable with switched-on control No		
signal/instantaneous contact		
retriggerable with deactivated control signal No	 retriggerable with deactivated control signal 	No

design of the control terminal non-floating	Yes			
design of the control terminal non-hoating	103			
number of NO contacts				
	1			
delayed switching operating frequency with 3RT2 contactor maximum	2 500 1/h			
Main circuit	2 300 1/11			
type of voltage	AC/DC			
Inputs/ Outputs				
product function				
non-volatile	No			
Electromagnetic compatibility				
EMC immunity according to IEC 61812-1	Environment A (industrial area)			
conducted interference				
 due to burst according to IEC 61000-4-4 	2 kV network connection / 1 kV control connection			
 due to conductor-earth surge according to IEC 61000-4-5 	2 kV			
• due to conductor-conductor surge according to IEC 61000-4-5	1 kV			
field-based interference according to IEC 61000-4-3	10 V/m			
electrostatic discharge according to IEC 61000-4-2	8 kV			
Safety related data				
protection class IP on the front according to IEC 60529	IP20			
type of insulation	Basic insulation			
category according to EN 954-1	none			
Connections/ Terminals				
product component removable terminal for auxiliary and control circuit	Yes			
type of electrical connection for auxiliary and control circuit	screw-type terminals			
type of connectable conductor cross-sections				
• solid	0.5 4 mm², 2x (0.5 2.5 mm²)			
 finely stranded with core end processing 	1x (0.5 2.5 mm²), 2x (0.5 1.5 mm²)			
 finely stranded without core end processing 	2x (0.5 1.5 mm²)			
 at AWG cables solid 	2x (20 14)			
 at AWG cables stranded 	2x (20 14)			
connectable conductor cross-section				
• solid	0.5 4 mm²			
 finely stranded with core end processing 	0.5 2.5 mm ²			
finely stranded without core end processing	0.25 1.5 mm²			
AWG number as coded connectable conductor cross section				
• solid	20 14			
• stranded	20 14			
Installation/ mounting/ dimensions				
mounting position	any (like contactor)			
fastening method	clip-on			
height	38 mm			
width	45 mm			
depth	74 mm			
required spacing				
 with side-by-side mounting 				
— forwards	0 mm			
— backwards	0 mm			
— upwards	0 mm			
— downwards	0 mm			
— at the side	0 mm			
 for grounded parts 				
— forwards	0 mm			
— backwards	0 mm			
— upwards	0 mm			
— at the side	0 mm			
— downwards	0 mm			
• for live parts				

— forwards		0 m	m				
— backwards	;	0 mm					
— upwards		0 m	m				
- downwards	S	0 m	m				
— at the side		0 m	m				
Ambient conditions							
installation altitude at h	eight above sea level maxir	num 2 00)0 m				
ambient temperature							
 during operation 	1	-25	-25 +60 °C				
 during storage 		-40	+85 °C				
 during transport 		-40	+85 °C				
relative humidity during	goperation	0	95 %				
Certificates/ approvals							
General Product App	oroval		Declaration of Conformity	,	Test Certificates		
Marine / Shipping	Ű	EHC	EG-Konf.	UK CA	ates/Test Report		
ABS	BUREAU VERITAS		Llovd's Register uis	PRS	RINA		
Marine / Shipping	other						
RMRS	<u>Confirmation</u>						
Further information							

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10 Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2831-1DH10

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2831-1DH10

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RA2831-1DH10


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA2831-1DH10&lang=en

Characteristic: Derating

https://support.industry.siemens.com/cs/ww/en/ps/3RA2831-1DH10/manual

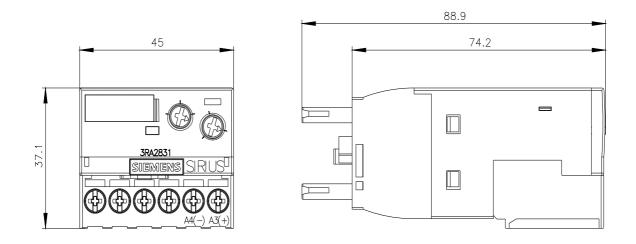

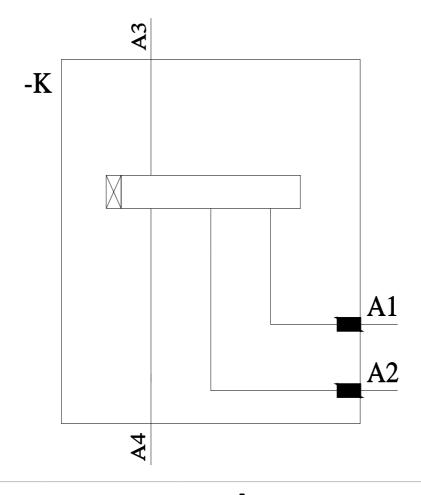

8/2/2022 🖸

5/13/2023