SIEMENS

product brand name

Data sheet 3RB2066-2MF2



Overload relay 160...630 A for motor protection Size S10/S12, Class 20E Contactor mounting/stand-alone installation Main circuit: busbar connection Auxiliary circuit: Spring-type terminal Manual-Automatic-Reset

product designation	solid-state overload relay
product type designation	3RB2
General technical data	
size of overload relay	S10, S12
size of contactor can be combined company-specific	S10, S12
insulation voltage with degree of pollution 3 at AC rated value	1 000 V
surge voltage resistance rated value	8 kV
maximum permissible voltage for safe isolation in networks with grounded star point	
 between auxiliary and auxiliary circuit 	300 V
 between auxiliary and auxiliary circuit 	300 V
 between main and auxiliary circuit 	600 V
 between main and auxiliary circuit 	690 V
shock resistance	15g / 11 ms
 according to IEC 60068-2-27 	15g / 11 ms; Signaling contact 97 / 98 in position "Tripped": 8g / 11 ms
vibration resistance	1-6 Hz, 15 mm; 6-500 Hz, 20 m/s ² ; 10 cycles
thermal current	630 A
type of protection according to ATEX directive 2014/34/EU	Ex II (2) G [Ex e] [Ex d] [Ex px]; Ex II (2) D [Ex t] [Ex p]
certificate of suitability according to ATEX directive 2014/34/EU	PTB 06 ATEX 3001
reference code according to IEC 81346-2	F
Substance Prohibitance (Date)	07/01/2006

SIRIUS

Substance Prohibitance (Date)	07/01/2006
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-25 +60 °C
 during storage 	-40 +80 °C
 during transport 	-40 +80 °C
temperature compensation	-25 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current-dependent overload release	160 630 A
operating voltage	
 rated value 	1 000 V
 at AC-3e rated value maximum 	1 000 V
operating frequency rated value	50 60 Hz
operational current rated value	630 A

operational current at AC-3e at 400 V rated value	630 A
operating power	
 for 3-phase motors at 400 V at 50 Hz 	90 355 kW
 for AC motors at 500 V at 50 Hz 	132 400 kW
 for AC motors at 690 V at 50 Hz 	160 560 kW
Auxiliary circuit	
design of the auxiliary switch	integrated
number of NC contacts for auxiliary contacts	1
• note	for contactor disconnection
number of NO contacts for auxiliary contacts	1
• note	for message "tripped"
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	
• at 24 V	4 A
• at 110 V	4 A
• at 120 V	4 A
● at 125 V	4 A
● at 230 V	3 A
operational current of auxiliary contacts at DC-13	
• at 24 V	2 A
● at 60 V	0.55 A
● at 110 V	0.3 A
• at 125 V	0.3 A
• at 220 V	0.11 A
Protective and monitoring functions	
trip class	CLASS 20E
design of the overload release	electronic
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
• at 480 V rated value	630 A
at 400 V rated value at 600 V rated value	630 A
contact rating of auxiliary contacts according to UL	B600 / R300
	B00071000
Short circuit protection	
Short-circuit protection	
design of the fuse link	
design of the fuse link • for short-circuit protection of the main circuit	
 design of the fuse link for short-circuit protection of the main circuit with type of coordination 1 required 	gG: 800 A, Class L: 1600 A
design of the fuse link ● for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required	gG: 630 A
 design of the fuse link for short-circuit protection of the main circuit with type of coordination 1 required with type of assignment 2 required for short-circuit protection of the auxiliary switch 	
design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required	gG: 630 A
design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	gG: 630 A
design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position	gG: 630 A fuse gG: 6 A
design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method	gG: 630 A fuse gG: 6 A any Contactor mounting/stand-alone installation
design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height	gG: 630 A fuse gG: 6 A any Contactor mounting/stand-alone installation 119 mm
design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width	gG: 630 A fuse gG: 6 A any Contactor mounting/stand-alone installation 119 mm 120 mm
design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth	gG: 630 A fuse gG: 6 A any Contactor mounting/stand-alone installation 119 mm
design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width	gG: 630 A fuse gG: 6 A any Contactor mounting/stand-alone installation 119 mm 120 mm
design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary	gG: 630 A fuse gG: 6 A any Contactor mounting/stand-alone installation 119 mm 120 mm
design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit	gG: 630 A fuse gG: 6 A any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm
design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection	gG: 630 A fuse gG: 6 A any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm
design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit	gG: 630 A fuse gG: 6 A any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm Yes busbar connection
design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit	gG: 630 A fuse gG: 6 A any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm Yes busbar connection spring-loaded terminals
design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit	gG: 630 A fuse gG: 6 A any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm Yes busbar connection
design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections	gG: 630 A fuse gG: 6 A any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm Yes busbar connection spring-loaded terminals
design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit	gG: 630 A fuse gG: 6 A any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm Yes busbar connection spring-loaded terminals
design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections	gG: 630 A fuse gG: 6 A any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm Yes busbar connection spring-loaded terminals
design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for auxiliary contacts	gG: 630 A fuse gG: 6 A any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm Yes busbar connection spring-loaded terminals Top and bottom
design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for auxiliary contacts — solid	gG: 630 A fuse gG: 6 A any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm Yes busbar connection spring-loaded terminals Top and bottom 2x (0.25 1.5 mm²)
design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for auxiliary contacts — solid — solid or stranded	gG: 630 A fuse gG: 6 A any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm Yes busbar connection spring-loaded terminals Top and bottom 2x (0.25 1.5 mm²) 2x (0,25 1,5 mm²)
design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for auxiliary contacts — solid — solid or stranded — finely stranded with core end processing	gG: 630 A fuse gG: 6 A any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm Yes busbar connection spring-loaded terminals Top and bottom 2x (0.25 1.5 mm²) 2x (0,25 1,5 mm²) 2x (0.25 1.5 mm²)
design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for auxiliary contacts — solid — solid or stranded — finely stranded with core end processing — finely stranded without core end processing	gG: 630 A fuse gG: 6 A any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm Yes busbar connection spring-loaded terminals Top and bottom 2x (0.25 1.5 mm²) 2x (0.25 1.5 mm²) 2x (0.25 1.5 mm²) 2x (0.25 1.5 mm²)
design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for auxiliary contacts — solid — solid or stranded — finely stranded with core end processing — finely stranded without core end processing • at AWG cables for auxiliary contacts	gG: 630 A fuse gG: 6 A any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm Yes busbar connection spring-loaded terminals Top and bottom 2x (0.25 1.5 mm²) 2x (0.25 1.5 mm²) 2x (0.25 1.5 mm²) 2x (0.25 1.5 mm²)
design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for auxiliary contacts — solid — solid or stranded — finely stranded with core end processing — finely stranded without core end processing • at AWG cables for auxiliary contacts tightening torque	any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm Yes busbar connection spring-loaded terminals Top and bottom 2x (0.25 1.5 mm²)

 for main contacts 	M10
Safety related data	
protection class IP on the front according to IEC 60529	IP00; IP20 with box terminal/cover
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front with box terminal/cover
Communication/ Protocol	
type of voltage supply via input/output link master	No
Electromagnetic compatibility	
conducted interference	
 due to burst according to IEC 61000-4-4 	2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3
 due to conductor-earth surge according to IEC 61000-4-5 	2 kV (line to earth) corresponds to degree of severity 3
 due to conductor-conductor surge according to IEC 61000-4-5 	1 kV (line to line) corresponds to degree of severity 3
 due to high-frequency radiation according to IEC 61000-4-6 	10 V in frequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz
field-based interference according to IEC 61000-4-3	10 V/m
electrostatic discharge according to IEC 61000-4-2	6 kV contact discharge / 8 kV air discharge
Display	
display version for switching status	Slide switch
Certificates/ approvals	



General Product Approval

Confirmation









EMC

For use in hazardous locations

Declaration of Conformity

Test Certificates

Marine / Shipping







Special Test Certificate

Type Test Certificates/Test Report



Marine / Shipping







Confirmation

other

Miscellaneous

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

 $\underline{https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RB2066-2MF2}$

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB2066-2MF2

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RB2066-2MF2

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RB2066-2MF2&lang=en


Characteristic: Tripping characteristics, I^2t , Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RB2066-2MF2/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RB2066-2MF2&objecttype=14&gridview=view1







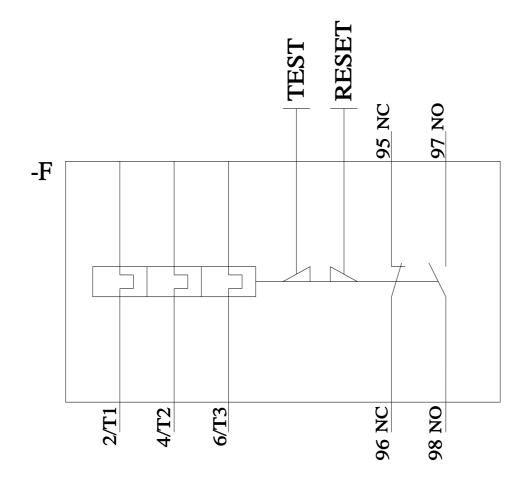

last modified:

2/9/2022