SIEMENS

Data sheet 3RF2030-1AA24



Semiconductor relay, 1-phase 3RF2 Overall width 45 mm, 30 A 48-460 V / 110-230 V AC screw terminal

product brand name product designation design of the product product type designation SIRIUS solid-state relay single-phase 3RF20

General technical data	
product function	zero-point switching
power loss [W] for rated value of the current	
 at AC in hot operating state 	44.2 W
 at AC in hot operating state per pole 	44.2 W
 without load current share typical 	3.5 W
insulation voltage rated value	600 V
type of voltage of the control supply voltage	AC
shock resistance according to IEC 60068-2-27	15g / 11 ms
vibration resistance according to IEC 60068-2-6	2g
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	05/28/2009
Main circuit	
number of poles for main current circuit	1
number of NO contacts for main contacts	1
number of NC contacts for main contacts	0
operating voltage at AC	

Main circuit	
number of poles for main current circuit	1
number of NO contacts for main contacts	1
number of NC contacts for main contacts	0
operating voltage at AC	
 at 50 Hz rated value 	48 460 V
 at 60 Hz rated value 	48 460 V
operating frequency rated value	50 60 Hz
relative symmetrical tolerance of the operating frequency	10 %
operating range relative to the operating voltage at AC	
● at 50 Hz	40 506 V
• at 60 Hz	40 506 V
operational current	
 at AC-51 rated value 	30 A
 according to UL 508 rated value 	30 A
ampacity maximum	30 A
operational current minimum	500 mA
rate of voltage rise at the thyristor for main contacts maximum permissible	500 V/μs
blocking voltage at the thyristor for main contacts maximum permissible	1 200 V
reverse current of the thyristor	10 mA
derating temperature	40 °C
surge current resistance rated value	300 A
I2t value maximum	450 A ² ·s

Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage 1 at AC	
• at 50 Hz	110 230 V
• at 60 Hz	110 230 V
control supply voltage frequency	110 200 V
1 rated value	50 Hz
2 rated value	50 Hz 60 Hz
	00 HZ
control supply voltage at AC	40.1/
at 50 Hz full-scale value for signal<0> recognition	40 V
 at 60 Hz full-scale value for signal<0> recognition 	40 V
control supply voltage	
 at AC initial value for signal <1> detection 	90 V
symmetrical line frequency tolerance	5 Hz
control current at minimum control supply voltage	
• at AC	2 mA
control current at AC rated value	15 mA
ON-delay time	40 ms; additionally max. one half-wave
OFF-delay time	40 ms
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Installation/ mounting/ dimensions	
3	corou fiving
fastening method	screw fixing
side-by-side mounting	Yes
design of the thread of the screw for securing the equipment	M4
• •	1 F N m
tightening torque of fixing screw maximum	1.5 N·m
tightening torque [lbf·in] of fixing screw maximum	13 lbf·in
height	58 mm
width	45 mm
depth	48 mm
Connections/ Terminals	
type of electrical connection	
 for main current circuit 	screw-type terminals
 for auxiliary and control circuit 	screw-type terminals
type of connectable conductor cross-sections	
• for main contacts	
— solid	2x (1.5 2.5 mm²), 2x (2.5 6 mm²)
— solid— finely stranded with core end processing	2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
— finely stranded with core end processing	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
finely stranded with core end processingat AWG cables for main contacts	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10)
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm²
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm²
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm²
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded with core end processing — finely stranded without core end processing	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing • at AWG cables for auxiliary and control contacts	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing • at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing • at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing • at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing • at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing • at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing • at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing • at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals tightening torque [lbf-in]	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10 2 2.5 N·m 0.5 0.6 N·m
- finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing • at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals tightening torque [lbf-in] • for main contacts with screw-type terminals	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10 2 2.5 N·m 0.5 0.6 N·m
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing • at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals tightening torque [lbf-in]	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10 2 2.5 N·m 0.5 0.6 N·m
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing — at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals tightening torque [lbf-in] • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10 2 2.5 N·m 0.5 0.6 N·m
 finely stranded with core end processing at AWG cables for main contacts connectable conductor cross-section for main contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-sections for auxiliary and control contacts solid finely stranded with core end processing finely stranded without core end processing at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque for main contacts with screw-type terminals for auxiliary and control contacts with screw-type terminals for main contacts with screw-type terminals for main contacts with screw-type terminals for main contacts with screw-type terminals for auxiliary and control contacts with screw-type	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10 2 2.5 N·m 0.5 0.6 N·m

• of the auxiliary and control contacts М3 stripped length of the cable • for main contacts 10 mm · for auxiliary and control contacts 7 mm Safety related data protection class IP on the front according to IEC IP20 60529 touch protection on the front according to IEC 60529 finger-safe, for vertical contact from the front **Ambient conditions** installation altitude at height above sea level maximum 1 000 m ambient temperature during operation -25 ... +60 °C during storage -55 ... +80 °C **Electromagnetic compatibility** conducted interference • due to burst according to IEC 61000-4-4 2 kV / 5 kHz behavior criterion 2 • due to conductor-earth surge according to IEC 2 kV behavior criterion 2 61000-4-5 • due to conductor-conductor surge according to IEC 1 kV behavior criterion 2 61000-4-5 • due to high-frequency radiation according to IEC 140 dBuV in the frequency range 0.15 ... 80 MHz, behavior criterion 1 61000-4-6 field-based interference according to IEC 61000-4-3 80 MHz ... 1 GHz 10 V/m, behavior criterion 1 electrostatic discharge according to IEC 61000-4-2 4 kV contact discharging / 8 kV air discharging, behavior criterion 2 conducted HF interference emissions according to Class A for industrial environment CISPR11 field-bound HF interference emission according to Class B for the domestic, business and commercial environments CISPR11 Short-circuit protection, design of the fuse link manufacturer's article number • of gS fuse for semiconductor protection at NH 3NE1815-0; These fuses have a smaller rated current than the design usable semiconductor relays 5SE1325; These fuses have a smaller rated current than the • of full range R fuse link for semiconductor protection at cylindrical design usable semiconductor relays • of back-up R fuse link for semiconductor protection 3NE8003-1 at NH design usable 3NC1025; These fuses have a smaller rated current than the • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable semiconductor relays • of back-up R fuse link for semiconductor protection 3NC1430 at cylindrical design 14 x 51 mm usable • of back-up R fuse link for semiconductor protection 3NC2232 at cylindrical design 22 x 58 mm usable manufacturer's article number of the gG fuse • at NH design usable 3NA6803; These fuses have a smaller rated current than the semiconductor relays • at cylindrical design 14 x 51 mm usable 3NW6101-1; These fuses have a smaller rated current than the semiconductor relays manufacturer's article number • of DIAZED fuse usable 5SB251; These fuses have a smaller rated current than the semiconductor relays Certificates/ approvals

General Product Approval

EMC

Declaration of Conformity



Confirmation









Declaration of Conformity

Test Certificates

other



Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2030-1AA24


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2030-1AA24


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RF2030-1AA24

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax de.aspx?mlfb=3RF2030-1AA24&lang=en

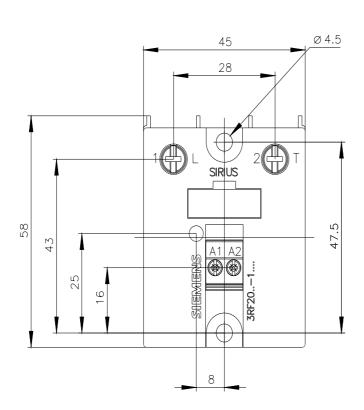

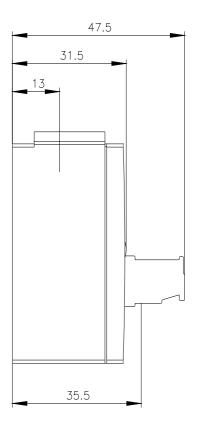

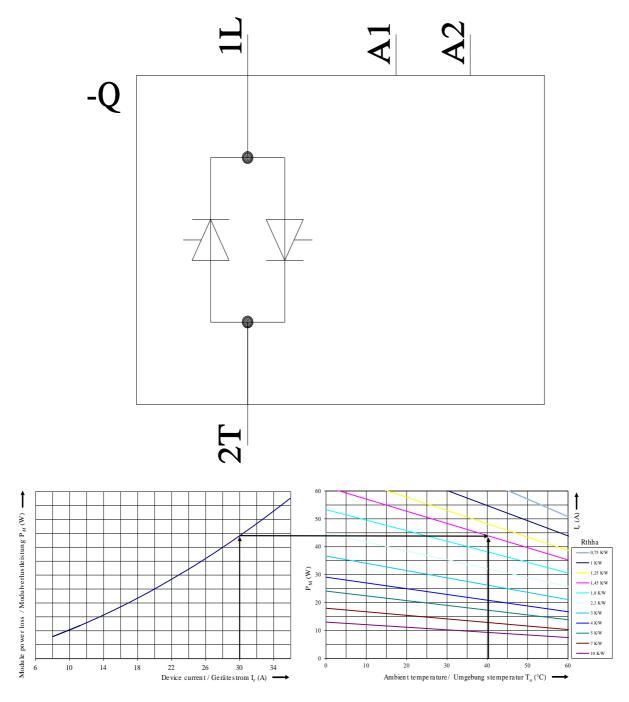

last modified: 1/11/2022 **C**