SIEMENS

Data sheet 3RF2090-1AA22



Semiconductor relay, 1-phase 3RF2 Overall width 45 mm, 90 A 24-230 V / 110-230 V AC screw terminal

product brand name product designation design of the product product type designation SIRIUS solid-state relay single-phase 3RF20

General technical data	
product function	zero-point switching
power loss [W] for rated value of the current	
 at AC in hot operating state 	118 W
 at AC in hot operating state per pole 	118 W
 without load current share typical 	3.5 W
insulation voltage rated value	600 V
type of voltage of the control supply voltage	AC
shock resistance according to IEC 60068-2-27	15g / 11 ms
vibration resistance according to IEC 60068-2-6	2g
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	05/28/2009
Main circuit	
number of noise for main current circuit	1

Main circuit	
number of poles for main current circuit	1
number of NO contacts for main contacts	1
number of NC contacts for main contacts	0
operating voltage at AC	
 at 50 Hz rated value 	24 230 V
 at 60 Hz rated value 	24 230 V
operating frequency rated value	50 60 Hz
relative symmetrical tolerance of the operating frequency	10 %
operating range relative to the operating voltage at AC	
● at 50 Hz	20 253 V
• at 60 Hz	20 253 V
operational current	
 at AC-51 rated value 	50 A
 according to UL 508 rated value 	50 A
ampacity maximum	90 A
operational current minimum	500 mA
rate of voltage rise at the thyristor for main contacts maximum permissible	1 000 V/μs
blocking voltage at the thyristor for main contacts maximum permissible	800 V
reverse current of the thyristor	10 mA
derating temperature	40 °C
surge current resistance rated value	1 150 A
I2t value maximum	6 600 A²·s

Control circuit/ Control			
type of voltage of the control supply voltage	AC		
control supply voltage 1 at AC			
• at 50 Hz	110 230 V		
• at 60 Hz	110 230 V		
control supply voltage frequency	110 200 V		
1 rated value	50 Hz		
2 rated value	50 Hz 60 Hz		
	00 HZ		
control supply voltage at AC	40.1/		
at 50 Hz full-scale value for signal<0> recognition	40 V		
 at 60 Hz full-scale value for signal<0> recognition 	40 V		
control supply voltage			
 at AC initial value for signal <1> detection 	90 V		
symmetrical line frequency tolerance	5 Hz		
control current at minimum control supply voltage			
• at AC	2 mA		
control current at AC rated value	15 mA		
ON-delay time	40 ms; additionally max. one half-wave		
OFF-delay time	40 ms		
Auxiliary circuit			
number of NC contacts for auxiliary contacts	0		
number of NO contacts for auxiliary contacts	0		
number of CO contacts for auxiliary contacts	0		
Installation/ mounting/ dimensions			
3	corou fiving		
fastening method	screw fixing		
side-by-side mounting	Yes		
design of the thread of the screw for securing the equipment	M4		
• •	4 5 N m		
tightening torque of fixing screw maximum	1.5 N·m		
tightening torque [lbf·in] of fixing screw maximum	13 lbf·in		
height	58 mm		
width	45 mm		
depth	48 mm		
Connections/ Terminals			
type of electrical connection			
 for main current circuit 	screw-type terminals		
 for auxiliary and control circuit 	screw-type terminals		
type of connectable conductor cross-sections			
• for main contacts			
— solid	2x (1.5 2.5 mm²), 2x (2.5 6 mm²)		
— solid— finely stranded with core end processing	2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²		
— finely stranded with core end processing	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²		
finely stranded with core end processingat AWG cables for main contacts	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²		
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²		
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10)		
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm²		
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm²		
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm²		
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)		
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)		
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)		
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing • at AWG cables for auxiliary and control contacts	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)		
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing • at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)		
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing • at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)		
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing • at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10		
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing • at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10		
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing • at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10		
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing • at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10		
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing • at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals tightening torque [lbf-in]	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10 2 2.5 N·m 0.5 0.6 N·m		
- finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing • at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals tightening torque [lbf-in] • for main contacts with screw-type terminals	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10 2 2.5 N·m 0.5 0.6 N·m		
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing • at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals tightening torque [lbf-in]	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10 2 2.5 N·m 0.5 0.6 N·m		
— finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing — at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals tightening torque [lbf-in] • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10 2 2.5 N·m 0.5 0.6 N·m		
 finely stranded with core end processing at AWG cables for main contacts connectable conductor cross-section for main contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-sections for auxiliary and control contacts solid finely stranded with core end processing finely stranded without core end processing at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque for main contacts with screw-type terminals for auxiliary and control contacts with screw-type terminals for main contacts with screw-type terminals for main contacts with screw-type terminals for main contacts with screw-type terminals for auxiliary and control contacts with screw-type	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10 2 2.5 N·m 0.5 0.6 N·m		

General Product Approval		EMC	Declaration of Conformity		
Certificates/ approvals					
of NEOZED fuse usable	<u>5SE2335</u> ; These fuses have a smaller rated current than the semiconductor relays				
	5SB4111; These fuses have a smaller rated current than the semiconductor relays				
manufacturer's article number • of DIAZED fuse usable	50P/111: Those fuese have	a smaller reted ourres	t than the		
at cylindrical design 22 x 58 mm usable	<u>3NW6217-1</u> ; These fuses have a smaller rated current than the semiconductor relays				
at NH design usable	<u>3NA6817</u> ; These fuses have a smaller rated current than the semiconductor relays				
manufacturer's article number of the gG fuse					
of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable	3NC2200				
of back-up R fuse link for semiconductor protection at NH design usable	3NE8021-1				
of full range R fuse link for semiconductor protection at NH design usable	3NE1021-2				
Short-circuit protection, design of the fuse link manufacturer's article number					
CISPR11 Short circuit protection, design of the fuse link					
field-bound HF interference emission according to	Class B for the domestic, business and commercial environments				
conducted HF interference emissions according to CISPR11	Class A for industrial environment				
electrostatic discharge according to IEC 61000-4-2	4 kV contact discharging / 8 kV air discharging, behavior criterion 2				
61000-4-6 field-based interference according to IEC 61000-4-3	80 MHz 1 GHz 10 V/m, behavior criterion 1				
 due to conductor-conductor surge according to IEC 61000-4-5 due to high-frequency radiation according to IEC 	1 kV behavior criterion 2 140 dBuV in the frequency range 0.15 80 MHz, behavior criterion 1				
due to conductor-earth surge according to IEC 61000-4-5 due to conductor conductor surge according to IEC.	2 kV behavior criterion 2				
due to burst according to IEC 61000-4-4 due to conductor earth ourse according to IEC.	2 kV / 5 kHz behavior criterion 2				
conducted interference	011//5111 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1				
Electromagnetic compatibility					
during storage	-55 +80 °C				
during operation	-25 +60 °C				
ambient temperature					
installation altitude at height above sea level maximum	1 000 m				
Ambient conditions					
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front				
protection class IP on the front according to IEC 60529	IP20				
Safety related data					
for auxiliary and control contacts	7 mm				
• for main contacts	10 mm				
stripped length of the cable	IVIO				
of the auxiliary and control contacts	M3				



Confirmation









Declaration of Conformity

Test Certificates

other



Type Test Certificates/Test Report

Confirmation

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2090-1AA22


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2090-1AA22


 ${\bf Service \& Support \ (Manuals, \ Certificates, \ Characteristics, \ FAQs, ...)}$

https://support.industry.siemens.com/cs/ww/en/ps/3RF2090-1AA22

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF2090-1AA22&lang=en

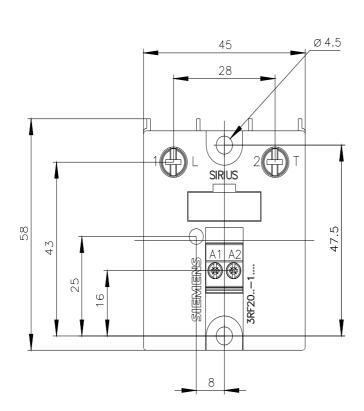

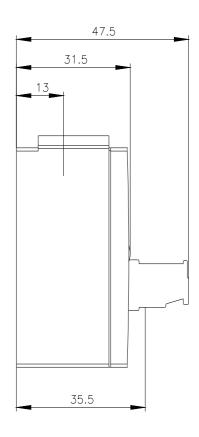

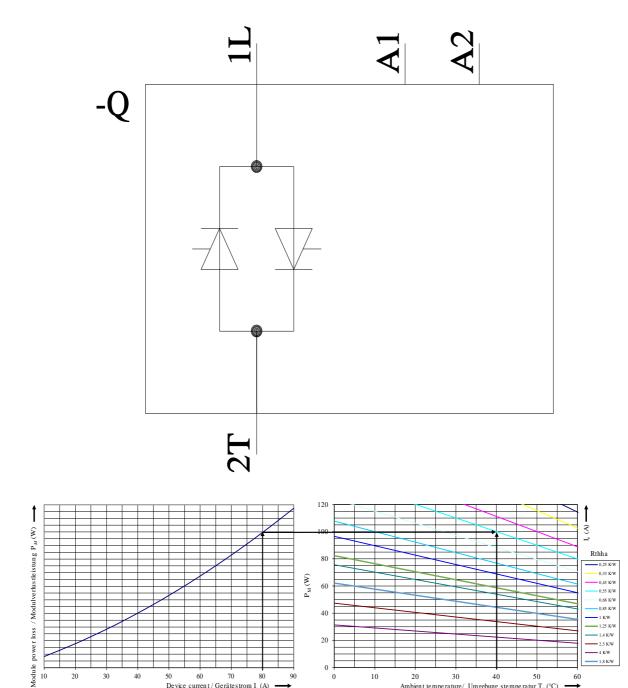

20

0

20 30 40 50 Ambient temperature/ Umgebung stemperatur T_a (°C)

12/15/2020 🗗 last modified:

50 60 70 80Device current / Gerätestrom I_e (A)