# **SIEMENS**

**Data sheet** 3RF2230-3AB45



Semiconductor relay, 3-phase 3RF2 30 A / 40 °C 48-600 V / 4-30 V DC 2phase controlled Ring cable connection Blocking voltage 1200 V

product brand name product designation design of the product product type designation manufacturer's article number

- \_2 of the accessories that can be ordered product designation
  - \_2 of the accessories that can be ordered

SIRIUS

solid-state relay

two-phase controlled

3RF22

3RF2900-0EA18

converter

#### General technical data

#### product function power loss [W] for rated value of the current

- at AC in hot operating state
- at AC in hot operating state per pole
- without load current share typical

### insulation voltage rated value

type of voltage of the control supply voltage surge voltage resistance of main circuit rated value

shock resistance according to IEC 60068-2-27 vibration resistance according to IEC 60068-2-6 reference code according to IEC 81346-2

**Substance Prohibitance (Date)** 

zero-point switching

81 W

81 W

0.9 W 600 V

DC

6 kV

15g / 11 ms

2g

07/01/2006

#### Main circuit

number of poles for main current circuit number of NO contacts for main contacts number of NC contacts for main contacts

operating voltage at AC

• at 50 Hz rated value

• at 60 Hz rated value operating frequency rated value

relative symmetrical tolerance of the operating frequency

operating range relative to the operating voltage at AC

- at 50 Hz
- at 60 Hz

#### operational current

- at AC-51 rated value
- according to UL 508 rated value

ampacity maximum

operational current minimum

rate of voltage rise at the thyristor for main contacts maximum permissible

blocking voltage at the thyristor for main contacts

3

2

Q

0

48 ... 600 V

48 ... 600 V

50 ... 60 Hz

10 %

40 ... 660 V

40 ... 660 V

30 A 30 A

30 A

500 mA

500 V/µs

1 200 V

maximum permissible	40 4
reverse current of the thyristor	10 mA 40 °C
derating temperature surge current resistance rated value	300 A
l2t value maximum	450 A <sup>2</sup> ·s
Control circuit/ Control	400 A 3
type of voltage of the control supply voltage	DC
control supply voltage 1	50
• at DC	4 30 V
control supply voltage	00 .
<ul> <li>at DC initial value for signal &lt;1&gt; detection</li> </ul>	4 V
<ul> <li>at DC full-scale value for signal&lt;0&gt; recognition</li> </ul>	1 V
control current at minimum control supply voltage	
• at DC	22 mA
control current at DC rated value	30 mA
ON-delay time	1 ms; additionally max. one half-wave
OFF-delay time	1 ms; additionally max. one half-wave
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Installation/ mounting/ dimensions	annu fiving
fastening method  • side-by-side mounting	screw fixing Yes
design of the thread of the screw for securing the	M4
equipment	IVIT
tightening torque of fixing screw maximum	1.5 N·m
tightening torque [lbf·in] of fixing screw maximum	13 lbf·in
height	95 mm
width	45 mm
depth	47 mm
0 " /= :	
Connections/ Terminals	
type of electrical connection	
type of electrical connection • for main current circuit	Ring cable lug connection
type of electrical connection	Ring cable lug connection screw-type terminals
type of electrical connection	
type of electrical connection	screw-type terminals
type of electrical connection	screw-type terminals  1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
type of electrical connection	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
type of electrical connection	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
type of electrical connection	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
type of electrical connection         • for main current circuit         • for auxiliary and control circuit  type of connectable conductor cross-sections         • for auxiliary and control contacts             — solid             — finely stranded with core end processing             — finely stranded without core end processing             • at AWG cables for auxiliary and control contacts	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
type of electrical connection         • for main current circuit         • for auxiliary and control circuit  type of connectable conductor cross-sections         • for auxiliary and control contacts             — solid             — finely stranded with core end processing             — finely stranded without core end processing             • at AWG cables for auxiliary and control contacts tightening torque         • for main contacts with screw-type terminals         • for auxiliary and control contacts with screw-type	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12)
type of electrical connection         • for main current circuit         • for auxiliary and control circuit  type of connectable conductor cross-sections         • for auxiliary and control contacts             — solid             — finely stranded with core end processing             — finely stranded without core end processing             • at AWG cables for auxiliary and control contacts tightening torque         • for main contacts with screw-type terminals         • for auxiliary and control contacts with screw-type terminals	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12)
type of electrical connection         • for main current circuit         • for auxiliary and control circuit  type of connectable conductor cross-sections         • for auxiliary and control contacts             — solid             — finely stranded with core end processing             — finely stranded without core end processing             • at AWG cables for auxiliary and control contacts tightening torque         • for main contacts with screw-type terminals         • for auxiliary and control contacts with screw-type terminals tightening torque [lbf-in]	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 2 2.5 N·m 0.5 0.6 N·m
type of electrical connection         • for main current circuit         • for auxiliary and control circuit  type of connectable conductor cross-sections         • for auxiliary and control contacts             — solid             — finely stranded with core end processing             — finely stranded without core end processing             • at AWG cables for auxiliary and control contacts tightening torque         • for main contacts with screw-type terminals         • for auxiliary and control contacts with screw-type terminals tightening torque [lbf-in]         • for main contacts with screw-type terminals	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 2 2.5 N·m 0.5 0.6 N·m
type of electrical connection         • for main current circuit         • for auxiliary and control circuit  type of connectable conductor cross-sections         • for auxiliary and control contacts             — solid             — finely stranded with core end processing             — finely stranded without core end processing             • at AWG cables for auxiliary and control contacts tightening torque         • for main contacts with screw-type terminals         • for auxiliary and control contacts with screw-type terminals tightening torque [lbf-in]         • for main contacts with screw-type terminals         • for auxiliary and control contacts with screw-type	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 2 2.5 N·m 0.5 0.6 N·m
type of electrical connection         • for main current circuit         • for auxiliary and control circuit  type of connectable conductor cross-sections         • for auxiliary and control contacts             — solid             — finely stranded with core end processing             — finely stranded without core end processing             • at AWG cables for auxiliary and control contacts tightening torque         • for main contacts with screw-type terminals         • for auxiliary and control contacts with screw-type terminals tightening torque [lbf-in]         • for main contacts with screw-type terminals         • for auxiliary and control contacts with screw-type terminals	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 2 2.5 N·m 0.5 0.6 N·m
type of electrical connection         • for main current circuit         • for auxiliary and control circuit  type of connectable conductor cross-sections         • for auxiliary and control contacts             — solid             — finely stranded with core end processing             — finely stranded without core end processing             • at AWG cables for auxiliary and control contacts tightening torque         • for main contacts with screw-type terminals         • for auxiliary and control contacts with screw-type terminals tightening torque [lbf-in]         • for main contacts with screw-type terminals         • for auxiliary and control contacts with screw-type	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 2 2.5 N·m 0.5 0.6 N·m
type of electrical connection         • for main current circuit         • for auxiliary and control circuit  type of connectable conductor cross-sections         • for auxiliary and control contacts             — solid             — finely stranded with core end processing             — finely stranded without core end processing             • at AWG cables for auxiliary and control contacts  tightening torque         • for main contacts with screw-type terminals         • for auxiliary and control contacts with screw-type terminals  tightening torque [lbf·in]         • for auxiliary and control contacts with screw-type terminals         • for auxiliary and control contacts with screw-type terminals         • for auxiliary and control contacts with screw-type terminals         • for auxiliary and control contacts with screw-type terminals         • for auxiliary and control contacts with screw-type terminals	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 2 2.5 N·m 0.5 0.6 N·m
type of electrical connection         • for main current circuit         • for auxiliary and control circuit  type of connectable conductor cross-sections         • for auxiliary and control contacts             — solid             — finely stranded with core end processing             — finely stranded without core end processing             • at AWG cables for auxiliary and control contacts  tightening torque         • for main contacts with screw-type terminals         • for auxiliary and control contacts with screw-type terminals  tightening torque [lbf-in]         • for main contacts with screw-type terminals         • for auxiliary and control contacts with screw-type terminals         • for main contacts with screw-type terminals         • for main contacts of the connection screw         • for main contacts	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 2 2.5 N·m 0.5 0.6 N·m 18 22 lbf·in 4.5 5.3 lbf·in
type of electrical connection         • for main current circuit         • for auxiliary and control circuit  type of connectable conductor cross-sections         • for auxiliary and control contacts             — solid             — finely stranded with core end processing             — finely stranded without core end processing             • at AWG cables for auxiliary and control contacts  tightening torque         • for main contacts with screw-type terminals         • for auxiliary and control contacts with screw-type terminals  tightening torque [lbf-in]         • for main contacts with screw-type terminals         • for auxiliary and control contacts with screw-type terminals         • for main contacts with screw-type terminals  design of the thread of the connection screw         • for main contacts         • of the auxiliary and control contacts         • for main contacts         • for main contacts         • for main contacts	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 2 2.5 N·m 0.5 0.6 N·m 18 22 lbf·in 4.5 5.3 lbf·in
type of electrical connection         • for main current circuit         • for auxiliary and control circuit  type of connectable conductor cross-sections         • for auxiliary and control contacts             — solid             — finely stranded with core end processing             — finely stranded without core end processing             • at AWG cables for auxiliary and control contacts  tightening torque         • for main contacts with screw-type terminals         • for auxiliary and control contacts with screw-type terminals  tightening torque [lbf-in]         • for main contacts with screw-type terminals         • for auxiliary and control contacts with screw-type terminals  design of the thread of the connection screw         • for main contacts         • of the auxiliary and control contacts  stripped length of the cable         • for main contacts         • for auxiliary and control contacts         • for main contacts         • for auxiliary and control contacts         • for auxiliary and control contacts         • for auxiliary and control contacts	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 2 2.5 N·m 0.5 0.6 N·m  18 22 lbf·in 4.5 5.3 lbf·in
type of electrical connection         • for main current circuit         • for auxiliary and control circuit  type of connectable conductor cross-sections         • for auxiliary and control contacts             — solid             — finely stranded with core end processing             — finely stranded without core end processing             — at AWG cables for auxiliary and control contacts  tightening torque         • for main contacts with screw-type terminals         • for auxiliary and control contacts with screw-type terminals  tightening torque [lbf·in]         • for main contacts with screw-type terminals         • for auxiliary and control contacts with screw-type terminals  design of the thread of the connection screw         • for main contacts         • of the auxiliary and control contacts  stripped length of the cable         • for main contacts         • for auxiliary and control contacts  Safety related data	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12)  2 2.5 N·m 0.5 0.6 N·m  18 22 lbf·in 4.5 5.3 lbf·in  M4 M3  7 mm
type of electrical connection         • for main current circuit         • for auxiliary and control circuit  type of connectable conductor cross-sections         • for auxiliary and control contacts             — solid             — finely stranded with core end processing             — finely stranded without core end processing             • at AWG cables for auxiliary and control contacts  tightening torque         • for main contacts with screw-type terminals         • for auxiliary and control contacts with screw-type terminals  tightening torque [lbf-in]         • for main contacts with screw-type terminals         • for auxiliary and control contacts with screw-type terminals  design of the thread of the connection screw         • for main contacts         • of the auxiliary and control contacts  stripped length of the cable         • for main contacts         • for auxiliary and control contacts         • for main contacts         • for auxiliary and control contacts         • for auxiliary and control contacts         • for auxiliary and control contacts	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12)  2 2.5 N·m 0.5 0.6 N·m  18 22 lbf·in 4.5 5.3 lbf·in  M4 M3  7 mm
type of electrical connection         • for main current circuit         • for auxiliary and control circuit  type of connectable conductor cross-sections         • for auxiliary and control contacts             — solid             — finely stranded with core end processing             — finely stranded without core end processing             — at AWG cables for auxiliary and control contacts  tightening torque         • for main contacts with screw-type terminals         • for auxiliary and control contacts with screw-type terminals  tightening torque [lbf·in]         • for main contacts with screw-type terminals         • for auxiliary and control contacts with screw-type terminals  design of the thread of the connection screw         • for main contacts         • of the auxiliary and control contacts  stripped length of the cable         • for main contacts         • for auxiliary and control contacts  Safety related data  protection class IP on the front according to IEC	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 2 2.5 N·m 0.5 0.6 N·m  18 22 lbf·in 4.5 5.3 lbf·in  M4 M3 7 mm 7 mm
type of electrical connection	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 2 2.5 N·m 0.5 0.6 N·m  18 22 lbf·in 4.5 5.3 lbf·in  M4 M3 7 mm 7 mm
type of electrical connection	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 2 2.5 N·m 0.5 0.6 N·m  18 22 lbf·in 4.5 5.3 lbf·in  M4 M3 7 mm 7 mm IP00
type of electrical connection	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12)  2 2.5 N·m 0.5 0.6 N·m  18 22 lbf·in 4.5 5.3 lbf·in  M4 M3  7 mm 7 mm

#### **Electromagnetic compatibility**

#### conducted interference

- due to burst according to IEC 61000-4-4
- due to conductor-earth surge according to IEC 61000-4-5
- due to conductor-conductor surge according to IEC 61000-4-5
- due to high-frequency radiation according to IEC 61000-4-6

electrostatic discharge according to IEC 61000-4-2 conducted HF interference emissions according to CISPR11

field-bound HF interference emission according to CISPR11

2 kV / 5 kHz behavior criterion 2

2 kV behavior criterion 2

1 kV behavior criterion 2

140 dBuV in the frequency range 0.15 ... 80 MHz, behavior criterion 1

4 kV contact discharging / 8 kV air discharging, behavior criterion 2 Class A for industrial environment

Class A for industrial environment

#### Short-circuit protection, design of the fuse link

manufacturer's article number

- of full range R fuse link for semiconductor protection at NH design usable
- of back-up R fuse link for semiconductor protection at NH design usable
- of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable
- of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable
- of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable

manufacturer's article number of the gG fuse at NH design usable

- up to 460 V
- up to 600 V

<u>3NE1814-0</u>; These fuses have a smaller rated current than the semiconductor relays

3NE8003-1

<u>3NC1025</u>; These fuses have a smaller rated current than the semiconductor relays

3NC1430

3NC2232

<u>3NA3803-6</u>; These fuses have a smaller rated current than the semiconductor relavs

<u>3NA3803-6</u>; These fuses have a smaller rated current than the semiconductor relays

#### Certificates/ approvals

#### **General Product Approval**

**EMC** 

Declaration of Conformity



Confirmation









Declaration of Conformity

**Test Certificates** 

other



Type Test Certificates/Test Report

Confirmation



## Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2230-3AB45


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2230-3AB45


 ${\bf Service \& Support\ (Manuals,\ Certificates,\ Characteristics,\ FAQs,...)}$ 


https://support.industry.siemens.com/cs/ww/en/ps/3RF2230-3AB45

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <a href="http://www.automation.siemens.com/bilddb/cax">http://www.automation.siemens.com/bilddb/cax</a> de.aspx?mlfb=3RF2230-3AB45&lang=en

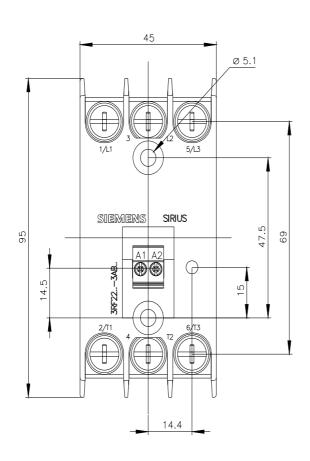

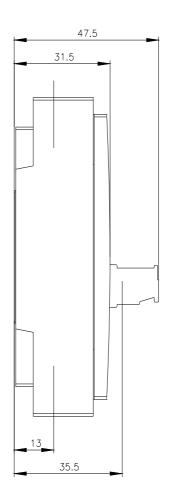

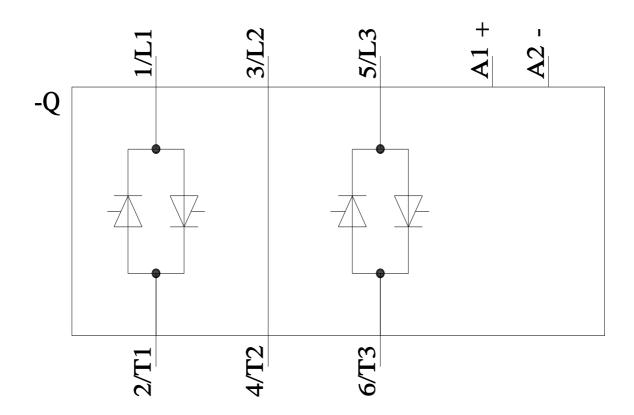

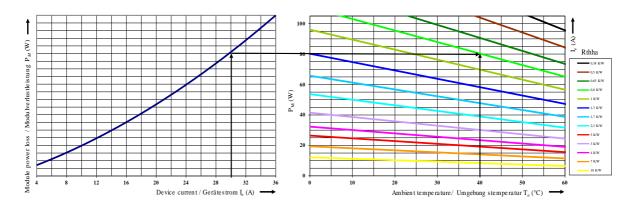

last modified: 3/4/2021 🖸