SIEMENS

Data sheet 3RF2255-1AC35



Semiconductor relay, 3-phase 3RF2 55 A / 40 $^{\circ}$ C 48-600 V / 110 V AC 3phase controlled screw terminal Blocking voltage 1200 V

product brand name product designation design of the product product type designation SIRIUS solid-state relay three-phase controlled 3RF22

General technical data

product function	zero-point s
power loss [W] for rated value of the current without	1.8 W

load current share typical insulation voltage rated value type of voltage of the control supply voltage

surge voltage resistance of main circuit rated value shock resistance according to IEC 60068-2-27

vibration resistance according to IEC 60068-2-6 reference code according to IEC 81346-2

Substance Prohibitance (Date)

switching

600 V AC 6 kV

15g / 11 ms

2g Q

07/01/2006

Main circuit

number of poles for main current circuit
number of NO contacts for main contacts
number of NC contacts for main contacts
operating voltage at AC

• at 50 Hz rated value

• at 60 Hz rated value operating frequency rated value

relative symmetrical tolerance of the operating frequency

operating range relative to the operating voltage at AC

• at 50 Hz • at 60 Hz

operational current

• at AC-51 rated value

• according to UL 508 rated value

ampacity maximum

operational current minimum

rate of voltage rise at the thyristor for main contacts maximum permissible

blocking voltage at the thyristor for main contacts maximum permissible

reverse current of the thyristor derating temperature

surge current resistance rated value

12t value maximum

3 3

0

48 ... 600 V

48 ... 600 V

50 ... 60 Hz

10 %

40 ... 660 V

40 ... 660 V

50 A

50 A 55 A

500 mA

100 V/µs 1 200 V

10 mA 40 °C

600 A 1 800 A²·s

11/7/2022

3RF22551AC35

Page 1/4

type of voltage of the control supply voltage	AC
control supply voltage 1 at AC	00 40414
• at 50 Hz	88 121 V
• at 60 Hz	88 121 V
control supply voltage frequency	50.11
• 1 rated value	50 Hz
• 2 rated value	60 Hz
control supply voltage at AC	40.14
at 50 Hz full-scale value for signal<0> recognition	40 V
at 60 Hz full-scale value for signal<0> recognition	40 V
control supply voltage	00.1/
at AC initial value for signal <1> detection	90 V
control current at minimum control supply voltage • at AC	2 mA
control current at AC rated value	15 mA
	40 ms
ON-delay time OFF-delay time	40 ms; additionally max. one half-wave
	40 ms, additionally max. one hall-wave
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Installation/ mounting/ dimensions	
fastening method	screw fixing
side-by-side mounting	Yes
tightening torque of fixing screw maximum	1.5 N⋅m
tightening torque [lbf·in] of fixing screw maximum	13 lbf·in
height	95 mm
width	45 mm
depth	47 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	screw-type terminals
 for auxiliary and control circuit 	screw-type terminals
type of connectable conductor cross-sections	
• for main contacts	
for main contacts — solid	2x (1.5 2.5 mm²), 2x (2.5 6 mm²)
 for main contacts — solid — finely stranded with core end processing 	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
 for main contacts — solid — finely stranded with core end processing at AWG cables for main contacts 	
 for main contacts — solid — finely stranded with core end processing at AWG cables for main contacts connectable conductor cross-section for main 	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
 for main contacts — solid — finely stranded with core end processing at AWG cables for main contacts connectable conductor cross-section for main contacts 	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10)
 for main contacts — solid — finely stranded with core end processing at AWG cables for main contacts connectable conductor cross-section for main contacts solid or stranded 	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm²
 for main contacts solid finely stranded with core end processing at AWG cables for main contacts connectable conductor cross-section for main contacts solid or stranded finely stranded with core end processing 	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10)
 for main contacts solid finely stranded with core end processing at AWG cables for main contacts connectable conductor cross-section for main contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-sections 	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm²
 for main contacts solid finely stranded with core end processing at AWG cables for main contacts connectable conductor cross-section for main contacts solid or stranded finely stranded with core end processing 	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm²
 for main contacts solid finely stranded with core end processing at AWG cables for main contacts connectable conductor cross-section for main contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-sections for auxiliary and control contacts solid 	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
 for main contacts solid finely stranded with core end processing at AWG cables for main contacts connectable conductor cross-section for main contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-sections for auxiliary and control contacts solid finely stranded with core end processing 	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
 for main contacts solid finely stranded with core end processing at AWG cables for main contacts connectable conductor cross-section for main contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-sections for auxiliary and control contacts solid 	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
 for main contacts solid finely stranded with core end processing at AWG cables for main contacts connectable conductor cross-section for main contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-sections for auxiliary and control contacts solid finely stranded with core end processing finely stranded without core end processing 	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing • at AWG cables for auxiliary and control contacts	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12)
for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing — at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12)
for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded with core end processing — at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 10 14
for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing — at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 10 14
for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing — at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 10 14
 for main contacts solid finely stranded with core end processing at AWG cables for main contacts connectable conductor cross-section for main contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-sections for auxiliary and control contacts solid finely stranded with core end processing finely stranded without core end processing at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque for auxiliary and control contacts with screw-type terminals for auxiliary and control contacts with screw-type terminals tightening torque [lbf-in]	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 10 14
for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing — at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 10 14
 for main contacts solid finely stranded with core end processing at AWG cables for main contacts connectable conductor cross-section for main contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-sections for auxiliary and control contacts solid finely stranded with core end processing at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque for auxiliary and control contacts with screw-type terminals for auxiliary and control contacts with screw-type terminals tightening torque [lbf-in] for main contacts with screw-type terminals for auxiliary and control contacts with screw-type 	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 10 14 2 2.5 N·m 0.5 0.6 N·m
 for main contacts solid finely stranded with core end processing at AWG cables for main contacts connectable conductor cross-section for main contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-sections for auxiliary and control contacts solid finely stranded with core end processing finely stranded without core end processing at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque for main contacts with screw-type terminals for auxiliary and control contacts with screw-type terminals tightening torque [lbf-in] for main contacts with screw-type terminals for auxiliary and control contacts with screw-type terminals design of the thread of the connection screw for main contacts 	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 10 14 2 2.5 N·m 0.5 0.6 N·m
for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing — at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals tightening torque [lbf-in] • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals • for main contacts • for main contacts • of the auxiliary and control contacts • of the auxiliary and control contacts • of the auxiliary and control contacts	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 10 14 2 2.5 N·m 0.5 0.6 N·m 18 22 lbf·in 4.5 5.3 lbf·in
for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing — finely stranded without core end processing — at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals tightening torque [lbf-in] • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals design of the thread of the connection screw • for main contacts • of the auxiliary and control contacts stripped length of the cable	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 10 14 2 2.5 N·m 0.5 0.6 N·m 18 22 lbf·in 4.5 5.3 lbf·in
for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing — at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals tightening torque [lbf-in] • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals • for main contacts • for main contacts • of the auxiliary and control contacts • of the auxiliary and control contacts • of the auxiliary and control contacts	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 10 14 2 2.5 N·m 0.5 0.6 N·m 18 22 lbf·in 4.5 5.3 lbf·in

Safety related data	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Ambient conditions	
installation altitude at height above sea level maximum	1 000 m
ambient temperature	
during operation	-25 +60 °C
 during storage 	-55 +80 °C
Electromagnetic compatibility	
conducted interference	
 due to burst according to IEC 61000-4-4 	2 kV / 5 kHz behavior criterion 2
 due to conductor-earth surge according to IEC 61000-4-5 	2 kV behavior criterion 2
 due to conductor-conductor surge according to IEC 61000-4-5 	1 kV behavior criterion 2
 due to high-frequency radiation according to IEC 61000-4-6 	140 dBuV in the frequency range 0.15 80 MHz, behavior criterion 1
electrostatic discharge according to IEC 61000-4-2	4 kV contact discharging / 8 kV air discharging, behavior criterion 2
conducted HF interference emissions according to CISPR11	Class A for industrial environment
field-bound HF interference emission according to CISPR11	Class A for industrial environment
Short-circuit protection, design of the fuse link	
manufacturer's article number	
 of full range R fuse link for semiconductor protection at NH design usable 	3NE1803-0; These fuses have a smaller rated current than the semiconductor relays
 of back-up R fuse link for semiconductor protection 	<u>3NE8018-1</u>

at cylindrical design 22 x 58 mm usable manufacturer's article number of the gG fuse at NH design usable

• of back-up R fuse link for semiconductor protection

• of back-up R fuse link for semiconductor protection

at cylindrical design 14 x 51 mm usable

• up to 460 V

at NH design usable

• up to 600 V

3NC1450; These fuses have a smaller rated current than the semiconductor relays

3NC2250; These fuses have a smaller rated current than the semiconductor relays

3NA3807-6; These fuses have a smaller rated current than the semiconductor relays

3NA3805-6; These fuses have a smaller rated current than the semiconductor relays

Certificates/ approvals

General Product Approval

EMC

Declaration of Conformity



Confirmation









Test Certificates

other

Type Test Certificates/Test Report

Confirmation



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)


 $\underline{https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2255-1AC35}$


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2255-1AC35

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RF2255-1AC35

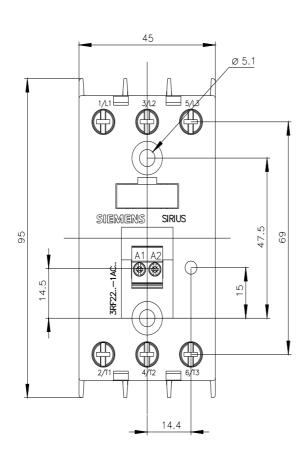

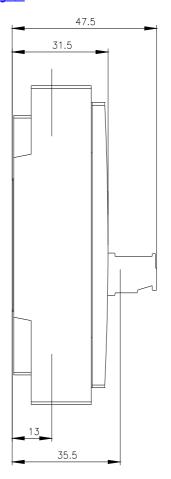

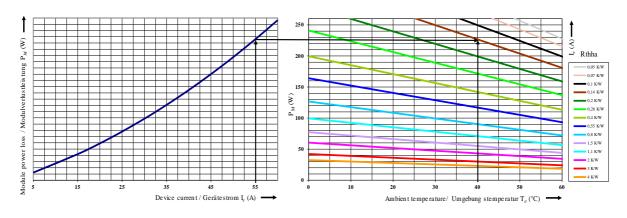

last modified: 3/4/2021 🖸