## **SIEMENS**

Data sheet 3RF2410-1AB55



Solid-state contactor 3-phase 3RF2 AC 51 / 10 A / 40  $^{\circ}\text{C}$  48-600 V / 230 V AC 2-phase controlled screw terminal Blocking voltage 1200 V

product brand name product designation design of the product product type designation

General technical data

SIRIUS solid-state contactor

two-phase controlled

3RF24

product function power loss [W] for rated value of the current	zero-point switching
power loss [W] for rated value of the current	
production and the second seco	
at AC in hot operating state	23 W
at AC in hot operating state per pole	7.67 W
without load current share typical	3.5 W
insulation voltage rated value	600 V
degree of pollution	3
type of voltage of the control supply voltage	AC
surge voltage resistance of main circuit rated value	6 kV
shock resistance according to IEC 60068-2-27	15g / 11 ms
vibration resistance according to IEC 60068-2-6	2g
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	07/01/2006
Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	2
number of NC contacts for main contacts	0
operating voltage at AC	
at 50 Hz rated value	48 600 V
at 60 Hz rated value	48 600 V
operating frequency rated value	50 60 Hz
relative symmetrical tolerance of the operating frequency	10 %
operating range relative to the operating voltage at AC	
• at 50 Hz	40 660 V
• at 60 Hz	40 660 V
operational current	
at AC-51 rated value	10.5 A
• at AC-51 according to IEC 60947-4-3	7 A
<ul> <li>according to UL 508 rated value</li> </ul>	7 A
operational current minimum	100 mA
rate of voltage rise at the thyristor for main contacts maximum permissible	500 V/μs
blocking voltage at the thyristor for main contacts maximum permissible	1 200 V
reverse current of the thyristor	10 mA
derating temperature	40 °C

surge current resistance rated value	200 A
Surge current resistance rated value	200 A 200 A <sup>2</sup> ·s
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage 1 at AC	NO TO THE PART OF
• at 50 Hz	180 230 V
• at 60 Hz	180 230 V
control supply voltage frequency	100 m <u>200</u> v
• 1 rated value	45 Hz
• 2 rated value	66 Hz
control supply voltage at AC	
<ul> <li>at 50 Hz full-scale value for signal&lt;0&gt; recognition</li> </ul>	40 V
<ul> <li>at 60 Hz full-scale value for signal&lt;0&gt; recognition</li> </ul>	180 V
control supply voltage	
<ul> <li>at AC initial value for signal &lt;1&gt; detection</li> </ul>	180 V
symmetrical line frequency tolerance	5 Hz
control current at minimum control supply voltage	
• at AC	2 mA
control current at AC rated value	15 mA
ON-delay time	40 ms; additionally max. one half-wave
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Installation/ mounting/ dimensions	6
fastening method	screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715
• side-by-side mounting	Yes
design of the thread of the screw for securing the	M4
equipment	·"·
height	95 mm
width	45 mm
depth	96.5 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	screw-type terminals
for auxiliary and control circuit	screw-type terminals
type of connectable conductor cross-sections	
• for main contacts	0 (45 05 2) 0 (05 0 2)
— solid	2x (1.5 2.5 mm²), 2x (2.5 6 mm²)
<ul> <li>finely stranded with core end processing</li> <li>at AWG cables for main contacts</li> </ul>	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
at AVVG caples for main contacts  connectable conductor cross-section for main	2x (14 10)
contacts	
solid or stranded	1.5 6 mm²
5 · · · · · · · · · · · · · · · · · · ·	
<ul> <li>finely stranded with core end processing</li> </ul>	1 10 mm²
<ul> <li>finely stranded with core end processing</li> <li>type of connectable conductor cross-sections</li> </ul>	1 10 mm²
	1 10 mm²
type of connectable conductor cross-sections  ● for auxiliary and control contacts  — solid	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
type of connectable conductor cross-sections  ● for auxiliary and control contacts  — solid  — finely stranded with core end processing	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
type of connectable conductor cross-sections  • for auxiliary and control contacts  — solid  — finely stranded with core end processing  — finely stranded without core end processing	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
<ul> <li>type of connectable conductor cross-sections</li> <li>for auxiliary and control contacts</li> <li>— solid</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> <li>at AWG cables for auxiliary and control contacts</li> </ul>	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12)
<ul> <li>type of connectable conductor cross-sections</li> <li>for auxiliary and control contacts</li> <li>— solid</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> <li>at AWG cables for auxiliary and control contacts</li> <li>AWG number as coded connectable conductor cross</li> </ul>	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
<ul> <li>type of connectable conductor cross-sections</li> <li>for auxiliary and control contacts</li> <li>— solid</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> <li>• at AWG cables for auxiliary and control contacts</li> <li>AWG number as coded connectable conductor cross section for main contacts</li> </ul>	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12)
<ul> <li>type of connectable conductor cross-sections</li> <li>for auxiliary and control contacts</li> <li>— solid</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> <li>• at AWG cables for auxiliary and control contacts</li> <li>AWG number as coded connectable conductor cross section for main contacts</li> <li>tightening torque</li> </ul>	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12)
<ul> <li>type of connectable conductor cross-sections</li> <li>for auxiliary and control contacts</li> <li>— solid</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> <li>• at AWG cables for auxiliary and control contacts</li> <li>AWG number as coded connectable conductor cross section for main contacts</li> </ul>	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10
type of connectable conductor cross-sections  • for auxiliary and control contacts  — solid  — finely stranded with core end processing  — finely stranded without core end processing  • at AWG cables for auxiliary and control contacts  AWG number as coded connectable conductor cross section for main contacts  tightening torque  • for main contacts with screw-type terminals	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10
type of connectable conductor cross-sections  • for auxiliary and control contacts  — solid  — finely stranded with core end processing  — finely stranded without core end processing  • at AWG cables for auxiliary and control contacts  AWG number as coded connectable conductor cross section for main contacts  tightening torque  • for main contacts with screw-type terminals  • for auxiliary and control contacts with screw-type	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10
type of connectable conductor cross-sections  • for auxiliary and control contacts  — solid  — finely stranded with core end processing  — finely stranded without core end processing  • at AWG cables for auxiliary and control contacts  AWG number as coded connectable conductor cross section for main contacts  tightening torque  • for main contacts with screw-type terminals  • for auxiliary and control contacts with screw-type terminals  tightening torque [lbf-in]  • for main contacts with screw-type terminals	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10 2 2.5 N·m 0.5 0.6 N·m
type of connectable conductor cross-sections  • for auxiliary and control contacts  — solid  — finely stranded with core end processing  — finely stranded without core end processing  • at AWG cables for auxiliary and control contacts  AWG number as coded connectable conductor cross section for main contacts  tightening torque  • for main contacts with screw-type terminals  • for auxiliary and control contacts with screw-type terminals  tightening torque [lbf-in]  • for main contacts with screw-type terminals  • for auxiliary and control contacts with screw-type	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10 2 2.5 N·m 0.5 0.6 N·m
type of connectable conductor cross-sections  for auxiliary and control contacts  — solid  — finely stranded with core end processing  — finely stranded without core end processing  • at AWG cables for auxiliary and control contacts  AWG number as coded connectable conductor cross section for main contacts  tightening torque  • for main contacts with screw-type terminals  • for auxiliary and control contacts with screw-type terminals  tightening torque [lbf-in]  • for main contacts with screw-type terminals  • for auxiliary and control contacts with screw-type terminals	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10 2 2.5 N·m 0.5 0.6 N·m
type of connectable conductor cross-sections  • for auxiliary and control contacts  — solid  — finely stranded with core end processing  — finely stranded without core end processing  • at AWG cables for auxiliary and control contacts  AWG number as coded connectable conductor cross section for main contacts  tightening torque  • for main contacts with screw-type terminals  • for auxiliary and control contacts with screw-type terminals  tightening torque [lbf-in]  • for main contacts with screw-type terminals  • for auxiliary and control contacts with screw-type	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) 14 10 2 2.5 N·m 0.5 0.6 N·m

a of the auxiliany and central centacts	MO	
<ul> <li>of the auxiliary and control contacts</li> <li>stripped length of the cable</li> </ul>	M3	
for main contacts	7 mm	
for auxiliary and control contacts	7 mm	
Safety related data		
protection class IP on the front according to IEC	IP20	
60529	11 20	
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front	
Ambient conditions		
installation altitude at height above sea level maximum	1 000 m	
ambient temperature		
during operation	-25 +60 °C	
during storage	-55 +80 °C	
Electromagnetic compatibility		
conducted interference		
<ul> <li>due to burst according to IEC 61000-4-4</li> </ul>	2 kV / 5 kHz behavior criterion 2	
<ul> <li>due to conductor-earth surge according to IEC 61000-4-5</li> </ul>	2 kV behavior criterion 2	
<ul> <li>due to conductor-conductor surge according to IEC 61000-4-5</li> </ul>	1 kV behavior criterion 2	
<ul> <li>due to high-frequency radiation according to IEC 61000-4-6</li> </ul>	140 dBuV in the frequency range 0.15 80 MHz, behavior criterion 1	
electrostatic discharge according to IEC 61000-4-2	4 kV contact discharging / 8 kV air discharging, behavior criterion 2	
conducted HF interference emissions according to CISPR11	Class A for industrial environment	
field-bound HF interference emission according to CISPR11	Class A for industrial environment	
Short-circuit protection, design of the fuse link		
manufacturer's article number		
<ul> <li>of full range R fuse link for semiconductor protection at NH design usable</li> </ul>	<u>3NE1813-0</u>	
<ul> <li>of full range R fuse link for semiconductor protection at cylindrical design usable</li> </ul>	5SE1310; Maximum operating voltage 400 V!	
<ul> <li>of back-up R fuse link for semiconductor protection at NH design usable</li> </ul>	3NE8015-1	
<ul> <li>of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable</li> </ul>	3NC1016	
<ul> <li>of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable</li> </ul>	3NC1420	
<ul> <li>of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable</li> </ul>	3NC2220	
manufacturer's article number of the gG fuse at NH design usable		

## Certificates/ approvals

• up to 460 V

General Product Approval EMC Declaration of Conformity



Confirmation





semiconductor relays



3NA3801; These fuses have a smaller rated current than the



Declaration of Conformity

**Test Certificates** 

other



Type Test Certificates/Test Report

Confirmation



Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2410-1AB55


Cax online generator


 $\underline{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RF2410-1AB55}$ 


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RF2410-1AB55

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RF2410-1AB55&lang=en

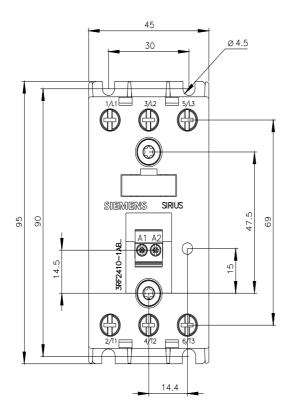

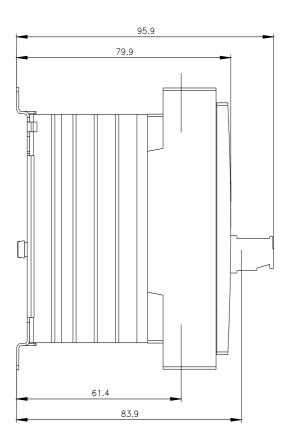

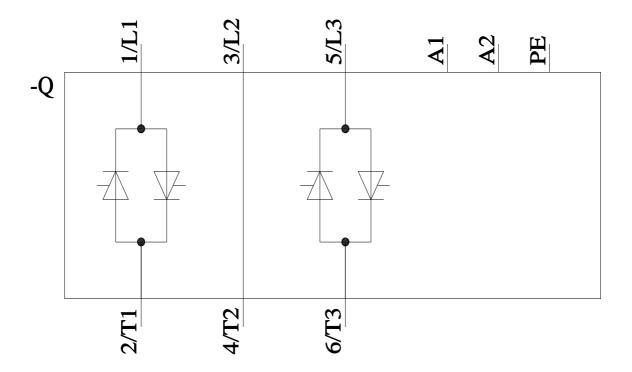

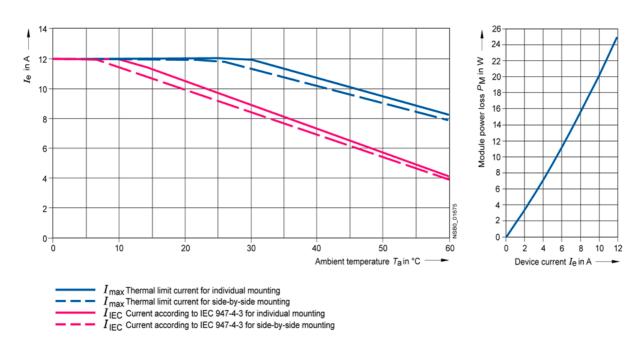

last modified: 1/26/2022 **C**