## SIEMENS

## Data sheet

## 3RF2450-1AB35

Solid-state contactor 3-phase 3RF2 AC 51 / 50 A / 40  $^\circ$ C 48-600 V / 110 V AC 2-phase controlled screw terminal Blocking voltage 1200 V

product brand name	SIRIUS
, product designation	solid-state contactor
design of the product	two-phase controlled
product type designation	3RF24
General technical data	
product function	zero-point switching
power loss [W] for rated value of the current	
at AC in hot operating state	107 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	35.67 W
<ul> <li>without load current share typical</li> </ul>	1.9 W
insulation voltage rated value	600 V
degree of pollution	3
type of voltage of the control supply voltage	AC
surge voltage resistance of main circuit rated value	6 kV
shock resistance according to IEC 60068-2-27	15g / 11 ms
vibration resistance according to IEC 60068-2-6	2g
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	07/01/2006
Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	2
number of NC contacts for main contacts	0
operating voltage at AC	
<ul> <li>at 50 Hz rated value</li> </ul>	48 600 V
<ul> <li>at 60 Hz rated value</li> </ul>	48 600 V
operating frequency rated value	50 60 Hz
relative symmetrical tolerance of the operating	10 %
frequency operating range relative to the operating voltage at AC	
• at 50 Hz	40 660 V
• at 60 Hz	40 660 V
operational current	
<ul> <li>at AC-51 rated value</li> </ul>	50 A
<ul> <li>at AC-51 according to IEC 60947-4-3</li> </ul>	38 A
<ul> <li>according to UL 508 rated value</li> </ul>	38 A
operational current minimum	500 mA
rate of voltage rise at the thyristor for main contacts maximum permissible	1 000 V/µs
blocking voltage at the thyristor for main contacts maximum permissible	1 200 V
reverse current of the thyristor	10 mA
derating temperature	40 °C

surge current resistance rated value	1 150 A
l2t value maximum	6 600 A <sup>2</sup> ·s
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage 1 at AC	
• at 50 Hz	90 125 V
• at 60 Hz	90 125 V
control supply voltage frequency	
• 1 rated value	45 Hz
• 2 rated value	66 Hz
control supply voltage at AC	
<ul> <li>at 50 Hz full-scale value for signal&lt;0&gt; recognition</li> </ul>	40 V
<ul> <li>at 60 Hz full-scale value for signal&lt;0&gt; recognition</li> </ul>	90 V
control supply voltage	
<ul> <li>at AC initial value for signal &lt;1&gt; detection</li> </ul>	90 V
symmetrical line frequency tolerance	5 Hz
control current at minimum control supply voltage	
• at AC	2 mA
control current at AC rated value	15 mA
ON-delay time	40 ms; additionally max. one half-wave
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Installation/ mounting/ dimensions	
fastening method	screw fixing
side-by-side mounting	Yes
design of the thread of the screw for securing the	M4
equipment	
height	95 mm
width	119.5 mm
depth	130 mm
-	130 1111
Connections/ Terminals	
-	
Connections/ Terminals	screw-type terminals
Connections/ Terminals type of electrical connection	
Connections/ Terminals type of electrical connection • for main current circuit	screw-type terminals
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit	screw-type terminals screw-type terminals
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid	screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²)
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing	screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts	screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²)
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main	screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts	screw-type terminals screw-type terminals 2x (1.5 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (14 10)
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded	screw-type terminals screw-type terminals 2x (1.5 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (14 10) 1.5 6 mm <sup>2</sup>
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing	screw-type terminals screw-type terminals 2x (1.5 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (14 10)
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections	screw-type terminals screw-type terminals 2x (1.5 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (14 10) 1.5 6 mm <sup>2</sup>
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts	screw-type terminals screw-type terminals 2x (1.5 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (14 10) 1.5 6 mm <sup>2</sup> 1 10 mm <sup>2</sup>
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid	screw-type terminals screw-type terminals 2x (1.5 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (14 10) 1.5 6 mm <sup>2</sup> 1 10 mm <sup>2</sup> 1 10 mm <sup>2</sup>
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing	screw-type terminals screw-type terminals 2x (1.5 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (14 10) 1.5 6 mm <sup>2</sup> 1 10 mm <sup>2</sup> 1 10 mm <sup>2</sup> 1x (0.5 2.5 mm <sup>2</sup> ), 2x (0.5 1.0 mm <sup>2</sup> ) 1x (0.5 2.5 mm <sup>2</sup> ), 2x (0.5 1.0 mm <sup>2</sup> )
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid	screw-type terminals screw-type terminals 2x (1.5 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (14 10) 1.5 6 mm <sup>2</sup> 1 10 mm <sup>2</sup> 1 10 mm <sup>2</sup>
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded with core end processing	screw-type terminals screw-type terminals $2x (1.5 2.5 mm^2), 2x (2.5 6 mm^2)$ $2x (1 2.5 mm^2), 2x (2.5 6 mm^2), 1x 10 mm^2$ 2x (14 10) $1.5 6 mm^2$ $1 10 mm^2$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded with core end processing — solid — finely stranded without core end processing — at AWG cables for auxiliary and control contacts	screw-type terminals $2x (1.5 2.5 mm^2), 2x (2.5 6 mm^2)$ $2x (1 2.5 mm^2), 2x (2.5 6 mm^2), 1x 10 mm^2$ 2x (14 10) $1.5 6 mm^2$ $1 10 mm^2$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ 1x (AWG 20 12)
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — solid — finely stranded with core end processing — at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross	screw-type terminals $2x (1.5 2.5 mm^2), 2x (2.5 6 mm^2)$ $2x (1 2.5 mm^2), 2x (2.5 6 mm^2), 1x 10 mm^2$ 2x (14 10) $1.5 6 mm^2$ $1 10 mm^2$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ 1x (AWG 20 12)
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — solid — finely stranded without core end processing • at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals	screw-type terminals $2x (1.5 2.5 mm^2), 2x (2.5 6 mm^2)$ $2x (1 2.5 mm^2), 2x (2.5 6 mm^2), 1x 10 mm^2$ 2x (14 10) $1.5 6 mm^2$ $1 10 mm^2$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ 1x (AWG 20 12)
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — solid — finely stranded without core end processing • at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for auxiliary and control contacts with screw-type terminals • for auxiliary and control contacts with screw-type	screw-type terminals $2x (1.5 2.5 mm^2), 2x (2.5 6 mm^2)$ $2x (1 2.5 mm^2), 2x (2.5 6 mm^2), 1x 10 mm^2$ 2x (14 10) $1.5 6 mm^2$ $1 10 mm^2$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ 1x (AWG 20 12) 14 10
Connections/ Terminals         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         type of connectable conductor cross-sections         • for main contacts         — solid         — finely stranded with core end processing         • at AWG cables for main contacts         connectable conductor cross-section for main contacts         econnectable conductor cross-section for main contacts         • solid or stranded         • finely stranded with core end processing         type of connectable conductor cross-sections         • for auxiliary and control contacts         — solid         — finely stranded with core end processing         • for auxiliary and control contacts         — solid         — finely stranded with core end processing         • at AWG cables for auxiliary and control contacts         AWG number as coded connectable conductor cross section for main contacts         tightening torque         • for main contacts with screw-type terminals         • for auxiliary and control contacts with screw-type terminals	screw-type terminals $2x (1.5 2.5 mm^2), 2x (2.5 6 mm^2)$ $2x (1 2.5 mm^2), 2x (2.5 6 mm^2), 1x 10 mm^2$ 2x (14 10) $1.5 6 mm^2$ $1 10 mm^2$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ 1x (AWG 20 12) 14 10 2 2.5 N·m
Connections/ Terminals         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         type of connectable conductor cross-sections         • for main contacts         — solid         — finely stranded with core end processing         • at AWG cables for main contacts         connectable conductor cross-section for main contacts         connectable conductor cross-section for main contacts         • solid or stranded         • finely stranded with core end processing         type of connectable conductor cross-sections         • for auxiliary and control contacts         — solid         — finely stranded with core end processing         type of connectable conductor cross-sections         • for auxiliary and control contacts         — solid         — finely stranded with core end processing         — finely stranded connectable conductor cross s	screw-type terminals $2x (1.5 2.5 mm^2), 2x (2.5 6 mm^2)$ $2x (1 2.5 mm^2), 2x (2.5 6 mm^2), 1x 10 mm^2$ 2x (14 10) $1.5 6 mm^2$ $1 10 mm^2$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ 1x (AWG 20 12) 14 10 $2 2.5 N \cdot m$ $0.5 0.6 N \cdot m$
Connections/ Terminals         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         type of connectable conductor cross-sections         • for main contacts         — solid         — finely stranded with core end processing         • at AWG cables for main contacts         connectable conductor cross-section for main contacts         e solid or stranded         • finely stranded with core end processing         type of connectable conductor cross-sections         • solid or stranded         • finely stranded with core end processing         type of connectable conductor cross-sections         • for auxiliary and control contacts         — solid         — finely stranded with core end processing         — finely stranded without core end processing         • finely stranded with core end processing         • finely stranded with core end processing         • for auxiliary and control contacts         AWG cables for auxiliary and control contacts         AWG number as coded connectable conductor cross section for main contacts         tightenin	screw-type terminals 2x (1.5 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (14 10) 1.5 6 mm <sup>2</sup> 1 10 mm <sup>2</sup> 1x (0.5 2.5 mm <sup>2</sup> ), 2x (0.5 1.0 mm <sup>2</sup> ) 1x (0.5 2.5 mm <sup>2</sup> ), 2x (0.5 1.0 mm <sup>2</sup> ) 1x (0.5 2.5 mm <sup>2</sup> ), 2x (0.5 1.0 mm <sup>2</sup> ) 1x (AWG 20 12) 14 10 2 2.5 N·m 0.5 0.6 N·m 18 22 lbf-in
Connections/ Terminals         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         type of connectable conductor cross-sections         • for main contacts         — solid         — finely stranded with core end processing         • at AWG cables for main contacts         connectable conductor cross-section for main contacts         connectable conductor cross-section for main contacts         • solid or stranded         • finely stranded with core end processing         type of connectable conductor cross-sections         • for auxiliary and control contacts         — solid         — finely stranded with core end processing         • for auxiliary and control contacts         — solid         — finely stranded with core end processing         — finely stranded with core end processing         — finely stranded without core end processing         — finely stranded connectable conductor cross section for main contacts         ti	screw-type terminals $2x (1.5 2.5 mm^2), 2x (2.5 6 mm^2)$ $2x (1 2.5 mm^2), 2x (2.5 6 mm^2), 1x 10 mm^2$ 2x (14 10) $1.5 6 mm^2$ $1 10 mm^2$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ 1x (AWG 20 12) 14 10 $2 2.5 N \cdot m$ $0.5 0.6 N \cdot m$
Connections/ Terminals         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         type of connectable conductor cross-sections         • for main contacts         — solid         — finely stranded with core end processing         • at AWG cables for main contacts         connectable conductor cross-section for main contacts         connectable conductor cross-section for main contacts         • solid or stranded         • finely stranded with core end processing         type of connectable conductor cross-sections         • for auxiliary and control contacts         — solid         — finely stranded with core end processing         • for auxiliary and control contacts         — solid         — finely stranded with core end processing         • finely stranded with core end processing         • finely stranded with core end processing         • finely stranded without core end processing         • for main contacts         tightening torque         • for	screw-type terminals 2x (1.5 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (14 10) 1.5 6 mm <sup>2</sup> 1 10 mm <sup>2</sup> 1x (0.5 2.5 mm <sup>2</sup> ), 2x (0.5 1.0 mm <sup>2</sup> ) 1x (0.5 2.5 mm <sup>2</sup> ), 2x (0.5 1.0 mm <sup>2</sup> ) 1x (0.5 2.5 mm <sup>2</sup> ), 2x (0.5 1.0 mm <sup>2</sup> ) 1x (AWG 20 12) 14 10 2 2.5 N·m 0.5 0.6 N·m 18 22 lbf-in
Connections/ Terminals         type of electrical connection         6 for main current circuit         type of connectable conductor cross-sections         6 for main contacts         — solid         — finely stranded with core end processing         e at AWG cables for main contacts         connectable conductor cross-section for main contacts         connectable conductor cross-section for main contacts         e solid or stranded         e for auxiliary and control contacts         e of connectable conductor cross-sections         e for auxiliary and control contacts         — solid         — finely stranded with core end processing         — finely stranded with core end processing       — finely stranded with core end processing       — finely stranded with core end processing       — finely stranded with core end processing       — finely stranded with core end processing       — finel	screw-type terminals $2x (1.5 2.5 mm^2), 2x (2.5 6 mm^2)$ $2x (1 2.5 mm^2), 2x (2.5 6 mm^2), 1x 10 mm^2$ 2x (14 10) $1.5 6 mm^2$ $1 10 mm^2$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ $1x (0.5 2.5 mm^2), 2x (0.5 1.0 mm^2)$ 1x (AWG 20 12) 14 10 $2 2.5 N \cdot m$ $0.5 0.6 N \cdot m$ $18 22 lbf \cdot in$ $7.5 5.3 lbf \cdot in$
Connections/ Terminals         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         type of connectable conductor cross-sections         • for main contacts         — solid         — finely stranded with core end processing         • at AWG cables for main contacts         connectable conductor cross-section for main contacts         connectable conductor cross-section for main contacts         • solid or stranded         • finely stranded with core end processing         type of connectable conductor cross-sections         • for auxiliary and control contacts         — solid         — finely stranded with core end processing         • for auxiliary and control contacts         — solid         — finely stranded with core end processing         • finely stranded with core end processing         • finely stranded with core end processing         • finely stranded without core end processing         • for main contacts         tightening torque         • for	screw-type terminals 2x (1.5 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (14 10) 1.5 6 mm <sup>2</sup> 1 10 mm <sup>2</sup> 1x (0.5 2.5 mm <sup>2</sup> ), 2x (0.5 1.0 mm <sup>2</sup> ) 1x (0.5 2.5 mm <sup>2</sup> ), 2x (0.5 1.0 mm <sup>2</sup> ) 1x (0.5 2.5 mm <sup>2</sup> ), 2x (0.5 1.0 mm <sup>2</sup> ) 1x (0.5 2.5 mm <sup>2</sup> ), 2x (0.5 1.0 mm <sup>2</sup> ) 1x (AWG 20 12) 14 10 2 2.5 N·m 0.5 0.6 N·m 18 22 lbf-in

stripped length of the cable	
for main contacts	7 mm
<ul> <li>for auxiliary and control contacts</li> </ul>	7 mm
Safety related data	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Ambient conditions	
installation altitude at height above sea level maximum	1 000 m
ambient temperature	
<ul> <li>during operation</li> </ul>	-25 +60 °C
during storage	-55 +80 °C
Electromagnetic compatibility	
conducted interference	
<ul> <li>due to burst according to IEC 61000-4-4</li> <li>due to conductor-earth surge according to IEC</li> </ul>	2 kV / 5 kHz behavior criterion 2 2 kV behavior criterion 2
<ul> <li>61000-4-5</li> <li>due to conductor-conductor surge according to IEC</li> </ul>	1 kV behavior criterion 2
<ul> <li>61000-4-5</li> <li>due to high-frequency radiation according to IEC</li> </ul>	140 dBuV in the frequency range 0.15 80 MHz, behavior criterion 1
61000-4-6 electrostatic discharge according to IEC 61000-4-2	4 kV contact discharging / 8 kV air discharging, behavior criterion 2
conducted HF interference emissions according to CISPR11	Class A for industrial environment
field-bound HF interference emission according to CISPR11	Class A for industrial environment
Short-circuit protection, design of the fuse link	
manufacturer's article number	
<ul> <li>of full range R fuse link for semiconductor protection at NH design usable</li> </ul>	<u>3NE1817-0</u>
of full range R fuse link for semiconductor protection	5SE1350; Maximum operating voltage 400 V!
at cylindrical design usable • of back-up R fuse link for semiconductor protection	<u>3NE8018-1</u>
<ul> <li>at NH design usable</li> <li>of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable</li> </ul>	<u>3NC1450</u>
<ul> <li>of back-up R fuse link for semiconductor protection</li> </ul>	3NC2280
at cylindrical design 22 x 58 mm usable manufacturer's article number of the gG fuse at NH design	
usable	
• up to 460 V	<u>3NA3812</u> ; These fuses have a smaller rated current than the semiconductor relays
Certificates/ approvals	
General Product Approval	EMC Declaration of Conformity
<u>Confirmation</u>	COT 🔊 UK
କ୍ର କ୍ର	EAL 🖉 RE
CH UL	
Declaration of Conformity Test Certificates other	
Type Test Certific- Confirmation	on 🔊
EG-Konf.	
Further information	

Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,...)

## https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2450-1AB35


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2450-1AB35


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RF2450-1AB35

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RF2450-1AB35&lang=en





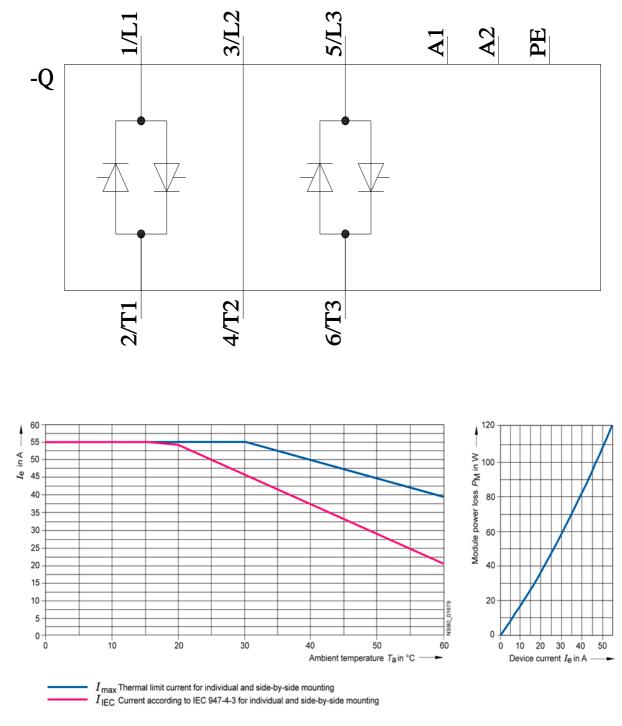

last modified:

6/3/2021 🖸