SIEMENS

Product data sheet

3RT1034-1AC00



CONTACTOR, AC-3, 15KW/400V, AC 32V 50HZ, 3-POLE, SIZE S2. SCREW TERMINAL

General details:		
Product brand name		SIRIUS
product designation		power contactor
Size of the contactor		S2
Protection class IP / on the front		IP20
Degree of pollution		3
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature / during operating	°C	-25 +60
Active power loss / per conductor / typical	W	1.8
Item designation		
according to DIN EN 61346-2		Q
 according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 		К
Mechanical operating cycles as operating time		
of the contactor / typical		10,000,000
• of the contactor with added auxiliary switch block / typical		10,000,000
 of the contactor with added electronics-compatible auxiliary switch block / typical 		5,000,000
Main circuit:		
Number of poles / for main current circuit		3

Number of NC contacts / for main contacts		0
Number of NO contacts / for main contacts		3
Operating current / at AC-1 / at 400 V / at 40 °C ambient temperature / rated value	А	50
Operating current / at AC-1 / at 400 V / at 60 °C ambient temperature / rated value	A	45
Operating current		
• at AC-3 / at 400 V / rated value	А	32
with 1 current path		
• at DC-1		
• at 24 V / rated value	А	45
• at 110 V / rated value	А	4.5
• at DC-3 / at DC-5		
• at 24 V / rated value	А	35
• at 110 V / rated value	А	2.5
• with 2 current paths in series		
• at DC-1		
• at 24 V / rated value	А	45
• at 110 V / rated value	А	45
• at DC-3 / at DC-5		
• at 24 V / rated value	А	45
• at 110 V / rated value	А	25
• with 3 current paths in series		
• at DC-1		
• at 24 V / rated value	А	45
• at 110 V / rated value	А	45
• at DC-3 / at DC-5		
• at 24 V / rated value	А	45
• at 110 V / rated value	А	45
Service power		
• at AC-1 / at 400 V / rated value	kW	31
• at AC-2 / at 400 V / rated value	kW	15
• at AC-3		
• at 400 V / rated value	kW	15
• at 500 V / rated value	kW	18.5
• at 690 V / rated value	kW	18.5

Control circuit:			
Design of activation		conventional	
Type of voltage / of the controlled supply voltage		AC	
Control supply voltage frequency			


• 1 / rated value	Hz	50
• 2 / rated value	Hz	60
Control supply voltage / 1		
• at 50 Hz / for AC		
rated value	V	32


Auxiliary circuit:

Contact reliability / of the auxiliary contacts		1 faulty switching per 100 million (17 V, 1 mA)
Number of NC contacts / for auxiliary contacts		
instantaneous switching		0
lagging switching		0
Number of NO contacts / for auxiliary contacts		
 instantaneous switching 		0
leading switching		0
Operating current / of the auxiliary contacts		
• at AC-12 / maximum	А	10
• at AC-15		
• at 230 V	А	6
• at 400 V	А	3
• at DC-12		
• at 60 V	А	6
• at 110 V	А	3
• at 220 V	А	1
• at DC-13		
• at 24 V	А	10
• at 60 V	А	2
• at 110 V	А	1
• at 220 V	А	0.3

Short-circuit:		
Design of the fuse link		
 for short-circuit protection of the auxiliary switch / required 		fuse gL/gG: 10 A
 for short-circuit protection of the main circuit 		
 with type of assignment 1 / required 		fuse gL/gG: 125 A
type of coordination 2 / required		fuse gL/gG: 63 A
Installation/mounting/dimensions:		
Type of mounting		screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022
series installation		Yes
Width	mm	55

Height			mm	112	
Depth			mm	115	
Distance, to be maintained, to earthed part / sidewards		mm	6		
Connection type:					
Design of the electric	al connection				
 for main current cir 	rcuit			screw-type terminals	
 for auxiliary and co 	ontrol current circuit			screw-type terminals	
Certificates/approv	vals:				
General Product Ap	proval				Test Certificates
COC	(SA)	<u>KETI</u>	ROSTEST		Manufacturer
Shipping Approval					
ABS	B U R E A U VER ITAS		GL	Llovd's Register	
Shipping Approval	other				
RMRS	<u>Manufacturer</u>	<u>other</u>			
Further information	า:				
Information- and Dow http://www.siemens.co					
Industry Mall (Online http://www.siemens.co		'mall			
CAx-Online-Generato					
Service&Support (Ma http://support.automati					
Image database (proc http://www.automation.				ircuit diagrams,)	

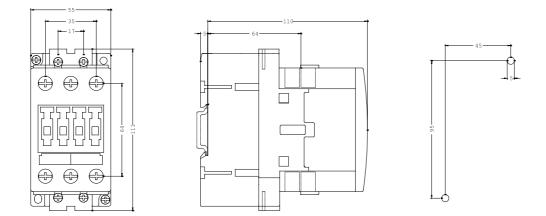

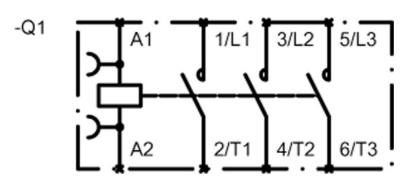

last change:

Sep 30, 2011