# **SIEMENS**

Data sheet 3RT1265-6AU36



vacuum contactor AC-3e/AC-3 265 A, 132 kW / 400 V, 3-pole, Uc: 240-277 V AC(50-60 Hz) / DC drive: conventional auxiliary contacts 2 NO + 2 NC main circuit: busbar control and auxiliary circuit: screw terminal

product brand name	SIRIUS
product designation	Vacuum contactor
product type designation	3RT12
General technical data	
size of contactor	S10
product extension	
<ul> <li>function module for communication</li> </ul>	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	36 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	12 W
<ul> <li>without load current share typical</li> </ul>	8.2 W
insulation voltage	
<ul> <li>of main circuit with degree of pollution 3 rated value</li> </ul>	1 000 V
<ul> <li>of auxiliary circuit with degree of pollution 3 rated value</li> </ul>	500 V
surge voltage resistance	
<ul> <li>of main circuit rated value</li> </ul>	8 kV
<ul> <li>of auxiliary circuit rated value</li> </ul>	6 kV
maximum permissible voltage for safe isolation between coil and main contacts according to EN 60947-1	690 V
shock resistance at rectangular impulse	
• at AC	8,5g / 5 ms, 4,2g / 10 ms
• at DC	8,5g / 5 ms, 4,2g / 10 ms
shock resistance with sine pulse	
• at AC	13,4g / 5 ms, 6,5g / 10 ms
• at DC	13,4g / 5 ms, 6,5g / 10 ms
mechanical service life (operating cycles)	
<ul> <li>of contactor typical</li> </ul>	10 000 000
<ul> <li>of the contactor with added electronically optimized auxiliary switch block typical</li> </ul>	5 000 000
<ul> <li>of the contactor with added auxiliary switch block typical</li> </ul>	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	05/01/2012
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul> <li>during operation</li> </ul>	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30	95 %

maximum

Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
operating voltage	
at AC-3 rated value maximum	1 000 V
<ul> <li>at AC-3e rated value maximum</li> </ul>	1 000 V
operational current	
<ul> <li>at AC-1 at 400 V at ambient temperature 40 °C rated value</li> </ul>	330 A
● at AC-1	
<ul> <li>up to 690 V at ambient temperature 40 °C rated value</li> </ul>	330 A
<ul> <li>up to 690 V at ambient temperature 60 °C rated value</li> </ul>	300 A
<ul> <li>up to 1000 V at ambient temperature 40 °C rated value</li> </ul>	330 A
<ul> <li>up to 1000 V at ambient temperature 60 °C rated value</li> </ul>	300 A
• at AC-3	
— at 400 V rated value	265 A
— at 500 V rated value	265 A
— at 690 V rated value	265 A
— at 1000 V rated value	265 A
• at AC-3e	
— at 400 V rated value	265 A
— at 500 V rated value	265 A
— at 690 V rated value	265 A
— at 1000 V rated value	265 A
<ul><li>at AC-4 at 400 V rated value</li><li>at AC-6a</li></ul>	230 A
<ul> <li>up to 230 V for current peak value n=20 rated value</li> </ul>	265 A
<ul> <li>up to 400 V for current peak value n=20 rated value</li> </ul>	265 A
— up to 500 V for current peak value n=20 rated value	265 A
— up to 690 V for current peak value n=20 rated value	265 A
<ul> <li>up to 1000 V for current peak value n=20 rated value</li> <li>at AC-6a</li> </ul>	265 A
— up to 230 V for current peak value n=30 rated value	209 A
<ul> <li>up to 400 V for current peak value n=30 rated value</li> </ul>	209 A
<ul> <li>up to 500 V for current peak value n=30 rated value</li> </ul>	209 A
— up to 690 V for current peak value n=30 rated value	209 A
— up to 1000 V for current peak value n=30 rated value  minimum cross-section in main circuit at maximum AC-1	209 A 185 mm <sup>2</sup>
rated value  operational current for approx. 200000 operating	100 11111
cycles at AC-4	
at 400 V rated value	115 A
• at 690 V rated value	115 A
operating power  ● at AC-3	
— at 230 V rated value	75 kW
— at 400 V rated value	132 kW
— at 500 V rated value	160 kW
— at 690 V rated value	250 kW
— at 1000 V rated value	355 kW
• at AC-3e	
— at 230 V rated value	75 kW
— at 400 V rated value	132 kW

— at 500 V rated value	160 kW
— at 690 V rated value	250 kW
<ul><li>— at 1000 V rated value</li></ul>	355 kW
operating power for approx. 200000 operating cycles	
at AC-4	
<ul> <li>at 400 V rated value</li> </ul>	65 kW
<ul> <li>at 690 V rated value</li> </ul>	112 kW
operating apparent power at AC-6a	
<ul> <li>up to 230 V for current peak value n=20 rated value</li> </ul>	100 000 kVA
<ul> <li>up to 400 V for current peak value n=20 rated value</li> </ul>	180 000 VA
<ul> <li>up to 500 V for current peak value n=20 rated value</li> </ul>	220 000 VA
• up to 690 V for current peak value n=20 rated value	310 000 VA
• up to 1000 V for current peak value n=20 rated	450 000 VA
value	
operating apparent power at AC-6a	
<ul> <li>up to 230 V for current peak value n=30 rated value</li> </ul>	80 000 VA
<ul> <li>up to 400 V for current peak value n=30 rated value</li> </ul>	140 000 VA
• up to 500 V for current peak value n=30 rated value	180 000 VA
up to 690 V for current peak value n=30 rated value	250 000 VA
• up to 1000 V for current peak value n=30 rated	360 000 VA
value	
no-load switching frequency	
• at AC	2 000 1/h
• at DC	2 000 1/h
operating frequency	
at AC-1 maximum	750 1/h
at AC-2 maximum	250 1/h
• at AC-3 maximum	750 1/h
at AC-3e maximum	750 1/h
• at AC-4 maximum	250 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
control supply voltage at AC	AOIDO
	240 277 V
at 50 Hz rated value	240 277 V
<ul><li>at 50 Hz rated value</li><li>at 60 Hz rated value</li></ul>	240 277 V 240 277 V
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>control supply voltage at DC</li> </ul>	240 277 V
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>control supply voltage at DC</li> <li>rated value</li> </ul>	
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>control supply voltage at DC</li> <li>rated value</li> <li>operating range factor control supply voltage rated</li> </ul>	240 277 V
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>control supply voltage at DC</li> <li>rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at DC</li> </ul>	240 277 V 240 277 V
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>control supply voltage at DC</li> <li>rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at DC</li> <li>initial value</li> </ul>	240 277 V 240 277 V 0.8
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>control supply voltage at DC</li> <li>rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at DC</li> <li>initial value</li> <li>full-scale value</li> </ul>	240 277 V 240 277 V
at 50 Hz rated value at 60 Hz rated value control supply voltage at DC rated value operating range factor control supply voltage rated value of magnet coil at DC initial value full-scale value operating range factor control supply voltage rated	240 277 V 240 277 V 0.8
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>control supply voltage at DC</li> <li>rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at DC</li> <li>initial value</li> <li>full-scale value</li> </ul>	240 277 V 240 277 V 0.8
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>control supply voltage at DC</li> <li>rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at DC</li> <li>initial value</li> <li>full-scale value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> </ul>	240 277 V 240 277 V 0.8 1.1
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>control supply voltage at DC</li> <li>rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at DC</li> <li>initial value</li> <li>full-scale value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul>	240 277 V 240 277 V  0.8 1.1
at 50 Hz rated value  at 60 Hz rated value  control supply voltage at DC  rated value  operating range factor control supply voltage rated value of magnet coil at DC  initial value  full-scale value  operating range factor control supply voltage rated value of magnet coil at AC  at 50 Hz  at 60 Hz  design of the surge suppressor	240 277 V  240 277 V  0.8  1.1  0.8 1.1  0.8 1.1
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>control supply voltage at DC</li> <li>rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at DC</li> <li>initial value</li> <li>full-scale value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul>	240 277 V  240 277 V  0.8  1.1  0.8 1.1  0.8 1.1 with varistor
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>control supply voltage at DC</li> <li>rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at DC</li> <li>initial value</li> <li>full-scale value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>design of the surge suppressor apparent pick-up power of magnet coil at AC</li> <li>at 50 Hz</li> </ul>	240 277 V  240 277 V  0.8  1.1  0.8 1.1  0.8 1.1 with varistor  590 VA
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>control supply voltage at DC</li> <li>rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at DC</li> <li>initial value</li> <li>full-scale value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>design of the surge suppressor apparent pick-up power of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> </ul>	240 277 V  240 277 V  0.8  1.1  0.8 1.1  0.8 1.1 with varistor
at 50 Hz rated value at 60 Hz rated value control supply voltage at DC rated value operating range factor control supply voltage rated value of magnet coil at DC initial value full-scale value operating range factor control supply voltage rated value of magnet coil at AC at 50 Hz at 60 Hz design of the surge suppressor apparent pick-up power of magnet coil at AC at 50 Hz at 60 Hz inductive power factor with closing power of the coil	240 277 V  240 277 V  0.8  1.1  0.8 1.1  0.8 1.1 with varistor  590 VA 590 VA
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>control supply voltage at DC</li> <li>rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at DC</li> <li>initial value</li> <li>full-scale value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>design of the surge suppressor</li> <li>apparent pick-up power of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>inductive power factor with closing power of the coil</li> <li>at 50 Hz</li> </ul>	240 277 V  240 277 V  0.8  1.1  0.8 1.1  0.8 1.1 with varistor  590 VA 590 VA
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>control supply voltage at DC</li> <li>rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at DC</li> <li>initial value</li> <li>full-scale value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>design of the surge suppressor</li> <li>apparent pick-up power of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>inductive power factor with closing power of the coil</li> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul>	240 277 V  240 277 V  0.8  1.1  0.8 1.1  0.8 1.1 with varistor  590 VA 590 VA
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>control supply voltage at DC</li> <li>rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at DC</li> <li>initial value</li> <li>full-scale value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>design of the surge suppressor</li> <li>apparent pick-up power of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>inductive power factor with closing power of the coil</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> </ul>	240 277 V  240 277 V  0.8  1.1  0.8 1.1  0.8 1.1 with varistor  590 VA 590 VA 590 VA
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>control supply voltage at DC</li> <li>rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at DC</li> <li>initial value</li> <li>full-scale value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>design of the surge suppressor apparent pick-up power of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>inductive power factor with closing power of the coil</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>apparent holding power of magnet coil at AC</li> <li>at 50 Hz</li> </ul>	240 277 V  240 277 V  0.8  1.1  0.8 1.1  0.8 1.1 with varistor  590 VA 590 VA  0.9  0.9  6.1 VA
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>control supply voltage at DC</li> <li>rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at DC</li> <li>initial value</li> <li>full-scale value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>design of the surge suppressor</li> <li>apparent pick-up power of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>inductive power factor with closing power of the coil</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>apparent holding power of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul>	240 277 V  240 277 V  0.8  1.1  0.8 1.1  0.8 1.1 with varistor  590 VA 590 VA 590 VA
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>control supply voltage at DC</li> <li>rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at DC</li> <li>initial value</li> <li>full-scale value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>design of the surge suppressor apparent pick-up power of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>inductive power factor with closing power of the coil</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>apparent holding power of magnet coil at AC</li> <li>at 50 Hz</li> </ul>	240 277 V  240 277 V  0.8  1.1  0.8 1.1  0.8 1.1 with varistor  590 VA 590 VA  0.9  0.9  6.1 VA
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>control supply voltage at DC</li> <li>rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at DC</li> <li>initial value</li> <li>full-scale value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>design of the surge suppressor</li> <li>apparent pick-up power of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>inductive power factor with closing power of the coil</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>apparent holding power of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li></ul>	240 277 V  240 277 V  0.8  1.1  0.8 1.1  0.8 1.1 with varistor  590 VA 590 VA  0.9  0.9  6.1 VA
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>control supply voltage at DC</li> <li>rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at DC</li> <li>initial value</li> <li>full-scale value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>design of the surge suppressor</li> <li>apparent pick-up power of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>inductive power factor with closing power of the coil</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>inductive power factor with the holding power of the coil</li> </ul>	240 277 V  240 277 V  0.8  1.1  0.8 1.1  0.8 1.1  with varistor  590 VA  590 VA  0.9  0.9  6.1 VA  6.1 VA
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>control supply voltage at DC</li> <li>rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at DC</li> <li>initial value</li> <li>full-scale value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>design of the surge suppressor</li> <li>apparent pick-up power of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>inductive power factor with closing power of the coil</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>inductive power factor with the holding power of the coil</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>inductive power factor with the holding power of the coil</li> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul>	240 277 V  240 277 V  0.8  1.1  0.8 1.1  0.8 1.1  with varistor  590 VA  590 VA  0.9  0.9  6.1 VA  6.1 VA
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>control supply voltage at DC</li> <li>rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at DC</li> <li>initial value</li> <li>full-scale value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>design of the surge suppressor</li> <li>apparent pick-up power of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>inductive power factor with closing power of the coil</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>apparent holding power of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>inductive power factor with the holding power of the coil</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>inductive power factor with the holding power of the coil</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>out 60 Hz</li> </ul>	240 277 V  240 277 V  0.8  1.1  0.8 1.1  0.8 1.1  with varistor  590 VA  590 VA  0.9  0.9  6.1 VA  6.1 VA  0.9  0.9
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>control supply voltage at DC</li> <li>rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at DC</li> <li>initial value</li> <li>full-scale value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>design of the surge suppressor</li> <li>apparent pick-up power of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>inductive power factor with closing power of the coil</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>inductive power factor with the holding power of the coil</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>inductive power factor with the holding power of the coil</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>inductive power of magnet coil at DC</li> <li>holding power of magnet coil at DC</li> </ul>	240 277 V  240 277 V  0.8  1.1  0.8 1.1  0.8 1.1  with varistor  590 VA  590 VA  0.9  0.9  6.1 VA  6.1 VA  0.9  0.9  700 W
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>control supply voltage at DC</li> <li>rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at DC</li> <li>initial value</li> <li>full-scale value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>design of the surge suppressor</li> <li>apparent pick-up power of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>inductive power factor with closing power of the coil</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>apparent holding power of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>inductive power factor with the holding power of the coil</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>inductive power factor with the holding power of the coil</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>out 60 Hz</li> </ul>	240 277 V  240 277 V  0.8  1.1  0.8 1.1  0.8 1.1  with varistor  590 VA  590 VA  0.9  0.9  6.1 VA  6.1 VA  0.9  0.9  700 W
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>control supply voltage at DC</li> <li>rated value</li> <li>prated value</li> <li>operating range factor control supply voltage rated value of magnet coil at DC</li> <li>initial value</li> <li>full-scale value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>design of the surge suppressor</li> <li>apparent pick-up power of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>inductive power factor with closing power of the coil</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>apparent holding power of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>inductive power factor with the holding power of the coil</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>inductive power factor with the holding power of the coil</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>ot 60 Hz</li> <li>ot 60 Hz</li> <li>ot 60 Hz</li> <li>ot 50 Hz</li> <li>ot 60 Hz</li></ul>	240 277 V  240 277 V  0.8  1.1  0.8 1.1  0.8 1.1  with varistor  590 VA  590 VA  0.9  0.9  6.1 VA  6.1 VA  0.9  0.9  700 W  8.2 W
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>control supply voltage at DC</li> <li>rated value</li> <li>operating range factor control supply voltage rated value of magnet coil at DC</li> <li>initial value</li> <li>full-scale value</li> <li>operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>design of the surge suppressor</li> <li>apparent pick-up power of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>inductive power factor with closing power of the coil</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>apparent holding power of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>inductive power factor with the holding power of the coil</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>inductive power factor with the holding power of the coil</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>inductive power of magnet coil at DC</li> <li>holding power of magnet coil at DC</li> <li>closing delay</li> <li>at AC</li> </ul>	240 277 V  240 277 V  0.8  1.1  0.8 1.1  0.8 1.1  with varistor  590 VA  590 VA  0.9  0.9  6.1 VA  6.1 VA  0.9  0.9  700 W  8.2 W  30 95 ms

a at AC	40 90 mg	
<ul><li>at AC</li><li>at DC</li></ul>	40 80 ms	
• at DC arcing time	40 80 ms 10 15 ms	
control version of the switch operating mechanism	Standard A1 - A2	
Auxiliary circuit		
number of NC contacts for auxiliary contacts	2	
instantaneous contact number of NO contacts for auxiliary contacts	2	
instantaneous contact		
operational current at AC-12 maximum	10 A	
operational current at AC-15		
at 230 V rated value	6 A	
at 400 V rated value	3 A	
at 500 V rated value	2 A	
<ul> <li>at 690 V rated value</li> </ul>	1 A	
operational current at DC-12		
<ul> <li>at 24 V rated value</li> </ul>	10 A	
<ul> <li>at 48 V rated value</li> </ul>	6 A	
<ul> <li>at 60 V rated value</li> </ul>	6 A	
<ul> <li>at 110 V rated value</li> </ul>	3 A	
• at 125 V rated value	2 A	
<ul> <li>at 220 V rated value</li> </ul>	1 A	
<ul> <li>at 600 V rated value</li> </ul>	0.15 A	
operational current at DC-13		
<ul> <li>at 24 V rated value</li> </ul>	10 A	
<ul> <li>at 48 V rated value</li> </ul>	2 A	
<ul> <li>at 60 V rated value</li> </ul>	2 A	
<ul> <li>at 110 V rated value</li> </ul>	1 A	
at 125 V rated value	0.9 A	
at 220 V rated value	0.3 A	
at 600 V rated value	0.1 A	
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)	
,		
UL/CSA ratings		
UL/CSA ratings		
	240 A	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor		
UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value	240 A	
UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp]	240 A	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for 3-phase AC motor	240 A 242 A	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp]  • for 3-phase AC motor  — at 200/208 V rated value	240 A 242 A 75 hp	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value	240 A 242 A 75 hp 100 hp	
ull-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp]  • for 3-phase AC motor  — at 200/208 V rated value  — at 220/230 V rated value  — at 460/480 V rated value	240 A 242 A 75 hp 100 hp 200 hp	
UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  ● at 480 V rated value  ● at 600 V rated value  yielded mechanical performance [hp]  ● for 3-phase AC motor  — at 200/208 V rated value  — at 220/230 V rated value  — at 460/480 V rated value  — at 575/600 V rated value	240 A 242 A 75 hp 100 hp	
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp]  • for 3-phase AC motor  — at 200/208 V rated value  — at 220/230 V rated value  — at 460/480 V rated value  — at 575/600 V rated value  contact rating of auxiliary contacts according to UL	240 A 242 A 75 hp 100 hp 200 hp 250 hp	
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp]  • for 3-phase AC motor  — at 200/208 V rated value  — at 220/230 V rated value  — at 460/480 V rated value  — at 575/600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection	240 A 242 A 75 hp 100 hp 200 hp 250 hp	
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp]  • for 3-phase AC motor  — at 200/208 V rated value  — at 220/230 V rated value  — at 460/480 V rated value  — at 575/600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link	240 A 242 A 75 hp 100 hp 200 hp 250 hp	
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp]  • for 3-phase AC motor  — at 200/208 V rated value  — at 220/230 V rated value  — at 460/480 V rated value  — at 575/600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit	240 A 242 A 75 hp 100 hp 200 hp 250 hp A600 / Q600	
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp]  • for 3-phase AC motor  — at 200/208 V rated value  — at 220/230 V rated value  — at 460/480 V rated value  — at 575/600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required	240 A 242 A 75 hp 100 hp 200 hp 250 hp A600 / Q600	
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp]  • for 3-phase AC motor  — at 200/208 V rated value  — at 220/230 V rated value  — at 460/480 V rated value  — at 575/600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit	240 A 242 A  75 hp 100 hp 200 hp 250 hp A600 / Q600  gG: 500 A (690 V, 100 kA) gG: 500 A (690 V, 100 kA), aM: 400 A (690 V, 50 kA), BS88: 450 A (415	
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp]  • for 3-phase AC motor  — at 200/208 V rated value  — at 220/230 V rated value  — at 460/480 V rated value  — at 575/600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required	240 A 242 A 75 hp 100 hp 200 hp 250 hp A600 / Q600	
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp]  • for 3-phase AC motor  — at 200/208 V rated value  — at 220/230 V rated value  — at 460/480 V rated value  — at 575/600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required	240 A 242 A  75 hp 100 hp 200 hp 250 hp A600 / Q600  gG: 500 A (690 V, 100 kA) gG: 500 A (690 V, 100 kA), aM: 400 A (690 V, 50 kA), BS88: 450 A (415 V, 50 kA)	
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  yielded mechanical performance [hp] • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch	240 A 242 A  75 hp 100 hp 200 hp 250 hp A600 / Q600  gG: 500 A (690 V, 100 kA) gG: 500 A (690 V, 100 kA), aM: 400 A (690 V, 50 kA), BS88: 450 A (415 V, 50 kA)	
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  yielded mechanical performance [hp] • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required	240 A 242 A  75 hp 100 hp 200 hp 250 hp A600 / Q600  gG: 500 A (690 V, 100 kA) gG: 500 A (690 V, 100 kA), aM: 400 A (690 V, 50 kA), BS88: 450 A (415 V, 50 kA)	
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  yielded mechanical performance [hp] • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions	240 A 242 A  75 hp 100 hp 200 hp 250 hp A600 / Q600  gG: 500 A (690 V, 100 kA) gG: 500 A (690 V, 100 kA), aM: 400 A (690 V, 50 kA), BS88: 450 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA)	
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  yielded mechanical performance [hp] • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions	240 A 242 A  75 hp 100 hp 200 hp 250 hp A600 / Q600  gG: 500 A (690 V, 100 kA) gG: 500 A (690 V, 100 kA), aM: 400 A (690 V, 50 kA), BS88: 450 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA)  +/-22,5° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface;	
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  yielded mechanical performance [hp] • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position	240 A 242 A  75 hp 100 hp 200 hp 250 hp A600 / Q600  gG: 500 A (690 V, 100 kA) gG: 500 A (690 V, 100 kA), aM: 400 A (690 V, 50 kA), BS88: 450 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA)  +/-22,5° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; standing, on horizontal mounting surface	
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  yielded mechanical performance [hp]  • for 3-phase AC motor  — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position	240 A 242 A  75 hp 100 hp 200 hp 250 hp A600 / Q600  gG: 500 A (690 V, 100 kA) gG: 500 A (690 V, 100 kA), aM: 400 A (690 V, 50 kA), BS88: 450 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA)  +/-22,5° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; standing, on horizontal mounting surface screw fixing	
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  yielded mechanical performance [hp] • for 3-phase AC motor  — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method • side-by-side mounting	240 A 242 A  75 hp 100 hp 200 hp 250 hp A600 / Q600  gG: 500 A (690 V, 100 kA) gG: 500 A (690 V, 100 kA), aM: 400 A (690 V, 50 kA), BS88: 450 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA)  +/-22,5° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; standing, on horizontal mounting surface screw fixing Yes	
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  yielded mechanical performance [hp] • for 3-phase AC motor  — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method • side-by-side mounting height	240 A 242 A  75 hp 100 hp 200 hp 250 hp A600 / Q600  gG: 500 A (690 V, 100 kA) gG: 500 A (690 V, 100 kA), aM: 400 A (690 V, 50 kA), BS88: 450 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA)  +/-22,5° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; standing, on horizontal mounting surface screw fixing Yes 210 mm	
full-load current (FLA) for 3-phase AC motor	240 A 242 A  75 hp 100 hp 200 hp 250 hp A600 / Q600  gG: 500 A (690 V, 100 kA) gG: 500 A (690 V, 100 kA), aM: 400 A (690 V, 50 kA), BS88: 450 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA)  +/-22,5° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; standing, on horizontal mounting surface screw fixing Yes 210 mm 145 mm	
full-load current (FLA) for 3-phase AC motor	240 A 242 A  75 hp 100 hp 200 hp 250 hp A600 / Q600  gG: 500 A (690 V, 100 kA) gG: 500 A (690 V, 100 kA), aM: 400 A (690 V, 50 kA), BS88: 450 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA)  +/-22,5° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; standing, on horizontal mounting surface screw fixing Yes 210 mm 145 mm	
full-load current (FLA) for 3-phase AC motor	240 A 242 A  75 hp 100 hp 200 hp 250 hp A600 / Q600  gG: 500 A (690 V, 100 kA) gG: 500 A (690 V, 100 kA), aM: 400 A (690 V, 50 kA), BS88: 450 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA)  +/-22,5° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; standing, on horizontal mounting surface screw fixing Yes 210 mm 145 mm	
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  yielded mechanical performance [hp] • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting	240 A 242 A  75 hp 100 hp 200 hp 250 hp A600 / Q600  gG: 500 A (690 V, 100 kA) gG: 500 A (690 V, 100 kA), aM: 400 A (690 V, 50 kA), BS88: 450 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA)  +/-22,5° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; standing, on horizontal mounting surface screw fixing Yes 210 mm 145 mm 206 mm	

— downwards	10 mm
— at the side	0 mm
for grounded parts	
— forwards	20 mm
— upwards	10 mm
— at the side	10 mm
— downwards	10 mm
for live parts	
— forwards	20 mm
— upwards	10 mm
— downwards	10 mm
— at the side	10 mm

#### type of electrical connection

- for main current circuit • for auxiliary and control circuit
- at contactor for auxiliary contacts
- of magnet coil

width of connection bar thickness of connection bar

diameter of holes number of holes

connectable conductor cross-section for main contacts

stranded

connectable conductor cross-section for auxiliary contacts

· solid or stranded • finely stranded with core end processing

type of connectable conductor cross-sections

• for auxiliary contacts

- solid

- solid or stranded

- finely stranded with core end processing

at AWG cables for auxiliary contacts

AWG number as coded connectable conductor cross section

• for auxiliary contacts

Connection bar

screw-type terminals

Screw-type terminals

Screw-type terminals

25 mm 6 mm 11 mm

1

70 ... 240 mm<sup>2</sup>

0.5 ... 4 mm<sup>2</sup>

0.5 ... 2.5 mm<sup>2</sup>

2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²), max. 2x (0.75 ... 4 mm²)

2x (0,5 ... 1,5 mm²), 2x (0,75 ... 2,5 mm²), max. 2x (0,75 ... 4 mm²)

2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)

2x (20 ... 16), 2x (18 ... 14), 1x 12

18 ... 14

#### Safety related data

#### product function

• mirror contact according to IEC 60947-4-1

• positively driven operation according to IEC 60947-

T1 value for proof test interval or service life according to IEC 61508

protection class IP on the front according to IEC 60529

touch protection on the front according to IEC 60529 suitability for use

• safety-related switching OFF

Yes

No

20 a

IP00; IP20 with box terminal/cover

finger-safe, for vertical contact from the front with box terminal/cover

Yes

### Certificates/ approvals

## **General Product Approval**





Confirmation



**KC** 



Functional EMC Safety/Safety o Machinery	Declaration of Conformity	Test Certificates
------------------------------------------	---------------------------	-------------------



Type Examination Certificate





Special Test Certificate

Type Test Certificates/Test Report

Confirmation

Marine / Shipping

other











other Railway

<u>Miscellaneous</u> <u>Confirmation</u> <u>Special Test Certific</u> <u>Vibration and Shock</u>

<u>ate</u>

#### **Further information**

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1265-6AU36

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1265-6AU36

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT1265-6AU36

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT1265-6AU36&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT1265-6AU36/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT1265-6AU36&objecttype=14&gridview=view1

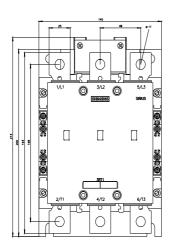



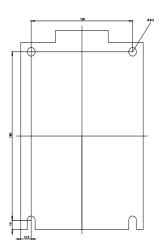

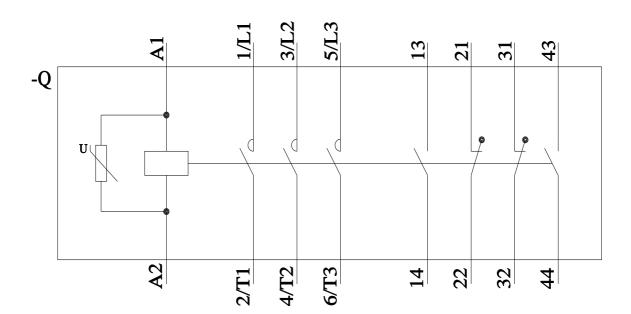

last modified:

11/12/2022 🗗