SIEMENS

Data sheet 3RT1275-6AM36



vacuum contactor AC-3e/AC-3 400 A, 200 kW / 400 V, 3-pole, Uc: 200-220 V AC(50-60 Hz) / DC drive: conventional auxiliary contacts 2 NO + 2 NC main circuit: busbar control and auxiliary circuit: screw terminal

product brand name	SIRIUS
product designation	Vacuum contactor
product type designation	3RT12
General technical data	
size of contactor	S12
product extension	
 function module for communication 	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	63 W
 at AC in hot operating state per pole 	21 W
 without load current share typical 	10 W
insulation voltage	
 of main circuit with degree of pollution 3 rated value 	1 000 V
 of auxiliary circuit with degree of pollution 3 rated value 	500 V
surge voltage resistance	
 of main circuit rated value 	8 kV
 of auxiliary circuit rated value 	6 kV
maximum permissible voltage for safe isolation between coil and main contacts according to EN 60947-1	690 V
shock resistance at rectangular impulse	
• at AC	8,5g / 5 ms, 4,2g / 10 ms
• at DC	8,5g / 5 ms, 4,2g / 10 ms
shock resistance with sine pulse	
• at AC	13,4g / 5 ms, 6,5g / 10 ms
• at DC	13,4g / 5 ms, 6,5g / 10 ms
mechanical service life (operating cycles)	
 of contactor typical 	10 000 000
 of the contactor with added electronically optimized auxiliary switch block typical 	5 000 000
 of the contactor with added auxiliary switch block typical 	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	05/01/2012
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-25 +60 °C
 during storage 	-55 +80 °C
relative humidity minimum	10 %

maximum

relative humidity at 55 °C according to IEC 60068-2-30

95 %

Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
operating voltage	
at AC-3 rated value maximum	1 000 V
 at AC-3e rated value maximum 	1 000 V
operational current	
 at AC-1 at 400 V at ambient temperature 40 °C rated value 	610 A
● at AC-1	
 up to 690 V at ambient temperature 40 °C rated value 	610 A
 up to 690 V at ambient temperature 60 °C rated value 	550 A
 up to 1000 V at ambient temperature 40 °C rated value 	610 A
 up to 1000 V at ambient temperature 60 °C rated value 	550 A
• at AC-3	
— at 400 V rated value	400 A
— at 500 V rated value	400 A
— at 690 V rated value	400 A
— at 1000 V rated value	400 A
• at AC-3e	
— at 400 V rated value	400 A
— at 500 V rated value	400 A
— at 690 V rated value	400 A
— at 1000 V rated value	400 A
at AC-4 at 400 V rated valueat AC-6a	350 A
— up to 230 V for current peak value n=20 rated value	400 A
 up to 400 V for current peak value n=20 rated value 	400 A
 up to 500 V for current peak value n=20 rated value 	400 A
— up to 690 V for current peak value n=20 rated value	400 A
 up to 1000 V for current peak value n=20 rated value at AC-6a 	400 A
— up to 230 V for current peak value n=30 rated value	293 A
 up to 400 V for current peak value n=30 rated value 	293 A
 up to 500 V for current peak value n=30 rated value 	293 A
— up to 690 V for current peak value n=30 rated value	293 A
— up to 1000 V for current peak value n=30 rated value	293 A
minimum cross-section in main circuit at maximum AC-1 rated value operational current for approx. 200000 operating	370 mm ²
cycles at AC-4	
 at 400 V rated value 	175 A
• at 690 V rated value	175 A
operating power ● at AC-3	
— at 230 V rated value	132 kW
— at 400 V rated value	200 kW
— at 500 V rated value	250 kW
— at 690 V rated value	400 kW
— at 1000 V rated value	560 kW
• at AC-3e	
— at 230 V rated value	132 kW
— at 400 V rated value	200 kW

1500.1/	0501111
— at 500 V rated value	250 kW
— at 690 V rated value	400 kW
— at 1000 V rated value	560 kW
operating power for approx. 200000 operating cycles at AC-4	
• at 400 V rated value	98 kW
• at 690 V rated value	172 kW
operating apparent power at AC-6a	
 up to 230 V for current peak value n=20 rated value 	150 000 kVA
 up to 400 V for current peak value n=20 rated value 	270 000 VA
 up to 500 V for current peak value n=20 rated value 	340 000 VA
 up to 690 V for current peak value n=20 rated value 	470 000 VA
 up to 1000 V for current peak value n=20 rated value 	690 000 VA
operating apparent power at AC-6a	
 up to 230 V for current peak value n=30 rated value 	110 000 VA
 up to 400 V for current peak value n=30 rated value 	200 000 VA
 up to 500 V for current peak value n=30 rated value 	250 000 VA
 up to 690 V for current peak value n=30 rated value 	350 000 VA
 up to 1000 V for current peak value n=30 rated value 	500 000 VA
no-load switching frequency	
• at AC	2 000 1/h
• at DC	2 000 1/h
operating frequency	
• at AC-1 maximum	700 1/h
• at AC-2 maximum	250 1/h
• at AC-3 maximum	750 1/h
• at AC-3e maximum	750 1/h
at AC-4 maximum	250 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
,, ,	
control supply voltage at AC	
control supply voltage at AC ■ at 50 Hz rated value	200 220 V
control supply voltage at AC ■ at 50 Hz rated value ■ at 60 Hz rated value	200 220 V 200 220 V
control supply voltage at AC ■ at 50 Hz rated value ■ at 60 Hz rated value control supply voltage at DC	200 220 V
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage at DC • rated value	
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage at DC • rated value operating range factor control supply voltage rated value of magnet coil at DC	200 220 V 200 220 V
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage at DC • rated value operating range factor control supply voltage rated value of magnet coil at DC • initial value	200 220 V 200 220 V 0.8
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage at DC • rated value operating range factor control supply voltage rated value of magnet coil at DC • initial value • full-scale value	200 220 V 200 220 V
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage at DC • rated value operating range factor control supply voltage rated value of magnet coil at DC • initial value • full-scale value operating range factor control supply voltage rated value of magnet coil at AC	200 220 V 200 220 V 0.8 1.1
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage at DC • rated value operating range factor control supply voltage rated value of magnet coil at DC • initial value • full-scale value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz	200 220 V 200 220 V 0.8 1.1
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage at DC • rated value operating range factor control supply voltage rated value of magnet coil at DC • initial value • full-scale value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz	200 220 V 200 220 V 0.8 1.1 0.8 1.1 0.8 1.1
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage at DC • rated value operating range factor control supply voltage rated value of magnet coil at DC • initial value • full-scale value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz design of the surge suppressor	200 220 V 200 220 V 0.8 1.1
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage at DC • rated value operating range factor control supply voltage rated value of magnet coil at DC • initial value • full-scale value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz	200 220 V 200 220 V 0.8 1.1 0.8 1.1 0.8 1.1
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage at DC • rated value operating range factor control supply voltage rated value of magnet coil at DC • initial value • full-scale value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz design of the surge suppressor apparent pick-up power of magnet coil at AC	200 220 V 200 220 V 0.8 1.1 0.8 1.1 0.8 1.1 with varistor
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage at DC • rated value operating range factor control supply voltage rated value of magnet coil at DC • initial value • full-scale value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz design of the surge suppressor apparent pick-up power of magnet coil at AC • at 50 Hz	200 220 V 200 220 V 0.8 1.1 0.8 1.1 0.8 1.1 with varistor 830 VA
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage at DC • rated value operating range factor control supply voltage rated value of magnet coil at DC • initial value • full-scale value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz design of the surge suppressor apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz	200 220 V 200 220 V 0.8 1.1 0.8 1.1 0.8 1.1 with varistor 830 VA
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage at DC • rated value operating range factor control supply voltage rated value of magnet coil at DC • initial value • full-scale value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz • at 50 Hz • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil	200 220 V 200 220 V 0.8 1.1 0.8 1.1 0.8 1.1 with varistor 830 VA 830 VA
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage at DC • rated value operating range factor control supply voltage rated value of magnet coil at DC • initial value • full-scale value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz at 60 Hz operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz • at 60 Hz at 60 Hz	200 220 V 200 220 V 0.8 1.1 0.8 1.1 0.8 1.1 with varistor 830 VA 830 VA 0.9 0.9
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage at DC • rated value operating range factor control supply voltage rated value of magnet coil at DC • initial value • full-scale value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz design of the surge suppressor apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz	200 220 V 200 220 V 0.8 1.1 0.8 1.1 0.8 1.1 with varistor 830 VA 830 VA 0.9 0.9 9.2 VA
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage at DC • rated value operating range factor control supply voltage rated value of magnet coil at DC • initial value • full-scale value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz design of the surge suppressor apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz	200 220 V 200 220 V 0.8 1.1 0.8 1.1 0.8 1.1 with varistor 830 VA 830 VA 0.9 0.9
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage at DC • rated value operating range factor control supply voltage rated value of magnet coil at DC • initial value • full-scale value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz design of the surge suppressor apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil	200 220 V 200 220 V 0.8 1.1 0.8 1.1 0.8 1.1 with varistor 830 VA 830 VA 0.9 0.9 9.2 VA 9.2 VA
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage at DC • rated value operating range factor control supply voltage rated value of magnet coil at DC • initial value • full-scale value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz design of the surge suppressor apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz	200 220 V 200 220 V 0.8 1.1 0.8 1.1 0.8 1.1 with varistor 830 VA 830 VA 0.9 0.9 9.2 VA 9.2 VA
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage at DC • rated value operating range factor control supply voltage rated value of magnet coil at DC • initial value • full-scale value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz design of the surge suppressor apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz	200 220 V 200 220 V 0.8 1.1 0.8 1.1 0.8 1.1 with varistor 830 VA 830 VA 0.9 0.9 9.2 VA 9.2 VA 9.2 VA
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage at DC • rated value operating range factor control supply voltage rated value of magnet coil at DC • initial value • full-scale value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz design of the surge suppressor apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz	200 220 V 200 220 V 0.8 1.1 0.8 1.1 0.8 1.1 with varistor 830 VA 830 VA 0.9 0.9 9.2 VA 9.2 VA 9.2 VA
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage at DC • rated value operating range factor control supply voltage rated value of magnet coil at DC • initial value • full-scale value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz design of the surge suppressor apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz closing power of magnet coil at DC holding power of magnet coil at DC	200 220 V 200 220 V 0.8 1.1 0.8 1.1 0.8 1.1 with varistor 830 VA 830 VA 0.9 0.9 9.2 VA 9.2 VA 9.2 VA
control supply voltage at AC at 50 Hz rated value at 60 Hz rated value control supply voltage at DC rated value operating range factor control supply voltage rated value of magnet coil at DC initial value full-scale value operating range factor control supply voltage rated value of magnet coil at AC at 50 Hz at 60 Hz design of the surge suppressor apparent pick-up power of magnet coil at AC at 50 Hz at 60 Hz inductive power factor with closing power of the coil at 50 Hz at 60 Hz at 60 Hz at 60 Hz inductive power factor with the holding power of the coil at 50 Hz at 60 Hz at 60 Hz inductive power factor with the holding power of the coil at 50 Hz at 60 Hz inductive power factor with the holding power of the coil at 50 Hz at 60 Hz inductive power factor with the holding power of the coil at 50 Hz at 60 Hz closing power of magnet coil at DC holding power of magnet coil at DC closing delay	200 220 V 200 220 V 0.8 1.1 0.8 1.1 0.8 1.1 with varistor 830 VA 830 VA 0.9 0.9 9.2 VA 9.2 VA 9.2 VA 9.2 VA
control supply voltage at AC at 50 Hz rated value at 60 Hz rated value control supply voltage at DC rated value operating range factor control supply voltage rated value of magnet coil at DC initial value full-scale value operating range factor control supply voltage rated value of magnet coil at AC at 50 Hz at 60 Hz design of the surge suppressor apparent pick-up power of magnet coil at AC at 50 Hz at 60 Hz inductive power factor with closing power of the coil at 50 Hz at 60 Hz at 60 Hz apparent holding power of magnet coil at AC at 50 Hz at 60 Hz inductive power factor with the holding power of the coil at 50 Hz at 60 Hz inductive power factor with the holding power of the coil at 50 Hz at 60 Hz inductive power factor with the holding power of the coil at 50 Hz at 60 Hz inductive power factor with the holding power of the coil at 50 Hz at 60 Hz inductive power factor with the holding power of the coil at 50 Hz at 60 Hz inductive power of magnet coil at DC closing power of magnet coil at DC closing delay at AC	200 220 V 200 220 V 0.8 1.1 0.8 1.1 0.8 1.1 with varistor 830 VA 830 VA 0.9 0.9 9.2 VA 9.2 VA 9.2 VA 9.2 VA 45 100 ms
control supply voltage at AC at 50 Hz rated value at 60 Hz rated value control supply voltage at DC rated value operating range factor control supply voltage rated value of magnet coil at DC initial value full-scale value operating range factor control supply voltage rated value of magnet coil at AC at 50 Hz at 60 Hz design of the surge suppressor apparent pick-up power of magnet coil at AC at 50 Hz at 60 Hz inductive power factor with closing power of the coil at 50 Hz at 60 Hz at 60 Hz at 60 Hz inductive power factor with the holding power of the coil at 50 Hz at 60 Hz at 60 Hz inductive power factor with the holding power of the coil at 50 Hz at 60 Hz inductive power factor with the holding power of the coil at 50 Hz at 60 Hz inductive power factor with the holding power of the coil at 50 Hz at 60 Hz closing power of magnet coil at DC holding power of magnet coil at DC closing delay	200 220 V 200 220 V 0.8 1.1 0.8 1.1 0.8 1.1 with varistor 830 VA 830 VA 0.9 0.9 9.2 VA 9.2 VA 9.2 VA 9.2 VA

a at AC	60 100 mg
• at AC	60 100 ms 60 100 ms
at DC arcing time	60 100 ms 10 15 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	Canada (1) / L
number of NC contacts for auxiliary contacts	2
instantaneous contact	
number of NO contacts for auxiliary contacts instantaneous contact	2
operational current at AC-12 maximum	10 A
operational current at AC-15	
at 230 V rated value	6 A
• at 400 V rated value	3 A
at 500 V rated value	2 A
at 690 V rated value	1 A
operational current at DC-12	40.4
• at 24 V rated value	10 A
at 48 V rated value at 60 V rated value	6 A
at 60 V rated valueat 110 V rated value	6 A 3 A
at 110 V rated value at 125 V rated value	2 A
at 125 V rated value at 220 V rated value	1 A
at 600 V rated value	0.15 A
operational current at DC-13	0.13 A
• at 24 V rated value	10 A
at 48 V rated value	2 A
at 40 V rated value at 60 V rated value	2 A
at 110 V rated value	1 A
at 125 V rated value	0.9 A
at 220 V rated value	0.3 A
at 600 V rated value	0.1 A
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
	, , ,
UL/CSA ratings	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor ● at 480 V rated value	361 A
full-load current (FLA) for 3-phase AC motor	361 A 382 A
full-load current (FLA) for 3-phase AC motor • at 480 V rated value	
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value	
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp]	
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for 3-phase AC motor	382 A
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for 3-phase AC motor — at 200/208 V rated value	382 A 125 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value	382 A 125 hp 150 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value	382 A 125 hp 150 hp 300 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value	382 A 125 hp 150 hp 300 hp 400 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value contact rating of auxiliary contacts according to UL	382 A 125 hp 150 hp 300 hp 400 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection	382 A 125 hp 150 hp 300 hp 400 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link	382 A 125 hp 150 hp 300 hp 400 hp A600 / Q600 gG: 800 A (690 V, 100 kA)
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit	382 A 125 hp 150 hp 300 hp 400 hp A600 / Q600 gG: 800 A (690 V, 100 kA) gG: 800 A (690 V, 50 kA), aM: 630 A (690 V, 50 kA), BS88: 800 A (415
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required	382 A 125 hp 150 hp 300 hp 400 hp A600 / Q600 gG: 800 A (690 V, 100 kA) gG: 800 A (690 V, 50 kA), aM: 630 A (690 V, 50 kA), BS88: 800 A (415 V, 50 kA)
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch	382 A 125 hp 150 hp 300 hp 400 hp A600 / Q600 gG: 800 A (690 V, 100 kA) gG: 800 A (690 V, 50 kA), aM: 630 A (690 V, 50 kA), BS88: 800 A (415
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required	382 A 125 hp 150 hp 300 hp 400 hp A600 / Q600 gG: 800 A (690 V, 100 kA) gG: 800 A (690 V, 50 kA), aM: 630 A (690 V, 50 kA), BS88: 800 A (415 V, 50 kA)
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	382 A 125 hp 150 hp 300 hp 400 hp A600 / Q600 gG: 800 A (690 V, 100 kA) gG: 800 A (690 V, 50 kA), aM: 630 A (690 V, 50 kA), BS88: 800 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA)
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required	382 A 125 hp 150 hp 300 hp 400 hp A600 / Q600 gG: 800 A (690 V, 100 kA) gG: 800 A (690 V, 50 kA), aM: 630 A (690 V, 50 kA), BS88: 800 A (415 V, 50 kA)
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	125 hp 150 hp 300 hp 400 hp A600 / Q600 gG: 800 A (690 V, 100 kA) gG: 800 A (690 V, 50 kA), aM: 630 A (690 V, 50 kA), BS88: 800 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) +/-22,5° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface;
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position	125 hp 150 hp 300 hp 400 hp A600 / Q600 gG: 800 A (690 V, 100 kA) gG: 800 A (690 V, 50 kA), aM: 630 A (690 V, 50 kA), BS88: 800 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) +/-22,5° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; standing, on horizontal mounting surface
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position	125 hp 150 hp 300 hp 400 hp A600 / Q600 gG: 800 A (690 V, 100 kA) gG: 800 A (690 V, 50 kA), aM: 630 A (690 V, 50 kA), BS88: 800 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) +/-22,5° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; standing, on horizontal mounting surface screw fixing
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting	125 hp 150 hp 300 hp 400 hp A600 / Q600 gG: 800 A (690 V, 100 kA) gG: 800 A (690 V, 50 kA), aM: 630 A (690 V, 50 kA), BS88: 800 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) +/-22,5° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; standing, on horizontal mounting surface screw fixing Yes
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height	125 hp 150 hp 300 hp 400 hp A600 / Q600 gG: 800 A (690 V, 100 kA) gG: 800 A (690 V, 50 kA), aM: 630 A (690 V, 50 kA), BS88: 800 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) +/-22,5° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; standing, on horizontal mounting surface screw fixing Yes 214 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width	125 hp 150 hp 300 hp 400 hp A600 / Q600 gG: 800 A (690 V, 100 kA) gG: 800 A (690 V, 50 kA), aM: 630 A (690 V, 50 kA), BS88: 800 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) +/-22,5° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; standing, on horizontal mounting surface screw fixing Yes 214 mm 160 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth	125 hp 150 hp 300 hp 400 hp A600 / Q600 gG: 800 A (690 V, 100 kA) gG: 800 A (690 V, 50 kA), aM: 630 A (690 V, 50 kA), BS88: 800 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) +/-22,5° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; standing, on horizontal mounting surface screw fixing Yes 214 mm 160 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing	125 hp 150 hp 300 hp 400 hp A600 / Q600 gG: 800 A (690 V, 100 kA) gG: 800 A (690 V, 50 kA), aM: 630 A (690 V, 50 kA), BS88: 800 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) +/-22,5° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; standing, on horizontal mounting surface screw fixing Yes 214 mm 160 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting	125 hp 150 hp 300 hp 400 hp A600 / Q600 gG: 800 A (690 V, 100 kA) gG: 800 A (690 V, 50 kA), aM: 630 A (690 V, 50 kA), BS88: 800 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) +/-22,5° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; standing, on horizontal mounting surface screw fixing Yes 214 mm 160 mm 225 mm

— downwards	10 mm
— at the side	0 mm
for grounded parts	
— forwards	20 mm
— upwards	10 mm
— at the side	10 mm
— downwards	10 mm
for live parts	
— forwards	20 mm
— upwards	10 mm
— downwards	10 mm
— at the side	10 mm
nnections/ Terminals	

type of electrical connection

- for main current circuit • for auxiliary and control circuit
- at contactor for auxiliary contacts
- of magnet coil

width of connection bar thickness of connection bar

diameter of holes number of holes

connectable conductor cross-section for main contacts

stranded

connectable conductor cross-section for auxiliary contacts

- · solid or stranded
 - finely stranded with core end processing

type of connectable conductor cross-sections

- for auxiliary contacts
 - solid
 - solid or stranded
 - finely stranded with core end processing
- at AWG cables for auxiliary contacts

AWG number as coded connectable conductor cross section

• for auxiliary contacts

Connection bar

screw-type terminals

Screw-type terminals

Screw-type terminals

25 mm

6 mm 11 mm

1

70 ... 240 mm²

0.5 ... 4 mm²

0.5 ... 2.5 mm²

2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²), max. 2x (0.75 ... 4 mm²)

2x (0,5 ... 1,5 mm²), 2x (0,75 ... 2,5 mm²), max. 2x (0,75 ... 4 mm²) 2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)

2x (20 ... 16), 2x (18 ... 14), 1x 12

18 ... 14

Safety related data

product function

- mirror contact according to IEC 60947-4-1
- positively driven operation according to IEC 60947-

T1 value for proof test interval or service life according to IEC 61508

protection class IP on the front according to IEC 60529

touch protection on the front according to IEC 60529 suitability for use

• safety-related switching OFF

Yes

No

20 a

IP00; IP20 with box terminal/cover

finger-safe, for vertical contact from the front with box terminal/cover

Yes

Certificates/ approvals

General Product Approval

Confirmation









EMC

Functional
Safety/Safety of
Machinery

Declaration of Conformity

Test Certificates

Marine / Shipping

Type Examination Certificate





Type Test Certificates/Test Report

Special Test Certificate



Marine / Shipping

other







Confirmation

Miscellaneous

Confirmation

Railway

Special Test Certific- Vibration and Shock

<u>ate</u>

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1275-6AM36

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1275-6AM36

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT1275-6AM36

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


 $\underline{\text{http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1275-6AM36\&lang=en}}$


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT1275-6AM36/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT1275-6AM36&objecttype=14&gridview=view1







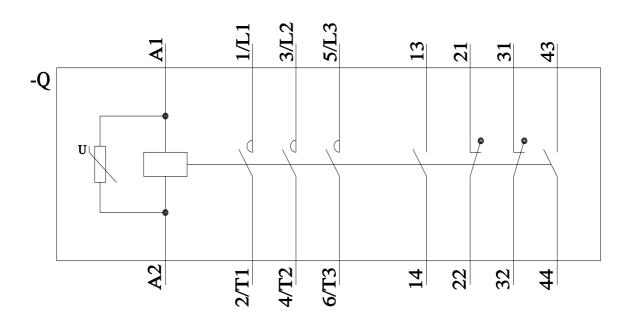

last modified:

11/12/2022 🗗