## SIEMENS

## Data sheet

## 3RT2025-1AL20



power contactor, AC-3e/AC-3, 17 A, 7.5 kW / 400 V, 1 NO + 1 NC, 230 V AC, 50 / 60 Hz, 3-pole, screw terminal

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S0
product extension	
<ul> <li>function module for communication</li> </ul>	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	1.8 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	0.6 W
<ul> <li>without load current share typical</li> </ul>	7.9 W
insulation voltage	
<ul> <li>of main circuit with degree of pollution 3 rated value</li> </ul>	690 V
<ul> <li>of auxiliary circuit with degree of pollution 3 rated value</li> </ul>	690 V
surge voltage resistance	
<ul> <li>of main circuit rated value</li> </ul>	6 kV
<ul> <li>of auxiliary circuit rated value</li> </ul>	6 kV
maximum permissible voltage for safe isolation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at AC	7,5g / 5 ms, 4,7g / 10 ms
shock resistance with sine pulse	
● at AC	11,8g / 5 ms, 7,4g / 10 ms
mechanical service life (operating cycles)	
<ul> <li>of contactor typical</li> </ul>	10 000 000
<ul> <li>of the contactor with added electronically optimized auxiliary switch block typical</li> </ul>	5 000 000
<ul> <li>of the contactor with added auxiliary switch block typical</li> </ul>	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul> <li>during operation</li> </ul>	-25 +60 °C
<ul> <li>during storage</li> </ul>	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	


number of poles for main current circuit	3 3			
number of NO contacts for main contacts				
operating voltage	000.14			
at AC-3 rated value maximum	690 V			
at AC-3e rated value maximum	690 V			
operational current	40.4			
<ul> <li>at AC-1 at 400 V at ambient temperature 40 °C rated value</li> </ul>	40 A			
• at AC-1				
— up to 690 V at ambient temperature 40 °C	40 A			
rated value				
— up to 690 V at ambient temperature 60 °C	35 A			
rated value				
• at AC-3				
— at 400 V rated value	17 A			
— at 500 V rated value	17 A			
— at 690 V rated value	13 A			
• at AC-3e	47 0			
— at 400 V rated value — at 500 V rated value	17 A 17 A			
— at 500 V rated value	17 A 13 A			
<ul> <li>at AC-4 at 400 V rated value</li> </ul>	15 A 15.5 A			
<ul> <li>at AC-5a up to 690 V rated value</li> </ul>	35.2 A			
<ul> <li>at AC-5b up to 400 V rated value</li> </ul>	14.1 A			
• at AC-6a	1-1.17			
— up to 230 V for current peak value n=20 rated	11.4 A			
value				
— up to 400 V for current peak value n=20 rated value	11.4 A			
— up to 500 V for current peak value n=20 rated value	11.4 A			
<ul> <li>up to 690 V for current peak value n=20 rated value</li> </ul>	11.3 A			
• at AC-6a				
— up to 230 V for current peak value n=30 rated	7.6 A			
value — up to 400 V for current peak value n=30 rated	7.6 A			
value — up to 500 V for current peak value n=30 rated value	7.6 A			
value — up to 690 V for current peak value n=30 rated value	7.6 A			
minimum cross-section in main circuit at maximum AC-1 rated value	10 mm <sup>2</sup>			
operational current for approx. 200000 operating cycles at AC-4				
• at 400 V rated value	7.7 A			
• at 690 V rated value	7.7 A			
operational current				
<ul> <li>at 1 current path at DC-1</li> </ul>				
— at 24 V rated value	35 A			
— at 110 V rated value	4.5 A			
— at 220 V rated value	1 A			
— at 440 V rated value	0.4 A			
— at 600 V rated value	0.25 A			
• with 2 current paths in series at DC-1				
— at 24 V rated value	35 A			
— at 110 V rated value	35 A			
— at 220 V rated value — at 440 V rated value	5 A 1 A			
— at 600 V rated value	0.8 A			
<ul> <li>with 3 current paths in series at DC-1</li> </ul>	0.0 A			
— at 24 V rated value	35 A			
— at 110 V rated value	35 A			
— at 220 V rated value	35 A			
— at 440 V rated value	2.9 A			


— at 600 V rated value	1.4 A
<ul> <li>at 1 current path at DC-3 at DC-5</li> </ul>	
— at 24 V rated value	20 A
— at 220 V rated value	1 A
— at 440 V rated value	0.09 A
— at 600 V rated value	0.06 A
<ul> <li>with 2 current paths in series at DC-3 at DC-5</li> </ul>	
— at 24 V rated value	35 A
— at 110 V rated value	15 A
— at 220 V rated value	3 A
— at 440 V rated value	0.27 A
— at 600 V rated value	0.16 A
<ul> <li>with 3 current paths in series at DC-3 at DC-5</li> </ul>	
— at 24 V rated value	35 A
— at 110 V rated value	35 A
— at 220 V rated value	10 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.6 A
operating power	
• at AC-3	
— at 230 V rated value	4 kW
— at 400 V rated value	7.5 kW
— at 500 V rated value	7.5 kW
— at 690 V rated value	11 kW
• at AC-3e	
- at 230 V rated value	4 kW
— at 400 V rated value	4.5 kW
— at 500 V rated value	4.5 KW
	1.5 KW 11 kW
— at 690 V rated value	I I KVV
operating power for approx. 200000 operating cycles at AC-4	
at 400 V rated value	3.5 kW
at 690 V rated value	6 kW
operating apparent power at AC-6a	
• up to 230 V for current peak value n=20 rated value	4.5 kVA
• up to 400 V for current peak value n=20 rated value	7.8 kVA
<ul> <li>up to 500 V for current peak value n=20 rated value</li> </ul>	9.9 kVA
• up to 690 V for current peak value n=20 rated value	13.6 kVA
operating apparent power at AC-6a	
• up to 230 V for current peak value n=30 rated value	3 kVA
• up to 400 V for current peak value n=30 rated value	5.2 kVA
• up to 500 V for current peak value n=30 rated value	6.6 kVA
<ul> <li>up to 500 v for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> </ul>	9.1 kVA
short-time withstand current in cold operating state	3.1 NVA
up to 40 °C	
<ul> <li>limited to 1 s switching at zero current maximum</li> </ul>	225 A; Use minimum cross-section acc. to AC-1 rated value
<ul> <li>limited to 5 s switching at zero current maximum</li> </ul>	225 A; Use minimum cross-section acc. to AC-1 rated value
<ul> <li>limited to 10 s switching at zero current maximum</li> </ul>	189 A; Use minimum cross-section acc. to AC-1 rated value
<ul> <li>limited to 30 s switching at zero current maximum</li> </ul>	140 A; Use minimum cross-section acc. to AC-1 rated value
<ul> <li>limited to 60 s switching at zero current maximum</li> </ul>	115 A; Use minimum cross-section acc. to AC-1 rated value
no-load switching frequency	
• at AC	5 000 1/h
operating frequency	
• at AC-1 maximum	1 000 1/h
• at AC-2 maximum	1 000 1/h
• at AC-3 maximum	1 000 1/h
• at AC-3e maximum	1 000 1/h
• at AC-3e maximum	300 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC
<ul> <li>control supply voltage at AC</li> <li>at 50 Hz rated value</li> </ul>	
	230.1/
• at 60 Hz rated value	230 V 230 V


value of magnet coil at AC	0.0 4.4
• at 50 Hz • at 60 Hz	0.8 1.1 0.85 1.1
	0.85 1.1
<ul> <li>apparent pick-up power of magnet coil at AC</li> <li>at 50 Hz</li> </ul>	68 VA
• at 50 Hz	67 VA
	07 VA
inductive power factor with closing power of the coil • at 50 Hz	0.72
• at 50 Hz	0.72
apparent holding power of magnet coil at AC	0.74
apparent noting power of magnet con at AC     a at 50 Hz	7.9 VA
• at 60 Hz	6.5 VA
inductive power factor with the holding power of the	0.5 VA
coil	
● at 50 Hz	0.25
● at 60 Hz	0.28
closing delay	
• at AC	8 40 ms
opening delay	
• at AC	4 16 ms
arcing time	10 10 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts	1
instantaneous contact	
number of NO contacts for auxiliary contacts instantaneous contact	1
operational current at AC-12 maximum	10 A
operational current at AC-15	
at 230 V rated value	10 A
at 400 V rated value	3 A
at 500 V rated value	2 A
• at 690 V rated value	1 A
operational current at DC-12	10.1
at 24 V rated value	10 A
at 48 V rated value	6 A
at 60 V rated value	6 A
at 110 V rated value	3 A 2 A
<ul> <li>at 125 V rated value</li> <li>at 220 V rated value</li> </ul>	1 A
<ul> <li>at 220 V rated value</li> <li>at 600 V rated value</li> </ul>	0.15 A
operational current at DC-13	0.13 A
at 24 V rated value	10 A
at 48 V rated value	2 A
at 60 V rated value	2 A
at 110 V rated value	1A
at 125 V rated value	0.9 A
at 220 V rated value	0.3 A
at 600 V rated value	0.1 A
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
• at 480 V rated value	14 A
• at 600 V rated value	17 A
yielded mechanical performance [hp]	
<ul> <li>for single-phase AC motor</li> </ul>	
— at 110/120 V rated value	1 hp
— at 230 V rated value	3 hp
<ul> <li>for 3-phase AC motor</li> </ul>	
— at 200/208 V rated value	3 hp
— at 220/230 V rated value	5 hp
— at 460/480 V rated value	10 hp
— at 575/600 V rated value	15 hp
contact rating of auxiliary contacts according to UL	A600 / P600

Short-circuit protection			
design of the fuse link			
for short-circuit protection of the main circuit			
- with type of coordination 1 required	gG: 63A (690V,100kA), aM: 32A (690V,100kA), BS88: 63A (415V,80kA)		
<ul> <li>with type of assignment 2 required</li> </ul>	gG: 25A (690V,100kA), aM: 22A (690V,100kA), B688: 25A (415V,80kA)		
<ul> <li>for short-circuit protection of the auxiliary switch</li> </ul>	gG: 10 A (500 V, 1 kA)		
required			
Installation/ mounting/ dimensions			
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface		
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715		
<ul> <li>side-by-side mounting</li> </ul>	Yes		
height	85 mm		
width	45 mm		
depth	97 mm		
required spacing			
<ul> <li>with side-by-side mounting</li> </ul>			
— forwards	10 mm		
— upwards	10 mm		
— downwards	10 mm		
— at the side	0 mm		
<ul> <li>for grounded parts</li> </ul>			
— forwards	10 mm		
— upwards	10 mm		
— at the side	6 mm		
— downwards	10 mm		
<ul> <li>for live parts</li> </ul>			
— forwards	10 mm		
— upwards	10 mm		
— downwards	10 mm		
— at the side	6 mm		
Connections/ Terminals			
type of electrical connection			
type of electrical connection • for main current circuit	screw-type terminals		
<ul> <li>type of electrical connection</li> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> </ul>	screw-type terminals		
<ul> <li>type of electrical connection</li> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> </ul>	screw-type terminals Screw-type terminals		
<ul> <li>type of electrical connection</li> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> <li>of magnet coil</li> </ul>	screw-type terminals		
<ul> <li>type of electrical connection</li> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> <li>of magnet coil</li> <li>type of connectable conductor cross-sections</li> </ul>	screw-type terminals Screw-type terminals		
<ul> <li>type of electrical connection</li> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> <li>of magnet coil</li> <li>type of connectable conductor cross-sections</li> <li>for main contacts</li> </ul>	screw-type terminals Screw-type terminals Screw-type terminals		
<ul> <li>type of electrical connection</li> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> <li>of magnet coil</li> <li>type of connectable conductor cross-sections</li> <li>for main contacts <ul> <li>solid</li> </ul> </li> </ul>	screw-type terminals Screw-type terminals Screw-type terminals 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> )		
<ul> <li>type of electrical connection</li> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> <li>of magnet coil</li> <li>type of connectable conductor cross-sections</li> <li>for main contacts <ul> <li>– solid</li> <li>– solid or stranded</li> </ul> </li> </ul>	screw-type terminals Screw-type terminals Screw-type terminals 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> )		
<ul> <li>type of electrical connection <ul> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> <li>of magnet coil</li> </ul> </li> <li>type of connectable conductor cross-sections <ul> <li>for main contacts</li> <li>solid</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> </ul> </li> </ul>	screw-type terminals Screw-type terminals Screw-type terminals 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup>		
<ul> <li>type of electrical connection <ul> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> <li>of magnet coil</li> </ul> </li> <li>type of connectable conductor cross-sections <ul> <li>for main contacts</li> <li>solid</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>at AWG cables for main contacts</li> </ul> </li> </ul>	screw-type terminals Screw-type terminals Screw-type terminals 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> )		
<ul> <li>type of electrical connection <ul> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> <li>of magnet coil</li> </ul> </li> <li>type of connectable conductor cross-sections <ul> <li>for main contacts</li> <li>solid</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> </ul> </li> </ul>	screw-type terminals Screw-type terminals Screw-type terminals 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup>		
<ul> <li>type of electrical connection <ul> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> <li>of magnet coil</li> </ul> </li> <li>type of connectable conductor cross-sections <ul> <li>for main contacts</li> <li>solid</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>at AWG cables for main contacts</li> </ul> </li> </ul>	screw-type terminals Screw-type terminals Screw-type terminals 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup>		
<ul> <li>type of electrical connection <ul> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> <li>of magnet coil</li> </ul> </li> <li>type of connectable conductor cross-sections <ul> <li>for main contacts</li> <li>solid</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>at AWG cables for main contacts</li> </ul> </li> <li>connectable conductor cross-section for main contacts</li> </ul>	screw-type terminals Screw-type terminals Screw-type terminals 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (16 12), 2x (14 8)		
<ul> <li>type of electrical connection <ul> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> <li>of magnet coil</li> </ul> </li> <li>type of connectable conductor cross-sections <ul> <li>for main contacts</li> <li>solid</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>at AWG cables for main contacts</li> </ul> </li> <li>connectable conductor cross-section for main contacts</li> <li>solid</li> </ul>	screw-type terminals Screw-type terminals Screw-type terminals 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (16 12), 2x (14 8) 1 10 mm <sup>2</sup>		
<ul> <li>type of electrical connection <ul> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> <li>of magnet coil</li> </ul> </li> <li>type of connectable conductor cross-sections <ul> <li>for main contacts</li> <li>solid</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>at AWG cables for main contacts</li> </ul> </li> <li>connectable conductor cross-section for main contacts</li> <li>solid</li> <li>stranded</li> </ul>	screw-type terminals Screw-type terminals Screw-type terminals 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (16 12), 2x (14 8) 1 10 mm <sup>2</sup> 1 10 mm <sup>2</sup>		
<ul> <li>type of electrical connection <ul> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> <li>of magnet coil</li> </ul> </li> <li>type of connectable conductor cross-sections <ul> <li>for main contacts</li> <li>solid</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> </ul> </li> <li>at AWG cables for main contacts <ul> <li>solid</li> <li>stranded</li> <li>finely stranded with core end processing</li> </ul> </li> </ul>	screw-type terminals Screw-type terminals Screw-type terminals 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (16 12), 2x (14 8) 1 10 mm <sup>2</sup> 1 10 mm <sup>2</sup>		
<ul> <li>type of electrical connection <ul> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> <li>of magnet coil</li> </ul> </li> <li>type of connectable conductor cross-sections <ul> <li>for main contacts</li> <li>solid</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>at AWG cables for main contacts</li> <li>connectable conductor cross-section for main contacts</li> <li>solid</li> <li>stranded</li> <li>finely stranded with core end processing</li> </ul> </li> </ul>	screw-type terminals Screw-type terminals Screw-type terminals 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (16 12), 2x (14 8) 1 10 mm <sup>2</sup> 1 10 mm <sup>2</sup>		
<ul> <li>type of electrical connection <ul> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> <li>of magnet coil</li> </ul> </li> <li>type of connectable conductor cross-sections <ul> <li>for main contacts</li> <li>solid</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>at AWG cables for main contacts</li> </ul> </li> <li>connectable conductor cross-section for main contacts</li> <li>solid</li> <li>stranded</li> <li>finely stranded with core end processing</li> <li>connectable conductor cross-section for main contacts</li> <li>solid</li> <li>stranded</li> <li>finely stranded with core end processing</li> </ul> <li>connectable conductor cross-section for auxiliary contacts <ul> <li>solid or stranded</li> <li>solid or stranded</li> <li>solid or stranded with core end processing</li> </ul> </li>	screw-type terminals Screw-type terminals Screw-type terminals 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (16 12), 2x (14 8) 1 10 mm <sup>2</sup> 1 10 mm <sup>2</sup> 1 10 mm <sup>2</sup> 0.5 2.5 mm <sup>2</sup>		
<ul> <li>type of electrical connection <ul> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> <li>of magnet coil</li> </ul> </li> <li>type of connectable conductor cross-sections <ul> <li>for main contacts</li> <li>solid</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> </ul> </li> <li>at AWG cables for main contacts <ul> <li>solid</li> <li>stranded</li> <li>finely stranded with core end processing</li> </ul> </li> <li>connectable conductor cross-section for main contacts <ul> <li>solid</li> <li>stranded</li> <li>finely stranded with core end processing</li> </ul> </li> <li>connectable conductor cross-section for auxiliary contacts <ul> <li>solid</li> <li>stranded</li> <li>finely stranded with core end processing</li> </ul> </li> <li>connectable conductor cross-section for auxiliary contacts <ul> <li>solid or stranded</li> <li>finely stranded with core end processing</li> </ul> </li> </ul>	screw-type terminals Screw-type terminals Screw-type terminals 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (16 12), 2x (14 8) 1 10 mm <sup>2</sup> 1 10 mm <sup>2</sup> 1 10 mm <sup>2</sup> 0.5 2.5 mm <sup>2</sup>		
<ul> <li>type of electrical connection <ul> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> <li>of magnet coil</li> </ul> </li> <li>type of connectable conductor cross-sections <ul> <li>for main contacts</li> <li>solid</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> </ul> </li> <li>at AWG cables for main contacts <ul> <li>solid</li> <li>stranded</li> <li>finely stranded with core end processing</li> </ul> </li> <li>solid <ul> <li>stranded</li> <li>finely stranded with core end processing</li> </ul> </li> <li>connectable conductor cross-section for main contacts <ul> <li>solid</li> <li>stranded</li> <li>finely stranded with core end processing</li> </ul> </li> <li>connectable conductor cross-section for auxiliary contacts <ul> <li>solid or stranded</li> <li>finely stranded with core end processing</li> </ul> </li> <li>connectable conductor cross-section for auxiliary contacts <ul> <li>solid or stranded</li> <li>finely stranded with core end processing</li> </ul> </li> </ul>	screw-type terminals Screw-type terminals Screw-type terminals 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (16 12), 2x (14 8) 1 10 mm <sup>2</sup> 1 10 mm <sup>2</sup> 1 10 mm <sup>2</sup> 2 2.5 mm <sup>2</sup> 0.5 2.5 mm <sup>2</sup> 2x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> )		
<ul> <li>type of electrical connection <ul> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> <li>of magnet coil</li> </ul> </li> <li>type of connectable conductor cross-sections <ul> <li>for main contacts</li> <li>solid</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> </ul> </li> <li>at AWG cables for main contacts <ul> <li>solid</li> <li>stranded</li> <li>finely stranded with core end processing</li> </ul> </li> <li>solid <ul> <li>stranded</li> <li>finely stranded with core end processing</li> </ul> </li> <li>connectable conductor cross-section for main contacts <ul> <li>solid</li> <li>stranded</li> <li>finely stranded with core end processing</li> </ul> </li> <li>connectable conductor cross-section for auxiliary contacts <ul> <li>solid or stranded</li> <li>finely stranded with core end processing</li> </ul> </li> <li>type of connectable conductor cross-section for auxiliary contacts <ul> <li>solid or stranded</li> <li>finely stranded with core end processing</li> </ul> </li> </ul>	screw-type terminals Screw-type terminals Screw-type terminals 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (16 12), 2x (14 8) 1 10 mm <sup>2</sup> 1 10 mm <sup>2</sup> 1 10 mm <sup>2</sup> 2x (0.5 2.5 mm <sup>2</sup> ) 2x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> ) 2x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> )		
<ul> <li>type of electrical connection <ul> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> <li>of magnet coil</li> </ul> </li> <li>type of connectable conductor cross-sections <ul> <li>for main contacts</li> <li>solid</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> </ul> </li> <li>at AWG cables for main contacts <ul> <li>solid</li> <li>stranded</li> <li>finely stranded with core end processing</li> <li>connectable conductor cross-section for main contacts</li> </ul> </li> <li>connectable conductor cross-section for main contacts</li> <li>solid</li> <li>stranded</li> <li>finely stranded with core end processing</li> </ul> <li>connectable conductor cross-section for auxiliary contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>type of connectable conductor cross-section for auxiliary contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>type of connectable conductor cross-sections</li> <li>for auxiliary contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>type of connectable conductor cross-sections</li> <li>auxiliary contacts</li> <li>solid or stranded</li> <li>for auxiliary contacts</li> <li>auxiliary contacts</li>	screw-type terminals Screw-type terminals Screw-type terminals 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (16 12), 2x (14 8) 1 10 mm <sup>2</sup> 1 10 mm <sup>2</sup> 1 10 mm <sup>2</sup> 2 2.5 mm <sup>2</sup> 0.5 2.5 mm <sup>2</sup> 2x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> )		
<ul> <li>type of electrical connection <ul> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> <li>of magnet coil</li> </ul> </li> <li>type of connectable conductor cross-sections <ul> <li>for main contacts</li> <li>solid</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> </ul> </li> <li>at AWG cables for main contacts <ul> <li>solid</li> <li>stranded</li> <li>finely stranded with core end processing</li> </ul> </li> <li>solid <ul> <li>stranded</li> <li>finely stranded with core end processing</li> </ul> </li> <li>connectable conductor cross-section for main contacts <ul> <li>solid</li> <li>stranded</li> <li>finely stranded with core end processing</li> </ul> </li> <li>connectable conductor cross-section for auxiliary contacts <ul> <li>solid or stranded</li> <li>finely stranded with core end processing</li> </ul> </li> <li>type of connectable conductor cross-section for auxiliary contacts <ul> <li>solid or stranded</li> <li>finely stranded with core end processing</li> </ul> </li> </ul>	screw-type terminals Screw-type terminals Screw-type terminals 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (16 12), 2x (14 8) 1 10 mm <sup>2</sup> 1 10 mm <sup>2</sup> 1 10 mm <sup>2</sup> 2x (0.5 2.5 mm <sup>2</sup> ) 2x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> ) 2x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> )		
<ul> <li>type of electrical connection <ul> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> <li>of magnet coil</li> </ul> </li> <li>type of connectable conductor cross-sections <ul> <li>for main contacts</li> <li>solid</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>at AWG cables for main contacts</li> </ul> </li> <li>connectable conductor cross-section for main contacts</li> <li>solid</li> <li>stranded</li> <li>finely stranded with core end processing</li> <li>connectable conductor cross-section for main contacts</li> <li>solid</li> <li>stranded</li> <li>finely stranded with core end processing</li> <li>connectable conductor cross-section for auxiliary contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>type of connectable conductor cross-section for auxiliary contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>type of connectable conductor cross-sections</li> <li>for auxiliary contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>type of connectable conductor cross-sections</li> <li>a tor stranded</li> <li>for auxiliary contacts</li> <li>a solid or stranded</li> <li>a tawg cables for auxiliary contacts</li> </ul>	screw-type terminals Screw-type terminals Screw-type terminals 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (16 12), 2x (14 8) 1 10 mm <sup>2</sup> 1 10 mm <sup>2</sup> 1 10 mm <sup>2</sup> 2x (0.5 2.5 mm <sup>2</sup> ) 2x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> ) 2x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> )		
<ul> <li>type of electrical connection <ul> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> <li>of magnet coil</li> </ul> </li> <li>type of connectable conductor cross-sections <ul> <li>for main contacts</li> <li>solid</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>at AWG cables for main contacts</li> </ul> </li> <li>connectable conductor cross-section for main contacts</li> <li>solid</li> <li>stranded</li> <li>finely stranded with core end processing</li> <li>connectable conductor cross-section for main contacts</li> <li>connectable conductor cross-section for auxiliary contacts</li> <li>solid</li> <li>stranded</li> <li>finely stranded with core end processing</li> <li>connectable conductor cross-section for auxiliary contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>type of connectable conductor cross-sections for auxiliary contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>type of connectable conductor cross-sections</li> <li>for auxiliary contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>at AWG cables for auxiliary contacts</li> </ul>	screw-type terminals Screw-type terminals 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (16 12), 2x (14 8) 1 10 mm <sup>2</sup> 1 10 mm <sup>2</sup> 1 10 mm <sup>2</sup> 2 x (0.5 2.5 mm <sup>2</sup> ) 2 x (0.5 2.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> ) 2 x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> ) 2 x (20 16), 2x (18 14)		
type of electrical connection <ul> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> <li>of magnet coil</li> </ul> type of connectable conductor cross-sections <ul> <li>for main contacts</li> <li>solid</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>at AWG cables for main contacts</li> </ul> connectable conductor cross-section for main contacts <ul> <li>solid</li> <li>stranded</li> <li>finely stranded with core end processing</li> </ul> connectable conductor cross-section for main contacts <ul> <li>solid</li> <li>stranded</li> <li>finely stranded with core end processing</li> </ul> connectable conductor cross-section for auxiliary contacts <ul> <li>solid or stranded</li> <li>finely stranded with core end processing</li> </ul> type of connectable conductor cross-section for auxiliary contacts <ul> <li>solid or stranded</li> <li>finely stranded with core end processing</li> </ul> type of connectable conductor cross-sections <ul> <li>for auxiliary contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> </ul> type of connectable conductor cross-sections <ul> <li>for auxiliary contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> </ul> type of connectable conductor cross-sections <ul> <li>for auxiliary contacts</li> <li>for auxiliary contacts</li> <li>at AWG cables for auxiliary contacts</li> </ul> AWG number as coded connectable conductor cross section <ul> <li>for main contacts</li> <li>for main contacts</li> <li>for auxiliary contacts</li> </ul>	screw-type terminals Screw-type terminals Screw-type terminals 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (16 12), 2x (14 8) 1 10 mm <sup>2</sup> 1 10 mm <sup>2</sup> 1 10 mm <sup>2</sup> 2x (0.5 2.5 mm <sup>2</sup> ) 2x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> ) 2x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> ) 2x (20 16), 2x (18 14) 16 8		
<ul> <li>type of electrical connection <ul> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> <li>of magnet coil</li> </ul> </li> <li>type of connectable conductor cross-sections <ul> <li>for main contacts</li> <li>solid</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>at AWG cables for main contacts</li> </ul> </li> <li>connectable conductor cross-section for main contacts</li> <li>solid</li> <li>stranded</li> <li>finely stranded with core end processing</li> <li>connectable conductor cross-section for main contacts</li> <li>solid</li> <li>stranded</li> <li>finely stranded with core end processing</li> <li>connectable conductor cross-section for auxiliary contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>type of connectable conductor cross-section for auxiliary contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>type of connectable conductor cross-sections</li> <li>for auxiliary contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>type of connectable conductor cross-sections</li> <li>auxiliary contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>at AWG cables for auxiliary contacts</li> <li>AWG cables for auxiliary contacts</li> </ul> <li>AWG cables for auxiliary contacts</li>	screw-type terminals Screw-type terminals Screw-type terminals 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (16 12), 2x (14 8) 1 10 mm <sup>2</sup> 1 10 mm <sup>2</sup> 1 10 mm <sup>2</sup> 2x (0.5 2.5 mm <sup>2</sup> ) 2x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> ) 2x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> ) 2x (20 16), 2x (18 14) 16 8		


<ul> <li>mirror contact according to IEC 60947-4-1</li> <li>B10 value with high demand rate according to SN 31920</li> <li>proportion of dangerous failures</li> <li>with low demand rate according to SN 31920</li> </ul>		Yes 450 000 40 %			
with high demand rate according to SN 31920     with high demand rate according to SN 31920     failure rate [FIT] with low demand rate according to SN     31920		40 % 73 % 100 FIT			
	T1 value for proof test interval or service life according to		20 у		
	on the front according	to IEC	IP20		
touch protection or	touch protection on the front according to IEC 60529		finger-safe, for vertical contact from the front		
<ul><li>suitability for use</li><li>safety-related</li></ul>	switching OFF		Yes		
Certificates/ approva					
General Product A	pproval				
SP	<u>Confirmation</u>			<u>KC</u>	EHC
EMC	Functional Safety/Safety of Machinery	Declaration o	of Conformity	Test Certificates	
RCM	<u>Type Examination</u> <u>Certificate</u>	UK CA	CE EG-Konf.	Type Test Certific- ates/Test Report	Special Test Certific- ate
Marine / Shipping					
ABS	B U REAU VERITAS		Lloyds Register urs	RINA	RMRS
other			Railway		
<u>Confirmation</u>	UDE VDE	<u>Confirmatic</u>	on <u>Vibration and Shoo</u>	<u>x</u>	
	ownloadcenter (Catalo	gs, Brochures,.	)		
https://mall.industry.s	ne ordering system) siemens.com/mall/en/en. or			2025 141 20	
Service&Support (N	Manuals, Certificates, C	haracteristics,		<u>2023-TAL2U</u>	
https://support.industry.siemens.com/cs/ww/en/ps/3RT2025-1AL20         Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros,)         http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2025-1AL20⟨=en         Characteristic: Tripping characteristics, I²t, Let-through current         http://support.industry.siemens.com/cs/ww/en/ps/3RT2025-1AL20/char         Further characteristics (e.g. electrical endurance, switching frequency)         http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2025-1AL20&objecttype=14&gridview=view1					
nup://www.automatic	on.siemens.com/bliddb/lf	iuex.aspx?VIEW=	-Searcharnitd=3K12025-1A	<u> </u>	<u>view=view1</u>








Subject to change without notice © Copyright Siemens

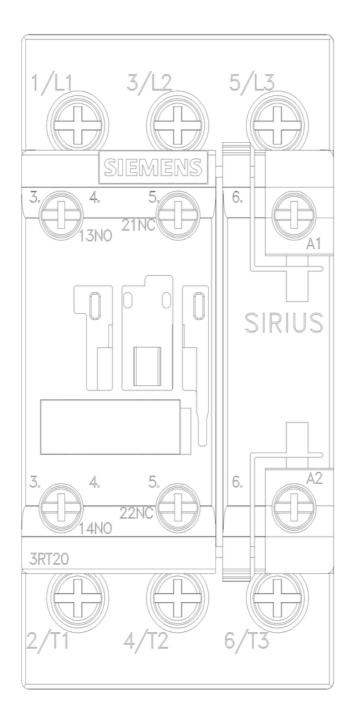

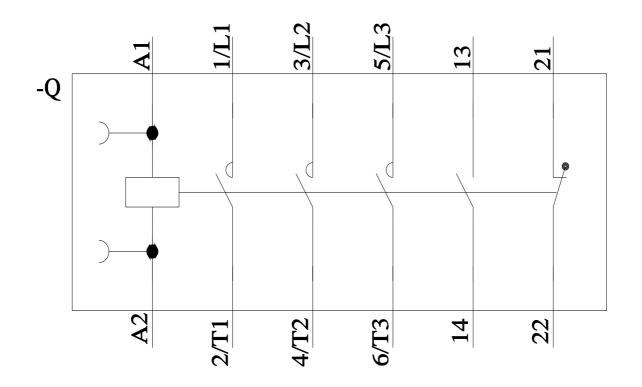

last modified:

11/21/2022 🖸