## **SIEMENS**

Data sheet 3RU2116-1CC0



Overload relay 1.8...2.5 A Thermal For motor protection Size S00, Class 10 Contactor mounting Main circuit: Spring-type terminal Auxiliary circuit: spring-type terminal Manual-Automatic-Reset

product brand name	SIRIUS
product designation	thermal overload relay
product type designation	3RU2
General technical data	
size of overload relay	S00
size of contactor can be combined company-specific	S00
power loss [W] for rated value of the current at AC in hot operating state	5.7 W
• per pole	1.9 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation in networks with grounded star point	
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	440 V
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	440 V
<ul> <li>between main and auxiliary circuit</li> </ul>	440 V
<ul> <li>between main and auxiliary circuit</li> </ul>	440 V
shock resistance according to IEC 60068-2-27	8g / 11 ms
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 98 ATEX G 001
reference code according to IEC 81346-2	F
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul><li>during operation</li></ul>	-40 +70 °C
<ul><li>during storage</li></ul>	-55 +80 °C
<ul> <li>during transport</li> </ul>	-55 +80 °C
temperature compensation	-40 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current-dependent overload release	1.8 2.5 A
operating voltage	
rated value	690 V
<ul> <li>at AC-3e rated value maximum</li> </ul>	690 V
operating frequency rated value	50 60 Hz
operational current rated value	2.5 A
operational current at AC-3e at 400 V rated value	2.5 A

operating power	
• at AC-3	
— at 400 V rated value	0.75 kW
— at 500 V rated value	1.1 kW
— at 690 V rated value	1.5 kW
• at AC-3e	
— at 400 V rated value	0.75 kW
— at 500 V rated value	1.1 kW
— at 690 V rated value	1.5 kW
Auxiliary circuit	
design of the auxiliary switch	integrated
number of NC contacts for auxiliary contacts	1
• note	for contactor disconnection
number of NO contacts for auxiliary contacts	1
• note	for message "Tripped"
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	
● at 24 V	3 A
● at 110 V	3 A
● at 120 V	3 A
● at 125 V	3 A
• at 230 V	2 A
● at 400 V	1 A
operational current of auxiliary contacts at DC-13	
● at 24 V	2 A
• at 60 V	0.3 A
● at 110 V	0.22 A
• at 125 V	0.22 A
• at 220 V	0.11 A
contact rating of auxiliary contacts according to UL	B600 / R300
Protective and monitoring functions	
trip class	CLASS 10
design of the overload release	thermal
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	25 /
<ul> <li>at 480 V rated value</li> </ul>	2.5 A
• at 600 V rated value	2.5 A
• at 600 V rated value Short-circuit protection	
at 600 V rated value  Short-circuit protection  design of the fuse link	2.5 A
<ul> <li>at 600 V rated value</li> <li>Short-circuit protection</li> <li>design of the fuse link</li> <li>for short-circuit protection of the auxiliary switch</li> </ul>	
<ul> <li>at 600 V rated value</li> <li>Short-circuit protection</li> <li>design of the fuse link</li> <li>for short-circuit protection of the auxiliary switch required</li> </ul>	2.5 A
at 600 V rated value  Short-circuit protection  design of the fuse link     for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions	2.5 A fuse gG: 6 A, quick: 10 A
at 600 V rated value  Short-circuit protection  design of the fuse link     for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions mounting position	2.5 A fuse gG: 6 A, quick: 10 A any
at 600 V rated value  Short-circuit protection  design of the fuse link     for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method	2.5 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting
at 600 V rated value  Short-circuit protection  design of the fuse link     for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height	2.5 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting 87 mm
at 600 V rated value  Short-circuit protection  design of the fuse link     o for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width	2.5 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting 87 mm 45 mm
at 600 V rated value  Short-circuit protection  design of the fuse link     for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth	2.5 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting 87 mm
at 600 V rated value  Short-circuit protection  design of the fuse link     for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals	2.5 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting 87 mm 45 mm
at 600 V rated value  Short-circuit protection  design of the fuse link     for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth	2.5 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting 87 mm 45 mm
at 600 V rated value  Short-circuit protection  design of the fuse link     o for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary	2.5 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting 87 mm 45 mm 70 mm
at 600 V rated value  Short-circuit protection  design of the fuse link     for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit	2.5 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting 87 mm 45 mm 70 mm
at 600 V rated value  Short-circuit protection  design of the fuse link     for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection	2.5 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting 87 mm 45 mm 70 mm
at 600 V rated value  Short-circuit protection  design of the fuse link     for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection     for main current circuit	2.5 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting 87 mm 45 mm 70 mm  No
at 600 V rated value  Short-circuit protection  design of the fuse link     for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection     for main current circuit     for auxiliary and control circuit arrangement of electrical connectors for main current circuit	2.5 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting 87 mm 45 mm 70 mm  No  spring-loaded terminals spring-loaded terminals
at 600 V rated value  Short-circuit protection  design of the fuse link     o for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection     o for main current circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections	2.5 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting 87 mm 45 mm 70 mm  No  spring-loaded terminals spring-loaded terminals
at 600 V rated value  Short-circuit protection  design of the fuse link     ofor short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection     ofor main current circuit     ofor auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections     ofor main contacts	2.5 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting 87 mm 45 mm 70 mm  No  spring-loaded terminals spring-loaded terminals Top and bottom
at 600 V rated value  Short-circuit protection  design of the fuse link     ofor short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection     ofor main current circuit     ofor auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections     ofor main contacts     osolid or stranded	fuse gG: 6 A, quick: 10 A  any Contactor mounting 87 mm 45 mm 70 mm  No  spring-loaded terminals spring-loaded terminals Top and bottom
at 600 V rated value  Short-circuit protection  design of the fuse link         • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection	fuse gG: 6 A, quick: 10 A  any Contactor mounting 87 mm 45 mm 70 mm  No  spring-loaded terminals spring-loaded terminals Top and bottom  1x (0,5 4 mm²) 1x (0.5 2.5 mm²)
at 600 V rated value  Short-circuit protection  design of the fuse link         • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection	fuse gG: 6 A, quick: 10 A  any Contactor mounting 87 mm 45 mm 70 mm  No  spring-loaded terminals spring-loaded terminals Top and bottom  1x (0,5 4 mm²) 1x (0.5 2.5 mm²) 1x (0.5 2.5 mm²)
at 600 V rated value  Short-circuit protection  design of the fuse link         • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection	fuse gG: 6 A, quick: 10 A  any Contactor mounting 87 mm 45 mm 70 mm  No  spring-loaded terminals spring-loaded terminals Top and bottom  1x (0,5 4 mm²) 1x (0.5 2.5 mm²)
at 600 V rated value  Short-circuit protection  design of the fuse link         • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection	fuse gG: 6 A, quick: 10 A  any Contactor mounting 87 mm 45 mm 70 mm  No  spring-loaded terminals spring-loaded terminals Top and bottom  1x (0,5 4 mm²) 1x (0.5 2.5 mm²) 1x (0.5 2.5 mm²)

- solid or stranded

— finely stranded with core end processing

- finely stranded without core end processing

• at AWG cables for auxiliary contacts

design of screwdriver shaft size of the screwdriver tip

2x (0.5 ... 2.5 mm²)

2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)

2x (0.5 ... 1.5 mm²)

2x (20 ... 14)

Diameter 3 mm 3,0 x 0,5 mm

Safety related data

failure rate [FIT] with low demand rate according to SN

31920

MTTF with high demand rate

T1 value for proof test interval or service life according to

IEC 61508

protection class IP on the front according to IEC

60529

touch protection on the front according to IEC 60529

50 FIT

2 280 y

20 y

IP20

finger-safe, for vertical contact from the front

Display

display version for switching status

Slide switch

Certificates/ approvals

## **General Product Approval**

For use in hazardous locations



Confirmation









For use in hazardous locations

**Declaration of Conformity** 

**Test Certificates** 

Marine / Shipping







Special Test Certificate

Type Test Certificates/Test Report



## Marine / Shipping













other

Railway

Confirmation

Vibration and Shock

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2116-1CC0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2116-1CC0


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-1CC0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <a href="http://www.automation.siemens.com/bilddb/cax">http://www.automation.siemens.com/bilddb/cax</a> de.aspx?mlfb=3RU2116-1CC0&lang=en

Characteristic: Tripping characteristics, I2t, Let-through current

Further characteristics (e.g. electrical endurance, switching frequency)
<a href="http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2116-1CC0&objecttype=14&gridview=view1">http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2116-1CC0&objecttype=14&gridview=view1</a>

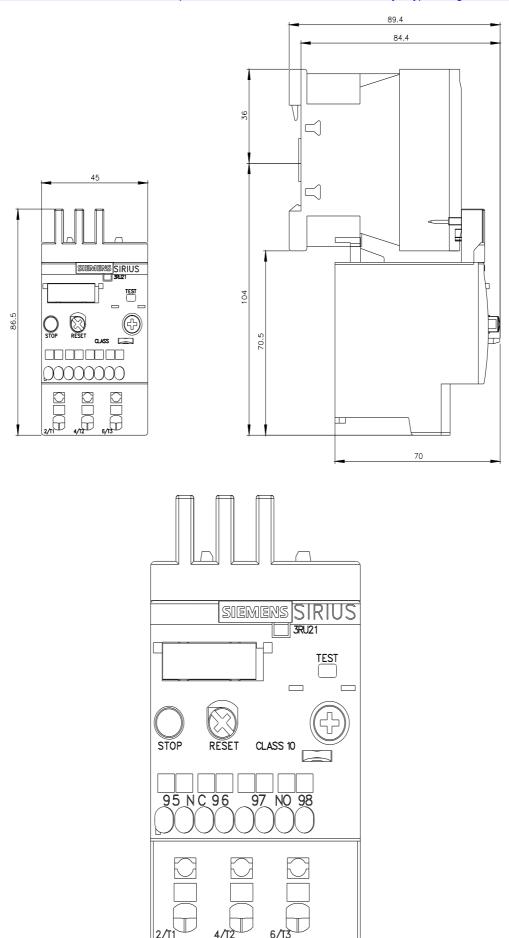

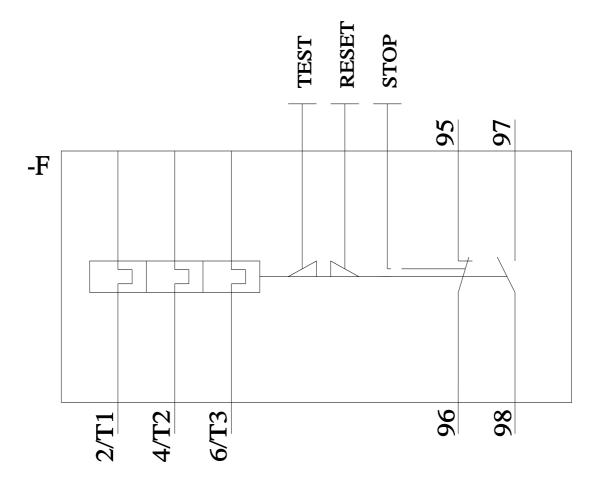

last modified: 3/8/2022 🖸