## **SIEMENS**

Data sheet 3RU2126-4PC1



Overload relay 30...36 A Thermal For motor protection Size S0, Class 10 Stand-alone installation Main circuit: Spring-type terminal Auxiliary circuit: spring-type terminal Manual-Automatic-Reset

| product brand name   | SIRIUS                 |
|--|------------------------|
| product designation  | thermal overload relay |
| product type designation   | 3RU2                   |
| General technical data   |                        |
| size of overload relay   | S0                     |
| size of contactor can be combined company-specific                                     | S0                     |
| power loss [W] for rated value of the current at AC in hot operating state             | 9.6 W                  |
| • per pole   | 3.2 W                  |
| insulation voltage with degree of pollution 3 at AC rated value                        | 690 V                  |
| surge voltage resistance rated value   | 6 kV                   |
| maximum permissible voltage for safe isolation in<br>networks with grounded star point |                        |
| <ul> <li>between auxiliary and auxiliary circuit</li> </ul>                            | 440 V                  |
| <ul> <li>between auxiliary and auxiliary circuit</li> </ul>                            | 440 V                  |
| <ul> <li>between main and auxiliary circuit</li> </ul>                                 | 440 V                  |
| <ul> <li>between main and auxiliary circuit</li> </ul>                                 | 440 V                  |
| shock resistance according to IEC 60068-2-27   | 8g / 11 ms             |
| type of protection according to ATEX directive 2014/34/EU                              | Ex II (2) GD           |
| certificate of suitability according to ATEX directive 2014/34/EU                      | DMT 98 ATEX G 001      |
| reference code according to IEC 81346-2  | F                      |
| Substance Prohibitance (Date)  | 10/01/2009             |
| Ambient conditions   |                        |
| installation altitude at height above sea level maximum                                | 2 000 m                |
| ambient temperature  |                        |
| <ul><li>during operation</li></ul>   | -40 +70 °C             |
| <ul> <li>during storage</li> </ul>   | -55 +80 °C             |
| <ul> <li>during transport</li> </ul>   | -55 +80 °C             |
| temperature compensation   | -40 +60 °C             |
| relative humidity during operation   | 10 95 %                |
| Main circuit   |                        |
| number of poles for main current circuit   | 3                      |
| adjustable current response value current of the<br>current-dependent overload release | 30 36 A                |
| operating voltage  |                        |
| rated value  | 690 V                  |
| <ul> <li>at AC-3e rated value maximum</li> </ul>                                       | 690 V                  |
| operating frequency rated value  | 50 60 Hz               |
| operational current rated value  | 36 A                   |
| operational current at AC-3e at 400 V rated value                                      | 36 A                   |

| operating power  |  |
|--|--|
| operating power  |  |
| • at AC-3  | 10 5 k/M   |
| — at 400 V rated value   | 18.5 kW  |
| — at 500 V rated value   | 22 kW  |
| — at 690 V rated value   | 30 kW  |
| • at AC-3e   | 10 E I/M   |
| — at 400 V rated value   | 18.5 kW  |
| — at 500 V rated value   | 22 kW  |
| — at 690 V rated value   | 30 kW  |
| Auxiliary circuit  |  |
| design of the auxiliary switch   | integrated   |
| number of NC contacts for auxiliary contacts   | 1  |
| • note   | for contactor disconnection  |
| number of NO contacts for auxiliary contacts   | 1  |
| • note   | for message "Tripped"  |
| number of CO contacts for auxiliary contacts   | 0  |
| operational current of auxiliary contacts at AC-15   |  |
| • at 24 V  | 3 A  |
| ● at 110 V   | 3 A  |
| ● at 120 V   | 3 A  |
| ● at 125 V   | 3 A  |
| • at 230 V   | 2 A  |
| • at 400 V   | 1 A  |
| operational current of auxiliary contacts at DC-13   |  |
| ● at 24 V  | 2 A  |
| ● at 60 V  | 0.3 A  |
| ● at 110 V   | 0.22 A   |
| • at 125 V   | 0.22 A   |
| ● at 220 V   | 0.11 A   |
| contact rating of auxiliary contacts according to UL   | B600 / R300  |
| Protective and monitoring functions  |  |
| trip class   | CLASS 10   |
| arp oldoo  | UUU IV   |
| design of the overload release   | thermal  |
| •  |  |
| design of the overload release   |  |
| design of the overload release UL/CSA ratings  |  |
| design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor   | thermal  |
| design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value   | thermal 36 A   |
| design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection   | thermal 36 A   |
| design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  | 36 A<br>36 A   |
| design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection   | thermal 36 A   |
| design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required   | 36 A<br>36 A   |
| design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions   | thermal  36 A 36 A  fuse gG: 6 A, quick: 10 A  |
| design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  | thermal  36 A 36 A  fuse gG: 6 A, quick: 10 A  any   |
| design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method   | thermal  36 A 36 A  fuse gG: 6 A, quick: 10 A  any stand-alone installation  |
| design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height  | thermal  36 A 36 A  fuse gG: 6 A, quick: 10 A  any stand-alone installation 114 mm   |
| design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width  | thermal  36 A 36 A  fuse gG: 6 A, quick: 10 A  any stand-alone installation 114 mm 45 mm   |
| design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  | thermal  36 A 36 A  fuse gG: 6 A, quick: 10 A  any stand-alone installation 114 mm   |
| design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  | thermal  36 A 36 A  fuse gG: 6 A, quick: 10 A  any stand-alone installation 114 mm 45 mm 95 mm   |
| design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  | thermal  36 A 36 A  fuse gG: 6 A, quick: 10 A  any stand-alone installation 114 mm 45 mm   |
| design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary  | thermal  36 A 36 A  fuse gG: 6 A, quick: 10 A  any stand-alone installation 114 mm 45 mm 95 mm   |
| design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  | thermal  36 A 36 A  fuse gG: 6 A, quick: 10 A  any stand-alone installation 114 mm 45 mm 95 mm   |
| design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit   | thermal  36 A 36 A  fuse gG: 6 A, quick: 10 A  any stand-alone installation 114 mm 45 mm 95 mm  No  spring-loaded terminals  |
| design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit   | thermal  36 A 36 A  fuse gG: 6 A, quick: 10 A  any stand-alone installation 114 mm 45 mm 95 mm  No  spring-loaded terminals spring-loaded terminals  |
| design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit   | thermal  36 A 36 A  fuse gG: 6 A, quick: 10 A  any stand-alone installation 114 mm 45 mm 95 mm  No  spring-loaded terminals  |
| design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current   | thermal  36 A 36 A  fuse gG: 6 A, quick: 10 A  any stand-alone installation 114 mm 45 mm 95 mm  No  spring-loaded terminals spring-loaded terminals  |
| design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit   | thermal  36 A 36 A  fuse gG: 6 A, quick: 10 A  any stand-alone installation 114 mm 45 mm 95 mm  No  spring-loaded terminals spring-loaded terminals  |
| design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections  | thermal  36 A 36 A  fuse gG: 6 A, quick: 10 A  any stand-alone installation 114 mm 45 mm 95 mm  No  spring-loaded terminals spring-loaded terminals  |
| design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts  | thermal  36 A 36 A 36 A  fuse gG: 6 A, quick: 10 A  any stand-alone installation 114 mm 45 mm 95 mm  No  spring-loaded terminals spring-loaded terminals Top and bottom  |
| design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection  • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded   | thermal  36 A 36 A 36 A  fuse gG: 6 A, quick: 10 A  any stand-alone installation 114 mm 45 mm 95 mm  No  No  spring-loaded terminals spring-loaded terminals Top and bottom  1x (1 10 mm²)                       |
| design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded — finely stranded with core end processing   | thermal  36 A 36 A 36 A  fuse gG: 6 A, quick: 10 A  any stand-alone installation 114 mm 45 mm 95 mm  No  spring-loaded terminals spring-loaded terminals Top and bottom  1x (1 10 mm²) 1x (1 6 mm²)              |
| design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded — finely stranded with core end processing — finely stranded without core end processing                                   | thermal  36 A 36 A 36 A  fuse gG: 6 A, quick: 10 A  any stand-alone installation 114 mm 45 mm 95 mm  No  spring-loaded terminals spring-loaded terminals Top and bottom  1x (1 10 mm²) 1x (1 6 mm²) 1x (1 6 mm²) |
| design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded — finely stranded with core end processing — finely stranded without core end processing • at AWG cables for main contacts | thermal  36 A 36 A 36 A  fuse gG: 6 A, quick: 10 A  any stand-alone installation 114 mm 45 mm 95 mm  No  spring-loaded terminals spring-loaded terminals Top and bottom  1x (1 10 mm²) 1x (1 6 mm²) 1x (1 6 mm²) |

- solid or stranded

- finely stranded with core end processing

- finely stranded without core end processing

• at AWG cables for auxiliary contacts

design of screwdriver shaft size of the screwdriver tip

2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)

2x (0.5 ... 1.5 mm²)

2x (0.5 ... 2.5 mm²)

2x (20 ... 14)

Diameter 3 mm 3.0 x 0.5 mm

Safety related data

failure rate [FIT] with low demand rate according to SN

31920

MTTF with high demand rate

T1 value for proof test interval or service life according to

IEC 61508 protection class IP on the front according to IEC

60529

touch protection on the front according to IEC 60529

50 FIT

2 280 y

20 y

IP20

finger-safe, for vertical contact from the front

display version for switching status

Slide switch

Certificates/ approvals

## **General Product Approval**

For use in hazardous locations





Confirmation







For use in hazardous locations

**Declaration of Conformity** 

**Test Certificates** 

Marine / Shipping







**Special Test Certific-**

Type Test Certificates/Test Report



## Marine / Shipping













other

Railway

Confirmation

Vibration and Shock

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2126-4PC1

Cax online generator


 $\underline{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RU2126-4PC1}$ 


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RU2126-4PC1


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RU2126-4PC1&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current

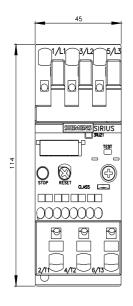

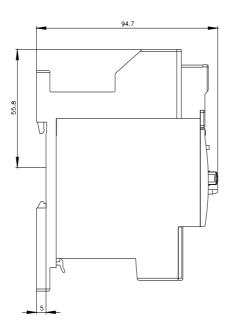

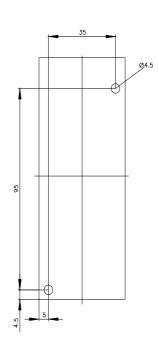

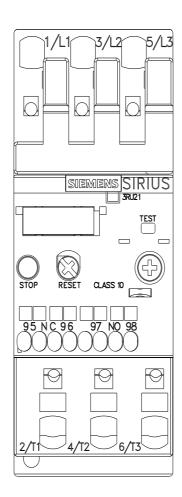

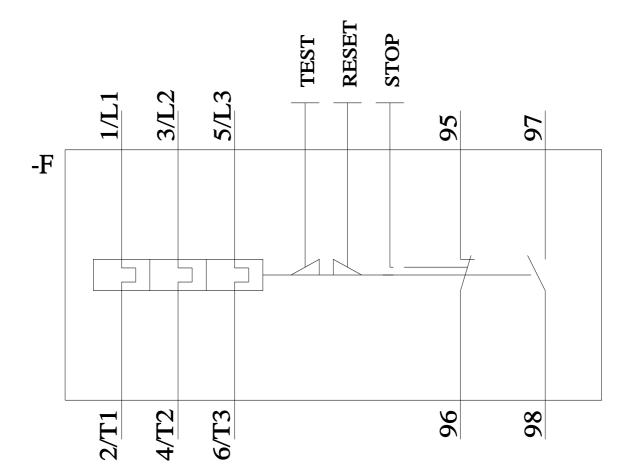

last modified: 3/8/2022 🖸