SIEMENS

Data sheet 3RU2146-4MB0



Overload relay 80...100 A Thermal For motor protection Size S3, Class 10 Contactor mounting Main circuit: Screw Auxiliary circuit: Screw Manual-Automatic-Reset

product brand name	SIRIUS
product designation	thermal overload relay
product type designation	3RU2
General technical data	
size of overload relay	S3
size of contactor can be combined company-specific	S3
power loss [W] for rated value of the current at AC in hot operating state	21 W
• per pole	7 W
insulation voltage with degree of pollution 3 at AC rated value	1 000 V
surge voltage resistance rated value	8 kV
maximum permissible voltage for safe isolation in networks with grounded star point	
 between auxiliary and auxiliary circuit 	440 V
 between auxiliary and auxiliary circuit 	440 V
 between main and auxiliary circuit 	440 V
 between main and auxiliary circuit 	440 V
shock resistance according to IEC 60068-2-27	8g / 11 ms
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 98 ATEX G 001
reference code according to IEC 81346-2	F
Substance Prohibitance (Date)	03/01/2017
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-40 +70 °C
during storage	-55 +80 °C
during transport	-55 +80 °C
temperature compensation	-40 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current-dependent overload release	80 100 A
operating voltage	
rated value	690 V
 at AC-3e rated value maximum 	1 000 V
operating frequency rated value	50 60 Hz
operational current rated value	100 A
operational current at AC-3e at 400 V rated value	100 A

operating power ● at AC-3	
● at AC-3 — at 400 V rated value	45 kW
— at 500 V rated value	55 kW
— at 690 V rated value	90 kW
• at AC-3e	30 KW
— at 400 V rated value	45 kW
— at 500 V rated value	55 kW
— at 690 V rated value	90 kW
Auxiliary circuit	
design of the auxiliary switch	integrated
number of NC contacts for auxiliary contacts	1
• note	for contactor disconnection
number of NO contacts for auxiliary contacts	1
• note	for message "Tripped"
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	
• at 24 V	3 A
• at 110 V	3 A
• at 120 V	3 A
● at 125 V	3 A
● at 230 V	2 A
● at 400 V	1 A
• at 690 V	0.75 A
operational current of auxiliary contacts at DC-13	
• at 24 V	2 A
• at 60 V	0.3 A
• at 110 V	0.22 A
• at 125 V	0.22 A
at 220 V design of the ministure sireuit breaker for short sireuit	0.11 A
design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required	6A (SCC less than equal to 0.5 kA; U less than equal to 260V)
contact rating of auxiliary contacts according to UL	B600 / R300
Protective and monitoring functions	
trip class	CLASS 10
trip class design of the overload release	CLASS 10 thermal
·	
design of the overload release	
design of the overload release UL/CSA ratings	
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor	thermal
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value	thermal 96 A
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value	thermal 96 A
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection	thermal 96 A
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link	thermal 96 A
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required	96 A 99 A
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch	96 A 99 A gG: 250 A
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required	gG: 250 A gG: 200 A
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	gG: 250 A gG: 200 A
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position	gG: 250 A gG: 200 A fuse gG: 6 A, quick: 10 A
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method	gG: 250 A gG: 200 A fuse gG: 6 A, quick: 10 A any Contactor mounting
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height	thermal 96 A 99 A gG: 250 A gG: 200 A fuse gG: 6 A, quick: 10 A any Contactor mounting 105 mm
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width	thermal 96 A 99 A gG: 250 A gG: 200 A fuse gG: 6 A, quick: 10 A any Contactor mounting 105 mm 70 mm
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth	thermal 96 A 99 A gG: 250 A gG: 200 A fuse gG: 6 A, quick: 10 A any Contactor mounting 105 mm
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals	thermal 96 A 99 A gG: 250 A gG: 200 A fuse gG: 6 A, quick: 10 A any Contactor mounting 105 mm 70 mm 125 mm
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary	thermal 96 A 99 A gG: 250 A gG: 200 A fuse gG: 6 A, quick: 10 A any Contactor mounting 105 mm 70 mm
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit	thermal 96 A 99 A gG: 250 A gG: 200 A fuse gG: 6 A, quick: 10 A any Contactor mounting 105 mm 70 mm 125 mm
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection	thermal 96 A 99 A gG: 250 A gG: 200 A fuse gG: 6 A, quick: 10 A any Contactor mounting 105 mm 70 mm 125 mm
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit	thermal 96 A 99 A gG: 250 A gG: 200 A fuse gG: 6 A, quick: 10 A any Contactor mounting 105 mm 70 mm 125 mm No
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit	thermal 96 A 99 A gG: 250 A gG: 200 A fuse gG: 6 A, quick: 10 A any Contactor mounting 105 mm 70 mm 125 mm No screw-type terminals screw-type terminals
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit	thermal 96 A 99 A gG: 250 A gG: 200 A fuse gG: 6 A, quick: 10 A any Contactor mounting 105 mm 70 mm 125 mm No
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current	thermal 96 A 99 A gG: 250 A gG: 200 A fuse gG: 6 A, quick: 10 A any Contactor mounting 105 mm 70 mm 125 mm No screw-type terminals screw-type terminals

solid 2x (2.5 ... 16 mm²) 2x (6 ... 16 mm²), 2x (10 ... 50 mm²), 1x (10 ... 70 mm²) stranded solid or stranded 2x (2,5 ... 50 mm²), 1x (10 ... 70 mm²) • finely stranded with core end processing 2x (2.5 ... 35 mm²), 1x (2.5 ... 50 mm²) type of connectable conductor cross-sections • for auxiliary contacts - solid or stranded 2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²) - finely stranded with core end processing 2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²) • at AWG cables for auxiliary contacts 2x (20 ... 16), 2x (18 ... 14) tightening torque 4.5 ... 6 N·m • for main contacts for ring cable lug outer diameter of the usable ring cable lug maximum 19 mm tightening torque 4.5 ... 6 N·m • for main contacts with screw-type terminals • for auxiliary contacts with screw-type terminals 0.8 ... 1.2 N·m design of screwdriver shaft Hexagonal socket size of the screwdriver tip 4 mm hexagon socket design of the thread of the connection screw • for main contacts M8 • of the auxiliary and control contacts M3 Safety related data T1 value for proof test interval or service life according to 20 a IEC 61508 protection class IP on the front according to IEC IP20 60529 touch protection on the front according to IEC 60529 finger-safe, for vertical contact from the front

Slide switch

Certificates/ approvals

General Product Approval

display version for switching status

For use in hazardous locations



Confirmation









For use in hazardous locations

Declaration of Conformity

Test Certificates

Marine / Shipping







Special Test Certificate

Type Test Certificates/Test Report



Marine / Shipping













other

Railway

Confirmation

Special Test Certific-

<u>ate</u>

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2146-4MB0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2146-4MB0

 $Service \& Support \ (Manuals, \ Certificates, \ Characteristics, \ FAQs, ...)$


https://support.industry.siemens.com/cs/ww/en/ps/3RU2146-4MB0


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RU2146-4MB0/char

Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2146-4MB0&objecttype=14&gridview=view1

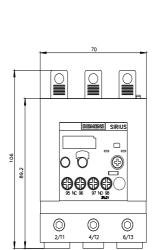

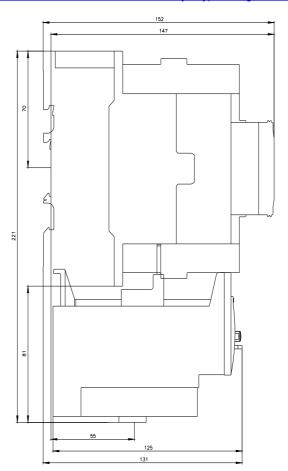

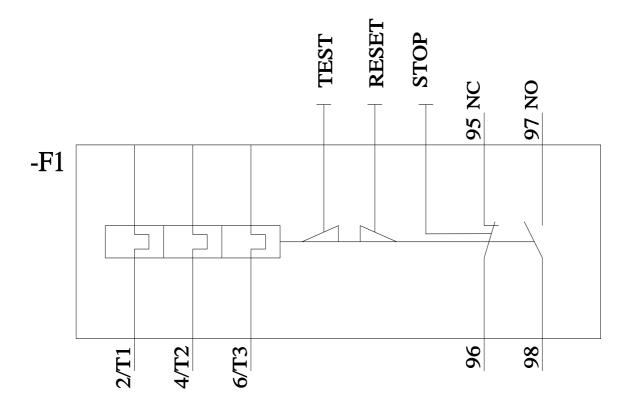

last modified: 3/8/2022 🖸