SIEMENS

Data sheet

3RV2311-0AC10



Circuit breaker size S00 for starter combination Rated current 0.16 A N-release 2.1 A screw terminal Standard switching capacity

4/12 6/13	
product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For starter combinations
product type designation	3RV2
General technical data	
size of the circuit-breaker	S00
size of contactor can be combined company-specific	S00, S0
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	5.5 W
 at AC in hot operating state per pole 	1.8 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	25g / 11 ms
mechanical service life (operating cycles)	
 of the main contacts typical 	100 000
 of auxiliary contacts typical 	100 000
electrical endurance (operating cycles) typical	100 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-20 +60 °C
 during storage 	-50 +80 °C
 during transport 	-50 +80 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
operating voltage	
 rated value 	20 690 V
 at AC-3 rated value maximum 	690 V
 at AC-3e rated value maximum 	690 V
operating frequency rated value	50 60 Hz
operational current rated value	0.16 A
operational current	
 at AC-3 at 400 V rated value 	0.16 A
 at AC-3e at 400 V rated value 	0.16 A
operating power	
• at AC-3	
— at 230 V rated value	0 kW

	0.111/
— at 400 V rated value	0 kW
— at 500 V rated value	0.1 kW
— at 690 V rated value	0.1 kW
• at AC-3e	
— at 230 V rated value	0 kW
— at 400 V rated value	0 kW
— at 500 V rated value	0.1 kW
— at 690 V rated value	0.1 kW
operating frequency	
• at AC-3 maximum	15 1/h
• at AC-3e maximum	15 1/h
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Protective and monitoring functions	
product function	
 ground fault detection 	No
 phase failure detection 	No
maximum short-circuit current breaking capacity (lcu)	
at AC at 240 V rated value	100 kA
 at AC at 400 V rated value 	100 kA
 at AC at 500 V rated value 	100 kA
at AC at 690 V rated value	100 kA
operating short-circuit current breaking capacity (Ics) at AC	
at 240 V rated value	100 kA
• at 400 V rated value	100 kA
• at 500 V rated value	100 kA
• at 690 V rated value	100 kA
response value current of instantaneous short-circuit trip	2.1 A
unit	
UL/CSA ratings	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor	
	0.16 A
full-load current (FLA) for 3-phase AC motor	0.16 A 0.16 A
full-load current (FLA) for 3-phase AC motor • at 480 V rated value	
 full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value 	
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection	0.16 A
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection product function short circuit protection	0.16 A Yes
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip	0.16 A Yes
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions	0.16 A Yes magnetic
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position	0.16 A Yes magnetic any
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position	0.16 A Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width	0.16 A Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth	0.16 A Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing	0.16 A Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side	0.16 A Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V	0.16 A Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V — downwards	0.16 A Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V — downwards — upwards	0.16 A Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V — downwards — upwards — at the side	0.16 A Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V	0.16 A Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — at the side	0.16 A Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm 30 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards	0.16 A Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm 30 mm 30 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side	0.16 A Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm 30 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — at the side • for live parts at 400 V — downwards — at the side • for grounded parts at 500 V	0.16 A Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm 30 mm 9 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards	0.16 A Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — upwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — upwards	0.16 A Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side	0.16 A Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V	0.16 A Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 9 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side	0.16 A Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm

— at the side		9 mm		
 for grounded parts at 690 V 				
— downwards		50 mm		
— upwards		50 mm		
— backwards		0 mm		
— at the side		30 mm		
— forwards		0 mm		
 for live parts at 690 V 				
— downwards		50 mm		
— upwards		50 mm		
— backwards		0 mm		
— at the side		30 mm		
— forwards		0 mm		
Connections/ Terminals				
type of electrical connection				
 for main current circuit 		screw-type terminals		
arrangement of electrical connectors for	or main current	Top and bottom		
circuit				
type of connectable conductor cross-s	ections			
 for main contacts applid or strended 		0x (0.7E 0.5 mm ²) 0. 1	mm ²	
— solid or stranded		2x (0,75 2,5 mm ²), 2x 4 r		
— finely stranded with core end p	rocessing	2x (0.5 1.5 mm ²), 2x (0.7	5 2.5 mm²)	
at AWG cables for main contacts		2x (18 14), 2x 12		
tightening torque	arminale	0.8 1.2 N·m		
 for main contacts with screw-type te design of screwdriver shaft 		Diameter 5 to 6 mm		
size of the screwdriver tip		Pozidriv size 2		
design of the thread of the connection	screw			
for main contacts		M3		
Safety related data				
B10 value				
	SN 31020	5 000		
 with high demand rate according to SN 31920 proportion of dangerous failures 		5 000		
with low demand rate according to SN 31920		50 %		
 with high demand rate according to SN 31920 with high demand rate according to SN 31920 		50 % 50 %		
failure rate [FIT]		00 /0		
with low demand rate according to \$	SN 31920	50 FIT		
T1 value for proof test interval or service I		10 a		
IEC 61508	j			
protection class IP on the front accord	ing to IEC	IP20		
60529				
touch protection on the front according	g to IEC 60529	finger-safe, for vertical cont	tact from the front	
display version for switching status		Handle		
Certificates/ approvals				
General Product Approval				
<u>Confirmation</u>			<u>KC</u>	
(SP	(a)	(ŲL)		FHI
	<u> </u>	<u> </u>		LIIL
Can.		UL UL		
Declaration of Conformity	Test Certifica	ites	Marine / Shipping	
Declaration of Conformity			Marine / Shipping	
	Special Test Ce	ertific- <u>Type Test Certific-</u>	Marine / Shipping	
Declaration of Conformity			Marine / Shipping	
	Special Test Ce	ertific- <u>Type Test Certific-</u>	Marine / Shipping	
	Special Test Ce	ertific- <u>Type Test Certific-</u>	Marine / Shipping	BUREAU VERITAS
	Special Test Ce	ertific- <u>Type Test Certific-</u>	Marine / Shipping	BUREAU VERITAS
UK CE CA CE EG-Konf.	Special Test Ce	ertific- <u>Type Test Certific-</u>	Marine / Shipping	
	Special Test Ce	ertific- <u>Type Test Certific-</u>	Marine / Shipping	EUREAU VERITAS
UK CE CA CE EG-Konf.	Special Test Ce	ertific- <u>Type Test Certific-</u>	Marine / Shipping	BUREAU VERITAS
UK CE CA CE EG-Konf.	Special Test Ce	ertific- <u>Type Test Certific-</u>	Marine / Shipping	E D REAU VERITAS

Subject to change without notice © Copyright Siemens




Further information


Information on the packaging


https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2311-0AC10 Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2311-0AC10 Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RV2311-0AC10 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2311-0AC10&lang=en Characteristic: Tripping characteristics, I²t, Let-through current https://support.industry.siemens.com/cs/ww/en/ps/3RV2311-0AC10/char

Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2311-0AC10&objecttype=14&gridview=view1

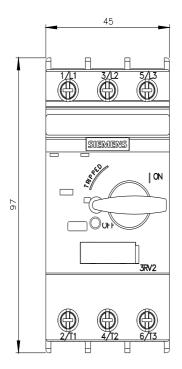

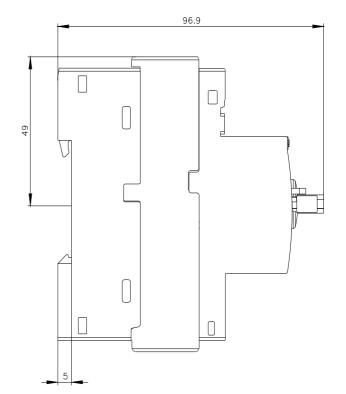

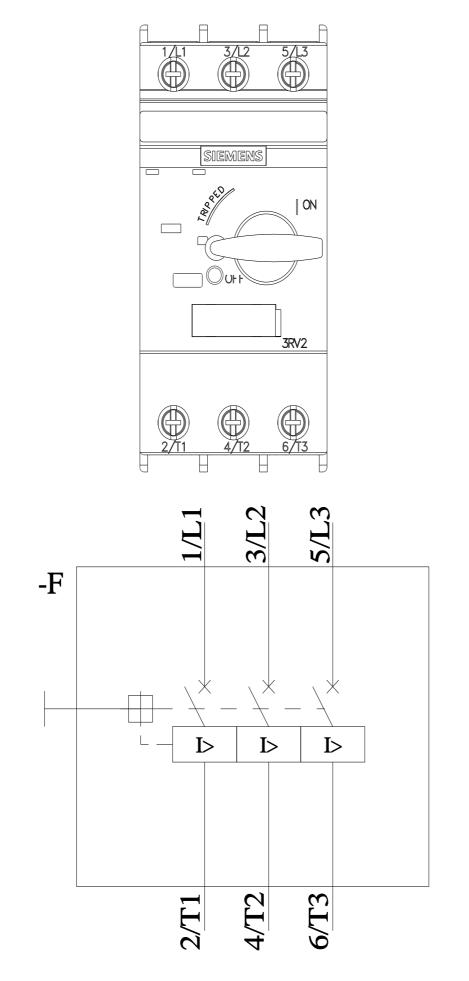

11/21/2022 🖸