SIEMENS

Data sheet

3RV2311-1GC20




Circuit breaker size S00 for starter combination Rated current 6.3 A Nrelease 82 A Spring-type terminal Standard switching capacity

product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For starter combinations
product type designation	3RV2
General technical data	
size of the circuit-breaker	S00
size of contactor can be combined company-specific	S00, S0
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	7.25 W
 at AC in hot operating state per pole 	2.4 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	25g / 11 ms
mechanical service life (operating cycles)	
 of the main contacts typical 	100 000
 of auxiliary contacts typical 	100 000
electrical endurance (operating cycles) typical	100 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-20 +60 °C
 during storage 	-50 +80 °C
 during transport 	-50 +80 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
operating voltage	
 rated value 	20 690 V
 at AC-3 rated value maximum 	690 V
 at AC-3e rated value maximum 	690 V
operating frequency rated value	50 60 Hz
operational current rated value	6.3 A
operational current	
 at AC-3 at 400 V rated value 	6.3 A
 at AC-3e at 400 V rated value 	6.3 A
operating power	
• at AC-3	
— at 230 V rated value	1.5 kW

— at 400 V rated value	2.2 kW
— at 500 V rated value	3 kW
— at 690 V rated value	4 kW
• at AC-3e	
— at 230 V rated value	1.5 kW
— at 400 V rated value	2.2 kW
— at 500 V rated value	3 kW
— at 690 V rated value	4 kW
operating frequency	
• at AC-3 maximum	15 1/h
• at AC-3e maximum	15 1/h
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Protective and monitoring functions	
product function	
 ground fault detection 	No
 phase failure detection 	No
maximum short-circuit current breaking capacity (Icu)	
• at AC at 240 V rated value	100 kA
 at AC at 400 V rated value 	100 kA
 at AC at 500 V rated value 	100 kA
 at AC at 690 V rated value 	6 kA
operating short-circuit current breaking capacity (Ics)	
at AC	
 at 240 V rated value 	100 kA
 at 400 V rated value 	100 kA
 at 500 V rated value 	100 kA
 at 690 V rated value 	4 kA
response value current of instantaneous short-circuit trip	82 A
unit	
LU /CCA watin wa	
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
full-load current (FLA) for 3-phase AC motor • at 480 V rated value	6.3 A
 full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value 	6.3 A 6.3 A
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp]	
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor	6.3 A
 full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value yielded mechanical performance [hp] for single-phase AC motor at 110/120 V rated value 	6.3 A 0.25 hp
 full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value yielded mechanical performance [hp] for single-phase AC motor at 110/120 V rated value at 230 V rated value 	6.3 A
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor	6.3 A 0.25 hp 0.5 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value	6.3 A 0.25 hp 0.5 hp 1 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value	6.3 A 0.25 hp 0.5 hp 1 hp 1.5 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value	6.3 A 0.25 hp 0.5 hp 1 hp 1.5 hp 3 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value	6.3 A 0.25 hp 0.5 hp 1 hp 1.5 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection	6.3 A 0.25 hp 0.5 hp 1 hp 1.5 hp 3 hp 5 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection	6.3 A 0.25 hp 0.5 hp 1 hp 1.5 hp 3 hp 5 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection design of the short-circuit trip	6.3 A 0.25 hp 0.5 hp 1 hp 1.5 hp 3 hp 5 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit	6.3 A 0.25 hp 0.5 hp 1 hp 1.5 hp 3 hp 5 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit	6.3 A 0.25 hp 0.5 hp 1 hp 1.5 hp 3 hp 5 hp Yes magnetic
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V	6.3 A 0.25 hp 0.5 hp 1 hp 1.5 hp 3 hp 5 hp Yes magnetic gL/gG 50 A
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V	6.3 A 0.25 hp 0.5 hp 1 hp 1.5 hp 3 hp 5 hp Yes magnetic gL/gG 50 A gL/gG 40 A
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/208 V rated value — at 220/208 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection design of the short-circuit protection design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V	6.3 A 0.25 hp 0.5 hp 1 hp 1.5 hp 3 hp 5 hp Yes magnetic gL/gG 50 A
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value — at 575/600 V rated value Short-circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions	6.3 A 0.25 hp 0.5 hp 1 hp 1.5 hp 3 hp 5 hp Yes magnetic gL/gG 50 A gL/gG 40 A gL/gG 35 A
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor - at 110/120 V rated value - at 230 V rated value • for 3-phase AC motor - at 200/208 V rated value • at 460/480 V rated value - at 575/600 V rated value - at 575/600 V rated value Short-circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V	6.3 A 0.25 hp 0.5 hp 1 hp 1.5 hp 3 hp 5 hp Yes magnetic gL/gG 50 A gL/gG 40 A gL/gG 35 A
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value — at 575/600 V rated value Short-circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions	6.3 A 0.25 hp 0.5 hp 1 hp 1.5 hp 3 hp 5 hp Yes magnetic gL/gG 50 A gL/gG 40 A gL/gG 35 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection design of the short-circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method	6.3 A 0.25 hp 0.5 hp 1 hp 1.5 hp 3 hp 5 hp Yes magnetic gL/gG 50 A gL/gG 40 A gL/gG 35 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value — at 230 V rated value — at 200/208 V rated value — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection design of the short-circuit protection design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height	6.3 A 0.25 hp 0.5 hp 1 hp 1.5 hp 3 hp 5 hp Yes magnetic gL/gG 50 A gL/gG 40 A gL/gG 35 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 106 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value — at 200/208 V rated value — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection design of the short-circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width	6.3 A 0.25 hp 0.5 hp 1 hp 1.5 hp 3 hp 5 hp Yes magnetic gL/gG 50 A gL/gG 50 A gL/gG 40 A gL/gG 35 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 106 mm 45 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor - at 230 V rated value - at 200/208 V rated value - at 220/230 V rated value - at 220/230 V rated value - at 220/230 V rated value - at 460/480 V rated value - at 575/600 V rated value - at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth	6.3 A 0.25 hp 0.5 hp 1 hp 1.5 hp 3 hp 5 hp Yes magnetic gL/gG 50 A gL/gG 40 A gL/gG 35 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 106 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor - at 230 V rated value - at 200/208 V rated value - at 220/230 V rated value - at 220/230 V rated value - at 220/230 V rated value - at 460/480 V rated value - at 575/600 V rated value - at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing	6.3 A 0.25 hp 0.5 hp 1 hp 1.5 hp 3 hp 5 hp Yes magnetic gL/gG 50 A gL/gG 40 A gL/gG 40 A gL/gG 35 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 106 mm 45 mm 97 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor - at 230 V rated value - at 200/208 V rated value - at 220/230 V rated value - at 220/230 V rated value - at 220/230 V rated value - at 460/480 V rated value - at 575/600 V rated value - at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth	6.3 A 0.25 hp 0.5 hp 1 hp 1.5 hp 3 hp 5 hp Yes magnetic gL/gG 50 A gL/gG 50 A gL/gG 40 A gL/gG 35 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 106 mm 45 mm


General Product Approval Conformity	IEC 61508 protection class IP on the front according to IEC 60529 touch protection on the front according to IEC 60529 display version for switching status Certificates/ approvals	finger-safe, for vertical contact from the front Handle Declaration of
downwards30 mm upwards30 mm at the side9 mm downwards30 mm upwards30 mm upwards30 mm upwards30 mm at the side9 mm for live parts at 500 V downwards30 mm upwards30 mm upwards30 mm upwards30 mm upwards30 mm at the side9 mm downwards50 mm downwards50 mm upwards50 mm upwards30 mm backwards0 mm backwards0 mm backwards50 mm upwards50 mm upwards50 mm backwards0 mm for main current circuitspring-loaded terminals backwards0 mm backwards20 mm backwards0 mm for main current circuitspring-loaded terminals for main contacts2x (0.5 2 mm ²) </td <td>IEC 61508 protection class IP on the front according to IEC 60529 touch protection on the front according to IEC 60529 display version for switching status</td> <td>finger-safe, for vertical contact from the front</td>	IEC 61508 protection class IP on the front according to IEC 60529 touch protection on the front according to IEC 60529 display version for switching status	finger-safe, for vertical contact from the front
- downwards 30 mm - upwards 30 mm - at the side 9 mm - downwards 30 mm - upwards 50 mm - upwards 50 mm - upwards 30 mm - upwards 50 mm - for live parts at 600 V mm - backwards 0 mm - for live parts at 600 V mm - for live parts at 600 V mm	IEC 61508 protection class IP on the front according to IEC 60529 touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
- downwards 30 mm - upwards 30 mm - at the side 9 mm - downwards 30 mm - upwards 50 mm - upwards 50 mm - upwards 50 mm - upwards 50 mm - backwards 0 mm - the side 30 mm - upwards 50 mm - upwards 50 mm - upwards 50 mm - the side 30 mm - the side 30 mm - the side 30 mm - upwards 50 mm - upwards <t< td=""><td>IEC 61508 protection class IP on the front according to IEC 60529</td><td></td></t<>	IEC 61508 protection class IP on the front according to IEC 60529	
- downwards 30 mm - upwards 30 mm - at the side 9 mm - downwards 30 mm - upwards 30 mm - downwards 30 mm - upwards 30 mm - at the side 9 mm - downwards 50 mm - upwards 50 mm - upwards 50 mm - upwards 50 mm - upwards 50 mm - backwards 0 mm - at the side 30 mm - at the side 30 mm - at the side 30 mm - backwards 0 mm - backwards 0 mm - upwards 50 mm - upwards 0 mm - at the side 30 mm - otormanicurrent circuit spring-loaded terminals Top and bottom Top and bottom - for main current circuit spring-loaded terminals <td>IEC 61508</td> <td>1000</td>	IEC 61508	1000
- downwards 30 mm - upwards 30 mm - at the side 9 mm • for grounded parts at 500 V 30 mm - upwards 30 mm - upwards 30 mm - upwards 30 mm - downwards 30 mm - upwards 30 mm - downwards 30 mm - upwards 30 mm - at the side 9 mm • for live parts at 500 V - - downwards 30 mm - at the side 9 mm • at the side 9 mm - at the side 9 mm - downwards 50 mm - upwards 50 mm - upwards 50 mm - upwards 50 mm - backwards 0 mm - forwards 50 mm - backwards 0 mm - downwards 50 mm - backwards 0 mm - forwards 0 mm - at the side 30 mm - backwards 0 mm - forwards	In the second second second interval or complete life concerding to	10 a
- downwards 30 mm - upwards 30 mm - at the side 9 mm • for grounded parts at 500 V 30 mm - downwards 30 mm - upwards 30 mm - at the side 9 mm • for live parts at 500 V - - downwards 30 mm - at the side 9 mm • for live parts at 500 V - - downwards 30 mm - upwards 30 mm - upwards 30 mm - upwards 50 mm - downwards 50 mm - downwards 50 mm - upwards 50 mm - downwards 50 mm - at the side 30 mm - at the side 30 mm - torwards 0 mm - torwards	-	
- downwards 30 mm - upwards 30 mm - at the side 9 mm • for grounded parts at 500 V 30 mm - downwards 30 mm - upwards 30 mm - at the side 9 mm • for live parts at 500 V - - downwards 30 mm - at the side 9 mm • for live parts at 500 V - - downwards 30 mm - upwards 50 mm - upwards 50 mm - upwards 50 mm - backwards 0 mm - forwards 50 mm - upwards 50 mm - upwards 50 mm - backwards 0 mm - backwards 0 mm - backwards 0 mm - forwards 0 mm - the side 30 mm - forwards 0 mm - forwards <td< td=""><td>failure rate [FIT]</td><td></td></td<>	failure rate [FIT]	
- downwards30 mm- upwards30 mm- at the side9 mm- downwards30 nm- upwards30 nm- at the side9 mm- at the side9 mm- at the side9 mm- downwards30 nm- at the side9 mm- downwards30 nm- upwards30 nm- upwards30 nm- upwards30 nm- upwards30 nm- upwards30 nm- upwards50 nm- downwards50 nm- downwards50 nm- backwards0 mm- backwards0 mm- at the side30 mm- backwards0 mm- forwards50 nm- backwards0 mm- forwards50 nm- backwards0 mm- forwards0 mm- backwards0 mm- forwards0 mm- backwards0 mm- forwards0 mm- forwards0 mm- backwards0 mm- forwards0 mm- forwards0 mm- forwards0 mm- forwards0 mm- forwards0 mm- forwards </td <td>-</td> <td></td>	-	
- downwards 30 mm - upwards 30 mm - at the side 9 mm - downwards 30 mm - upwards 30 mm - at the side 9 mm - downwards 30 mm - at the side 9 mm - downwards 30 mm - upwards 30 mm - downwards 50 mm - downwards 50 mm - downwards 0 mm - at the side 0 mm - at the side 30 mm - at the side 30 mm - upwards 50 mm - upwards 50 mm - upwards 50 mm - at the side 30 mm - backwards 0 mm - at the side 30 mm - backwards 0 mm - for main current circuit spring-loaded terminals trin		50 %
- downwards 30 mm - upwards 30 mm - at the side 9 mm - downwards 30 mm - upwards 30 mm - upwards 30 mm - at the side 9 mm - odwnwards 30 mm - at the side 9 mm - odwnwards 30 mm - at the side 9 mm - downwards 30 mm - upwards 50 mm - upwards 50 mm - upwards 0 mm - downwards 50 mm - at the side 30 mm - at the side 30 mm - bord leparts at 690 V - - downwards 50 mm - upwards 50 mm - bordwards 0 mm	• with high demand rate according to SN 31920	5 000
- downwards30 mm- upwards30 mm- dthe side9 mm- downwards30 mm- upwards30 mm- upwards30 mm- upwards30 mm- at the side9 mm• for live parts at 500 V downwards30 mm- upwards30 mm- upwards30 mm- upwards30 mm- downwards30 mm- upwards30 mm- upwards30 mm- downwards50 mm- downwards50 mm- downwards50 mm- upwards50 mm- upwards50 mm- backwards0 mm- forwards50 mm- backwards50 mm- forwards50 mm- forwards50 mm- forwards50 mm- forwards50 mm- upwards50 mm- upwards50 mm- sackwards0 mm- forwards50 mm- sackwards0 mm- forwards50 mm- sackwards0 mm- forwards0 mm- forwards2x (0.5 4 mm ²)- finely stranded with core end processing2x (0.5 2.5 mm ²) <t< td=""><td></td><td></td></t<>		
- downwards30 mm- upwards30 mm- at the side9 mm• for grounded parts at 500 V downwards30 mm- upwards30 mm- at the side9 mm• at the side9 mm• for live parts at 500 V downwards30 mm- at the side9 mm• for live parts at 500 V downwards30 mm- at the side9 mm- at the side30 mm- backwards0 mm- backwards0 mm- forwards50 mm- at the side30 mm- forwards50 mm- backwards0 mm- at the side30 mm- at the side30 mm- backwards0 mm- forwards0 mm- forwards2x (0.5 4 mm ³)- finely stranded with core end process	-	
- downwards30 mm- upwards30 mm- at the side9 mm• for grounded parts at 500 V downwards30 mm- upwards30 mm- at the side9 mm• for live parts at 500 V downwards30 mm- at the side9 mm• for live parts at 500 V downwards30 mm- at the side9 mm• for grounded parts at 690 V downwards50 mm- at the side9 mm• for grounded parts at 690 V downwards50 mm- backwards0 mm- forwards0 mm- backwards0 mm- forwards0 mm- forwards50 mm- forwards0 mm- forwards0 mm- forwards50 mm- forwards0 mm- forwards0 mm- forwards0 mm- forwards0 mm- forwards0 mm- backwards0 mm- at the side30 mm- at the side30 mm- forwards0 mm <td>•</td> <td></td>	•	
downwards30 mm upwards30 mm at the side9 mm downwards30 mm upwards30 mm upwards30 mm upwards30 mm downwards30 mm upwards30 mm downwards30 mm downwards30 mm downwards30 mm downwards30 mm upwards30 mm upwards30 mm upwards30 mm at the side9 mm for grounded parts at 690 V downwards50 mm upwards50 mm backwards0 mm backwards0 mm at the side30 mm forwards50 mm forwards50 mm downwards50 mm forwards50 mm forwards50 mm forwards0 mm forwards0 mm forwards0 mm at the side30 mm backwards0 mm forwards0 mm forwards0 mm forwards0 mm at the side30 mm at the side30 mm at the side30 mm at the side10 mm forwards0 mm forwards0 mm forwards0 mm forwards0 mm forwards0 mm forwards0 mm forwards for		
downwards30 mm upwards30 mm at the side9 mm downwards30 mm upwards30 mm upwards30 mm upwards9 mm downwards30 mm upwards9 mm downwards30 mm upwards30 mm upwards30 mm upwards30 mm upwards30 mm upwards30 mm upwards30 mm at the side9 mm for grounded parts at 690 V		
	 finely stranded with core end processing 	2x (0.5 2.5 mm ²)
- downwards30 mm- upwards30 mm- at the side9 mm• for grounded parts at 500 V downwards30 mm- upwards30 mm- upwards30 mm- at the side9 mm• for live parts at 500 V downwards30 mm- at the side9 mm• for grounded parts at 600 V downwards30 mm- upwards9 mm• for grounded parts at 690 V downwards50 mm- at the side9 mm• for grounded parts at 690 V downwards50 mm- backwards0 mm- backwards0 mm- backwards0 mm- forwards50 mm- forwards50 mm- forwards50 mm- forwards0 mm- forwards0 mm- forwards50 mm- upwards50 mm- upwards50 mm- upwards50 mm- at the side30 mm- backwards0 mm- backwards0 mm- backwards0 mm- at the side30 mm- at the side30 mm- forwards0 mm- forwards0 mm- forwards0 mm- backwards0 mm- forwards0 mm- forwards0 mm- forwards0 mm- forwards0 mm- forwards0 mm- forwards0 m		2x (0,5 4 mm²)
- downwards30 mm- upwards30 mm- at the side9 mm- downwards30 mm- upwards30 mm- upwards30 mm- upwards30 mm- at the side9 mm- downwards30 mm- at the side9 mm- downwards30 mm- upwards30 mm- at the side9 mm- downwards30 mm- upwards30 mm- upwards50 mm- upwards50 mm- at the side9 mm- downwards50 mm- upwards50 mm- upwards50 mm- upwards0 mm- backwards0 mm- for ilve parts at 690 V downwards50 mm- at the side30 mm- backwards0 mm- forwards50 mm- downwards50 mm- backwards0 mm- backwards0 mm- backwards0 mm- forwards0 mm <t< td=""><td></td><td></td></t<>		
- downwards30 mm- upwards30 mm- at the side9 mm• for grounded parts at 500 V downwards30 mm- upwards30 mm- at the side9 mm• downwards30 mm- at the side9 mm• downwards30 mm- at the side9 mm• downwards30 mm- upwards30 mm- upwards30 mm- upwards30 mm- upwards50 mm- at the side9 mm• for grounded parts at 690 V downwards50 mm- upwards50 mm- upwards50 mm- backwards0 mm- forwards0 mm- forwards50 mm- downwards50 mm- forwards50 mm- forwards0 mm- forwards0 mm- downwards50 mm- at the side30 mm- backwards0 mm- backwards0 mm- at the side30 mm- backwards0 mm- forwards0 mm <td></td> <td></td>		
downwards30 mm upwards30 mm at the side9 mm- for grounded parts at 500 V downwards30 mm upwards30 mm upwards30 mm at the side9 mm• for live parts at 500 V downwards30 mm at the side9 mm• for grounded parts at 690 V at the side9 mm at the side50 mm upwards50 mm upwards50 mm backwards0 mm at the side30 mm backwards0 mm forwards50 mm forwards50 mm forwards50 mm forwards50 mm at the side30 mm forwards50 mm forwards50 mm at the side30 mm at the side30 mm at the side30 mm backwards0 mm backwards0 mm at the side30 mm at the side30 mm at the side30 mm at the side30 mm backwards0 mm at the side30 mm <t< td=""><td></td><td>Top and bottom</td></t<>		Top and bottom
downwards30 mm upwards30 mm at the side9 mm• for grounded parts at 500 V downwards30 mm upwards30 mm at the side9 mm• for live parts at 500 V at the side9 mm• for live parts at 500 V downwards30 mm at the side9 mm• for grounded parts at 600 V downwards50 mm at the side9 mm• for grounded parts at 690 V downwards50 mm at the side30 mm backwards0 mm at the side30 mm forwards0 mm at the side30 mm at the side30 mm at the side30 mm forwards50 mm upwards50 mm at the side30 mm		
downwards30 mm upwards30 mm at the side9 mm• for grounded parts at 500 V downwards30 mm upwards30 mm at the side9 mm• for live parts at 500 V downwards30 mm at the side9 mm• for live parts at 500 V downwards30 mm upwards30 mm upwards30 mm upwards30 mm at the side9 mm• for grounded parts at 690 V downwards50 mm upwards50 mm backwards0 mm backwards0 mm forwards50 mm forwards50 mm downwards50 mm at the side30 mm forwards50 mm downwards50 mm at the side30 mm at the side30 mm backwards0 mm at the side30 mm	type of electrical connection	
downwards30 mm upwards30 mm at the side9 mm• for grounded parts at 500 V downwards30 mm upwards30 mm at the side9 mm• for live parts at 500 V downwards30 mm at the side9 mm• for live parts at 500 V downwards30 mm at the side9 mm• for live parts at 600 V at the side50 mm at the side50 mm upwards50 mm backwards0 mm at the side30 mm browards50 mm backwards0 mm at the side30 mm at the side50 mm backwards50 mm backwards50 mm backwards50 mm backwards50 mm at the side50 mm backwards50 mm backwards50 mm at the side30 mm	Connections/ Terminals	
- downwards30 mm- upwards30 mm- at the side9 mm• for grounded parts at 500 V downwards30 mm- upwards30 mm- upwards30 mm- at the side9 mm• for live parts at 500 V downwards30 mm- upwards30 mm- upwards30 mm- upwards30 mm- upwards30 mm- upwards30 mm- upwards50 mm- at the side9 mm• for grounded parts at 690 V downwards50 mm- upwards0 mm- backwards0 mm- forwards50 mm- at the side0 mm- forwards50 mm- upwards50 mm- backwards50 mm- forwards50 mm- backwards50 mm		
- downwards30 mm- upwards30 mm- at the side9 mm• for grounded parts at 500 V downwards30 mm- upwards30 mm- upwards30 mm- at the side9 mm• for live parts at 500 V downwards30 mm- at the side9 mm• for live parts at 500 V downwards30 mm- upwards30 mm- at the side9 mm• for grounded parts at 690 V downwards50 mm- upwards50 mm- backwards0 mm- forwards0 mm- forwards0 mm- forwards50 mm- upwards50 mm- upwards50 mm- upwards0 mm		
- downwards30 mm- upwards30 mm- at the side9 mm• for grounded parts at 500 V downwards30 mm- upwards30 mm- at the side9 mm• for live parts at 500 V downwards30 mm- at the side9 mm• for live parts at 500 V downwards30 mm- at the side9 mm• for live parts at 500 V downwards30 mm- upwards30 mm- upwards30 mm- upwards50 mm- at the side50 mm- upwards50 mm- backwards0 mm- backwards0 mm- forwards0 mm- forwards0 mm- forwards50 mm		
- downwards30 mm- upwards30 mm- at the side9 mm• for grounded parts at 500 V downwards30 mm- upwards30 mm- upwards9 mm- at the side9 mm• for live parts at 500 V downwards30 mm- at the side9 mm• for live parts at 500 V downwards30 mm- upwards30 mm- upwards30 mm- upwards30 mm- upwards50 mm- at the side9 mm• for grounded parts at 690 V downwards50 mm- upwards50 mm- upwards50 mm- upwards50 mm- backwards0 mm- at the side30 mm- browards0 mm- forwards0 mm- forwards0 mm- forwards0 mm		
- downwards30 mm- upwards30 mm- at the side9 mm• for grounded parts at 500 V downwards30 mm- upwards30 mm- at the side9 mm• at the side9 mm• for live parts at 500 V downwards30 mm- at the side9 mm• for live parts at 500 V downwards30 mm- at the side9 mm• for grounded parts at 600 V at the side9 mm• for grounded parts at 690 V downwards50 mm- downwards50 mm- upwards50 mm- upwards0 mm- backwards0 mm- at the side30 mm		50 mm
- downwards30 mm- upwards30 mm- at the side9 mm• for grounded parts at 500 V downwards30 mm- upwards30 mm- at the side9 mm• at the side9 mm• for live parts at 500 V downwards30 mm- at the side9 mm• for live parts at 500 V downwards30 mm- at the side9 mm• at the side9 mm• at the side9 mm• for grounded parts at 690 V downwards50 mm- upwards50 mm- upwards50 mm- upwards50 mm- upwards50 mm- upwards30 mm		0 mm
- downwards30 mm- upwards30 mm- at the side9 mm• for grounded parts at 500 V downwards30 mm- upwards30 mm- at the side9 mm- at the side9 mm• for live parts at 500 V downwards30 mm- at the side9 mm• for live parts at 500 V downwards30 mm- at the side9 mm- backwards50 mm- upwards50 mm- upwards50 mm		
- downwards30 mm- upwards30 mm- at the side9 mm• for grounded parts at 500 V downwards30 mm- upwards30 mm- at the side9 mm• for live parts at 500 V9 mm- at the side9 mm• for live parts at 500 V downwards30 mm- at the side9 mm• for live parts at 500 V at the side9 mm• for grounded parts at 600 V at the side9 mm• for grounded parts at 690 V downwards50 mm		
- downwards30 mm- upwards30 mm- at the side9 mm- at the side9 mm- downwards30 mm- upwards30 mm- at the side9 mm- at the side30 mm- at the side9 mm- at the side9 mm- at the side9 mm- at the side9 mm	— upwards	50 mm
- downwards30 mm- upwards30 mm- at the side9 mm• for grounded parts at 500 V downwards30 mm- upwards30 mm- at the side9 mm• for live parts at 500 V downwards30 mm- at the side9 mm• for live parts at 500 V downwards30 mm- at the side9 mm• for live parts at 500 V at the side30 mm- at the side9 mm		50 mm
- downwards30 mm- upwards30 mm- at the side9 mm- at the side9 mm- downwards30 mm- upwards30 mm- at the side9 mm- upwards30 mm- at the side9 mm- upwards30 mm- upwards30 mm- upwards30 mm		
- downwards30 mm- upwards30 mm- at the side9 mm• for grounded parts at 500 V downwards30 mm- upwards30 mm- upwards9 mm- at the side9 mm• for live parts at 500 V downwards30 mm- at the side9 mm• for live parts at 500 V downwards30 mm		
- downwards30 mm- upwards30 mm- at the side9 mm• for grounded parts at 500 V downwards30 mm- upwards30 mm- upwards9 mm- at the side9 mm• for live parts at 500 V-		
- downwards30 mm- upwards30 mm- at the side9 mm• for grounded parts at 500 V downwards30 mm- upwards30 mm- upwards9 mm		20
- downwards 30 mm - upwards 30 mm - at the side 9 mm • for grounded parts at 500 V - - downwards 30 mm - upwards 30 mm		9 mm
	— upwards	
downwards 30 mm upwards 30 mm at the side 9 mm	— downwards	30 mm
— downwards 30 mm — upwards 30 mm		
- downwards 30 mm		
		30 mm
— at the side 9 mm		9 mm
— upwards 30 mm		
— downwards 30 mm	— upwards	30 mm


Subject to change without notice © Copyright Siemens

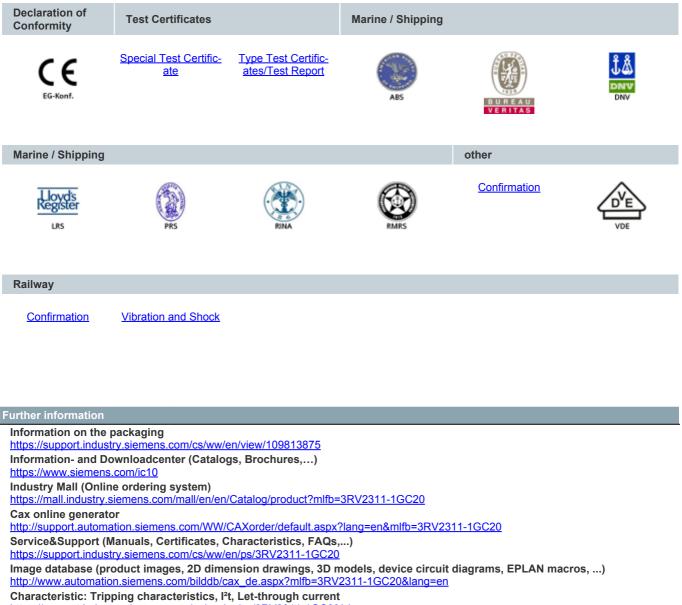



https://support.industry.siemens.com/cs/ww/en/ps/3RV2311-1GC20/char

Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2311-1GC20&objecttype=14&gridview=view1

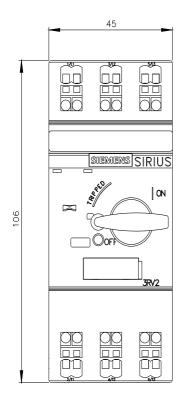

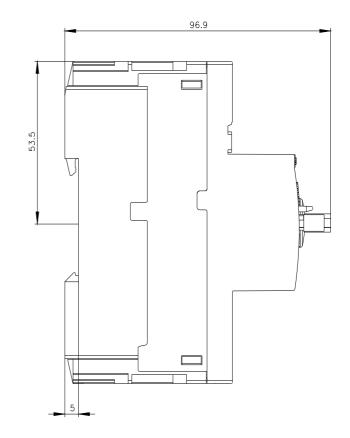

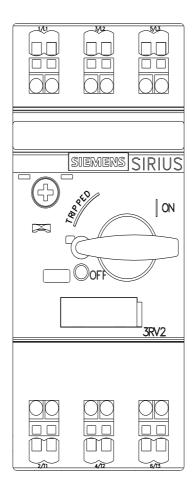

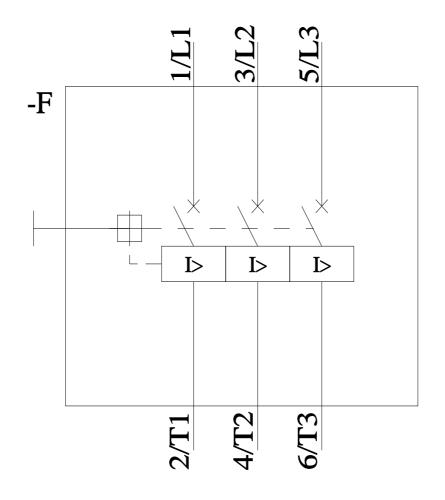

last modified:

11/21/2022 🖸