## **SIEMENS**

Data sheet 3TK2810-1KA42



SIRIUS safety relay Safety-oriented Speed monitoring 110-240 V AC/DC, 45 mm overall width Spring-type terminal EC instantaneous: 2 NO EC delayed: 0 SC: 2 electrical Auto-start/manual start Basic device Maximum achievable PL according to EN 13849-1: e Maximum achievable SIL according to IEC 61508: 3

product brand name product designation design of the product SIRIUS

Speed monitor

standstill and speed monitoring

## General technical data

protection class IP of the enclosure touch protection against electrical shock insulation voltage rated value ambient temperature

- during storage
- during operation

air pressure according to SN 31205 relative humidity during operation installation altitude at height above sea level maximum

vibration resistance according to IEC 60068-2-6 shock resistance

surge voltage resistance rated value EMC emitted interference

installation environment regarding EMC

reference code according to DIN 40719 extended according to IEC 204-2 according to IEC 750 reference code according to EN 61346-2 number of sensor inputs

- 2-channel
- 1-channel or 2-channel

design of the cascading

type of the safety-related wiring of the inputs product feature cross-circuit-proof Safety Integrity Level (SIL)

- according to IEC 61508
- according to IEC 62061
- for delayed release circuit according to IEC 61508

SIL Claim Limit (subsystem) according to EN 62061 performance level (PL)

- according to ISO 13849-1
- for delayed release circuit according to EN ISO 13849-1

category according to EN ISO 13849-1 hardware fault tolerance according to IEC 61508 safety device type according to IEC 61508-2 PFHD with high demand rate according to EN 62061 IP20 finger-safe 300 V

-20 ... +70 °C 0 ... 60 °C 90 ... 106 kPa 10 ... 95 % 2 000 m

10 ... 55 Hz: 0.35 mm

8g / 10 ms 4 000 V EN 60947-5-1

This product is suitable for Class A environments only. In household environments, this device can cause unwanted radio interference. The user is required to implement appropriate measures in this case.

KT

F

3 0 none

single-channel or two-channel

Yes

e e

> 4 1 Type B 3.4E-9 1/h

T1 value for proof test interval or service life	20 a
according to IEC 61508 number of outputs as contact-affected switching	
element	
• as NC contact	
for signaling function instantaneous contact	0
— for signaling function delayed switching	0
<ul> <li>— safety-related instantaneous contact</li> <li>— safety-related delayed switching</li> </ul>	0
as NO contact	O
for signaling function instantaneous contact	0
for signaling function delayed switching	0
safety-related instantaneous contact	1
<ul> <li>— safety-related delayed switching</li> </ul>	1
number of outputs as contact-less semiconductor switching element	
safety-related	
<ul> <li>delayed switching</li> </ul>	0
<ul><li>instantaneous contact</li></ul>	0
<ul> <li>for signaling function</li> </ul>	
— delayed switching	1
— instantaneous contact	1
stop category according to EN 60204-1	0
Inputs	
<ul><li>design of input</li><li>cascading input/functional switching</li></ul>	No
feedback input	Yes
• start input	Yes
Encoder	
encoder signal evaluation	two signal tracks each with inverted signals
type of signal level of the encoder	optionally TTL, HTL or sin/cos (Ua = 1Vss)
type of failure response of the encoder	high-resistance
Proximity switch	
Proximity switch type of voltage of the supply voltage of proximity switches	DC
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches	24 V; provided by the device
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum	24 V; provided by the device 30 mA
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output	24 V; provided by the device 30 mA optionally PNP or NPN
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum	24 V; provided by the device 30 mA optionally PNP or NPN 10 V
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum	24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 μs
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity	24 V; provided by the device 30 mA optionally PNP or NPN 10 V
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches	24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 μs 75 μs
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity	24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 μs 75 μs 1 Hz 2 kHz
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision	24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 μs 75 μs 1 Hz 2 kHz +-2 %
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis  Outputs  switching capacity current	24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 μs 75 μs 1 Hz 2 kHz +-2 %
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis  Outputs  switching capacity current  of semiconductor outputs	24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 μs 75 μs 1 Hz 2 kHz +-2 % 6.25 %
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis  Outputs  switching capacity current  of semiconductor outputs  — for signaling function at DC-13 at 24 V	24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 μs 75 μs 1 Hz 2 kHz +-2 %
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis  Outputs  switching capacity current  of semiconductor outputs  for signaling function at DC-13 at 24 V  of the NO contacts of the relay outputs at DC-13	24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 µs 75 µs 1 Hz 2 kHz +-2 % 6.25 %
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis  Outputs  switching capacity current  of semiconductor outputs  for signaling function at DC-13 at 24 V  of the NO contacts of the relay outputs at DC-13  at 24 V	24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 µs 75 µs 1 Hz 2 kHz +-2 % 6.25 %
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis  Outputs  switching capacity current  of semiconductor outputs  for signaling function at DC-13 at 24 V  of the NO contacts of the relay outputs at DC-13  at 24 V  at 115 V	24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 µs 75 µs 1 Hz 2 kHz +-2 % 6.25 %
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis  Outputs  switching capacity current  of semiconductor outputs  — for signaling function at DC-13 at 24 V  of the NO contacts of the relay outputs at DC-13  — at 24 V	24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 µs 75 µs 1 Hz 2 kHz +-2 % 6.25 %
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis  Outputs  switching capacity current  of semiconductor outputs  for signaling function at DC-13 at 24 V  of the NO contacts of the relay outputs at DC-13  at 24 V  at 115 V  of the NO contacts of the relay outputs at AC-15	24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 µs 75 µs 1 Hz 2 kHz +-2 % 6.25 %  0.02 A 2 A 2 A
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis  Outputs  switching capacity current  of semiconductor outputs  for signaling function at DC-13 at 24 V  of the NO contacts of the relay outputs at DC-13  at 24 V  at 115 V  of the NO contacts of the relay outputs at AC-15  at 230 V  of the NC contacts of the relay outputs at AC-15	24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 µs 75 µs 1 Hz 2 kHz +-2 % 6.25 %  0.02 A 2 A 2 A 3 A 3 A
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis  Outputs  switching capacity current  of semiconductor outputs — for signaling function at DC-13 at 24 V of the NO contacts of the relay outputs at DC-13 — at 24 V — at 115 V of the NO contacts of the relay outputs at AC-15 — at 230 V of the NC contacts of the relay outputs at AC-15 — at 24 V at 230 V of the NC contacts of the relay outputs at AC-15 — at 24 V	24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 µs 75 µs 1 Hz 2 kHz +-2 % 6.25 %  0.02 A 2 A 2 A 3 A 3 A 3 A
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis  Outputs  switching capacity current  of semiconductor outputs — for signaling function at DC-13 at 24 V of the NO contacts of the relay outputs at DC-13 — at 24 V — at 115 V  of the NO contacts of the relay outputs at AC-15 — at 24 V — at 230 V of the NC contacts of the relay outputs at AC-15 — at 24 V — at 115 V	24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 µs 75 µs 1 Hz 2 kHz +-2 % 6.25 %
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis  Outputs  switching capacity current  of semiconductor outputs — for signaling function at DC-13 at 24 V of the NO contacts of the relay outputs at DC-13 — at 24 V — at 115 V of the NO contacts of the relay outputs at AC-15 — at 24 V — at 230 V of the NC contacts of the relay outputs at AC-15 — at 24 V — at 115 V — at 230 V of the NC contacts of the relay outputs at AC-15 — at 24 V — at 230 V	24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 µs 75 µs 1 Hz 2 kHz +-2 % 6.25 %  0.02 A  2 A 2 A 3 A 3 A 3 A 3 A 3 A
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis  Outputs  switching capacity current  of semiconductor outputs — for signaling function at DC-13 at 24 V of the NO contacts of the relay outputs at DC-13 — at 24 V — at 115 V  of the NO contacts of the relay outputs at AC-15 — at 24 V — at 230 V of the NC contacts of the relay outputs at AC-15 — at 24 V — at 115 V	24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 µs 75 µs 1 Hz 2 kHz +-2 % 6.25 %
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis  Outputs  switching capacity current  of semiconductor outputs  for signaling function at DC-13 at 24 V  of the NO contacts of the relay outputs at DC-13  at 24 V  at 115 V  of the NO contacts of the relay outputs at AC-15  at 24 V  at 230 V  of the NC contacts of the relay outputs at AC-15  at 24 V  at 115 V  at 230 V  thermal current of the switching element with contacts maximum electrical endurance (operating cycles) typical	24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 µs 75 µs 1 Hz 2 kHz +-2 % 6.25 %  0.02 A 2 A 2 A 3 A 3 A 3 A 3 A 3 A 3 A 3 A 100 000
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis  Outputs  Switching capacity current  of semiconductor outputs  for signaling function at DC-13 at 24 V  of the NO contacts of the relay outputs at DC-13  at 24 V  at 115 V  of the NO contacts of the relay outputs at AC-15  at 24 V  at 230 V  of the NC contacts of the relay outputs at AC-15  at 24 V  at 115 V  at 230 V  thermal current of the switching element with contacts maximum	24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 µs 75 µs 1 Hz 2 kHz +-2 % 6.25 %  0.02 A  2 A 2 A 3 A 3 A 3 A 3 A 3 A 3 A 3 A 3 A

the NO contacts of the relay outputs required	
Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
control supply voltage frequency	
1 rated value	50 Hz
2 rated value	60 Hz
control supply voltage 1	
• at DC	110 240 V
control supply voltage 1 at AC	
● at 50 Hz	110 240 V
● at 60 Hz	110 240 V
operating range factor control supply voltage rated value of magnet coil	
• at AC	
— at 50 Hz	0.8 1.1
— at 60 Hz	0.8 1.1
• at DC	0.8 1.1
Installation/ mounting/ dimensions	
mounting position	any
fastening method	any screw and snap-on mounting
width	45 mm
height	107.7 mm
depth	124.3 mm
Connections/ Terminals	12.1.0 11111
	anring leaded terminals
type of electrical connection	spring-loaded terminals
type of connectable conductor cross-sections  • solid	0.5 4 mm²
finely stranded	0.5 4 111111
with core end processing	2 x (0.25 1.5 mm²)
with core end processing     without core end processing	2x (0.25 1.5 mm²)
type of connectable conductor cross-sections at AWG	ZX (0.20 1.0 mm )
cables	
• solid	2x (24 16)
• stranded	2x (24 16) 2x (20 16)
	· · · · ·
• stranded	· · · · ·
• stranded  Product Function  product function  • light barrier monitoring	2x (20 16)
<ul> <li>stranded</li> <li>Product Function</li> <li>product function</li> <li>light barrier monitoring</li> <li>standstill monitoring</li> </ul>	2x (20 16)  No Yes
<ul> <li>stranded</li> <li>Product Function</li> <li>product function</li> <li>light barrier monitoring</li> <li>standstill monitoring</li> <li>protective door monitoring</li> </ul>	2x (20 16)  No Yes Yes
<ul> <li>stranded</li> <li>Product Function</li> <li>product function</li> <li>light barrier monitoring</li> <li>standstill monitoring</li> <li>protective door monitoring</li> <li>automatic start</li> </ul>	2x (20 16)  No Yes Yes Yes
stranded  Product Function  product function      light barrier monitoring     standstill monitoring     protective door monitoring     automatic start     magnetically operated switch monitoring NC-NO	2x (20 16)  No Yes Yes Yes No
stranded  Product Function  product function      light barrier monitoring     standstill monitoring     protective door monitoring     automatic start     magnetically operated switch monitoring NC-NO     rotation speed monitoring	2x (20 16)  No Yes Yes Yes No Yes
stranded  Product Function  product function      light barrier monitoring     standstill monitoring     protective door monitoring     automatic start     magnetically operated switch monitoring NC-NO     rotation speed monitoring     laser scanner monitoring	2x (20 16)  No Yes Yes Yes No Yes No
stranded  Product Function  product function      light barrier monitoring     standstill monitoring     protective door monitoring     automatic start     magnetically operated switch monitoring NC-NO     rotation speed monitoring     laser scanner monitoring     monitored start-up	2x (20 16)  No Yes Yes Yes No Yes No Yes
stranded  Product Function  product function      light barrier monitoring     standstill monitoring     protective door monitoring     automatic start     magnetically operated switch monitoring NC-NO     rotation speed monitoring     laser scanner monitoring     monitored start-up     light array monitoring	2x (20 16)  No Yes Yes Yes No Yes No Yes No Yes No
stranded  Product Function  product function      light barrier monitoring     standstill monitoring     protective door monitoring     automatic start     magnetically operated switch monitoring NC-NO     rotation speed monitoring     laser scanner monitoring     monitored start-up     light array monitoring     magnetically operated switch monitoring NC-NC	2x (20 16)  No Yes Yes Yes No Yes No Yes No Yes No Yes
stranded  Product Function  product function      light barrier monitoring     standstill monitoring     protective door monitoring     automatic start     magnetically operated switch monitoring NC-NO     rotation speed monitoring     laser scanner monitoring     monitored start-up     light array monitoring     magnetically operated switch monitoring NC-NC     EMERGENCY OFF function	2x (20 16)  No Yes Yes Yes No Yes No Yes No Yes No Yes
<ul> <li>stranded</li> <li>Product Function</li> <li>product function</li> <li>light barrier monitoring</li> <li>standstill monitoring</li> <li>protective door monitoring</li> <li>automatic start</li> <li>magnetically operated switch monitoring NC-NO</li> <li>rotation speed monitoring</li> <li>laser scanner monitoring</li> <li>monitored start-up</li> <li>light array monitoring</li> <li>magnetically operated switch monitoring NC-NC</li> <li>EMERGENCY OFF function</li> <li>pressure-sensitive mat monitoring</li> </ul>	2x (20 16)  No Yes Yes Yes No Yes No Yes No Yes No No Yes No No
stranded  Product Function  product function      light barrier monitoring     standstill monitoring     protective door monitoring     automatic start     magnetically operated switch monitoring NC-NO     rotation speed monitoring     laser scanner monitoring     monitored start-up     light array monitoring     magnetically operated switch monitoring NC-NC     EMERGENCY OFF function     pressure-sensitive mat monitoring suitability for interaction press control	No Yes Yes Yes No Yes No Yes No Yes No Yes
stranded  Product Function  product function      light barrier monitoring     standstill monitoring     protective door monitoring     automatic start     magnetically operated switch monitoring NC-NO     rotation speed monitoring     laser scanner monitoring     monitored start-up     light array monitoring     magnetically operated switch monitoring NC-NC     EMERGENCY OFF function     pressure-sensitive mat monitoring suitability for interaction press control suitability for use	2x (20 16)  No Yes Yes Yes No Yes No Yes No Yes No
stranded  Product Function  product function      light barrier monitoring     standstill monitoring     protective door monitoring     protective door monitoring     automatic start     magnetically operated switch monitoring NC-NO     rotation speed monitoring     laser scanner monitoring     monitored start-up     light array monitoring     magnetically operated switch monitoring NC-NC     EMERGENCY OFF function     pressure-sensitive mat monitoring suitability for interaction press control suitability for use     monitoring of floating sensors	2x (20 16)  No Yes Yes Yes No Yes No Yes No Yes No No No Yes No No Yes
<ul> <li>stranded</li> <li>Product Function</li> <li>product function</li> <li>light barrier monitoring</li> <li>standstill monitoring</li> <li>protective door monitoring</li> <li>automatic start</li> <li>magnetically operated switch monitoring NC-NO</li> <li>rotation speed monitoring</li> <li>laser scanner monitoring</li> <li>monitored start-up</li> <li>light array monitoring</li> <li>magnetically operated switch monitoring NC-NC</li> <li>EMERGENCY OFF function</li> <li>pressure-sensitive mat monitoring</li> <li>suitability for interaction press control</li> <li>suitability for use</li> <li>monitoring of floating sensors</li> <li>monitoring of non-floating sensors</li> </ul>	2x (20 16)  No Yes Yes Yes No Yes No Yes No No Yes No No Yes No No Yes No No No Yes No No
<ul> <li>stranded</li> <li>Product Function</li> <li>product function</li> <li>light barrier monitoring</li> <li>standstill monitoring</li> <li>protective door monitoring</li> <li>automatic start</li> <li>magnetically operated switch monitoring NC-NO</li> <li>rotation speed monitoring</li> <li>laser scanner monitoring</li> <li>monitored start-up</li> <li>light array monitoring</li> <li>magnetically operated switch monitoring NC-NC</li> <li>EMERGENCY OFF function</li> <li>pressure-sensitive mat monitoring</li> <li>suitability for interaction press control</li> <li>suitability for use</li> <li>monitoring of floating sensors</li> <li>monitoring of non-floating sensors</li> <li>safety switch</li> </ul>	2x (20 16)  No Yes Yes Yes No Yes No Yes No No No Yes No No Yes No No Yes No No Yes
<ul> <li>stranded</li> <li>Product Function</li> <li>product function</li> <li>light barrier monitoring</li> <li>standstill monitoring</li> <li>protective door monitoring</li> <li>automatic start</li> <li>magnetically operated switch monitoring NC-NO</li> <li>rotation speed monitoring</li> <li>laser scanner monitoring</li> <li>monitored start-up</li> <li>light array monitoring</li> <li>magnetically operated switch monitoring NC-NC</li> <li>EMERGENCY OFF function</li> <li>pressure-sensitive mat monitoring</li> <li>suitability for interaction press control</li> <li>suitability for use</li> <li>monitoring of floating sensors</li> <li>monitoring of non-floating sensors</li> <li>safety switch</li> <li>position switch monitoring</li> </ul>	No         Yes         Yes         Yes         No         Yes         No         No         Yes         No         No         Yes         No         Yes         Yes         Yes         Yes         Yes         Yes
<ul> <li>stranded</li> <li>Product Function</li> <li>product function</li> <li>light barrier monitoring</li> <li>standstill monitoring</li> <li>protective door monitoring</li> <li>automatic start</li> <li>magnetically operated switch monitoring NC-NO</li> <li>rotation speed monitoring</li> <li>laser scanner monitoring</li> <li>monitored start-up</li> <li>light array monitoring</li> <li>magnetically operated switch monitoring NC-NC</li> <li>EMERGENCY OFF function</li> <li>pressure-sensitive mat monitoring</li> <li>suitability for interaction press control</li> <li>suitability for use</li> <li>monitoring of floating sensors</li> <li>monitoring of non-floating sensors</li> <li>safety switch</li> <li>position switch monitoring</li> <li>EMERGENCY-OFF circuit monitoring</li> </ul>	No Yes Yes Yes No Yes No Yes No Yes No No Yes No No Yes No No Yes No No No Yes No No No Yes No No No
<ul> <li>stranded</li> <li>Product Function</li> <li>product function</li> <li>light barrier monitoring</li> <li>standstill monitoring</li> <li>protective door monitoring</li> <li>automatic start</li> <li>magnetically operated switch monitoring NC-NO</li> <li>rotation speed monitoring</li> <li>laser scanner monitoring</li> <li>monitored start-up</li> <li>light array monitoring</li> <li>magnetically operated switch monitoring NC-NC</li> <li>EMERGENCY OFF function</li> <li>pressure-sensitive mat monitoring</li> <li>suitability for interaction press control</li> <li>suitability for use</li> <li>monitoring of floating sensors</li> <li>monitoring of non-floating sensors</li> <li>safety switch</li> <li>position switch monitoring</li> <li>EMERGENCY-OFF circuit monitoring</li> <li>valve monitoring</li> </ul>	No         Yes         Yes         No         Yes         No         Yes         No         No         Yes         No         Yes         No         Yes         No
<ul> <li>stranded</li> <li>Product Function</li> <li>product function</li> <li>light barrier monitoring</li> <li>standstill monitoring</li> <li>protective door monitoring</li> <li>automatic start</li> <li>magnetically operated switch monitoring NC-NO</li> <li>rotation speed monitoring</li> <li>laser scanner monitoring</li> <li>monitored start-up</li> <li>light array monitoring</li> <li>magnetically operated switch monitoring NC-NC</li> <li>EMERGENCY OFF function</li> <li>pressure-sensitive mat monitoring</li> <li>suitability for interaction press control</li> <li>suitability for use</li> <li>monitoring of floating sensors</li> <li>monitoring of non-floating sensors</li> <li>safety switch</li> <li>position switch monitoring</li> <li>EMERGENCY-OFF circuit monitoring</li> <li>valve monitoring</li> <li>tactile sensor monitoring</li> </ul>	No         Yes         Yes         No         Yes         No         Yes         No         No         Yes         No         Yes         No         Yes         No         No
<ul> <li>stranded</li> <li>Product Function</li> <li>product function</li> <li>light barrier monitoring</li> <li>standstill monitoring</li> <li>protective door monitoring</li> <li>automatic start</li> <li>magnetically operated switch monitoring NC-NO</li> <li>rotation speed monitoring</li> <li>laser scanner monitoring</li> <li>monitored start-up</li> <li>light array monitoring</li> <li>magnetically operated switch monitoring NC-NC</li> <li>EMERGENCY OFF function</li> <li>pressure-sensitive mat monitoring</li> <li>suitability for interaction press control</li> <li>suitability for use</li> <li>monitoring of floating sensors</li> <li>monitoring of non-floating sensors</li> <li>safety switch</li> <li>position switch monitoring</li> <li>EMERGENCY-OFF circuit monitoring</li> <li>valve monitoring</li> <li>tactile sensor monitoring</li> <li>magnetically operated switch monitoring</li> </ul>	No         Yes         Yes         No         Yes         No         Yes         No         No         Yes         No         Yes         No         Yes         No
<ul> <li>stranded</li> <li>Product Function</li> <li>product function</li> <li>light barrier monitoring</li> <li>standstill monitoring</li> <li>protective door monitoring</li> <li>automatic start</li> <li>magnetically operated switch monitoring NC-NO</li> <li>rotation speed monitoring</li> <li>laser scanner monitoring</li> <li>monitored start-up</li> <li>light array monitoring</li> <li>magnetically operated switch monitoring NC-NC</li> <li>EMERGENCY OFF function</li> <li>pressure-sensitive mat monitoring</li> <li>suitability for interaction press control</li> <li>suitability for use</li> <li>monitoring of floating sensors</li> <li>monitoring of non-floating sensors</li> <li>safety switch</li> <li>position switch monitoring</li> <li>EMERGENCY-OFF circuit monitoring</li> <li>valve monitoring</li> <li>tactile sensor monitoring</li> <li>magnetically operated switch monitoring</li> <li>safety-related circuits</li> </ul>	No         Yes         Yes         Yes         No         Yes         No         No         Yes         No         No         Yes         No         Yes         No         No
stranded  Product Function  product function    light barrier monitoring     standstill monitoring     protective door monitoring     automatic start     magnetically operated switch monitoring NC-NO     rotation speed monitoring     laser scanner monitoring     monitored start-up     light array monitoring     magnetically operated switch monitoring NC-NC     EMERGENCY OFF function     pressure-sensitive mat monitoring     suitability for interaction press control     suitability for use     monitoring of floating sensors     monitoring of non-floating sensors     safety switch     position switch monitoring     EMERGENCY-OFF circuit monitoring     valve monitoring     tactile sensor monitoring     magnetically operated switch monitoring     safety-related circuits     Certificates/approvals	No         Yes         Yes         Yes         No         Yes         No         No         No         No         Yes         No         Yes         No         Yes
stranded  Product Function  product function    light barrier monitoring     standstill monitoring     protective door monitoring     protective door monitoring     automatic start     magnetically operated switch monitoring NC-NO     rotation speed monitoring     laser scanner monitoring     monitored start-up     light array monitoring     magnetically operated switch monitoring NC-NC     EMERGENCY OFF function     pressure-sensitive mat monitoring     suitability for interaction press control     suitability for use     monitoring of floating sensors     monitoring of non-floating sensors     safety switch     position switch monitoring     EMERGENCY-OFF circuit monitoring     valve monitoring     tactile sensor monitoring     magnetically operated switch monitoring     safety-related circuits     Certificates/ approvals     certificate of suitability	No Yes Yes Yes No Yes No Yes No No Yes No No No No No Yes No No No Yes EN ISO 13849, EN 62061, IEC 61508
stranded  Product Function  product function    light barrier monitoring     standstill monitoring     protective door monitoring     automatic start     magnetically operated switch monitoring NC-NO     rotation speed monitoring     laser scanner monitoring     monitored start-up     light array monitoring     magnetically operated switch monitoring NC-NC     EMERGENCY OFF function     pressure-sensitive mat monitoring     suitability for interaction press control     suitability for use     monitoring of floating sensors     monitoring of non-floating sensors     safety switch     position switch monitoring     EMERGENCY-OFF circuit monitoring     valve monitoring     tactile sensor monitoring     magnetically operated switch monitoring     safety-related circuits     Certificates/approvals	No         Yes         Yes         Yes         No         Yes         No         No         No         No         Yes         No         Yes         No         Yes

BG BIA approval

No

**General Product Approval** 

Declaration of Conformity

**Test Certificates** 











Special Test Certificate

other

Railway

Confirmation

Confirmation

## **Further information**

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TK2810-1KA42

Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TK2810-1KA42


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3TK2810-1KA42

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3TK2810-1KA42&lang=en

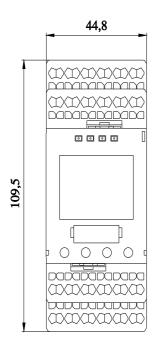

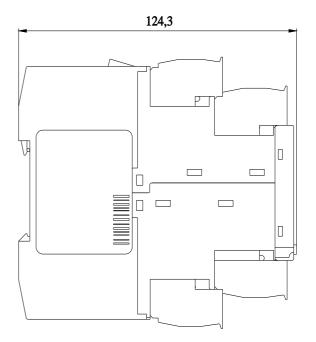

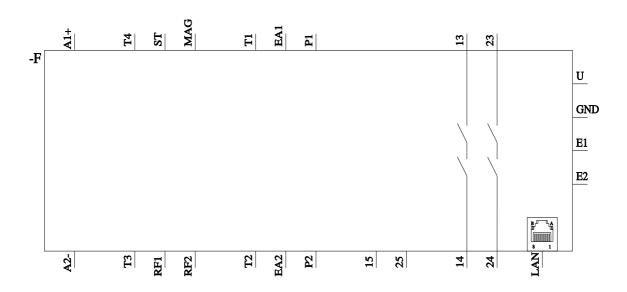

last modified: 4/11/2022 🖸