Specification





variable speed drive ATV71 - 200kW - 690V - EMC filter-graphic terminal

ATV71HC20Y

! Discontinued on: 01-Nov-2020

(!) Discontinued

Main

IVIAIII					
Range Of Product	Altivar 71				
Product Or Component Type	Variable speed drive				
Product Specific Application	Complex, high-power machines				
Component Name	ATV71				
Motor Power Kw	160 kW, 3 phases at 500 V 200 kW, 3 phases at 690 V				
Motor Power Hp	200 hp, 3 phases at 575 V				
Maximum Motor Cable Length	15 m shielded cable 30 m unshielded cable				
Power Supply Voltage	500690 V - 1510 %				
Network Number Of Phases	3 phases				
Line Current	204 A for 600 V 3 phases / 250 hp 212 A for 690 V 3 phases 200 kW 227 A for 500 V 3 phases 160 kW				
Emc Filter	Integrated				
Assembly Style	With heat sink				
Variant	Reinforced version				
Prospective Line Isc	35 kA for 3 phases				
Nominal Output Current	192 A at 2.5 kHz 575 V 3 phases / 250 hp 220 A at 2.5 kHz 690 V 3 phases 200 kW 240 A at 2.5 kHz 500 V 3 phases 160 kW				
Maximum Transient Current	360 A for 60 s 3 phases 160 kW 396 A for 2 s 3 phases / 250 hp 396 A for 2 s 3 phases 200 kW				
Output Frequency	0.1500 Hz				
Nominal Switching Frequency	2.5 kHz				
Switching Frequency	2.54.9 kHz adjustable 2.54.9 kHz with derating factor				
Asynchronous Motor Control Profile	ENA (Energy adaptation) system for unbalanced loads Voltage/frequency ratio (2 or 5 points) Sensorless flux vector control (SFVC) (voltage or current vector) Flux vector control (FVC) with sensor (current vector)				
Type Of Polarization	No impedance for Modbus				

Complementary

Product Destination Asynchronous motors
Synchronous motors

Power Supply Voltage Limits 425759 V Power Supply Frequency 5060 Hz - 55 % Power Supply Frequency Limits 47.563 Hz Speed Range 1100 for asynchronous motor in open-loop mode, without speed feedback 11000 for asynchronous motor in closed-loop mode with encoder feedback 150 for synchronous motor in open-loop mode, without speed feedback 150 for synchronous motor in open-loop mode, without speed feedback 0.2 +/- 10 % of nominal slip without speed feedback 0.2 +/- 10 % of nominal slip without speed feedback 0.2 *Th to Th Torque Accuracy +/- 10 % of nominal slip without speed feedback 0.2 *Th to Th Torque Accuracy +/- 15 % in open-loop mode, without speed feedback 0.2 *Th to Th Torque Accuracy +/- 10 % of nominal motor torque +/- 10 % for 60 s every 10 minutes 220 % of nominal motor torque +/- 10 % for 60 s every 10 minutes 220 % of nominal motor torque +/- 10 % for 2 s Braking Torque = 150 % with braking or hoist resistor 30 % without braking resistor Synchronous Motor Control Vector control without speed feedback Regulation Loop Adjustable PI regulator Motor Slip Compensation Suppressable Automatic whatever the load Not available in voltage/frequency ratio (2 or 5 points) Adjustable Automatic whatever the load Not available in voltage/frequency ratio (2 or 5 points) Adjustable Plead by the state of	
Power Supply Frequency Limits 47.563 Hz Speed Range 1100 for asynchronous motor in open-loop mode, without speed feedback 1100 for synchronous motor in closed-loop mode with encoder feedback 1100 for synchronous motor in open-loop mode, without speed feedback 1100 for synchronous motor in open-loop mode, without speed feedback 0.2 Hz 10.01 % of nominal speed in closed-loop mode with encoder feedback 0.2 Hz 10 % of nominal speed in closed-loop mode with encoder feedback 0.2 Hz 10 % of nominal speed feedback 0.2 Th to Tn Torque Accuracy +/- 15 % in open-loop mode, without speed feedback 1100 % of nominal motor torque +/- 10 % for 60 s every 10 minutes 220 % of nominal motor torque +/- 10 % for 60 s every 10 minutes 220 % of nominal motor torque +/- 10 % for 2 s Braking Torque 1750 % with braking or hoist resistor 30 % without braking resistor 4.00 % of 2 s 20 % of nominal motor torque +/- 10 % for 2 s 20 % of nominal motor torque +/- 10 % for 2 s 20 % of nominal motor torque +/- 10 % for 60 s every 10 minutes 200 % of nominal motor torque +/- 10 % for 60 s every 10 minutes 200 % of nominal motor torque +/- 10 % for 60 s every 10 minutes 200 % of nominal motor torque +/- 10 % for 60 s every 10 minutes 200 % of nominal motor torque +/- 10 % for 60 s every 10 minutes 200 % of nominal motor torque +/- 10 % for 60 s every 10 minutes 200 % of nominal motor torque +/- 10 % for 60 s every 10 minutes 200 % of for 60 s every 10 minutes 200 % of for 60 s every 10 minutes 200 % of for 60 s every 10 minutes 20 s 20 % of for 60 s every 10 minutes 20 % of for 60 s every 10 minutes 20 % of for 60 s every 10 minutes 20 % of for 60 s every 10 minutes 20 % of for 60 s every 10 minutes 20 % of for 60 s every 10 minutes 20 % of for 60 s every 10 minutes 20 % of for 60 s every 10 minutes 20 % of for 60 s every 10 minutes 20 % of for	
Speed Range 1100 for asynchronous motor in open-loop mode, without speed feedback 11000 for asynchronous motor in closed-loop mode with encoder feedback 150 for synchronous motor in open-loop mode, without speed feedback 150 for synchronous motor in open-loop mode, without speed feedback 0.2 +/- 10 % of nominal slip without speed feedback 0.2 the 10 % of nominal slip without speed feedback 0.2 the 10 % of nominal slip without speed feedback 0.2 the 10 % of nominal slip without speed feedback 0.2 the 10 % of nominal motor torque +/- 10 % for 60 s every 10 minutes 220 % of nominal motor torque +/- 10 % for 60 s every 10 minutes 220 % of nominal motor torque +/- 10 % for 2 s Braking Torque	
11000 for asynchronous motor in closed-loop mode with encoder feedback 150 for synchronous motor in closed-loop mode, without speed feedback 2.50 for synchronous motor in open-loop mode, without speed feedback 0.2 for 10 % of nominal slipe without speed feedback 0.2 for 10 % of nominal slip without speed feedback 0.2 for 10 % of nominal slip without speed feedback 2.2 for 10 for 10 % of nominal slip without speed feedback 2.2 for 10 for 10 % of nominal motor torque 4/- 10 % for 60 s every 10 minutes 220 % of nominal motor torque 4/- 10 % for 60 s every 10 minutes 220 % of nominal motor torque 4/- 10 % for 60 s every 10 minutes 220 % of nominal motor torque 4/- 10 % for 60 s every 10 minutes 220 % of nominal motor torque 4/- 10 % for 60 s every 10 minutes 220 % of nominal motor torque 4/- 10 % for 60 s every 10 minutes 220 % of nominal motor torque 4/- 10 % for 60 s every 10 minutes 220 % of nominal motor torque 4/- 10 % for 60 s every 10 minutes 220 % of nominal motor torque 4/- 10 % for 60 s every 10 minutes 220 % of nominal motor torque 4/- 10 % for 60 s every 10 minutes 220 % of nominal motor torque 4/- 10 % for 60 s every 10 minutes 220 % of nominal motor torque 4/- 10 % for 60 s every 10 minutes 220 % of nominal motor torque 4/- 10 % for 60 s every 10 minutes 220 % of nominal motor torque 4/- 10 % for 60 s every 10 minutes 220 % of nominal motor torque 4/- 10 % for 60 s every 10 minutes 220 % of nominal motor torque 4/- 10 % for 60 s every 10 minutes 220 % of nominal motor torque 4/- 10 % for 60 s every 10 minutes 220 % of nominal motor torque 4/- 10 % for 60 s every 10 minutes 220 % of nominal motor torque 4/- 10 % for 60 s every 10 minutes 220 % of nominal motor torque 4/- 10 % for 60 s every 10 minutes 220 % of nominal motor torque 4/- 10 % for 60 s every 10 minutes 220 for for for 60 for 60 s every 10 minutes 220 for for for 60 for 60 s every 10 minutes 220 for for 60 for 60 s every 10 minutes 220 for 60 for 60 s every 10 minutes 220 for 60 s every 10 minutes 220 for 60 for 60 for 60 for 60 for 60	
#/- 10 % of nominal slip without speed feedback 0.2 Tn to Tn Torque Accuracy #/- 15 % in open-loop mode, without speed feedback #/- 5 % in closed-loop mode with encoder feedback #/- 5 % in closed-loop mode with encoder feedback Transient Overtorque #/- 10 % for 60 s every 10 minutes # 220 % of nominal motor torque #/- 10 % for 60 s every 10 minutes # 220 % of nominal motor torque #/- 10 % for 60 s every 10 minutes # 220 % of nominal motor torque #/- 10 % for 60 s every 10 minutes # 220 % of nominal motor torque #/- 10 % for 60 s every 10 minutes # 220 % of nominal motor torque #/- 10 % for 60 s every 10 minutes # 220 % of nominal motor torque #/- 10 % for 60 s every 10 minutes # 220 % of nominal motor torque #/- 10 % for 60 s every 10 minutes # 220 % of nominal motor torque #/- 10 % for 60 s every 10 minutes # 220 % of nominal motor torque #/- 10 % for 60 s every 10 minutes # 220 % of nominal motor torque #/- 10 % for 60 s every 10 minutes # 220 % of nominal motor torque #/- 10 % for 60 s every 10 minutes # 220 % of nominal motor torque #/- 10 % for 60 s every 10 minutes # 220 % of nominal motor torque #/- 10 % of nominal motor torque	
## ## ## ## ## ## ## ## ## ## ## ## ##	Tn to Tn
Braking Torque = 150 % with braking or hoist resistor 30 % without braking or hoist resistor 30 % without braking resistor Vector control without speed feedback Regulation Loop Adjustable PI regulator Motor Slip Compensation Suppressable Automatic whatever the load Not available in voltage/frequency ratio (2 or 5 points) Adjustable Diagnostic 1 LED (red) for drive voltage Celectrical between power and control Type Of Cable For Mounting In An Enclosure With an IP21 or an IP31 kit: 3 wire(s)IDC cable at 40 °C, copper 75 °C / PVC Without mounting kit: 1 wire(s)IEC cable at 40 °C, copper 70 °C / PVC Without mounting kit: 1 wire(s)IEC cable at 45 °C, copper 70 °C / PVC Without mounting kit: 1 wire(s)IEC cable at 45 °C, copper 90 °C / XLPE/EPF Electrical Connection Terminal, clamping capacity: 2.5 mm², AWG 14 (Al1-/Al1+, Al2, Ao1, R1A, R1C, R2A, R2B, L1L16, PWR) Terminal, clamping capacity: 4 x 185 mm² (PC/-, PA/+) Tightening Torque 0.6 N.m (Al1-/Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, L11L16, PWR) 41 N.m, 360 lb.in (L7R, L2/S, L3/T, U/T1, V/T2, W/T3) 41 N.m, 360 lb.in (PC/-, PA/+) Supply Internal supply for reference potentiometer (1 to 10 kOhm): 10.5 V DC +/- 5 mA, protection lnternal supply: 24 V DC (2127 V), <200 mA, protection type: overload and short-circuit protection lnternal supply: 24 V DC (2127 V), <200 mA, protection type: overload and circuit protection lnternal supply: 24 V DC (2127 V), <200 mA, protection type: overload and short-circuit protection type: overload and short-circuit protection type: overload and circuit protection Analogue Input Number 2 Analogue Input Number	
Synchronous Motor Control Profile Regulation Loop Adjustable PI regulator Motor Slip Compensation Suppressable Automatic whatever the load Not available in voltage/frequency ratio (2 or 5 points) Adjustable Diagnostic 1 LED (red) for drive voltage Output Voltage Sepower supply voltage Insulation Electrical between power and control Type Of Cable For Mounting In An With a NEMA Type1 kit: 3 wire(s)UL 508 cable at 40 °C, copper 75 °C / PVC Without mounting kit: 1 wire(s)IEC cable at 40 °C, copper 70 °C / PVC Without mounting kit: 1 wire(s)IEC cable at 45 °C, copper 90 °C / XLPE/IEPF Electrical Connection Terminal, clamping capacity: 2.5 mm², AWG 14 (Al1-/Al1+, Al2, AO1, R1A, R1C, R2A, R2B, L11L16, PWR) Terminal, clamping capacity: 4 x 185 mm² (PC/-, PA/+) Tightening Torque O.6 N.m (Al1-/Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, L11L16, PWR) 41 N.m, 360 lb.in (PC/-, PA/+) Internal supply for reference potentiometer (1 to 10 kOhm): 10.5 V DC +/- 5 mA, protection type: overload and short-circuit protection internal supply: 24 V DC (2127 V), <200 mA, protection type: overload and circuit protection internal supply: 24 V DC (2127 V), <200 mA, protection type: overload and short-circuit protection internal supply: 24 V DC (2127 V), <200 mA, protection type: overload and circuit protection linernal supply: 24 V DC (2127 V), <200 mA, protection type: overload and circuit protection linernal supply: 24 V DC (2127 V), <200 mA, protection type: overload and circuit protection linernal supply: 24 V DC (2127 V), <200 mA, protection type: overload and circuit protection linernal supply: 24 V DC (2127 V), <200 mA, protection type: overload and circuit protection linernal supply: 24 V DC (2127 V), <200 mA, protection type: overload and circuit protection linernal supply: 24 V DC (2127 V), <200 mA, protection type: overload and circuit protection linernal supply: 24 V DC (2127 V), <200 mA, impedance: 242 Ohm, resolution bits	
Profile Regulation Loop Adjustable PI regulator Suppressable Automatic whatever the load Not available in voltage/frequency ratio (2 or 5 points) Adjustable Diagnostic 1 LED (red) for drive voltage Insulation Electrical between power and control Type Of Cable For Mounting In An Enclosure With a NEMA Type1 kit: 3 wire(s)UL 508 cable at 40 °C, copper 75 °C / PVC Without mounting kit: 1 wire(s)IEC cable at 40 °C, copper 70 °C / PVC Without mounting kit: 1 wire(s)IEC cable at 45 °C, copper 70 °C / PVC Without mounting kit: 1 wire(s)IEC cable at 45 °C, copper 90 °C / XLPE/EPF Electrical Connection Terminal, clamping capacity: 2.5 mm², AWG 14 (Al1-/Al1+, Al2, AO1, R1A, R1C, R2A, R2B, L11LIC, PWR) Terminal, clamping capacity: 4 x 185 mm² (L1/R, L2/S, L3/T, U/T1, V/T2, W/Terminal, clamping capacity: 4 x 185 mm² (PC/-, PA/+) Tightening Torque 0.6 N.m (Al1-/Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, L11LIC, PWR) 41 N.m, 360 lb.in (L1/R, L2/S, L3/T, U/T1, V/T2, W/T3) 41 N.m, 360 lb.in (PC/-, PA/+) Supply Internal supply for reference potentiometer (1 to 10 kOhm): 10.5 V DC +/-5 mA, protection type: overload and short-circuit protection Internal supply: 24 V DC (2127 V), <200 mA, protection type: overload and circuit protection Internal supply: 24 V DC (2127 V), <200 mA, protection type: overload incircuit protection Analogue Input Number 2 Analogue Input Type Al1-/Al1+ bipolar differential voltage: +/- 10 V DC 24 V max, resolution 11 bit Al2 software-configurable current: 020 mA, impedance: 242 Ohm, resolution bits	
Motor Slip Compensation Suppressable Automatic whatever the load Not available in voltage/frequency ratio (2 or 5 points) Adjustable Diagnostic 1 LED (red) for drive voltage = power supply voltage Insulation Electrical between power and control Type Of Cable For Mounting In An Enclosure With a NEMA Type1 kit: 3 wire(s)UL 508 cable at 40 °C, copper 75 °C / PVC Without mounting kit: 1 wire(s)IEC cable at 40 °C, copper 70 °C / PVC Without mounting kit: 1 wire(s)IEC cable at 45 °C, copper 70 °C / PVC Without mounting kit: 1 wire(s)IEC cable at 45 °C, copper 90 °C / XLPE/EPF Electrical Connection Terminal, clamping capacity: 2.5 mm², AWG 14 (AII-/AII+, AI2, AO1, R1A, R1C, R2A, R2B, L11L16, PWR) Terminal, clamping capacity: 4 x 185 mm² (PCI-, PAI+) Tightening Torque 0.6 N.m (AI1-/AII+, AI2, AO1, R1A, R1B, R1C, R2A, R2B, L11L16, PWR) 41 N.m, 360 lb.in (L1/R, L2/S, L3/T, U/T1, V/T2, W/T3) 41 N.m, 360 lb.in (PC/-, PAI+) Supply Internal supply for reference potentiometer (1 to 10 kOhm): 10.5 V DC +/-5 mA, protection type: overload and short-circuit protection Internal supply: 24 V DC (2127 V), <200 mA, protection type: overload and circuit protection Analogue Input Number 2 Analogue Input Type Al1-/AI1+ bipolar differential voltage: +/- 10 V DC 24 V max, resolution 11 bit AI2 software-configurable current: 020 mA, impedance: 242 Ohm, resolutio bits	
Automatic whatever the load Not available in voltage/frequency ratio (2 or 5 points) Adjustable Diagnostic 1 LED (red) for drive voltage Output Voltage = power supply voltage Insulation Electrical between power and control Type Of Cable For Mounting In An Enclosure With a NEMA Type1 kit: 3 wire(s)UL 508 cable at 40 °C, copper 75 °C / PVC Without mounting kit: 1 wire(s)IEC cable at 40 °C, copper 70 °C / PVC Without mounting kit: 1 wire(s)IEC cable at 45 °C, copper 70 °C / PVC Without mounting kit: 1 wire(s)IEC cable at 45 °C, copper 90 °C / XLPE/EPF Electrical Connection Terminal, clamping capacity: 2.5 mm², AWG 14 (Al1-/Al1+, Al2, AO1, R1A, R1C, R2A, R2B, L11L16, PWR) Terminal, clamping capacity: 4 x 185 mm² (L1/R, L2/S, L3/T, U/T1, V/T2, W/Terminal, clamping capacity: 4 x 185 mm² (PC/-, PA/+) Tightening Torque 0.6 N.m (Al1-/Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, L11L16, PWR) 41 N.m, 360 lb.in (L1/R, L2/S, L3/T, U/T1, V/T2, W/T3) 41 N.m, 360 lb.in (PC/-, PA/+) Supply Internal supply for reference potentiometer (1 to 10 kOhm): 10.5 V DC +/- 5 mA, protection type: overload and short-circuit protection Internal supply: 24 V DC (2127 V), <200 mA, protection type: overload and circuit protection Analogue Input Number 2 Analogue Input Type Al1-/Al1+ bipolar differential voltage: +/- 10 V DC 24 V max, resolution 11 bit Al2 software-configurable current: 020 mA, impedance: 242 Ohm, resolutio bits	
Output Voltage Insulation Electrical between power and control	
Insulation Electrical between power and control Type Of Cable For Mounting In An Enclosure With a NEMA Type1 kit: 3 wire(s)ILC cable at 40 °C, copper 75 °C / PVC Without mounting kit: 1 wire(s)IEC cable at 40 °C, copper 70 °C / PVC Without mounting kit: 1 wire(s)IEC cable at 45 °C, copper 70 °C / PVC Without mounting kit: 1 wire(s)IEC cable at 45 °C, copper 90 °C / XLPE/EPF Electrical Connection Terminal, clamping capacity: 2.5 mm², AWG 14 (Al1-/Al1+, Al2, AO1, R1A, R1C, R2A, R2B, L11L16, PWR) Terminal, clamping capacity: 4 x 185 mm² (L1/R, L2/S, L3/T, U/T1, V/T2, W/Terminal, clamping capacity: 4 x 185 mm² (PC/-, PA/+) Tightening Torque 0.6 N.m (Al1-/Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, L11L16, PWR) 41 N.m, 360 lb.in (L1/R, L2/S, L3/T, U/T1, V/T2, W/T3) 41 N.m, 360 lb.in (PC/-, PA/+) Supply Internal supply for reference potentiometer (1 to 10 kOhm): 10.5 V DC +/- 5 mA, protection type: overload and short-circuit protection Internal supply: 24 V DC (2127 V), <200 mA, protection type: overload and circuit protection Analogue Input Number 2 Analogue Input Type Al1-/Al1+ bipolar differential voltage: +/- 10 V DC 24 V max, resolution 11 bit Al2 software-configurable current: 020 mA, impedance: 242 Ohm, resolution bits	
Type Of Cable For Mounting In An Enclosure With a NEMA Type1 kit: 3 wire(s)UL 508 cable at 40 °C, copper 75 °C / PVC With an IP21 or an IP31 kit: 3 wire(s)IEC cable at 40 °C, copper 70 °C / PVC Without mounting kit: 1 wire(s)IEC cable at 45 °C, copper 70 °C / PVC Without mounting kit: 1 wire(s)IEC cable at 45 °C, copper 90 °C / XLPE/EPF Electrical Connection Terminal, clamping capacity: 2.5 mm², AWG 14 (Al1-/Al1+, Al2, AO1, R1A, R1C, R2A, R2B, L11LI6, PWR) Terminal, clamping capacity: 4 x 185 mm² (L1/R, L2/S, L3/T, U/T1, V/T2, W/Terminal, clamping capacity: 4 x 185 mm² (PC/-, PA/+) Tightening Torque 0.6 N.m (Al1-/Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, L11LI6, PWR) 41 N.m, 360 lb.in (L1/R, L2/S, L3/T, U/T1, V/T2, W/T3) 41 N.m, 360 lb.in (PC/-, PA/+) Supply Internal supply for reference potentiometer (1 to 10 kOhm): 10.5 V DC +/-5 mA, protection type: overload and short-circuit protection Internal supply: 24 V DC (2127 V), <200 mA, protection type: overload and circuit protection Internal Supply: 24 V DC (2127 V), <200 mA, protection type: overload and circuit protection Analogue Input Number 2 Analogue Input Type Al1-/Al1+ bipolar differential voltage: +/- 10 V DC 24 V max, resolution 11 bit Al2 software-configurable current: 020 mA, impedance: 242 Ohm, resolution bits	
With an IP21 or an IP31 kit: 3 wire(s)IEC cable at 40 °C, copper 70 °C / PVC Without mounting kit: 1 wire(s)IEC cable at 45 °C, copper 70 °C / PVC Without mounting kit: 1 wire(s)IEC cable at 45 °C, copper 90 °C / XLPE/EPF Electrical Connection Terminal, clamping capacity: 2.5 mm², AWG 14 (Al1-/Al1+, Al2, AO1, R1A, R1C, R2A, R2B, L11L16, PWR) Terminal, clamping capacity: 4 x 185 mm² (L1/R, L2/S, L3/T, U/T1, V/T2, W/Terminal, clamping capacity: 4 x 185 mm² (PC/-, PA/+) Tightening Torque 0.6 N.m (Al1-/Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, L11L16, PWR) 41 N.m, 360 lb.in (L1/R, L2/S, L3/T, U/T1, V/T2, W/T3) 41 N.m, 360 lb.in (PC/-, PA/+) Supply Internal supply for reference potentiometer (1 to 10 kOhm): 10.5 V DC +/- 5 mA, protection type: overload and short-circuit protection Internal supply: 24 V DC (2127 V), <200 mA, protection type: overload and circuit protection Analogue Input Number 2 Analogue Input Type Al1-/Al1+ bipolar differential voltage: +/- 10 V DC 24 V max, resolution 11 bit Al2 software-configurable current: 020 mA, impedance: 242 Ohm, resolution bits	
R1C, R2A, R2B, L11Ll6, PWR) Terminal, clamping capacity: 4 x 185 mm² (L1/R, L2/S, L3/T, U/T1, V/T2, W/Terminal, clamping capacity: 4 x 185 mm² (PC/-, PA/+) Tightening Torque 0.6 N.m (Al1-/Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, L11Ll6, PWR) 41 N.m, 360 lb.in (L1/R, L2/S, L3/T, U/T1, V/T2, W/T3) 41 N.m, 360 lb.in (PC/-, PA/+) Supply Internal supply for reference potentiometer (1 to 10 kOhm): 10.5 V DC +/- 5 mA, protection type: overload and short-circuit protection Internal supply: 24 V DC (2127 V), <200 mA, protection type: overload and circuit protection Analogue Input Number 2 Analogue Input Type Al1-/Al1+ bipolar differential voltage: +/- 10 V DC 24 V max, resolution 11 bit Al2 software-configurable current: 020 mA, impedance: 242 Ohm, resolution bits	;
41 N.m, 360 lb.in (L1/R, L2/S, L3/T, U/T1, V/T2, W/T3) 41 N.m, 360 lb.in (PC/-, PA/+) Supply Internal supply for reference potentiometer (1 to 10 kOhm): 10.5 V DC +/- 5 mA, protection type: overload and short-circuit protection Internal supply: 24 V DC (2127 V), <200 mA, protection type: overload and circuit protection Analogue Input Number 2 Analogue Input Type Al1-/Al1+ bipolar differential voltage: +/- 10 V DC 24 V max, resolution 11 bit Al2 software-configurable current: 020 mA, impedance: 242 Ohm, resolution bits	
mA, protection type: overload and short-circuit protection Internal supply: 24 V DC (2127 V), <200 mA, protection type: overload and circuit protection Analogue Input Number 2 Analogue Input Type Al1-/Al1+ bipolar differential voltage: +/- 10 V DC 24 V max, resolution 11 bit Al2 software-configurable current: 020 mA, impedance: 242 Ohm, resolution bits	
Analogue Input Type Al1-/Al1+ bipolar differential voltage: +/- 10 V DC 24 V max, resolution 11 bit Al2 software-configurable current: 020 mA, impedance: 242 Ohm, resolution bits	
Al2 software-configurable current: 020 mA, impedance: 242 Ohm, resolution bits	
resolution 11 bits	on 11
Input Sampling Time 2 ms +/- 0.5 ms (Al1-/Al1+) - analog input(s) 2 ms +/- 0.5 ms (Al2) - analog input(s) 2 ms +/- 0.5 ms (Ll1Ll5) - discrete input(s) 2 ms +/- 0.5 ms (Ll6)if configured as logic input - discrete input(s)	
Response Time <= 100 ms in STO (Safe Torque Off) AO1 2 ms, tolerance +/- 0.5 ms for analog output(s) R1A, R1B, R1C 7 ms, tolerance +/- 0.5 ms for discrete output(s) R2A, R2B 7 ms, tolerance +/- 0.5 ms for discrete output(s)	
Absolute Accuracy Precision +/- 0.6 % (Al1-/Al1+) for a temperature variation 60 °C +/- 0.6 % (Al2) for a temperature variation 60 °C +/- 1 % (AO1) for a temperature variation 60 °C	
Linearity Error +/- 0.15 % of maximum value (Al1-/Al1+, Al2) +/- 0.2 % (AO1)	

Analogue Output Number	1						
Analogue Output Type	AO1 software-configurable logic output 10 V 20 mA AO1 software-configurable current 020 mA, impedance: 500 Ohm, resolution 10 bits AO1 software-configurable voltage 010 V DC, impedance: 470 Ohm, resolution 10 bits						
Discrete Output Number	2						
Discrete Output Type	Configurable relay logic: (R1A, R1B, R1C) NO/NC - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles						
Minimum Switching Current	3 mA at 24 V DC for configurable relay logic						
Maximum Switching Current	R1, R2: 2 A at 250 V AC inductive load, cos phi = 0.4 R1, R2: 2 A at 30 V DC inductive load, cos phi = 0.4 R1, R2: 5 A at 250 V AC resistive load, cos phi = 1 R1, R2: 5 A at 30 V DC resistive load, cos phi = 1						
Discrete Input Number	7						
Discrete Input Type	LI1LI5: programmable 24 V DC with level 1 PLC, impedance: 3500 Ohm LI6: switch-configurable 24 V DC with level 1 PLC, impedance: 3500 Ohm LI6: switch-configurable PTC probe 06, impedance: 1500 Ohm PWR: safety input 24 V DC, impedance: 1500 Ohm conforming to ISO 13849-1 level d						
Discrete Input Logic	Negative logic (sink) (LI1LI5), > 16 V (state 0), < 10 V (state 1) Positive logic (source) (LI1LI5), < 5 V (state 0), > 11 V (state 1) Negative logic (sink) (LI6)if configured as logic input, > 16 V (state 0), < 10 V (state 1) Positive logic (source) (LI6)if configured as logic input, < 5 V (state 0), > 11 V (state 1)						
Acceleration And Deceleration Ramps	S, U or customized Linear adjustable separately from 0.01 to 9000 s Automatic adaptation of ramp if braking capacity exceeded, by using resistor						
Braking To Standstill	By DC injection						
Protection Type	Against exceeding limit speed: drive Against input phase loss: drive Break on the control circuit: drive Input phase breaks: drive Line supply overvoltage: drive Line supply undervoltage: drive Overcurrent between output phases and earth: drive Overheating protection: drive Overvoltages on the DC bus: drive Short-circuit between motor phases: drive Thermal protection: drive Motor phase break: motor Power removal: motor Thermal protection: motor						
Insulation Resistance	> 1 mOhm 500 V DC for 1 minute to earth						
Frequency Resolution	Analog input: 0.024/50 Hz Display unit: 0.1 Hz						
Communication Port Protocol	CANopen Modbus						
Connector Type	1 RJ45 (on front face) for Modbus 1 RJ45 (on terminal) for Modbus Male SUB-D 9 on RJ45 for CANopen						
Physical Interface	2-wire RS 485 for Modbus						
Transmission Frame	RTU for Modbus						
Transmission Rate	4800 bps, 9600 bps, 19200 bps, 38.4 Kbps for Modbus on terminal 9600 bps, 19200 bps for Modbus on front face 20 kbps, 50 kbps, 125 kbps, 250 kbps, 500 kbps, 1 Mbps for CANopen						
Data Format	8 bits, 1 stop, even parity for Modbus on front face 8 bits, odd even or no configurable parity for Modbus on terminal						
Number Of Addresses	1127 for CANopen 1247 for Modbus						

Method Of Access	Slave CANopen				
Marking	CE				
Operating Position	Vertical +/- 10 degree				
Height	1190 mm				
Depth	377 mm				
Width	595 mm				
Net Weight	207 kg				
Option Card	Communication card for CC-Link Controller inside programmable card Communication card for DeviceNet Communication card for EtherNet/IP Communication card for Fipio I/O extension card Communication card for Interbus-S Interface card for encoder Communication card for Modbus Plus Communication card for Modbus TCP Communication card for Modbus/Uni-Telway Overhead crane card Communication card for Profibus DP				

Environment

Noise Level	77 dB conforming to 86/188/EEC						
Dielectric Strength	3110 V DC between earth and power terminals 5345 V DC between control and power terminals						
Electromagnetic Compatibility	1.2/50 µs - 8/20 µs surge immunity test level 3 conforming to IEC 61000-4-5 Conducted radio-frequency immunity test level 3 conforming to IEC 61000-4-6 Electrical fast transient/burst immunity test level 4 conforming to IEC 61000-4-4 Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test level 3 conforming to IEC 61000-4-3 Voltage dips and interruptions immunity test conforming to IEC 61000-4-11						
Standards	EN 61800-3 environments 1 category C3 EN 55011 class A group 2 IEC 60721-3-3 class 3C2 EN 61800-3 environments 2 category C3 EN/IEC 61800-3 UL Type 1 EN/IEC 61800-5-1						
Product Certifications	NOM 117 CSA UL C-Tick GOST						
Pollution Degree	2 conforming to EN/IEC 61800-5-1 3 conforming to UL 840						
Ip Degree Of Protection	IP41 on upper part conforming to EN/IEC 60529 IP41 on upper part conforming to EN/IEC 61800-5-1 IP54 on lower part conforming to EN/IEC 60529 IP54 on lower part conforming to EN/IEC 61800-5-1 IP00 conforming to EN/IEC 60529 IP00 conforming to EN/IEC 61800-5-1 IP30 on side parts conforming to EN/IEC 60529 IP30 on side parts conforming to EN/IEC 61800-5-1 IP30 on the front panel conforming to EN/IEC 60529 IP30 on the front panel conforming to EN/IEC 61800-5-1						
Vibration Resistance	0.6 gn (f= 10200 Hz) conforming to EN/IEC 60068-2-6 1.5 mm peak to peak (f= 310 Hz) conforming to EN/IEC 60068-2-6						
Shock Resistance	4 gn for 11 ms conforming to EN/IEC 60068-2-27						

Relative Humidity	595 % without condensation conforming to IEC 60068-2-3 595 % without dripping water conforming to IEC 60068-2-3			
Ambient Air Temperature For Operation	-1050 °C (without derating)			
Ambient Air Temperature For Storage	-2570 °C			
Operating Altitude	<= 1000 m without derating 10002260 m with current derating 1 % per 100 m			

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	54.0 cm
Package 1 Width	43.0 cm
Package 1 Length	123.0 cm
Package 1 Weight	180.0 kg
Unit Type Of Package 2	PAL
Number Of Units In Package 2	1
Package 2 Height	53.34 cm
Package 2 Width	129.54 cm
Package 2 Length	62.23 cm
Package 2 Weight	185.066 kg

Contractual warranty

Warranty 18 months



Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



RoHS/REACh

Well-being performance



Mercury Free



Rohs Exemption Information

Yes


Certifications & Standards

Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)			
	EU RoHS Declaration			
China Rohs Regulation	China RoHS declaration			
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins			

Dimensions Drawings

UL Type 1/IP 20 Drives

Dimensions with or without 1 Option Card (1)



Dimensions in mm


а	b	С	G	Н	K	K1	K2	Ø
595	1190	377	540	920	150	75	30	11.5

Dimensions in in.

а	b	С	G	Н	K	K1	K2	Ø
23.43	46.85	14.84	21.26	36.22	5.90	2.95	1.18	0.45

 $(1) \ Option \ cards: I/O \ extension \ cards, \ communication \ cards \ or \ "Controller \ Inside" \ programmable \ card.$

Dimensions with 2 Option Cards (1)

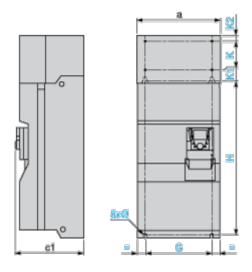

Dimensions in mm

а	с1	G	Н	K	K1	K2	Ø
595	392	540	920	150	75	30	11.5

Dimensions in in.


ATV71HC20Y

а	ı	c1	G	Н	K	K1	K2	Ø
2	3.43	15.43	21.26	36.22	5.90	2.95	1.18	0.45

(1) Option cards: I/O extension cards, communication cards or "Controller Inside" programmable card.


Drive with Braking Unit VW3A7101

Dimensions with or without 1 Option Card (1)



b in mm	c in mm	b in in.	c in in.
1190	377	46.85	14.84

(1) Option cards: I/O extension cards, communication cards or "Controller Inside" programmable card. Dimensions with 2 Option Cards (1)




c1 in mm	c1 in in.	
392	15.43	

(1) Option cards: I/O extension cards, communication cards or "Controller Inside" programmable card.

Mounting and Clearance


Mounting Recommendations


Clearance



X1 in mm	X2 in mm	X1 in in.	X2 in in.
150	200	5.91	7.87

These drives can be mounted side by side, observing the following mounting recommendations:






ATV71HC20Y

Specific Recommendations for Mounting the Drive in an Enclosure

Ventilation

To ensure proper air circulation in the drive:

- Fit ventilation grilles.
- Ensure that there is sufficient ventilation. If there is not, install a forced ventilation unit with a filter. The
 openings and/or fans must provide a flow rate at least equal to that of the drive fans (refer to the product
 characteristics).



- Use special filters with IP 54 protection.
- Remove the blanking cover from the top of the drive.

Dust and Damp Proof Metal Enclosure (IP 54)


The drive must be mounted in a dust and damp proof enclosure in certain environmental conditions: dust, corrosive gases, high humidity with risk of condensation and dripping water, splashing liquid, etc.

This enables the drive to be used in an enclosure where the maximum internal temperature reaches 50°C.

Connections and Schema

Wiring Diagram Conforming to Standards EN 954-1 Category 1, IEC/EN 61508 Capacity SIL1, in Stopping Category 0 According to IEC/EN 60204-1

Three-Phase Power Supply with Upstream Breaking via Contactor

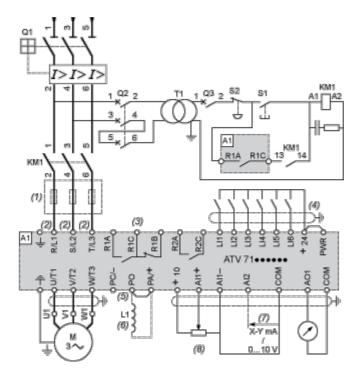

A1 ATV71 drive

KM1 Contactor

- L1 DC choke
- Q1 Circuit-breaker
- Q2 GV2 L rated at twice the nominal primary current of T1
- Q3 GB2CB05
- S1, S2 XB4 B or XB5 A pushbuttons
- T1 100 VA transformer 220 V secondary
- (1) Line choke (three-phase); mandatory for ATV71HC11Y...HC63Y drives (except when a special transformer is used (12-pulse)).
- (2) For ATV71HC40N4 drives combined with a 400 kW motor, ATV71HC50N4 and ATV71HC40Y...HC63Y, refer to the power terminal connections diagram.
- $\hbox{(3)} \quad \hbox{Fault relay contacts. Used for remote signalling of the drive status.}$
- (4) Connection of the common for the logic inputs depends on the positioning of the SW1 switch. The above diagram shows the internal power supply switched to the "source" position (for other connection types, refer to the user guide).
- (5) There is no PO terminal on ATV71HC11Y...HC63Y drives.
- (6) Optional DC choke for ATV71H•••M3, ATV71HD11M3X...HD45M3X, ATV71•075N4...•D75N4 and ATV71P•••N4Z drives. Connected in place of the strap between the PO and PA/+ terminals. For ATV71HD55M3X, HD75M3X, ATV71HD90N4...HC50N4 drives, the choke is supplied with the drive; the customer is responsible for connecting it.
- (7) Software-configurable current (0...20 mA) or voltage (0...10 V) analog input.
- (8) Reference potentiometer.


ATV71HC20Y

All terminals are located at the bottom of the drive. Fit interference suppressors on all inductive circuits near the drive or connected on the same circuit, such as relays, contactors, solenoid valves, fluorescent lighting, etc.

05-Jun-2024

Wiring Diagram Conforming to Standards EN 954-1 Category 1, IEC/EN 61508 Capacity SIL1, in Stopping Category 0 According to IEC/EN 60204-1

Three-Phase Power Supply with Downstream Breaking via Switch Disconnector

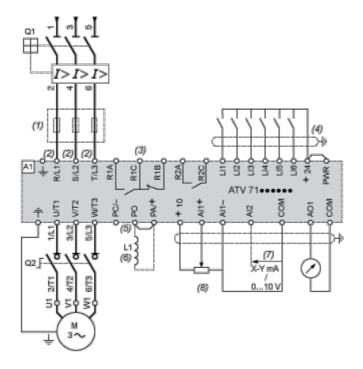


- A1 ATV71 drive
- L1 DC choke
- Q1 Circuit-breaker
- Q2 Switch disconnector (Vario)
- (1) Line choke (three-phase), mandatory for ATV71HC11Y...HC63Y drives (except when a special transformer is used (12-pulse)).
- (2) For ATV71HC40N4 drives combined with a 400 kW motor, ATV71HC50N4 and ATV71HC40Y...HC63Y, refer to the power terminal connections diagram.
- (3) Fault relay contacts. Used for remote signalling of the drive status.
- (4) Connection of the common for the logic inputs depends on the positioning of the SW1 switch. The above diagram shows the internal power supply switched to the "source" position (for other connection types, refer to the user guide).
- (5) There is no PO terminal on ATV71HC11Y...HC63Y drives.
- (6) Optional DC choke for ATV71H•••M3, ATV71HD11M3X...HD45M3X, ATV71•075N4...•D75N4 and ATV71P•••N4Z drives. Connected in place of the strap between the PO and PA/+ terminals. For ATV71HD55M3X, HD75M3X, ATV71HD90N4...HC50N4 drives, the choke is supplied with the drive; the customer is responsible for connecting it.
- (7) Software-configurable current (0...20 mA) or voltage (0...10 V) analog input.
- (8) Reference potentiometer.

All terminals are located at the bottom of the drive. Fit interference suppressors on all inductive circuits near the drive or connected on the same circuit, such as relays, contactors, solenoid valves, fluorescent lighting, etc.

Wiring Diagram Conforming to Standards EN 954-1 Category 3, IEC/EN 61508 Capacity SIL2, in Stopping Category 0 According to IEC/EN 60204-1

Three-Phase Power Supply, Low Inertia Machine, Vertical Movement

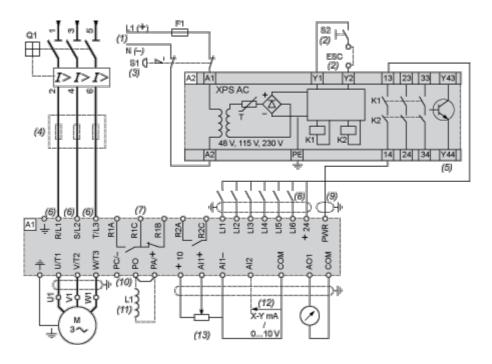

A1 ATV71 drive

- A2 Preventa XPS AC safety module for monitoring emergency stops and switches. One safety module can manage the "Power Removal" function for several drives on the same machine. In this case, each drive must connect its PWR terminal to its + 24 V via the safety contacts on the XPS AC module. These contacts are independent for each drive.
- F1 Fuse
- L1 DC choke
- Q1 Circuit-breaker
- S1 Emergency stop button with 2 contacts
- S2 XB4 B or XB5 A pushbutton
- (1) Power supply: 24 Vdc or Vac, 48 Vac, 115 Vac, 230 Vac.
- (2) S2: resets XPS AC module on power-up or after an emergency stop. ESC can be used to set external starting conditions.
- (3) Requests freewheel stopping of the movement and activates the "Power Removal" safety function.
- (4) Line choke (three-phase), mandatory for and ATV71HC11Y...HC63Y drives (except when a special transformer is used (12-pulse)).
- (5) The logic output can be used to signal that the machine is in a safe stop state.
- (6) For ATV71HC40N4 drives combined with a 400 kW motor, ATV71HC50N4 and ATV71HC40Y...HC63Y, refer to the power terminal connections diagram.
- (7) Fault relay contacts. Used for remote signalling of the drive status.
- (8) Connection of the common for the logic inputs depends on the positioning of the SW1 switch. The above diagram shows the internal power supply switched to the "source" position (for other connection types, refer to the user guide).
- (9) Standardized coaxial cable, type RG174/U according to MIL-C17 or KX3B according to NF C 93-550, external diameter 2.54 mm /0.09 in., maximum length 15 m / 49.21 ft. The cable shielding must be earthed.
- (10) There is no PO terminal on ATV71HC11Y...HC63Y drives.
- (11) Optional DC choke for ATV71H•••M3, ATV71HD11M3X...HD45M3X, ATV71•075N4...•D75N4 and ATV71P•••N4Z drives. Connected in place of the strap between the PO and PA/+ terminals. For ATV71HD55M3X,

ATV71HC20Y


HD75M3X, ATV71HD90N4...HC50N4 drives, the choke is supplied with the drive; the customer is responsible for connecting it.

- (12) Software-configurable current (0...20 mA) or voltage (0...10 V) analog input.
- (13) Reference potentiometer.

All terminals are located at the bottom of the drive. Fit interference suppressors on all inductive circuits near the drive or connected on the same circuit, such as relays, contactors, solenoid valves, fluorescent lighting, etc.

Wiring Diagram Conforming to Standards EN 954-1 Category 3, IEC/EN 61508 Capacity SIL2, in Stopping Category 1 According to IEC/EN 60204-1

Three-Phase Power Supply, High Inertia Machine

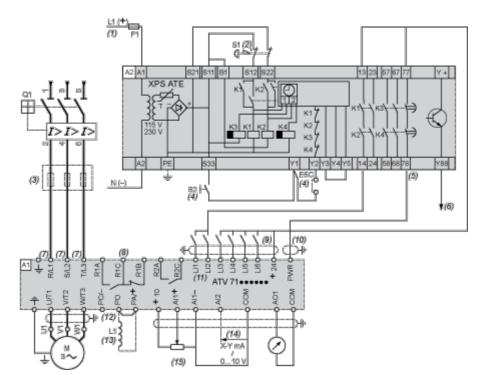

A1 ATV71 drive

A2 (5) Preventa XPS ATE safety module for monitoring emergency stops and switches. One safety module can manage the "Power Removal" safety function for several drives on the same machine. In this case the time delay must be adjusted on the drive controlling the motor that requires the longest stopping time. In addition, each drive must connect its PWR terminal to its + 24 V via the safety contacts on the XPS ATE module. These contacts are independent for each drive.

- F1 Fuse
- L1 DC choke
- Q1 Circuit-breaker
- S1 Emergency stop button with 2 N/C contacts
- S2 Run button
- (1) Power supply: 24 Vdc or Vac, 115 Vac, 230 Vac.
- (2) Requests controlled stopping of the movement and activates the "Power Removal" safety function.
- (3) Line choke (three-phase), mandatory for ATV71HC11Y...HC63Y drives (except when a special transformer is used (12-pulse)).
- (4) S2: resets XPS ATE module on power-up or after an emergency stop. ESC can be used to set external starting conditions.
- (5) For stopping times requiring more than 30 seconds in category 1, use a Preventa XPS AV safety module which can provide a maximum time delay of 300 seconds.
- (6) The logic output can be used to signal that the machine is in a safe state.
- (7) For ATV71HC40N4 drives combined with a 400 kW motor, ATV71HC50N4 and ATV71HC40Y...HC63Y, refer to the power terminal connections diagram.
- (8) Fault relay contacts. Used for remote signalling of the drive status.

ATV71HC20Y

- (9) Connection of the common for the logic inputs depends on the positioning of the SW1 switch. The above diagram shows the internal power supply switched to the "source" position (for other connection types, refer to the user guide).
- (10) Standardized coaxial cable, type RG174/U according to MIL-C17 or KX3B according to NF C 93-550, external diameter 2.54 mm/0.09 in., maximum length 15 m/49.21 ft. The cable shielding must be earthed.
- (11) Logic inputs LI1 and LI2 must be assigned to the direction of rotation: LI1 in the forward direction and LI2 in the reverse direction.
- (12) There is no PO terminal on ATV71HC11Y...HC63Y drives.
- (13) Optional DC choke for ATV71H•••M3, ATV71HD11M3X...HD45M3X, ATV71•075N4...•D75N4 and ATV71P•••N4Z drives. Connected in place of the strap between the PO and PA/+ terminals. For ATV71HD55M3X, HD75M3X, ATV71HD90N4...HC50N4 drives, the choke is supplied with the drive; the customer is responsible for connecting it.
- (14) Software-configurable current (0...20 mA) or voltage (0...10 V) analog input.
- (15) Reference potentiometer.


All terminals are located at the bottom of the drive. Fit interference suppressors on all inductive circuits near the drive or connected on the same circuit, such as relays, contactors, solenoid valves, fluorescent lighting, etc.

ATV71HC20Y

Performance Curves

Derating Curves

The derating curves for the drive nominal current (In) depend on the temperature and the switching frequency. For intermediate temperatures (e.g. 55° C), interpolate between 2 curves.



X Switching frequency