

General and Heavy Duty Safety Switches

Accessories

Selection



HR612

Class R Fuse Clip Kits

All General Duty and Heavy Duty Switches are field convertible to accept Class R Fuse Clip Kits. The kits prevent the installation of Class H and K fuses (one kit required per 3-pole switch).

Class R Fuse Clip Kits

| Catalog Number | Description |
|----------------|-------------------------|
| HR21A | 30A, 240V Kit (GD only) |
| HR21 | 30A, 240V Kit (HD only) |
| HR612 | 30A, 600V Kit |
| HR22A | 60A 240V Kit (GD only) |
| HR62 | 60A, 600V Kit |
| HR63 | 100A Kit |
| HR64 | 200A Kit |
| HR65A | 400A Kit |
| HR66A | 600A Kit |

Class J Fusing

All 30-600A, 600V and 100-600A, 240V fusible Heavy Duty Switches are field convertible to accept Class J fuses by moving the load base to a pre-drilled J fuse position. All 100-600A, 240V fusible General Duty switches can also be field converted to accept Class J fuses.

Class J Fuse Kits

| Catalog Number | Description |
|----------------|---------------------|
| HJ66A | 600A, 240V/600V Kit |

Internal Shield Kits (for fusible switches)

Kits provide a clear plastic inner door to prevent accidental contact with live parts. Test probe holes are provided and fuses can be replaced without removal of kit.

Internal Shield Kits[®]

| Switch Ampere Rating | Kit Catalog Number |
|----------------------|--------------------|
| 30A HD | HSK61SSW |
| 60A HD | HSK62SSW |
| 100A HD | HSK63SSW |
| 200A HD | HSK64SSW |



HT63

Class T Fuse Adapter Kits

All 100-600A, General Duty and 100-200Amp and 1200Amp Heavy Duty Switches are field convertible to accept Class T fuses.

Class T Fuse Adapter Kits[®]

| Catalog Number | Description |
|----------------|-----------------|
| HT23 | 100A, 240V Kit |
| HT63 | 100A, 600V Kit |
| HT24 | 200A, 240V Kit |
| HT64▲ | 200A, 600V Kit |
| HT25A | 400A, 240V Kit |
| HT65A | 400A, 600V Kit |
| HT26A | 600A, 240V Kit |
| HT66A | 600A, 600V Kit |
| TFAK72 | 800A, 240V Kit |
| TFAK75 | 800A, 600V Kit |
| TFAK82 | 1200A, 240V Kit |



HN612

Neutral Kits

Standard Neutral Kits can be field installed in General and Heavy Duty Switches.

Neutral Kits

| Switch Ampere Rating | Kit Catalog Number |
|----------------------|--------------------|
| 30 GD | n/a |
| 30 HD | HN612 |
| 60 GD | HN22A |
| 60, 100 HD, 100 GD | HN623 |
| 200 | HN64 |
| 400 & 600 | HN656A |
| 800 & 1200 | HN678 |




HN264

200% Neutral Kits

UL listed 200% Neutrals are available on 100-600A Heavy Duty Switches. They are typically used with non-linear transformers or where increased neutral ampacity/lug capacity is required.

200% Neutral Kits

| Switch Ampere Rating | Kit Catalog Number | Wire Range Line & Load Lugs (Cu/Al) |
|----------------------|--------------------|---|
| 100 | HN263 | (2) #14-1/0 AWG |
| 200 | HN264 | (2) #6 AWG-300 Kcmil |
| 400 | HN656A | (2) 1/0 AWG-600 Kcmil (2) #6 AWG-300 Kcmil |
| 600 | HN678A | (2) 1/0 AWG-600 Kcmil (2) #6 AWG-300 Kcmil |

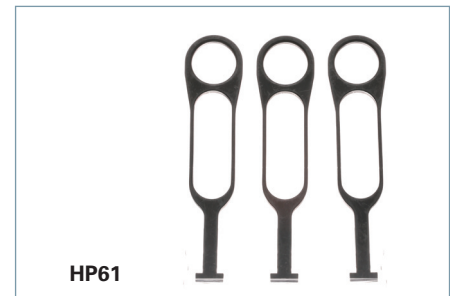

HP61

Fuse Puller Kits

Fuse Puller Kits are field installable in 30-100A Type VBII Heavy Duty Switches (one kit required per 3-pole switch).

Fuse Puller Kits

| Switch Ampere Rating | Fuse Puller Kit Catalog Number |
|----------------------|--------------------------------|
| 30 | HP61 |
| 60 | HP62▲ |
| 100 | HP63▲ |

▲ Built to order. Allow 6-8 weeks for delivery.

® One kit per pole required.

® Not designed for use in Non-metallic 4X safety switches. Not designed for use with Auxiliary Contacts.