

# 5 Port Solenoid Valve

## Series SY3000/5000/7000/9000

Rubber Seal




[Option]




(Details → P.512 to 515)

Power Consumption  
**0.1W**  
With Power Saving Circuit

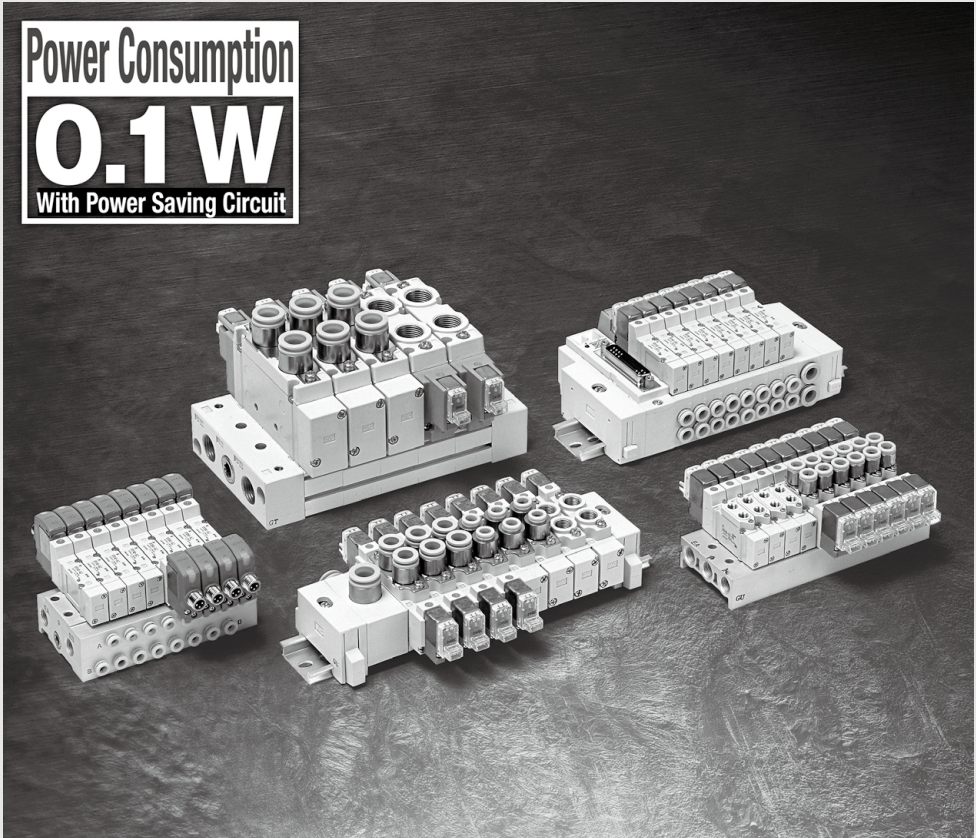

- SJ
- SY
- SY**
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7



Cover (stainless steel)

- **Improved pilot valve**

Pilot valve cover is stronger using stainless steel.

Mounting thread is also reinforced from size M1.7 to M2.


- **Flow Characteristics**

Series	Flow characteristics		
	C [dm <sup>3</sup> /(s·bar)]	b	Cv
SY3000	1.1	0.28	0.29
SY5000	2.8	0.37	0.90
SY7000	4.5	0.28	1.4
SY9000	10	0.29	2.5


# Cylinder Speed Chart

Use as a guide for selection.  
Please confirm the actual conditions with SMC Sizing Program.

## Body Ported

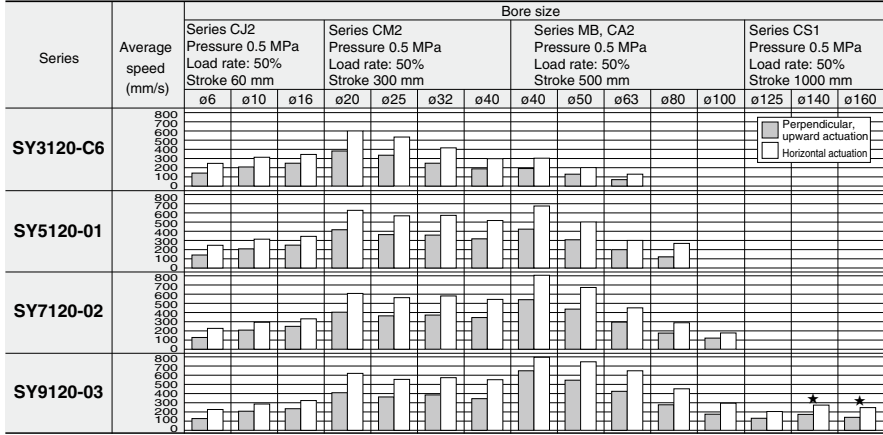

## Base Mounted

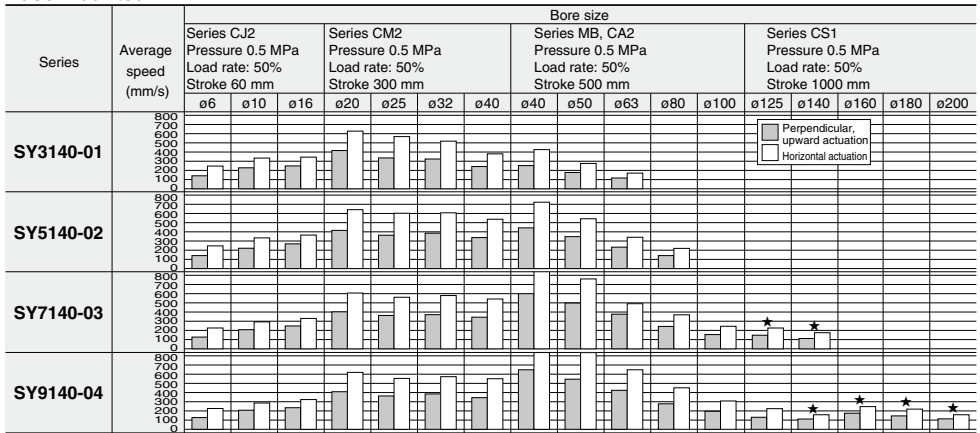

\* Cylinder is in extending. Speed controller is meter-out, which is directly connected with cylinder and its needle is fully opened.  
\* Average speed of cylinder is obtained by dividing the full stroke time by the stroke.  
\* Load factor: (Load mass x 9.8) / (Theoretical force) x 100%  
\* The histograms with ★ marked are the case when piping is done by using steel.

## Conditions

Body ported	Series CJ2	Series CM2	Series MB, CA2	Series CS1
SY3120-C6	Tubing bore x Length	T0604 x 1 m		
	Speed controller	AS2052F-06		
	Silencer	AN120-M5		
SY5120-01	Tubing bore x Length	T0604 x 1 m	T0806 x 1 m	
	Speed controller	AS3002F-06	AS3002F-08	
	Silencer	AN101-01		
SY7120-02	Tubing bore x Length	T0604 x 1 m	T1075 x 1 m	
	Speed controller	AS3002F-06	AS4002F-10	
	Silencer	AN110-01		
SY9120-03	Tubing bore x Length	T0604 x 1 m	T1075 x 1 m	T1209 x 1 m
	Speed controller	AS3002F-06	AS4002F-10	AS4002F-12
	Silencer	AN20-02		AN202-02

## Conditions

Base mounted	Series CJ2	Series CM2	Series MB, CA2	Series CS1
SY3140-01	Tubing bore x Length	T0604 x 1 m		
	Speed controller	AS3002F-06		
	Silencer	AN110-01		
SY5140-02	Tubing bore x Length	T0604 x 1 m	T0806 x 1 m	
	Speed controller	AS3002F-06	AS3002F-08	
	Silencer	AN101-01		
SY7140-03	Tubing bore x Length	T0604 x 1 m	T1075 x 1 m	T1209 x 1 m
	Speed controller	AS3002F-06	AS4002F-10	
	Silencer	AN20-02		
SY9140-04	Tubing bore x Length	T0604 x 1 m	T1075 x 1 m	T1209 x 1 m
	Speed controller	AS3002F-06	AS4002F-10	AS4002F-12
	Silencer	AN20-02		



## Conditions [When using SGP (steel pipe)]

Body ported	Series CS1	
SY9120-03	Tubing bore x Length	SGP10A x 1 m
	Speed controller	AS420-03
	Silencer	AN20-02

## Conditions [When using SGP (steel pipe)]

Base mounted	Series CS1	
SY7140-03	Tubing bore x Length	SGP10A x 1 m
	Speed controller	AS420-03
	Silencer	AN30-03
SY9140-04	Tubing bore x Length	SGP15A x 1 m
	Speed controller	AS420-04
	Silencer	AN40-04

# Valve Variations

	Series	Sonic conductance C [dm <sup>3</sup> /(s·bar)] { 4/2→5/3 (A/B→EA/EB)}	Actuation					Voltage		Electrical entry					Light/surge voltage suppressor <sup>(Note 1)</sup>
			2 position		3 position			DC 24 V 12 V 6 V 5 V 3 V	AC 100 V 50/60 Hz 110 V 50/60 Hz 200 V 50/60 Hz 220 V 50/60 Hz	Grommet	L plug connector	M plug connector	DIN terminal <sup>(Note 4)</sup>	M8 connector	
			Single	Double	Closed center	Exhaust center	Pressure center								
Body ported	P.290 	SY3 □ 20	0.65	●	●	●	●	●	●	●	●	●	●	●	●
		SY5 □ 20	2.4	●	●	●	●	●	●	●	●	●	●	●	●
		SY7 □ 20	3.3	●	●	●	●	●	●	●	●	●	●	●	●
		SY9 □ 20	8.6	●	●	●	●	●	●	●	●	●	●	●	●
Base mounted	P.306 	SY3 □ 40	1.1	●	●	●	●	●	●	●	●	●	●	●	
		SY5 □ 40	2.8	●	●	●	●	●	●	●	●	●	●	●	
		SY7 □ 40	4.5	●	●	●	●	●	●	●	●	●	●	●	
		SY9 □ 40	10	●	●	●	●	●	●	●	●	●	●	●	

	Series	Manual override	Manual override		P, EA, EB port size								A, B port size							Valve option							
			Non-locking push type	Push-turn locking slotted type	Push-turn locking lever type	Bracket	M5	1/8	1/4	3/8	1/2	M5	1/8	1/4	3/8	1/2	One-touch fitting				Exhaust throttle Oil resistant (Other than degreaser/turbine oil)	Vacuum specifications	Low pressure specifications	Dual pressure	Enclosure IP65 <sup>(Note 3)</sup>	Interface regulator	
			C4	C6	C8	C10	C12	N3	N7	N9	N11																
Body ported	SY3 □ 20	●	●	●	●						●							●	●								
	SY5 □ 20	●	●	●	●						●							●	●								
	SY7 □ 20	●	●	●	●																						
	SY9 □ 20	●	●	●	●																						
Base mounted	SY3 □ 40	●	●	●	●						●																●
	SY5 □ 40	●	●	●	●						●																●
	SY7 □ 40	●	●	●	●																						●
	SY9 □ 40	●	●	●	●																						●

● Standard ● Option ▲ Made to order (Refer to page "Made to Order").

Note 1) All AC voltage models have built-in surge voltage suppressor.








Note 2) Body ported external pilot style (made to order) is not available for DIN terminal.

Note 3) Only available for DIN terminal and M8 connector.

Note 4) SY3000 does not have a DIN terminal which can be connected to a manifold.

- SJ
- SY
- SY
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

# Manifold Variations

Manifold Variations		Valve Series	Wiring									
			Connection								Common specifications	
			Individual wiring	Flat ribbon cable (26 pins)	Flat ribbon cable (20 pins) connector box	Plug-in type D-sub connector (25 pins)	Plug-in type flat ribbon cable (26, 20, 10 pins)	Plug-in type terminal block (9, 18 pins)	PC wiring	Serial transmission unit	Positive common	Negative common
5 port												
Body ported	<b>Bar stock type Individual wiring</b> ■ Direct piping to the main unit of a valve. Combination of different fittings is possible. 	Type <b>20</b> P. 324	SY3□20	●	—	—	—	—	—	—	—	—
			SY5□20	—	●	—	—	—	—	—	—	—
			SY7□20	—	—	—	—	—	—	—	—	—
	<b>Bar stock type Flat ribbon cable</b> ■ A 26 pins MIL connector permits One-touch wiring of external cables in a bundle. 	Type <b>20P</b> P. 334	SY3□20	—	●	—	—	—	—	—	—	(Note)
			SY5□20	—	—	—	—	—	—	—	—	In common
			SY7□20	—	—	—	—	—	—	—	—	—
	<b>Stacking type Individual wiring</b> ■ Manifold stations can be increased or decreased. 	Type <b>23</b> P. 330	SY9□20	●	—	—	—	—	—	—	—	—
		<b>Stacking type Flat ribbon cable</b> ■ Manifold stations can be increased or decreased. 	Type <b>23P</b> P. 340	SY9□20	—	●	—	—	—	—	—	—
					—	—	—	—	—	—	—	In common
	<b>Bar stock type EX510 gateway type</b> ■ Can be used with a serial transmission system. 	Type <b>20SA</b> P. 344	SY3□20	—	—	—	—	—	—	●	—	—
			SY5□20	—	—	—	—	—	—	—	—	—
			SY7□20	—	—	—	—	—	—	—	—	—
<b>Stacking type EX510 gateway type</b> ■ Can be used with a serial transmission system. 	Type <b>23SA</b> P. 350	SY9□20	—	—	—	—	—	—	●	—	—	
	<b>Cassette type Individual wiring</b> ■ Size and weight reduced by eliminating the manifold base. 	Type <b>60</b> P. 358	SY3□60	●	—	—	—	—	—	—	—	—
		SY5□60	●	—	—	—	—	—	—	—	—	
		SY7□60	●	—	—	—	—	—	—	—	—	

● Standard ● Option ▲ Made to order (Refer to page "Made to Order".)

(Note) When there are polarities, the positive common specifications are used.














# Manifold Variations

Manifold option								A, B port size							Valve option																		
Blanking plate	Individual SUP spacer	Individual EXH spacer	SUP block disk	EXH block disk	Label for block disk	Silencer for One-touch fitting	Built-in silencer	Connector	M5	1/8	1/4	3/8	One-touch fitting							Mixed mounting SY3000 SY5000	Oil resistant (Other than designated turbine oil)	Vacuum specifications	Low pressure specifications	Different pressure	Dual pressure	Exhaust throttle	Bundle wiring	Mixed fitting sizes	IP65 enclosure	Interface regulator			
													C4	C6	C8	C10	C12	N3	N7												N9	N11	SY3000
●	●	●	—	—	—	—	—	—	●	—	—	—	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	Note)
—	—	—	—	—	—	—	—	—	●	—	—	—	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	Note)	
—	—	—	—	—	—	—	—	—	—	●	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	Note)	
—	—	—	—	—	—	—	—	—	—	—	●	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	Note)
—	—	—	—	—	—	—	—	—	—	—	—	●	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	Note)
—	—	—	—	—	—	—	—	—	—	—	—	●	—	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	Note)
—	—	—	—	—	—	—	—	—	—	—	—	—	●	—	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	Note)
—	—	—	—	—	—	—	—	—	—	—	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	Note)
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	Note)
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	Note)
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	Note)
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	Note)

Note) When using DIN terminal or M8 connector, SY3000 does not have a DIN terminal which can be connected to a manifold.

SJ
SY
<b>SY</b>
SV
SYJ
SZ
VF
VP4
S0700
VQ
VQ4
VQ5
VQC
VQC4
VQZ
SQ
VFS
VFR
VQ7

# Manifold Variations

Manifold Variations		Valve Series	Wiring											
			Connection								Common specifications			
			Individual wiring	Flat ribbon cable (26 pins)	Flat ribbon cable (20 pins) connector box	Plug-in type D-sub connector (25 pins)	Plug-in type flat ribbon cable (26, 20, 10 pins)	Plug-in type terminal block (9, 18 pins)	PC wiring	Serial transmission unit	Positive common	Negative common		
Base mounted	<b>Compact bar stock type Individual wiring</b> ■ The base mounting facilitates maintenance after valves are changed.	 Type <b>41</b> P. 376	<b>SY3□40</b> <b>SY5□40</b>	●	—	—	—	—	—	—	—	—	—	
	<b>Compact bar stock type Flat ribbon cable</b> ■ A 26 pins MIL connector permits one-touch wiring of external cables in a bundle.	 Type <b>41P</b> P. 392	<b>SY3□40</b> <b>SY5□40</b>	—	●	—	—	—	—	—	—	—	● (Note)	In common
	<b>Bar stock type/Common external EXH Individual wiring</b> ■ The base mounting facilitates maintenance after valves are changed. ■ Vacuum/low pressure combination system is possible.	 Type <b>42</b> P. 376	<b>SY3□40</b> <b>SY5□40</b> <b>SY7□40</b>	●	—	—	—	—	—	—	—	—	—	—
	<b>Bar stock type/Common external EXH Flat ribbon cable</b> ■ A 26 pins MIL connector permits one-touch wiring of external cables in a bundle. ■ Vacuum/low pressure combination system is possible.	 Type <b>42P</b> P. 392	<b>SY3□40</b> <b>SY5□40</b> <b>SY7□40</b>	—	●	—	—	—	—	—	—	—	● (Note)	In common
	<b>Stacking type Individual wiring</b> ■ Manifold stations can be increased or decreased.	 Type <b>43</b> P. 386	<b>SY9□40</b>	●	—	—	—	—	—	—	—	—	—	—
	<b>Stacking type Flat ribbon cable</b> ■ Manifold stations can be increased or decreased.	 Type <b>43P</b> P. 400	<b>SY9□40</b>	—	●	—	—	—	—	—	—	—	● (Note)	In common
	<b>Bar stock type EX510 gateway type</b> ■ Can be used with a serial transmission system.	 Type <b>42SA</b> P. 406	<b>SY3□40</b> <b>SY5□40</b> <b>SY7□40</b>	—	—	—	—	—	—	●	—	—	—	—
	<b>Stacking type EX510 gateway type</b> ■ Can be used with a serial transmission system.	 Type <b>43SA</b> P. 411	<b>SY9□40</b>	—	—	—	—	—	—	●	—	—	—	—
	<b>Stacking type/DIN rail mounted Individual wiring</b> ■ Stations can be increased on the DIN rail. Integral mounting of other electric parts is possible, too.	 Type <b>45</b> P. 422	<b>SY3□40</b> <b>SY5□40</b>	●	—	—	—	—	—	—	—	—	—	—
	<b>Stacking type/DIN rail mounted Connector box</b> ■ Stations can be increased or decreased on the DIN rail. The provided connector box permits one-touch connection of electric cables.	 Type <b>45A</b> P. 434	<b>SY3□40</b> <b>SY5□40</b>	—	—	●	—	—	—	●	—	●	●	●
	<b>Stacking type/DIN rail mounted EX510 gateway type</b> ■ Can be used with a serial transmission system.	 Type <b>45SA</b> P. 442	<b>SY3□40</b> <b>SY5□40</b>	—	—	—	—	—	—	●	—	—	—	—
	<b>Stacking type/DIN rail mounted Plug-in</b> ■ Stations can be increased or decreased on the DIN rail. ■ A variety of centralized wiring methods are possible.	 Type <b>45I</b> P. 450	<b>SY3□40</b> <b>SY5□40</b>	—	—	—	●	●	●	●	●	●	●	●
	<b>Stacking type/DIN rail mounted Plug-in EX510 gateway type</b> ■ Can be used with a serial transmission system.	 Type <b>45SB</b> P. 490	<b>SY3□40</b> <b>SY5□40</b>	—	—	—	—	—	—	●	—	—	—	—

● Standard ● Option ▲ Made to order (Refer to page "Made to Order").  
 (Note) When there are polarities, the positive common specifications are used.

# Manifold Variations

Manifold option											A, B port size								Valve option														
Blanking plate	Individual SUP spacer	Individual EXH spacer	SUP block disk	EXH block disk	Label for block disk	Silencer for One-touch fitting	Built-in silencer	Connector	M5	1/8	1/4	3/8	One-touch fitting								Mixed mounting SY3000 SY5000	Oil resistant (Other than designated turbine oil)	Vacuum specifications	Low pressure specifications	Different pressure	Dual pressure	Exhaust throttle	Bundle wiring	Mixed fitting sizes	IP65 enclosure	Interface regulator		
													C4	C6	C8	C10	C12	N3	N7	N9												N11	Individual SUP interface
●	●	●	—	—	—	—	—	—	●	—	—	—	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	● (Note)	●
●	●	●	—	—	—	—	—	—	●	—	—	—	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	● (Note)	●	
●	●	●	—	—	—	—	—	—	●	—	—	—	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	● (Note)	●	
●	●	●	—	—	—	—	—	—	●	—	—	—	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	● (Note)	●	
●	●	●	—	—	—	—	—	—	●	—	—	—	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	● (Note)	●	
●	●	●	—	—	—	—	—	—	●	—	—	—	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	● (Note)	●	
●	●	●	—	—	—	—	—	—	●	—	—	—	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	● (Note)	●	
●	●	●	—	—	—	—	—	—	●	—	—	—	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	● (Note)	●	
●	●	●	—	—	—	—	—	—	●	—	—	—	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	● (Note)	●	
●	●	●	—	—	—	—	—	—	●	—	—	—	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	● (Note)	●	
●	●	●	—	—	—	—	—	—	●	—	—	—	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	● (Note)	●	
●	●	●	—	—	—	—	—	—	●	—	—	—	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	● (Note)	●	
●	●	●	—	—	—	—	—	—	●	—	—	—	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	● (Note)	●	
●	●	●	—	—	—	—	—	—	●	—	—	—	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	● (Note)	●	
—	—	—	—	—	—	—	—	—	●	—	—	—	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	● (Note)	●	
—	—	—	—	—	—	—	—	—	●	—	—	—	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	● (Note)	●	

Note) When using DIN terminal or M8 connector. SY3000 does not have a DIN terminal which can be connected to a manifold.

- SJ**
- SY**
- SY**
- SV**
- SYJ**
- SZ**
- VF**
- VP4**
- S0700**
- VQ**
- VQ4**
- VQ5**
- VQC**
- VQC4**
- VQZ**
- SQ**
- VFS**
- VFR**
- VQ7**

# 5 Port Solenoid Valve Body Ported/Single Unit Series SY3000/5000/7000/9000



[Option] (Details → P.512)  
Note) AC-type models that are CE-compliant have DIN terminals only.

## How to Order

SY 5 1 20 - 5 L - 01 - - - -

### Series

3	SY3000
5	SY5000
7	SY7000
9	SY9000

### Type of actuation

1	2 position single (A) 4 2 (B)	
	(EA) 5 1 3 (EB) (P)	
2	2 position double (A) 4 2 (B)	
	(EA) 5 1 3 (EB) (P)	
3	3 position closed center (A) 4 2 (B)	
	(EA) 5 1 3 (EB) (P)	
4	3 position exhaust center (A) 4 2 (B)	
	(EA) 5 1 3 (EB) (P)	
5	3 position pressure center (A) 4 2 (B)	
	(EA) 5 1 3 (EB) (P)	

Note) For details about Symbol of the 3 position type of series SY9000, refer to page 293.

### Coil specifications

Standard	
T	With power saving circuit (24, 12 VDC only)

\* Power saving circuit is not available in the case of D, DO, Y, YO or W□ type.

### For DC

5	24 VDC
6	12 VDC
V	6 VDC
S	5 VDC
R	3 VDC

### Rated voltage

For AC (%Hz)	
1	100 VAC
2	200 VAC
3	110 VAC [115 VAC]
4	220 VAC [230 VAC]

\* DC specifications of type D, Y, DO and YO is only available with 12 and 24 VDC.  
\* For type W□, DC voltage is only available.  
Note) AC-type models that are CE-compliant have DIN terminals only.

### Electrical entry

24, 12, 6, 5, 3 VDC/100, 110, 200, 220 VAC		24, 12 VDC/100, 110, 200, 220 VAC			
Grommet	L plug connector	M plug connector	MN terminal	DIN terminal	
G: Lead wire length 300 mm	L: With lead wire (Length 300 mm)	M: With lead wire (Length 300 mm)	MN: Without lead wire	D, Y: With connector	
H: Lead wire length 600 mm	LN: Without lead wire	LO: Without connector	MO: Without connector	DO, YO: Without connector	
CE: compl. <input type="checkbox"/> ant. <input type="checkbox"/>	DC <input type="checkbox"/>	AC <input type="checkbox"/>	DC <input type="checkbox"/>	AC <input type="checkbox"/>	DC <input type="checkbox"/>


24, 12 VDC  
6, 5, 3 VDC

### M8 connector

W□: Without connector cable



W□: With connector cable (Note)



- \* LN, MN type: with 2 sockets.
- \* For DIN terminal of SY3000 series, refer to page 520.
- \* "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN43650C). For details, refer to page 519.
- \* For connector cable of M8 connector, refer to page 522.
- \* M8 connector conforming to IEC60947-5-2 standard is also available. Refer to page 509 for details.
- \* Refer to page 519 for the lead wire length of L and M plug connectors.
- \* Refer to page 520 for the connector assembly with cover for L and M plug connectors.

Note) Enter the cable length symbols in □. Please be sure to fill in the blank referring to page 523.

### A, B port size

#### Thread piping

Symbol	Port size	Applicable series
M5	M5 x 0.8	SY3000
01	1/8	SY5000
02	1/4	SY7000
02	1/4	SY9000
03	3/8	SY9000

#### One-touch fitting (Metric size)

Symbol	Port size	Applicable series
C4	One-touch fitting for ø4	SY3000
C6	One-touch fitting for ø6	SY3000
C4	One-touch fitting for ø4	SY5000
C6	One-touch fitting for ø6	SY5000
C8	One-touch fitting for ø8	SY5000
C8	One-touch fitting for ø8	SY7000
C10	One-touch fitting for ø10	SY7000
C8	One-touch fitting for ø8	SY9000
C10	One-touch fitting for ø10	SY9000
C12	One-touch fitting for ø12	SY9000

#### One-touch fitting (Inch size)

Symbol	Port size	Applicable series
N3	One-touch fitting for ø 3/32"	SY3000
N7	One-touch fitting for ø 1/4"	SY3000
N3	One-touch fitting for ø 3/32"	SY5000
N7	One-touch fitting for ø 1/4"	SY5000
N9	One-touch fitting for ø 5/16"	SY5000
N9	One-touch fitting for ø 5/16"	SY7000
N11	One-touch fitting for ø 3/8"	SY7000
N9	One-touch fitting for ø 5/16"	SY9000
N11	One-touch fitting for ø 3/8"	SY9000

### Manual override

Nil: Non-locking push type 	D: Push-turn locking slotted type 	E: Push-turn locking lever type 
--------------------------------	---------------------------------------	-------------------------------------

### Light/Surge voltage suppressor

#### Electrical entry for G, H, L, M, W

Nil	Without light/surge voltage suppressor
S	With surge voltage suppressor
Z	With light/surge voltage suppressor
R	With surge voltage suppressor (Non-polar type)
U	With light/surge voltage suppressor (Non-polar type)

- \* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.
- \* For "R" and "U", DC voltage is only available.
- \* Power saving circuit is only available in the "Z" type.


#### Electrical entry for D, Y

Nil	Without light/surge voltage suppressor
S	With surge voltage suppressor
Z	With light/surge voltage suppressor

- \* DOZ and YOZ are not available.
- \* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.


### Bracket

Nil: Without bracket  
F1: With foot bracket



(2 position single only)

F2: With side bracket



\* SY9000 has no bracket.

### Thread type

Nil	Rc
F	G
N	NPT
T	NPTF

\* Except for M5

### Made to Order

Nil	—
X20	Body ported external pilot (Refer to page 510.)
X90	Main valve fluorine rubber (Refer to page 510.)


### CE-compliant

Nil	—
Q	CE-compliant

Note) AC-type models that are CE-compliant have DIN terminals only.



## Specifications



Series		SY3000	SY5000	SY7000	SY9000
<b>Fluid</b>		Air			
<b>Internal pilot</b>	2 position single	0.15 to 0.7			
<b>Operating pressure range (MPa)</b>	2 position double	0.1 to 0.7			
	3 position	0.2 to 0.7			
<b>Ambient and fluid temperature (°C)</b>		-10 to 50 (No freezing)			
<b>Max. operating frequency (Hz)</b>	2 position single, double	10	5	5	5
	3 position	3	3	3	3
<b>Manual override (Manual operation)</b>		Non-locking push type, Push-turn locking slotted type, Push-turn locking lever type			
<b>Pilot exhaust method</b>		Common exhaust type for main and pilot valve			
<b>Lubrication</b>		Not required			
<b>Mounting orientation</b>		Unrestricted			
<b>Impact/Vibration resistance (m/s<sup>2</sup>)</b> <small>Note</small>		150/30			
<b>Enclosure</b>		Dust proof (* DIN terminal and M8 connector: IP65)			

\* Based on IEC60529

Note) Impact resistance: No malfunction occurred when it is tested in the axial direction and at the right angles to the main valve and armature in both energized and de-energized states every once for each condition. (Values at the initial period)

Vibration resistance: No malfunction occurred in a one-sweep test between 45 and 2000 Hz. Test was performed at both energized and de-energized states in the axial direction and at the right angles to the main valve and armature. (Values at the initial period)



**Made to Order**

(For details, refer to pages 502 to 510.)

## Solenoid Specifications

Electrical entry		Grommet (G), (H)		DIN terminal (D), (Y)	
		L plug connector (L)		M8 connector (W)	
		G, H, L, M, W		D, Y	
<b>Coil rated voltage (V)</b>	DC	24, 12, 6, 5, 3		24, 12	
	AC 50/60 Hz	100, 110, 200, 220			
<b>Allowable voltage fluctuation</b>		±10% of rated voltage *			
<b>Power consumption (W)</b>	DC	<b>Standard</b>	0.35 (With indicator light: 0.4 DIN terminal with indicator light: 0.45)		
		With power saving circuit	0.1 (With indicator light only)		
<b>Apparent power (VA) *</b>	AC	100 V	0.78 (With indicator light: 0.81)	0.78 (With indicator light: 0.87)	
		110 V [115 V]	0.86 (With indicator light: 0.89)	0.86 (With indicator light: 0.97)	
		200 V	1.18 (With indicator light: 1.22)	1.15 (With indicator light: 1.30)	
		220 V [230 V]	1.30 (With indicator light: 1.34)	1.27 (With indicator light: 1.46)	
			1.42 (With indicator light: 1.46)	1.39 (With indicator light: 1.60)	
<b>Surge voltage suppressor</b>		Diode (Varistor is for DIN terminal and Non-polar type.)			
<b>Indicator light</b>		LED (AC of DIN connector is neon light.)			

\* In common between 110 VAC and 115 VAC, and between 220 VAC and 230 VAC.

\* For 115 VAC and 230 VAC, the allowable voltage is -15% to +5% of rated voltage.

\* S, Z and T type (with power saving circuit) should be used within the following allowable voltage fluctuation range due to a voltage drop caused by the internal circuit.

S and Z type: 24 VDC: -7% to +10%

12 VDC: -4% to +10%

T type: 24 VDC: -8% to +10%

12 VDC: -6% to +10%

\* DIN terminal and M8 connector with power saving circuit are not available.

## Response Time

Note) Based on dynamic performance test, JIS B 8375-1981. (Coil temperature: 20°C, at rated voltage)

### SY3000

Type of actuation	Response time (ms) (at the pressure of 0.5 MPa)			
	Without light/surge voltage suppressor	With light/surge voltage suppressor		
		Type S, Z	Type R, U	
2 position single	12 or less	15 or less	12 or less	
2 position double	10 or less	13 or less	10 or less	
3 position	15 or less	20 or less	16 or less	

### SY7000

Type of actuation	Response time (ms) (at the pressure of 0.5 MPa)			
	Without light/surge voltage suppressor	With light/surge voltage suppressor		
		Type S, Z	Type R, U	
2 position single	31 or less	38 or less	33 or less	
2 position double	27 or less	30 or less	28 or less	
3 position	50 or less	56 or less	50 or less	

### SY5000

Type of actuation	Response time (ms) (at the pressure of 0.5 MPa)			
	Without light/surge voltage suppressor	With light/surge voltage suppressor		
		Type S, Z	Type R, U	
2 position single	19 or less	26 or less	19 or less	
2 position double	18 or less	22 or less	18 or less	
3 position	32 or less	38 or less	32 or less	

### SY9000

Type of actuation	Response time (ms) (at the pressure of 0.5 MPa)			
	Without light/surge voltage suppressor	With light/surge voltage suppressor		
		Type S, Z	Type R, U	
2 position single	35 or less	41 or less	35 or less	
2 position double	35 or less	41 or less	35 or less	
3 position	62 or less	64 or less	62 or less	

# Series SY3000/5000/7000/9000

## Flow Characteristics/Weight

### Series SY3000

Valve model	Type of actuation	Port size		Flow characteristics						Weight (g)		
		1, 5, 3 P, EA, EB	4, 2 (A, B)	1→4/2 (P→A/B) C (dm <sup>3</sup> /s-bar)	b	Cv	4/2→5/3 (AB→EA/EB) C (dm <sup>3</sup> /s-bar)	b	Cv	Gro- mmet	L/M plug connector	W M8 connector
SY3020 -□-M5	2 position	M5 x 0.8		0.61	0.44	0.16	0.64	0.45	0.18	51	53	57
	Double Closed center			0.48	0.46	0.13	0.47	0.43	0.13	68	74	82
	3 position			0.47	0.42	0.13	0.47	0.41	0.13	71	76	84
	Exhaust center			0.50	0.48	0.15	0.47	0.43	0.13			
SY3020 -□-C4	2 position	M5 x 0.8	C4 (One-touch fitting for ø4)	0.72	0.29	0.18	0.64	0.34	0.17	60	63	67
	Double Closed center			0.59	0.28	0.15	0.59	0.30	0.15	83	83	91
	3 position			0.63	0.35	0.16	0.42	0.34	0.11	81	86	94
	Exhaust center			0.76	0.42	0.21	0.59	0.29	0.15			
SY3020 -□-C6	2 position	M5 x 0.8	C6 (One-touch fitting for ø6)	0.76	0.30	0.19	0.65	0.39	0.17	56	59	63
	Double Closed center			0.76	0.55	0.24	0.60	0.33	0.16	74	79	87
	3 position			0.65	0.32	0.16	0.64	0.31	0.17	77	82	90
	Exhaust center			0.77	0.34	0.21	0.61	0.34	0.16			
	Pressure center		0.77	0.49	0.43	0.15						

Note) [ ]: denotes normal position.

### Series SY7000

Valve model	Type of actuation	Port size		Flow characteristics						Weight (g)		
		1, 5, 3 P, EA, EB	4, 2 (A, B)	1→4/2 (P→A/B) C (dm <sup>3</sup> /s-bar)	b	Cv	4/2→5/3 (AB→EA/EB) C (dm <sup>3</sup> /s-bar)	b	Cv	Gro- mmet	L/M plug connector	W DIN terminal
SY7020 -□-02	2 position	1/4		4.1	0.23	0.93	3.3	0.33	0.81	101	104	125
	Double Closed center			2.9	0.31	0.70	2.4	0.38	0.63	120	125	167
	3 position			2.5	0.39	0.68	3.4	0.35	0.82	128	133	175
	Exhaust center			4.3	0.23	0.97	2.2	0.39	0.58			
SY7020 -□-C8	2 position	1/4	C8 (One-touch fitting for ø8)	3.2	0.26	0.77	3.2	0.37	0.82	107	110	131
	Double Closed center			2.6	0.24	0.63	2.4	0.31	0.62	126	132	174
	3 position			2.4	0.25	0.57	2.6	0.42	0.70	134	140	182
	Exhaust center			3.3	0.28	0.78	2.2	0.34	0.60			
SY7020 -□-C10	2 position	1/4	C10 (One-touch fitting for ø10)	3.8	0.26	0.86	3.2	0.34	0.82	103	105	126
	Double Closed center			2.8	0.27	0.67	2.4	0.21	0.59	122	127	169
	3 position			2.5	0.25	0.59	2.7	0.38	0.70	130	135	177
	Exhaust center			3.8	0.25	0.89	2.3	0.38	0.61			
	Pressure center		3.8	0.41	0.61							

Note) [ ]: denotes normal position.

### Series SY5000

Valve model	Type of actuation	Port size		Flow characteristics						Weight (g)		
		1, 5, 3 P, EA, EB	4, 2 (A, B)	1→4/2 (P→A/B) C (dm <sup>3</sup> /s-bar)	b	Cv	4/2→5/3 (AB→EA/EB) C (dm <sup>3</sup> /s-bar)	b	Cv	Gro- mmet	L/M plug connector	W DIN terminal
SY5020 -□-01	2 position	1/8		1.9	0.35	0.49	2.4	0.39	0.61	70	72	93
	Double Closed center			1.7	0.43	0.45	1.8	0.35	0.46	88	93	135
	3 position			1.5	0.44	0.41	2.5	0.32	0.59	93	98	140
	Exhaust center			2.2	0.46	0.61	1.8	0.38	0.46			
SY5020 -□-C4	2 position	1/8	C4 (One-touch fitting for ø4)	0.75	0.43	0.20	0.85	0.64	0.30	94	96	117
	Double Closed center			0.74	0.40	0.19	0.84	0.57	0.28	111	117	159
	3 position			0.75	0.36	0.19	0.84	0.64	0.30	117	122	164
	Exhaust center			0.78	0.44	0.21	0.84	0.57	0.27			
SY5020 -□-C6	2 position	1/8	C6 (One-touch fitting for ø6)	1.5	0.33	0.33	2.0	0.37	0.52	88	91	112
	Double Closed center			1.3	0.31	0.33	1.6	0.32	0.39	106	111	153
	3 position			1.3	0.33	0.33	1.8	0.35	0.44	111	116	158
	Exhaust center			1.7	0.31	0.42	1.7	0.33	0.44			
SY5020 -□-C8	2 position	1/8	C8 (One-touch fitting for ø8)	1.9	0.21	0.45	2.3	0.29	0.57	80	82	103
	Double Closed center			1.6	0.29	0.39	1.7	0.38	0.46	98	103	145
	3 position			1.4	0.38	0.39	2.0	0.37	0.52	103	108	150
	Exhaust center			2.2	0.32	0.56	1.8	0.41	0.50			
	Pressure center		2.2	0.44	0.44							

Note) [ ]: denotes normal position.








### Series SY9000

Valve model	Type of actuation	Port size		Flow characteristics						Weight (g)		
		1, 5, 3 P, EA, EB	4, 2 (A, B)	1→4/2 (P→A/B) C (dm <sup>3</sup> /s-bar)	b	Cv	4/2→5/3 (AB→EA/EB) C (dm <sup>3</sup> /s-bar)	b	Cv	Gro- mmet	L/M plug connector	W DIN terminal
SY9020 -□-02	2 position	1/4		7.0	0.33	1.7	7.6	0.35	2.0	241	244	265
	Double Closed center			6.7	0.37	1.7	6.4	0.34	1.6	260	266	308
	3 position			6.4	0.36	1.6	8.3	0.41	2.2	284	290	332
	Exhaust center			8.0	0.27	1.8	6.5	0.22	1.4			
SY9020 -□-03	2 position	3/8		8.0	0.29	1.9	8.0	0.33	2.0	236	239	260
	Double Closed center			7.9	0.33	1.9	6.6	0.27	1.6	255	261	303
	3 position			8.0	0.33	1.9	8.7	0.34	2.2	279	285	327
	Exhaust center			8.9	0.34	2.2	6.5	0.25	1.5			
SY9020 -□-C8	2 position	1/4	C8 (One-touch fitting for ø8)	4.3	0.28	0.96	7.1	0.32	1.7	293	296	317
	Double Closed center			4.3	0.31	0.99	6.1	0.28	1.4	312	318	360
	3 position			4.3	0.33	0.99	7.4	0.36	1.9	336	342	384
	Exhaust center			4.4	0.35	1.0	2.1	0.41	0.53			
SY9020 -□-C10	2 position	1/4	C10 (One-touch fitting for ø10)	6.1	0.28	1.4	7.9	0.33	1.9	279	282	303
	Double Closed center			5.9	0.30	1.4	6.5	0.26	1.5	298	304	346
	3 position			5.8	0.25	1.3	8.4	0.33	2.0	322	328	370
	Exhaust center			6.3	0.29	1.5	6.4	0.25	1.5			
SY9020 -□-C12	2 position	1/2	C12 (One-touch fitting for ø12)	7.0	0.25	1.6	8.6	0.41	2.2	265	268	289
	Double Closed center			6.9	0.24	1.6	7.0	0.33	1.7	284	290	332
	3 position			6.6	0.23	1.4	9.4	0.48	2.6	308	314	356
	Exhaust center			7.4	0.25	1.7	6.6	0.23	1.5			
	Pressure center		7.4	0.34	0.74							


Note) [ ]: denotes normal position.

## Construction

### Series SY

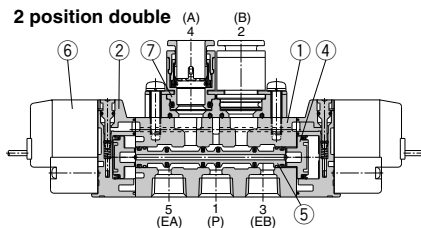

### 3 position closed center / exhaust center / pressure center

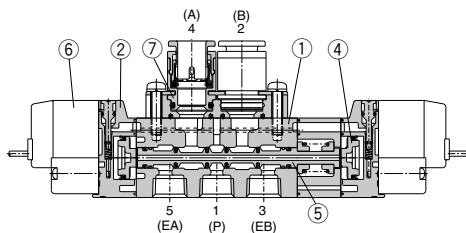

(This figure shows a closed center type.)

### Component Parts

No.	Description	Material	Note
1	Body	Aluminum die-casted (SY3000: Zinc die-casted)	White
2	Adapter plate	Resin	White (SY9000: Gray)
3	End plate	Resin	White
4	Piston	Resin	-
5	Spool valve assembly	Aluminum, H-NBR	-

### Replacement Parts

No.	Description	Part no.
6	Pilot valve assembly	Refer to "How to Order Pilot Valve Assembly" on page 511.
7	M5 port block assembly	Refer to "How to Order Port Block Assembly" on page 511.

### Bracket Assembly No.


Description	Part no.
Bracket (For F1)	SX000-16-2A (with mounting screw)
Bracket (For F2)	SX000-16-1A (with mounting screw)

\* SY9000 has no bracket.

### How to Change Port Block Assembly

If using body port type, both A and B port sizes can be changed by replacing the port block assembly mounted on the body. When changing this block assembly, the correct screw torque must be achieved to avoid possible air leakage.

#### For SY5000

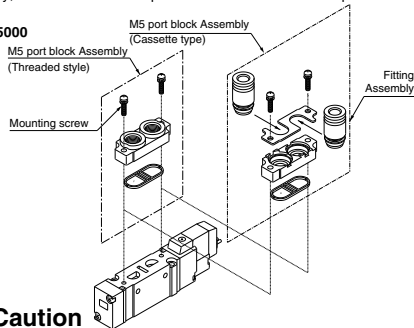

### Caution

Mounting screw tightening torques

SY3000 (M2): 0.12 N·m  
SY5000 (M3): 0.6 N·m  
SY9000 (M4): 1.4 N·m

\* Refer to "How to Order Port Block Assembly" on page 511 for part no.


# Series SY3000/5000/7000/9000

## Dimensions: Series SY3000

[ ] : AC


### 2 position single

Grommet (G), (H): SY3120-□<sub>G</sub>□□-C4, N3  
C6, N7(-F2)

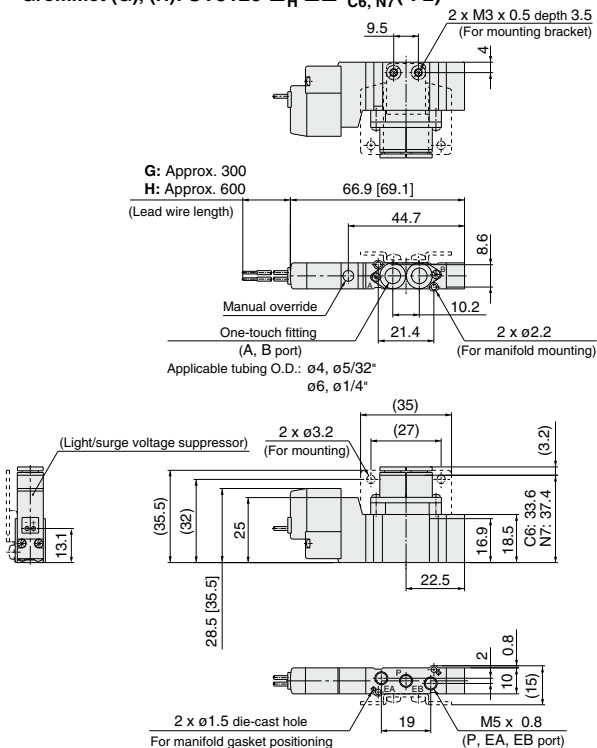


### Foot bracket

SY3120-□<sub>G</sub>□□-C4, N3  
C6, N7 -F1

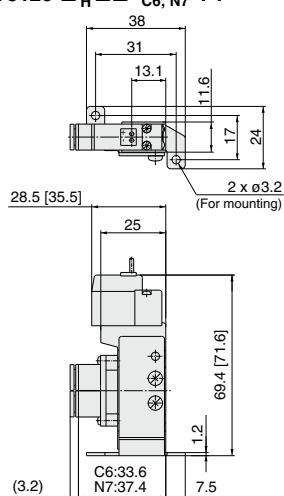


SY3120-□<sub>G</sub>□□-M5(-F2)




### L plug connector (L):

SY3120-□<sub>L</sub>□□-C4, N3  
C6, N7(-F2)

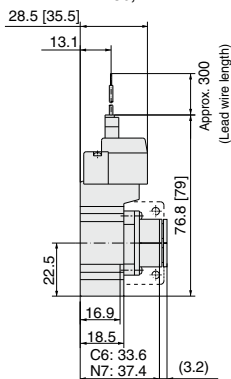


### M plug connector (M):

SY3120-□<sub>M</sub>□□-C4, N3  
C6, N7(-F2)



### M8 connector (WO):

SY3120-□<sub>WO</sub>□□-C4, N3  
C6, N7(-F2)







Note) Refer to page 523 for dimensions of connector types.

**Dimensions: Series SY3000**


[ ]: AC

**2 position double**

**Grommet (G), (H): SY3220-□<sup>G</sup>□□-C4, N3  
C6, N7(-F2)**

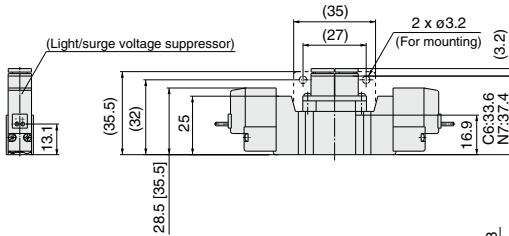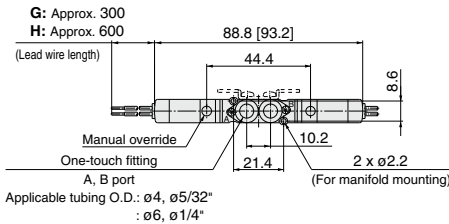


**SY3220-□<sup>G</sup>□□-M5(-F2)**

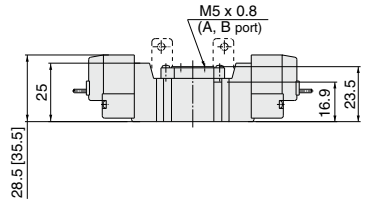


SY
SV
SZ
VF
VP4
S0700
VQ
VQ4
VQ5
VQC
VQC4
VQZ
SQ
VFS
VFR
VQ7


**L plug connector (L):  
SY3220-□L□□-C4, N3  
C6, N7(-F2)**

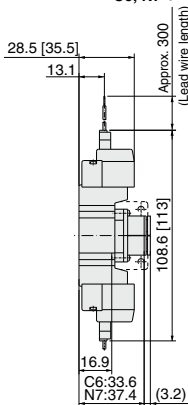

**M plug connector (M):  
SY3220-□M□□-C4, N3  
C6, N7(-F2)**



**M8 connector (WO):  
SY3220-WO□□-C4, N3  
C6, N7(-F1)**



Note) Refer to page 523 for dimensions of connector types.


# Series SY3000/5000/7000/9000

## Dimensions: Series SY3000


[ ]: AC

3 position closed center / exhaust center / pressure center

Grommet (G), (H): SY3<sup>3/8</sup>20-□G□□-C4, N3  
C6, N7 (-F2)

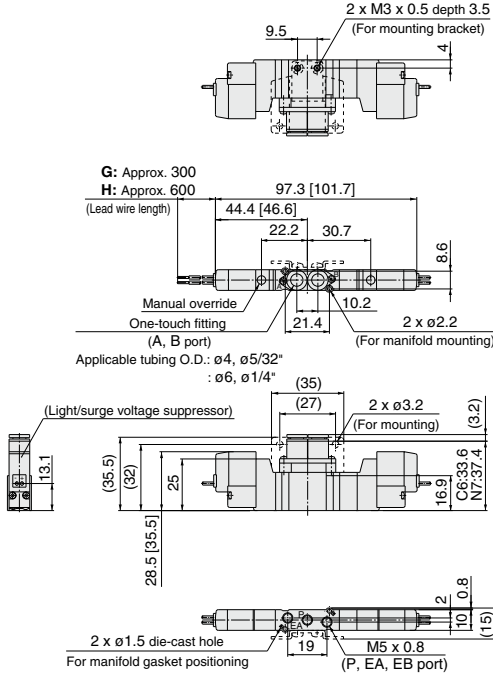


SY3<sup>3/8</sup>20-□H□□-M5(-F2)




L plug connector (L):

SY3<sup>3/8</sup>20-□L□□-C4, N3  
C6, N7 (-F2)

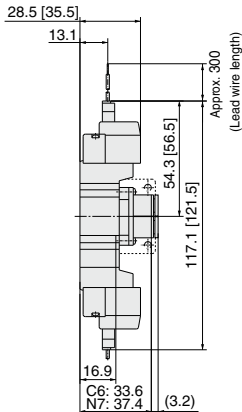


M plug connector (M):

SY3<sup>3/8</sup>20-□M□□-C4, N3  
C6, N7 (-F2)

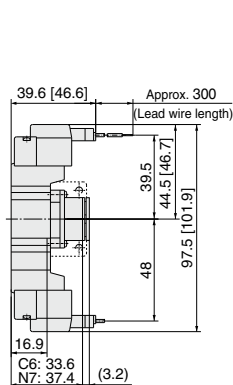

M8 connector (WO):

SY3<sup>3/8</sup>20-□WO□□-C4, N3  
C6, N7 (-F2)

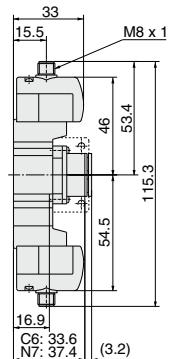


Note) Refer to page 523 for dimensions of connector types.

## Dimensions: Series SY5000

[ ] : AC


### 2 position single

Grommet (G), (H): SY5120-□G□□-□<sup>C4, N3</sup>□<sup>C6, N7</sup>□(-F<sub>2</sub>)<sup>C8, N9</sup>

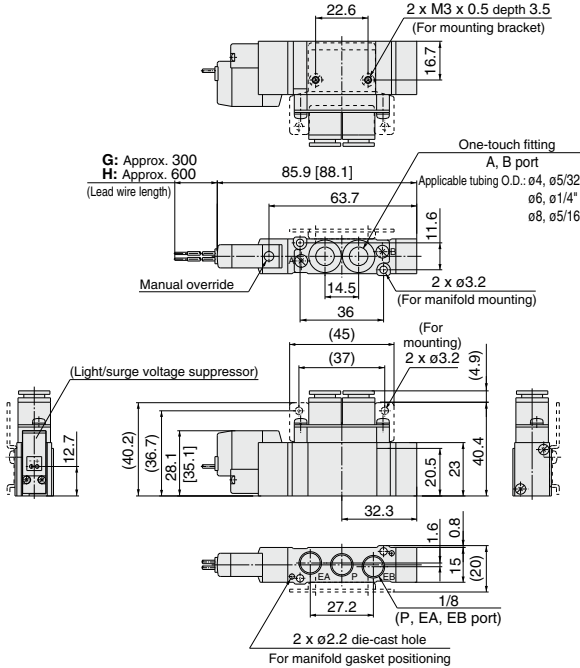


### Foot bracket

SY5120-□H□□-□<sup>C4, N3</sup>□<sup>C6, N7</sup>□(-F<sub>1</sub>)<sup>C8, N9</sup>

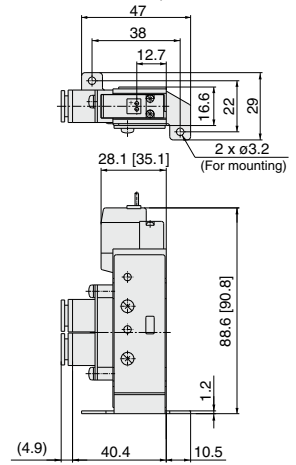


SY5120-□G□□-01□(-F<sub>2</sub>)




### L plug connector (L):

SY5120-□L□□-□<sup>C4, N3</sup>□<sup>C6, N7</sup>□(-F<sub>2</sub>)<sup>C8, N9</sup>

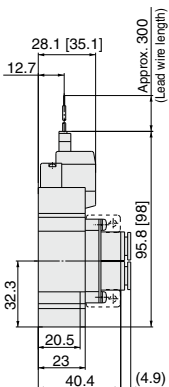


### M plug connector (M):

SY5120-□M□□-□<sup>C4, N3</sup>□<sup>C6, N7</sup>□(-F<sub>2</sub>)<sup>C8, N9</sup>

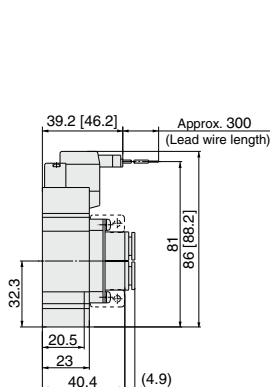


### DIN terminal (D, Y):

SY5120-□D□□-□<sup>C4, N3</sup>□<sup>C6, N7</sup>□(-F<sub>2</sub>)<sup>C8, N9</sup>

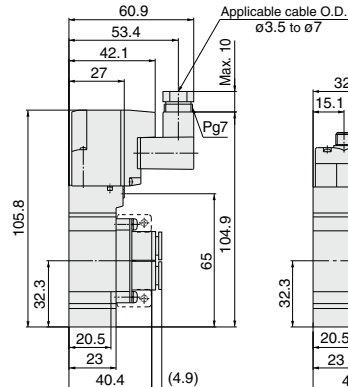

### M8 connector (WO):

SY5120-□WO□□-□<sup>C4, N3</sup>□<sup>C6, N7</sup>□(-F<sub>2</sub>)<sup>C8, N9</sup>

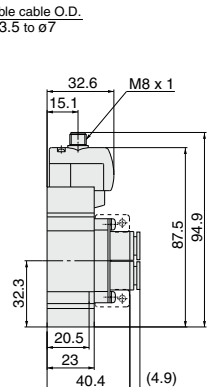

Note) Refer to page 523 for dimensions of connector types.

SJ
SY
SY
SV
SYJ
SZ
VF
VP4
S0700
VQ
VQ4
VQ5
VQC
VQC4
VQZ
SQ
VFS
VFR
VQ7


# Series SY3000/5000/7000/9000

## Dimensions: Series SY5000


[ ]: AC

### 2 position double

Grommet (G), (H): SY5220-□<sup>G</sup>□<sup>H</sup>□<sup>C4, N3</sup>□<sup>C6, N7</sup>□<sup>C8, N9</sup>□(-F2)


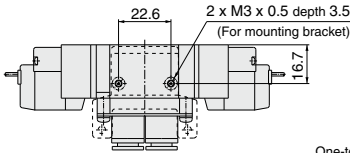


SY5220-□<sup>G</sup>□<sup>H</sup>□<sup>C4, N3</sup>□<sup>C6, N7</sup>□<sup>C8, N9</sup>-01□(-F2)

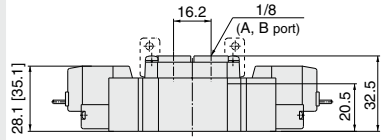

G: Approx. 300  
H: Approx. 600  
(Lead wire length)

One-touch fitting  
(A, B port)  
Applicable tubing O.D.:  $\phi 4, \phi 5/32''$   
 $\phi 6, \phi 1/4''$   
 $\phi 8, \phi 5/16''$

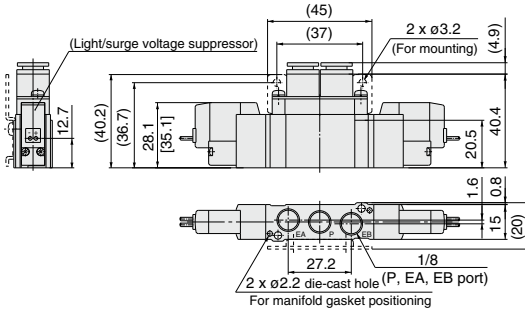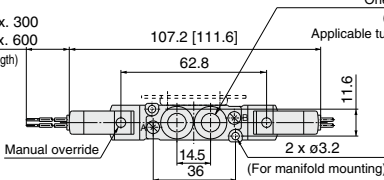

### L plug connector (L):

SY5220-□<sup>L</sup>□<sup>C4, N3</sup>□<sup>C6, N7</sup>□<sup>C8, N9</sup>□(-F2)

### M plug connector (M):





SY5220-□<sup>M</sup>□<sup>C4, N3</sup>□<sup>C6, N7</sup>□<sup>C8, N9</sup>□(-F2)

### DIN terminal (D, Y):

SY5220-□<sup>D, Y</sup>□<sup>C4, N3</sup>□<sup>C6, N7</sup>□<sup>C8, N9</sup>□(-F2)

### M8 connector (WO):

SY5220-□<sup>WO</sup>□<sup>C4, N3</sup>□<sup>C6, N7</sup>□<sup>C8, N9</sup>□(-F2)

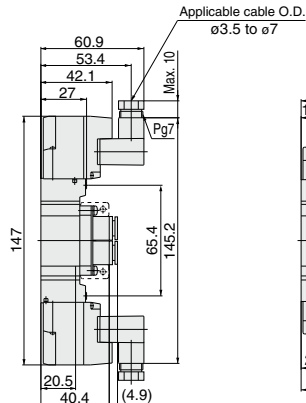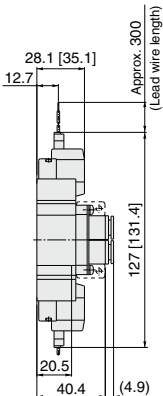

Note) Refer to page 523 for dimensions of connector types.






# Series SY3000/5000/7000/9000

## Dimensions: Series SY7000


[ ] : AC

### 2 position single


Grommet (G), (H): SY7120-□<sub>G</sub>□<sub>H</sub>□<sub>C8, N9</sub>□<sub>C10, N11</sub>□(-F2)

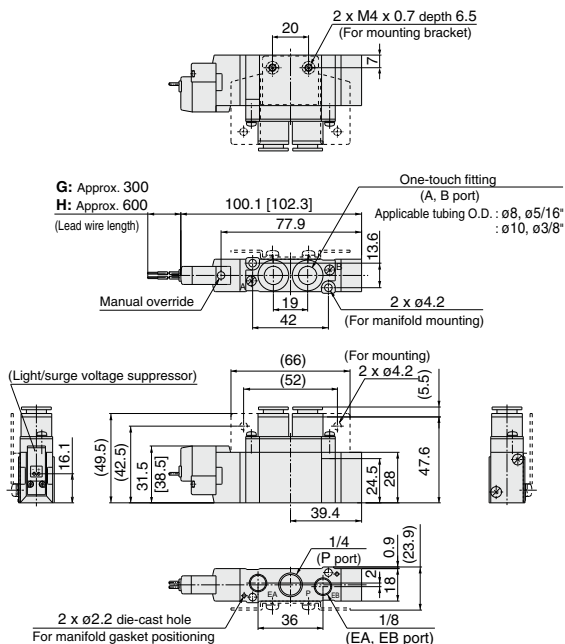

SY7120-□<sub>G</sub>□<sub>H</sub>□<sub>C8, N9</sub>□<sub>C10, N11</sub>□(-F1)

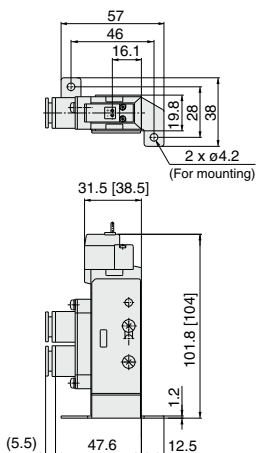

SY7120-□<sub>G</sub>□<sub>H</sub>□<sub>C8, N9</sub>□<sub>C10, N11</sub>□(-F2)



L plug connector (L):

SY7120-□<sub>L</sub>□<sub>C8, N9</sub>□<sub>C10, N11</sub>□(-F<sub>2</sub>)

M plug connector (M):





SY7120-□<sub>M</sub>□<sub>C8, N9</sub>□<sub>C10, N11</sub>□(-F<sub>2</sub>)

DIN terminal (D, Y):

SY7120-□<sub>D</sub>□<sub>C8, N9</sub>□<sub>C10, N11</sub>□(-F<sub>2</sub>)

M8 connector (WO):

SY7120-□<sub>WO</sub>□<sub>C8, N9</sub>□<sub>C10, N11</sub>□(-F<sub>2</sub>)

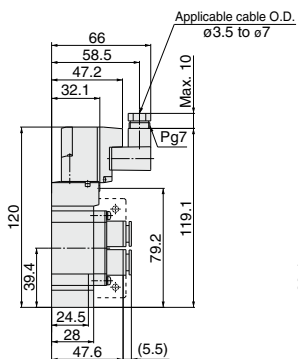

Note) Refer to page 523 for dimensions of connector types.

# Body Ported *Series SY3000/5000/7000/9000*



## Dimensions: Series SY7000

[ ]: AC

### 2 position double

Grommet (G), (H): SY7220-□<sub>G</sub>□<sub>H</sub>□<sub>C8, N9</sub>□<sub>C10, N11</sub>□(-F2)

SY7220-□<sub>G</sub>□<sub>H</sub>□<sub>C8, N9</sub>□<sub>C10, N11</sub>□-02□(-F2)

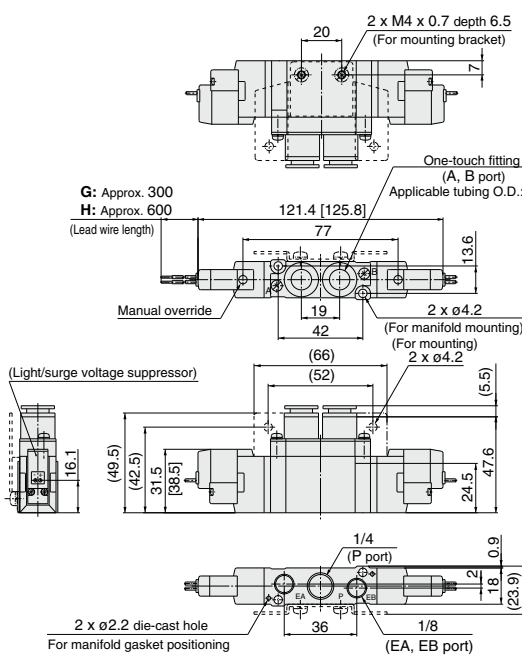

- SJ
- SY
- SY**
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

### L plug connector (L):

SY7220-□<sub>L</sub>□<sub>C8, N9</sub>□<sub>C10, N11</sub>□(-F2)

### M plug connector (M):





SY7220-□<sub>M</sub>□<sub>C8, N9</sub>□<sub>C10, N11</sub>□(-F2)

### DIN terminal (D, Y):

SY7220-□<sub>D</sub>□<sub>C8, N9</sub>□<sub>C10, N11</sub>□(-F2)

### M8 connector (WO):

SY7220-□<sub>WO</sub>□<sub>C8, N9</sub>□<sub>C10, N11</sub>□(-F2)

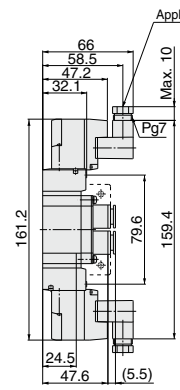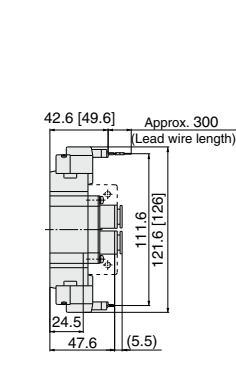

Note) Refer to page 523 for dimensions of connector types.

# Series SY3000/5000/7000/9000



## Dimensions: Series SY7000

[ ] : AC

3 position closed center / exhaust center / pressure center

Grommet (G), (H): SY7 $\frac{3}{5}$ 20-□□□□-C8, N9  
C10, N11 □□(-F2)

SY7 $\frac{3}{5}$ 20-□□□□-02□(-F2)

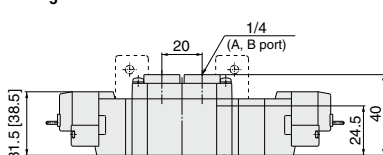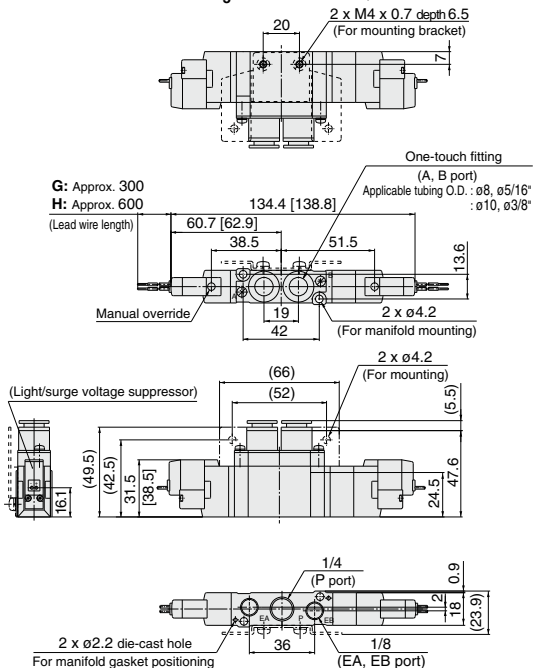





L plug connector (L):

M plug connector (M):

DIN terminal (D, Y):

M8 connector (WO):

SY7 $\frac{3}{5}$ 20-□□□□-C8, N9  
C10, N11 □□(-F2) SY7 $\frac{3}{5}$ 20-□□□□-C8, N9  
C10, N11 □□(-F2) SY7 $\frac{3}{5}$ 20-□□□□-C8, N9  
C10, N11 □□(-F2) SY7 $\frac{3}{5}$ 20-□□□□-C8, N9  
C10, N11 □□(-F2)

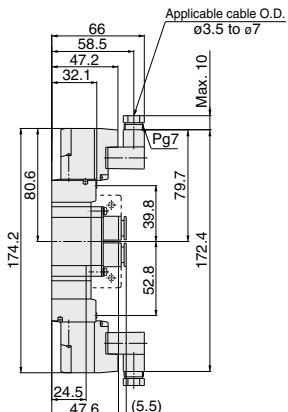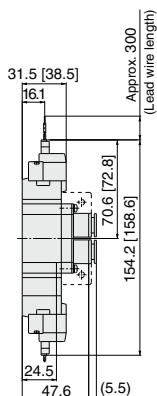

Note) Refer to page 523 for dimensions of connector types.

## Dimensions: Series SY9000



[ JAC

### 2 position single

Grommet (G), (H): SY9120-□G□□□C8, N9  
C12

SY9120-□G□□□02□  
03□

G: Approx. 300  
H: Approx. 600  
(Lead wire length)



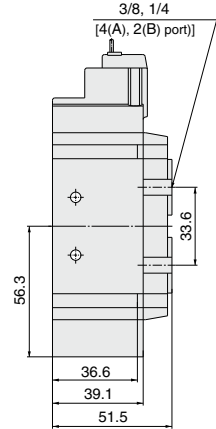
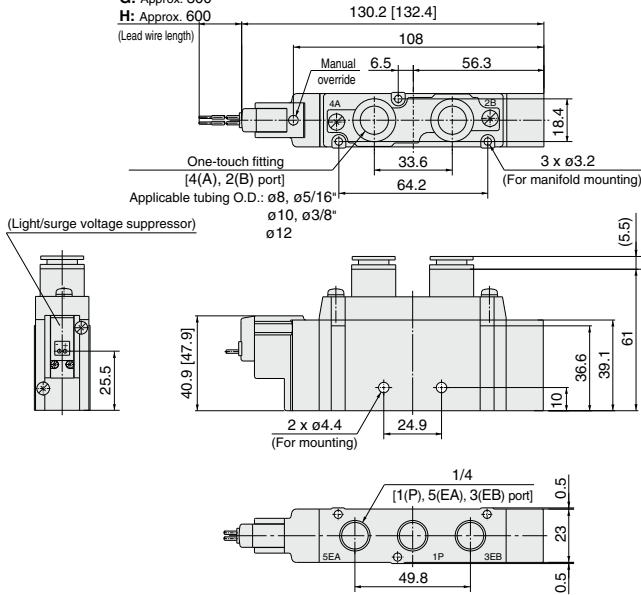


L plug connector (L):  
SY9120-□L□□□C8, N9  
C12, N11□

M plug connector (M):  
SY9120-□M□□□C8, N9  
C12, N11□

DIN terminal (D, Y):  
SY9120-□D□□□C8, N9  
C12, N11□

M8 connector (WO):  
SY9120-□WO□□□C8, N9  
C12, N11□

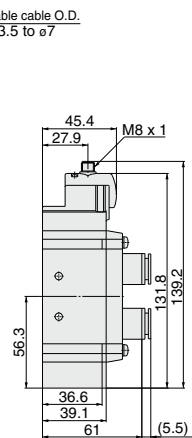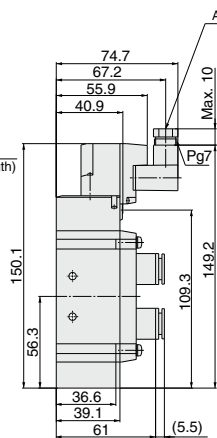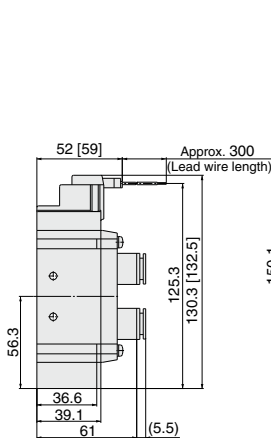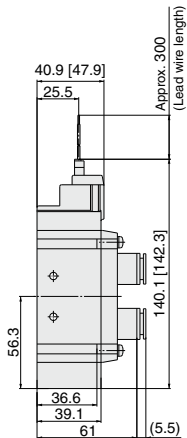

- SJ
- SY
- SY**
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

Note) Refer to page 523 for dimensions of connector types.

# Series SY3000/5000/7000/9000

## Dimensions: Series SY9000



[ ] : AC

### 2 position double

Grommet (G), (H): SY9220-□G□□C8, N9  
C10, N11□C12

SY9220-□G□□02□  
H□□□03□

G: Approx. 300  
H: Approx. 600



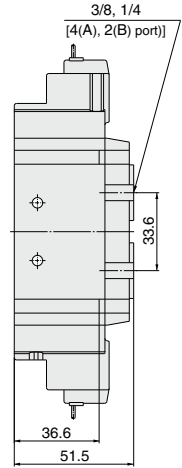
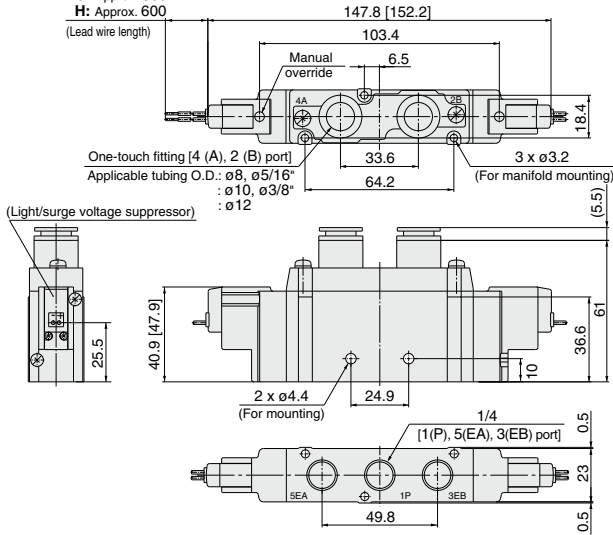


L plug connector (L):  
SY9220-□L□□C8, N9  
C10, N11□C12

M plug connector (M):  
SY9220-□M□□C8, N9  
C10, N11□C12

DIN terminal (D, Y):  
SY9220-□Y□□C8, N9  
C10, N11□C12

M8 connector (WO):  
SY9220-□WO□□C8, N9  
C10, N11□C12

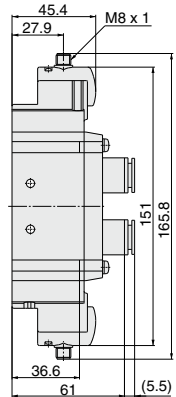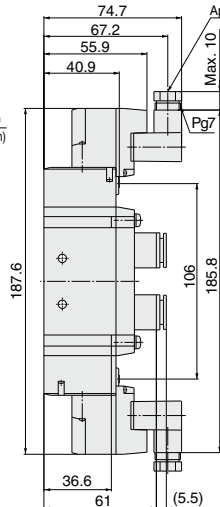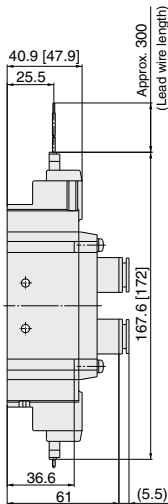

Note) Refer to page 523 for dimensions of connector types.


## Dimensions: Series SY9000

[ ]: AC


### 3 position closed center / exhaust center / pressure center

Grommet (G), (H): SY9<sup>3</sup>/<sub>5</sub>20-□<sup>G</sup>□□-<sup>C8, N9</sup>C10, N11□<sup>C12</sup>


G: Approx. 300  
H: Approx. 600  
(Lead wire length)

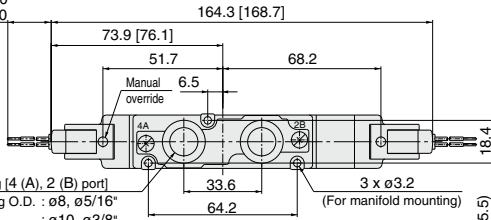

One-touch fitting 4 (A), 2 (B) port  
Applicable tubing O.D.: ø8, ø5/16"  
: ø10, ø3/8"  
: ø12

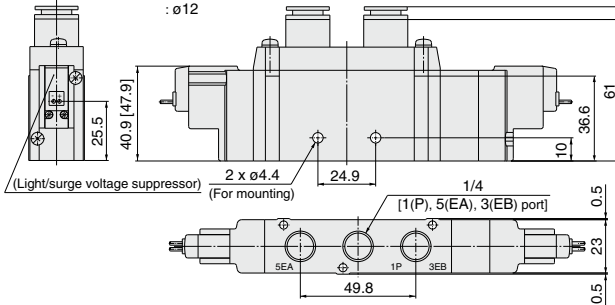


SY9<sup>3</sup>/<sub>5</sub>20-□<sup>G</sup>□□-<sup>C8, N9</sup>02□□<sup>C12</sup>

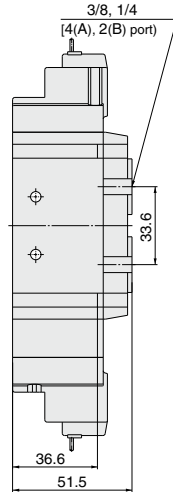


### L plug connector (L):

SY9<sup>3</sup>/<sub>5</sub>20-□<sup>C8, N9</sup>□□-□□<sup>C10, N11</sup>□□<sup>C12</sup>

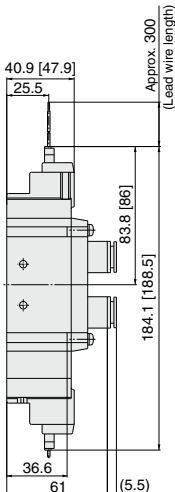


### M plug connector (M):

SY9<sup>3</sup>/<sub>5</sub>20-□<sup>C8, N9</sup>M□□-□□<sup>C10, N11</sup>□□<sup>C12</sup>

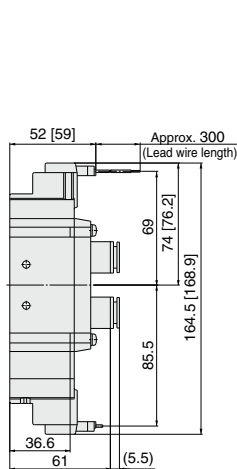


### DIN terminal (D, Y):

SY9<sup>3</sup>/<sub>5</sub>20-□<sup>C8, N9</sup>□□-□□<sup>C10, N11</sup>□□<sup>C12</sup>

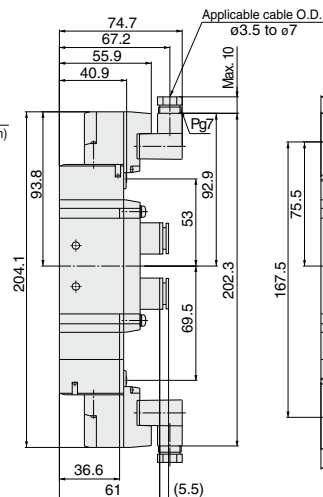

### M8 connector (WO):

SY9<sup>3</sup>/<sub>5</sub>20-□<sup>C8, N9</sup>WO□□-□□<sup>C10, N11</sup>□□<sup>C12</sup>

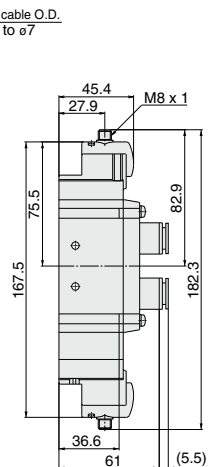

Note) Refer to page 523 for dimensions of connector types.

SJ
SY
<b>SY</b>
SV
SYJ
SZ
VF
VP4
S0700
VQ
VQ4
VQ5
VQC
VQC4
VQZ
SQ
VFS
VFR
VQ7

# 5 Port Solenoid Valve Base Mounted/Single Unit



[Option] (Details → P.513)  
Note) AC-type models that are CE-compliant have DIN terminals only.

# Series SY3000/5000/7000/9000

## How to Order

SY 5 2 40 [ ] - 5 L [ ] - [ ] - [ ] - [ ]

**Series**

3	SY3000
5	SY5000
7	SY7000
9	SY9000

**Type of actuation**

1	2 position single (A)4 2(B)  (EA)5 1 3(EB) (P)
2	2 position double (A)4 2(B)  (EA)5 1 3(EB) (P)
3	3 position closed center (A)4 2(B)  (EA)5 1 3(EB) (P)
4	3 position exhaust center (A)4 2(B)  (EA)5 1 3(EB) (P)
5	3 position pressure center (A)4 2(B)  (EA)5 1 3(EB) (P)

Note) For details about Symbol of the 3 position type of series SY9000, refer to page 309.

**Pilot type**

Nil	Internal pilot
R	External pilot*

\* External pilot specifications for SY3000 DIN terminal are not available.

**Coil specifications**

Nil	Standard
T	With power saving circuit (24, 12 VDC only)

\* Power saving circuit is not available in the case of D, Y, DO, YO or W□ type.

**Rated voltage**

**For DC**

5	24 VDC
6	12 VDC
V	6 VDC
S	5 VDC
R	3 VDC

**For AC (50/60 Hz)**

1	100 VAC
2	200 VAC
3	110 VAC [115 VAC]
4	220 VAC [230 VAC]

\* DC specifications of type D, Y, DO and YO is only available with 12 and 24 VDC.  
\* For type W□, DC voltage is only available.

**Port size**

Symbol	Port size	Applicable series
Nil	Without sub-plate	
01	1/8 With sub-plate	SY3000
02	1/4 With sub-plate	SY5000 SY7000
03	3/8 With sub-plate	SY7000 SY9000
04	1/2 With sub-plate	SY9000


**Thread type**

Nil	Rc
F	G
N	NPT
T	NPTF

**Made to Order**

Nil	—
X90	Main valve fluororubber (Refer to page 510).

**Manual override**

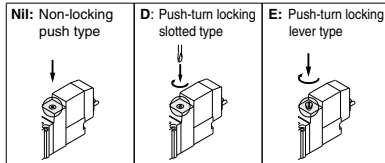

**CE-compliant**

Nil	—
Q	CE-compliant

Note) AC-type models that are CE-compliant have DIN terminals only.

**Light/Surge voltage suppressor**

**Electrical entry for G, H, L, M, W**

Nil	Without light/surge voltage suppressor
S	With surge voltage suppressor
Z	With light/surge voltage suppressor
R	With surge voltage suppressor (Non-polar type)
U	With light/surge voltage suppressor (Non-polar type)

- \* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.
- \* For "R" and "U", DC voltage is only available.
- \* Power saving circuit is only available in the "Z" type.

**Electrical entry for D, Y**

Nil	Without light/surge voltage suppressor
S	With surge voltage suppressor (Non-polar type)
Z	With light/surge voltage suppressor (Non-polar type)

- \* DOZ and YOZ are not available.
- \* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.

**Electrical entry**

	24, 12, 6, 5, 3 VDC / 100, 110, 200, 220 VAC				24, 12 VDC / 100, 110, 200, 220 VAC	24, 12, 6, 5, 3 VDC
	Grommet	L plug connector	M plug connector	MN: Without lead wire	D, Y. With connector	W□: With connector cable (Note)
G: Lead wire length 300 mm		L: With lead wire (Length 300 mm)	M: With lead wire (Length 300 mm)	MN: Without lead wire		WO: Without connector cable
H: Lead wire length 600 mm		LN: Without lead wire	LO: Without connector	MO: Without connector	DO, YO: Without connector	
CE-compliant	DC	AC	AC	AC	AC	AC

\* LN, MN type: with 2 sockets.

\* The DIN terminal of series SY3000 cannot be mounted on the standard sub-plate. For details, refer to page 520.

\* "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN43650C). For details, refer to page 519.

\* For connector cable of M8 connector, refer to page 522.

\* M8 connector conforming to IEC60947-5-2 standard is also available. Refer to page 509 for details.

\* Refer to page 519 for the lead wire length of L and M plug connectors.


\* Refer to page 520 for the connector assembly with cover for L and M plug connectors.

Note) Enter the cable length symbols in □. Please be sure to fill in the blank referring to page 523.

Note) When ordering single unit of the base mounted type solenoid valve, the mounting screws and gaskets for the manifold are included.



## Specifications

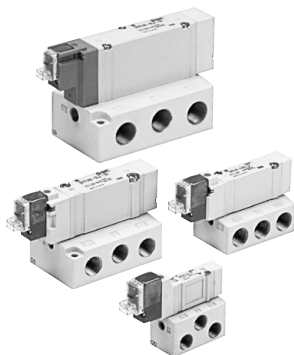

**Made to Order**  
(For details, refer to pages 502 to 510.)

Series	SY3000	SY5000	SY7000	SY9000
<b>Fluid</b>	Air			
<b>Internal pilot</b>	2 position single 0.15 to 0.7			
<b>Operating pressure range (MPa)</b>	2 position double 0.1 to 0.7			
	3 position 0.2 to 0.7			
<b>External pilot</b>	Operating pressure range -100 kPa to 0.7			
<b>Operating pressure range (MPa)</b>	Pilot pressure 0.25 to 0.7			
	2 position double 0.25 to 0.7			
	3 position 0.25 to 0.7			
<b>Ambient and fluid temperature (°C)</b>	-10 to 50 (No freezing.)			
<b>Max. operating frequency (Hz)</b>	10	5	5	5
	3 position	3	3	3
<b>Manual override (Manual operation)</b>	Non-locking push type, Push-turn locking slotted type, Push-turn locking lever type			
<b>Pilot exhaust method</b>	Internal pilot	Common exhaust type for main and pilot valve		
	External pilot	Pilot valve individual exhaust		
<b>Lubrication</b>	Not required			
<b>Mounting orientation</b>	Unrestricted			
<b>Impact/Vibration resistance (m/s<sup>2</sup>)</b> <small>Note)</small>	150/30			
<b>Enclosure</b>	Dust proof (* DIN terminal and M8 connector: IP65)			

\* Based on IEC60529

Note) Impact resistance: No malfunction occurred when it is tested in the axial direction and at the right angles to the main valve and armature in both energized and de-energized states every once for each condition. (Values at the initial period)

Vibration resistance: No malfunction occurred in a one-sweep test between 45 and 2000 Hz. Test was performed at both energized and de-energized states in the axial direction and at the right angles to the main valve and armature. (Values at the initial period)

## Response Time

Note) Based on dynamic performance test, JIS B 8375-1981. (Coil temperature: 20°C, at rated voltage)

### SY3000

Type of actuation	Response time (ms) (at the pressure of 0.5 MPa)		
	Without light/surge voltage suppressor	With light/surge voltage suppressor	Type S, Z   Type R, U
2 position single	12 or less	15 or less	12 or less
2 position double	10 or less	13 or less	10 or less
3 position	15 or less	20 or less	16 or less

### SY5000

Type of actuation	Response time (ms) (at the pressure of 0.5 MPa)		
	Without light/surge voltage suppressor	With light/surge voltage suppressor	Type S, Z   Type R, U
2 position single	19 or less	26 or less	19 or less
2 position double	18 or less	22 or less	18 or less
3 position	32 or less	38 or less	32 or less

### SY7000

Type of actuation	Response time (ms) (at the pressure of 0.5 MPa)		
	Without light/surge voltage suppressor	With light/surge voltage suppressor	Type S, Z   Type R, U
2 position single	31 or less	38 or less	33 or less
2 position double	27 or less	30 or less	28 or less
3 position	50 or less	56 or less	50 or less

### SY9000

Type of actuation	Response time (ms) (at the pressure of 0.5 MPa)		
	Without light/surge voltage suppressor	With light/surge voltage suppressor	Type S, Z   Type R, U
2 position single	35 or less	41 or less	35 or less
2 position double	35 or less	41 or less	35 or less
3 position	62 or less	64 or less	62 or less

## Solenoid Specifications

Electrical entry	Grommet (G), (H) L plug connector (L) M plug connector (M)		DIN terminal (D), (Y) M8 connector (W)	
	G, H, L, M, W		D, Y	
<b>Coil rated voltage (V)</b>	DC	24, 12, 6, 5, 3		
	AC 50/60 Hz	100, 110, 200, 220		
<b>Allowable voltage fluctuation</b>	±10% of rated voltage *			
<b>Power consumption (W)</b>	DC	Standard	0.35 (With indicator light: 0.4 DIN terminal with indicator light: 0.45)	
		With power saving circuit	0.1 (With indicator light only)	
<b>Apparent power (VA) *</b>	AC	100 V	0.78 (With indicator light: 0.81)	0.78 (With indicator light: 0.87)
		110 V [115 V]	0.86 (With indicator light: 0.89)	0.86 (With indicator light: 0.97)
		200 V	1.30 (With indicator light: 1.34)	1.27 (With indicator light: 1.46)
		220 V [230 V]	1.42 (With indicator light: 1.46)	1.39 (With indicator light: 1.60)
<b>Surge voltage suppressor</b>	Diode (Varistor is for DIN terminal and Non-polar type.)			
<b>Indicator light</b>	LED (AC of DIN connector is neon light.)			

\* In common between 110 VAC and 115 VAC, and between 220 VAC and 230 VAC.

\* For 115 VAC and 230 VAC, the allowable voltage is -15% to +5% of rated voltage.

\* S, Z and T type (with power saving circuit) should be used within the following allowable voltage fluctuation range due to a voltage drop caused by the internal circuit.

S and Z type: 24 VDC: -7% to +10%

12 VDC: -4% to +10%

T type: 24 VDC: -8% to +10%

12 VDC: -6% to +10%

\* DIN terminal and M8 connector with power saving circuit are not available.

SJ

SY

SY

SV

SYJ

SZ

VF

VP4

S0700

VQ

VQ4

VQ5

VQC

VQC4

VQZ

SQ

VFS

VFR

VQ7

# Series SY3000/5000/7000/9000

## Flow Characteristics/Weight

### Series SY3000

Valve model	Type of actuation		Port size	Flow characteristics <sup>Note 1)</sup>						Weight (g) <sup>Note 2)</sup>		
				1 → 4/2 (P → A/B)			4/2 → 5/3 (A/B → EA/EB)			Grommet	L plug connector, M plug connector	W M8 connector
				C (dm <sup>3</sup> /s/bar)	b	Cv	C (dm <sup>3</sup> /s/bar)	b	Cv			
SY3□40-□-01	2 position	Single	1/8	1.0	0.30	0.24	1.1	0.30	0.26	84 (50)	85 (53)	89 (57)
		Double		0.77	0.28	0.18	0.85	0.30	0.19	102 (68)	107 (73)	115 (81)
	Closed center			0.73	0.31	0.18	1.1	0.26	0.24	104 (69)	109 (74)	117 (82)
	Exhaust center			1.2	0.24	0.29	0.89	0.47	0.24			
	Pressure center			[0.51]	[0.45]	[0.14]						

Note 1) [ ]: denotes the normal position. Note 2) ( ): denotes without sub-plate.

### Series SY5000

Valve model	Type of actuation		Port size	Flow characteristics <sup>Note 1)</sup>						Weight (g) <sup>Note 2)</sup>			
				1 → 4/2 (P → A/B)			4/2 → 5/3 (A/B → EA/EB)			Grommet	L plug connector, M plug connector	DIN terminal	W M8 connector
				C (dm <sup>3</sup> /s/bar)	b	Cv	C (dm <sup>3</sup> /s/bar)	b	Cv				
SY5□40-□-02	2 position	Single	1/4	2.4	0.41	0.64	2.8	0.29	0.66	121 (58)	123 (61)	154 (92)	127 (65)
		Double		1.8	0.47	0.50	1.8	0.40	0.47	139 (76)	144 (81)	186 (123)	152 (89)
	Closed center			1.4	0.55	0.44	3.0	0.33	0.72	144 (82)	150 (87)	192 (129)	158 (95)
	Exhaust center			[1.2]	[0.48]	[0.37]							
	Pressure center			3.3	0.36	0.85	1.8	0.40	0.48				

Note 1) [ ]: denotes the normal position. Note 2) ( ): denotes without sub-plate.

### Series SY7000

Valve model	Type of actuation		Port size	Flow characteristics <sup>Note 1)</sup>						Weight (g) <sup>Note 2)</sup>			
				1 → 4/2 (P → A/B)			4/2 → 5/3 (A/B → EA/EB)			Grommet	L plug connector, M plug connector	DIN terminal	W M8 connector
				C (dm <sup>3</sup> /s/bar)	b	Cv	C (dm <sup>3</sup> /s/bar)	b	Cv				
SY7□40-□-02	2 position	Single	1/4	4.1	0.41	1.1	4.1	0.29	1.0	218 (89)	221 (92)	242 (113)	225 (96)
		Double		3.0	0.43	0.80	2.6	0.41	0.72	237 (108)	242 (113)	284 (155)	250 (121)
	Closed center			2.6	0.42	0.71	4.7	0.35	1.1	239 (110)	245 (116)	287 (158)	253 (124)
	Exhaust center			[1.7]	[0.48]	[0.49]							
	Pressure center			5.3	0.39	1.3	2.2	0.49	0.63				

Note 1) [ ]: denotes the normal position. Note 2) ( ): denotes without sub-plate.






### Series SY9000

Valve model	Type of actuation		Port size	Flow characteristics <sup>Note 1)</sup>						Weight (g) <sup>Note 2)</sup>			
				1 → 4/2 (P → A/B)			4/2 → 5/3 (A/B → EA/EB)			Grommet	L plug connector, M plug connector	DIN terminal	W M8 connector
				C (dm <sup>3</sup> /s/bar)	b	Cv	C (dm <sup>3</sup> /s/bar)	b	Cv				
SY9□40-□-03	2 position	Single	3/8	7.9	0.34	2.0	9.6	0.43	2.6	469(172)	472(175)	493(196)	476(179)
		Double		7.5	0.33	1.8	7.3	0.30	1.7	488(191)	494(197)	535(239)	502(205)
	Closed center			7.2	0.34	1.7	13	0.23	2.8	512(215)	518(221)	560(263)	526(229)
	Exhaust center			[4.0]	[0.41]	[0.95]							
	Pressure center			12	0.26	2.8	6.7	0.40	1.9				




Note 1) [ ]: denotes the normal position. Note 2) ( ): denotes without sub-plate.

## Construction

### Series SY

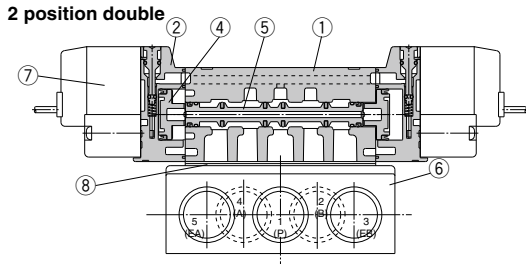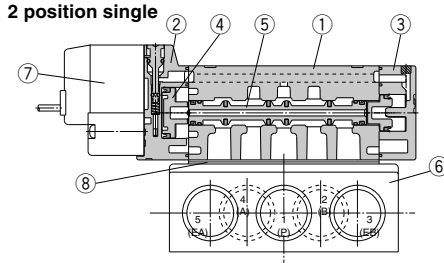

**3 position closed center / exhaust center / pressure center**

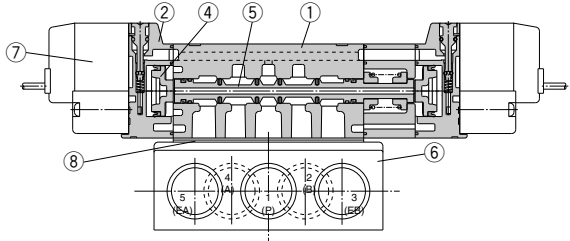

(This figure shows a closed center type.)

### Component Parts

No.	Description	Material	Note
1	<b>Body</b>	Aluminum die-casted (SY3000: Zinc die-casted)	White
2	<b>Adapter plate</b>	Resin	White (SY9000: Gray)
3	<b>End plate</b>	Resin	White
4	<b>Piston</b>	Resin	—
5	<b>Spool valve assembly</b>	Aluminum, H-NBR	—

### Replacement Parts

No.	Description	Part No.				Note
		SY3□40	SY5□40	SY7□40	SY9□40	
6	<b>Sub-plate</b> <small>(Note)</small>	SY3000-27-1□	SY5000-27-1□	1/4: SY7000-27-1□ 3/8: SY7000-27-2□	3/8: SY9000-27-1□ 1/2: SY9000-27-2□	Aluminum die-casted
7	<b>Pilot valve assembly</b>	Refer to "How to Order Pilot Valve Assembly" on page 511.				
8	<b>Gasket</b>	Standard: SY3000-11-25 CE-compliant: SY3000-11-25	SY5000-11-15 SY5000-11-18	SY7000-11-11 SY7000-11-14	SY9000-11-2 SY9000-11-2	H-NBR
—	Round head combination screw	SY3000-23-4	AC00077	AC00296	SY9000-18-2	For valve mounting
—	Reference screw size	(M2 x 21)	(M3 x 26)	(M4 x 31)	(M3 x 42)	(Matt nickel plated)

\* Thread type

### ⚠ Caution

**Mounting screw tightening torques**

**M2: 0.16 N·m**  
**M3: 0.8 N·m**  
**M4: 1.4 N·m**

SY
SV
SYJ
SZ
VF
VP4
S0700
VQ
VQ4
VQ5
VQC
VQC4
VQZ
SQ
VFS
VFR
VQ7

# Series SY3000/5000/7000/9000

## How to Order Interface Regulator

### Series SY3000

ARBY3000-05-P-2


#### Pressure gauge connection port

05	Pressure gauge (G15-10-01) (for odd number station)
06	Pressure gauge (G15-10-01) (for even number station)
M1	Plug (M-5P)


#### Regulating port

P	P port
A1	A port (P controlled type, A port regulation)
B1	B port (P controlled type, B port regulation)

ARBY3000-05-□-2



ARBY3000-M1-□-2



Note) The M8 connector for wiring cannot be mounted for the ARBY3000 series.

### Series SY5000

ARBY5000-00-P-2


#### Pressure gauge connection port

00	Pressure gauge (G15-10-01)
M1	Plug (M-5P)


#### Regulating port

P	P port
A1	A port (P controlled type, A port regulation)
B1	B port (P controlled type, B port regulation)

ARBY5000-00-□-2

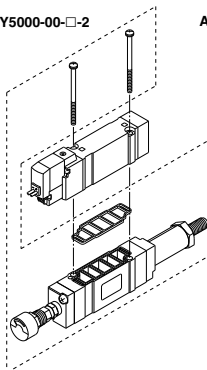

ARBY5000-M1-□-2

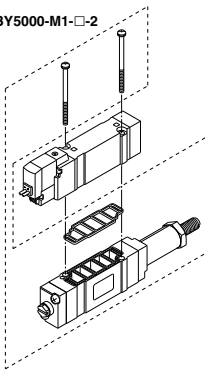

### Series SY7000

ARBY7000-00-P-2


#### Pressure gauge connection port

00	Pressure gauge (G15-10-01)
M1	Plug (M-5P)


#### Regulating port

P	P port
A1	A port (P controlled type, A port regulation)
B1	B port (P controlled type, B port regulation)

ARBY7000-00-□-2

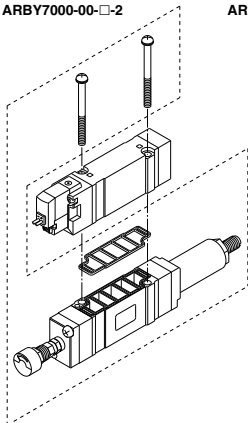

ARBY7000-M1-□-2

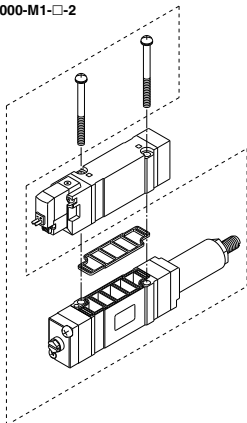

Note) ARBY is not CE-compliant.

## Accessory

Series	Round head combination screw Reference screw size	Gasket
ARBY3000	SY3000-23-10 (M2 x 36)	SX3000-57-4
ARBY5000	AC00283 (M3 x 48.5)	SX5000-57-6
ARBY7000	AC00282 (M4 x 58)	SX7000-57-5

### Caution

Mounting screw  
tightening torques

M2: 0.16 N·m

M3: 0.8 N·m


M4: 1.4 N·m

**Dimensions: Series SY3000**


[ ] : AC

**2 position single**


**Grommet (G), (H): SY3140(R)-□<sup>G</sup>□□-01□**

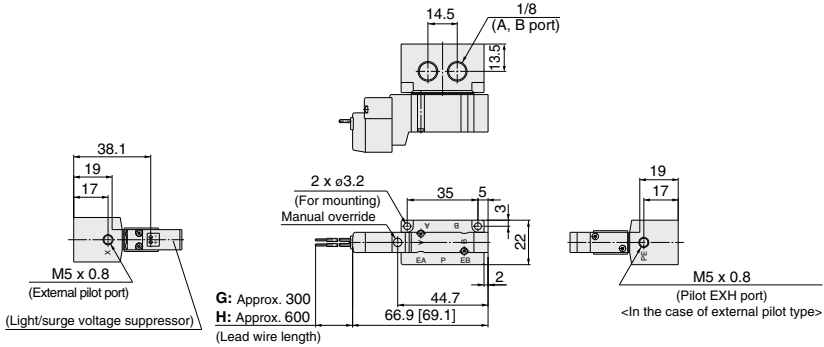


**With interface regulator**

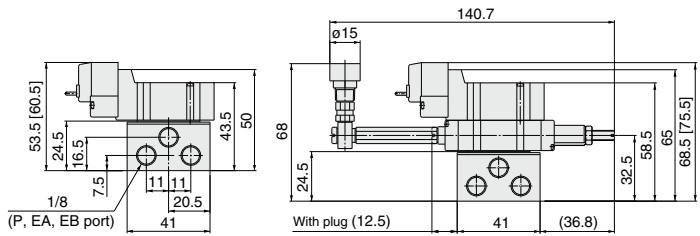


**L plug connector (L):  
 SY3140(R)-□L□□-01□**

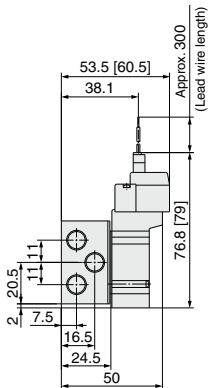

**M plug connector (M):  
 SY3140(R)-□M□□-01□**



**M8 connector (WO):  
 SY3140(R)-□WO□□-01□**



Note) Refer to page 523 for dimensions of connector types.

SY
SY
SV
SYJ
SZ
VF
VP4
S0700
VQ
VQ4
VQ5
VQC
VQC4
VQZ
SQ
VFS
VFR
VQ7



# Series SY3000/5000/7000/9000

## Dimensions: Series SY3000


[ ]: AC

### 2 position double


Grommet (G), (H): SY3240(R)-□<sup>G</sup>□□-01□

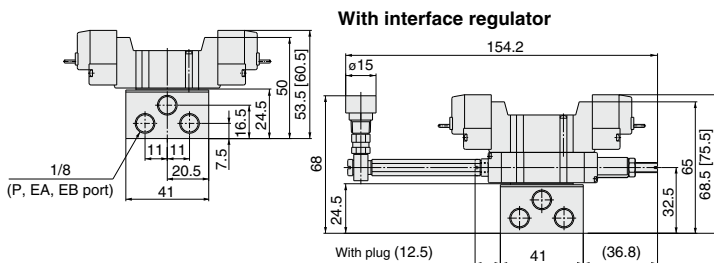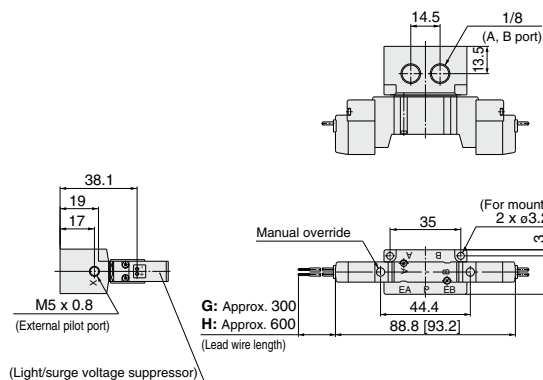


**L plug connector (L):**  
SY3240(R)-□L□□-01□

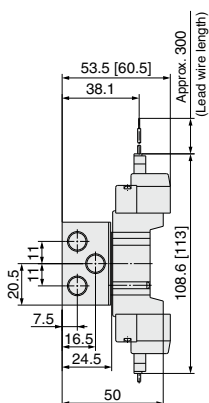

**M plug connector (M):**  
SY3240(R)-□M□□-01□



**M8 connector (WO):**  
SY3240(R)-□WO□□-01□





Note) Refer to page 523 for dimensions of connector types.

**Dimensions: Series SY3000**


[ ] : AC

3 position closed center / exhaust center / pressure center


Grommet (G), (H): SY3 $\frac{3}{5}$ 40(R)-□G□□-01□

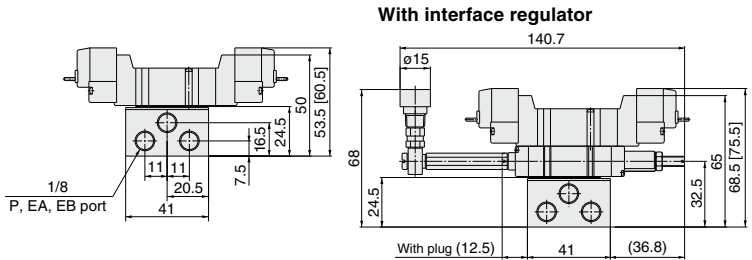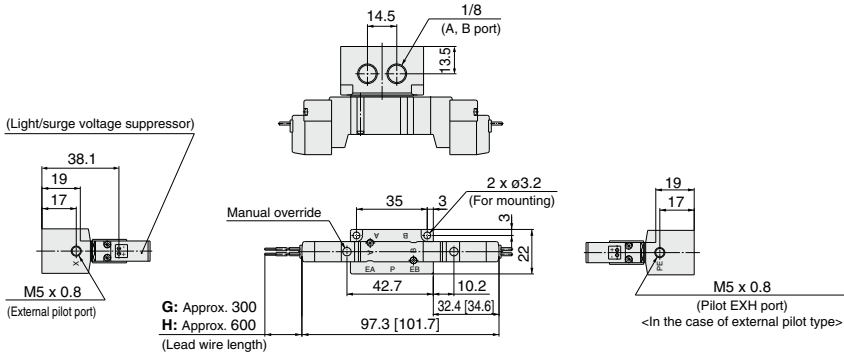


**L plug connector (L):**  
SY3 $\frac{3}{5}$ 40(R)-□L□□-01□

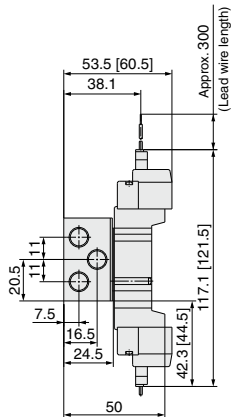

**M plug connector (M):**  
SY3 $\frac{3}{5}$ 40(R)-□M□□-01□



**M8 connector (WO):**  
SY3 $\frac{3}{5}$ 40(R)-□WO□□-01□



Note) Refer to page 523 for dimensions of connector types.

- SY
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7



# Series SY3000/5000/7000/9000

## Dimensions: Series SY5000


[ ]: AC

### 2 position single

Grommet (G), (H): SY5140(R)-□<sup>G</sup>□□□-02□

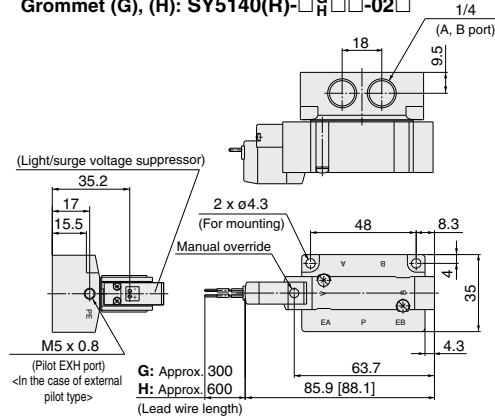

### With interface regulator




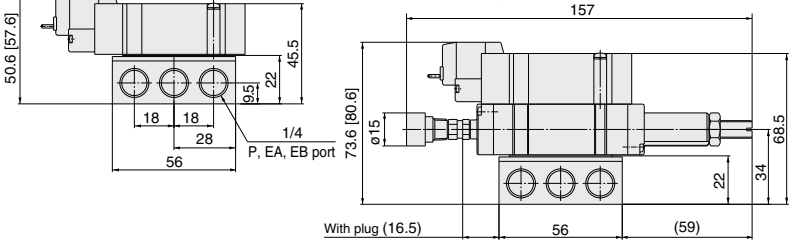


L plug connector (L):  
SY5140(R)-□L□□-02□

M plug connector (M):  
SY5140(R)-□M□□-02□

DIN terminal (D, Y):  
SY5140(R)-□D□□-02□

M8 connector (WO):  
SY5140(R)-□WO□□-02□

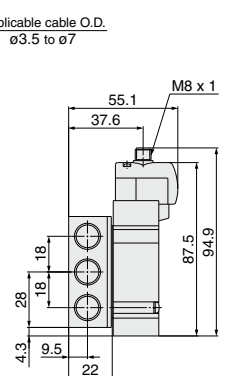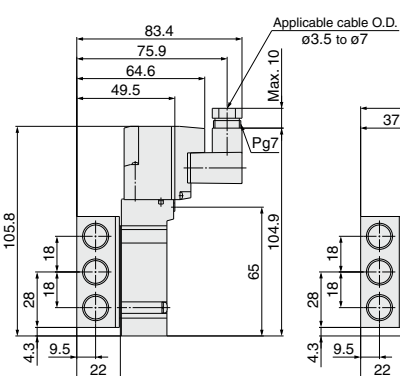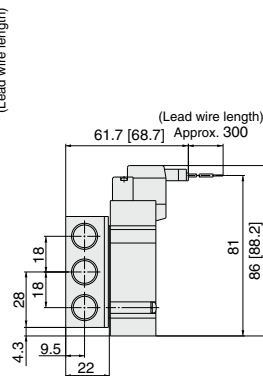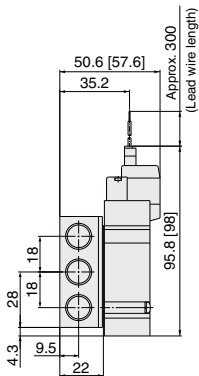

Note) Refer to page 523 for dimensions of connector types.




**Dimensions: Series SY5000**


[ ]: AC

**2 position double**

**Grommet (G), (H): SY5240(R)-□<sub>G</sub>□□-02□**

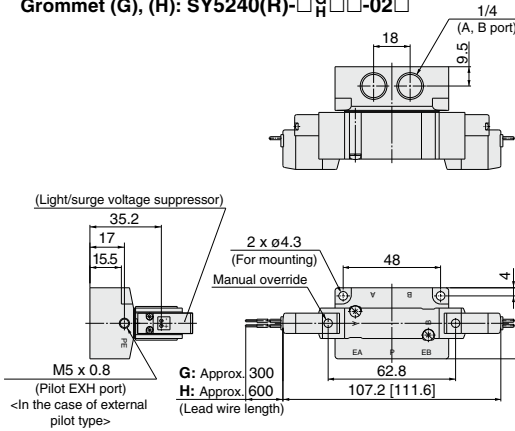

**With interface regulator**



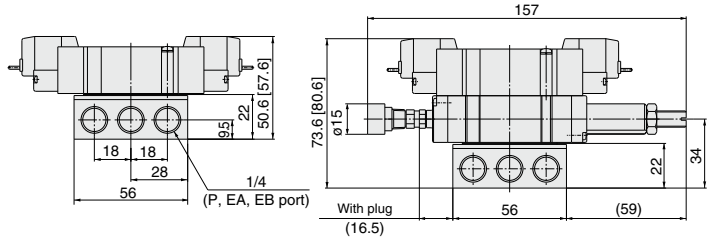


**L plug connector (L): SY5240(R)-□L□□-02□**


**M plug connector (M): SY5240(R)-□M□□-02□**

**DIN terminal (D, Y): SY5240(R)-□Y□□-02□**

**M8 connector (WO): SY5240(R)-□WO□□-02□**

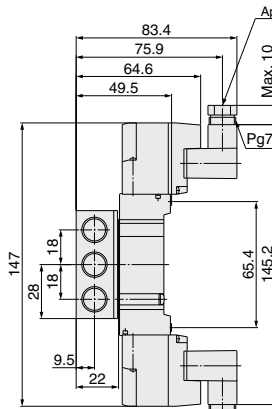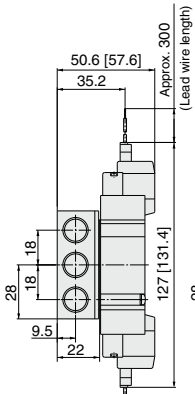

Applicable cable O.D.  
 $\phi 3.5$  to  $\phi 7$



Note) Refer to page 523 for dimensions of connector types.

SJ
SY
<b>SY</b>
SV
SYJ
SZ
VF
VP4
S0700
VQ
VQ4
VQ5
VQC
VQC4
VQZ
SQ
VFS
VFR
VQ7


# Series SY3000/5000/7000/9000

## Dimensions: Series SY5000


[ ] : AC

3 position closed center / exhaust center / pressure center


Grommet (G), (H): SY5 $\frac{3}{4}$ 40(R)-□ $\frac{G}{H}$ □□-02□




(Light/surge voltage suppressor)




M5 x 0.8  
(Pilot EXH port)  
<In the case of external pilot type>

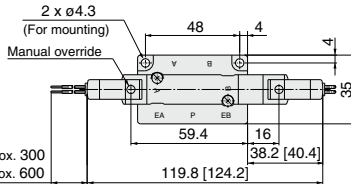


G: Approx. 300  
H: Approx. 600  
(Lead wire length)



With interface regulator



(P, EA, EB port)

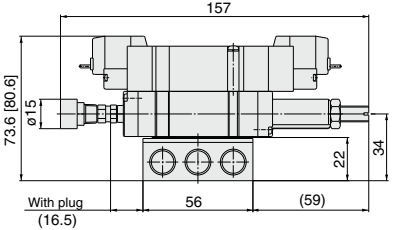

With plug  
(16.5)

L plug connector (L):

SY5 $\frac{3}{4}$ 40(R)-□L□□-02□

M plug connector (M):




SY5 $\frac{3}{4}$ 40(R)-□M□□-02□

DIN terminal (D, Y):

SY5 $\frac{3}{4}$ 40(R)-□D□□-02□

M8 connector (WO):

SY5 $\frac{3}{4}$ 40(R)-□WO□□-02□

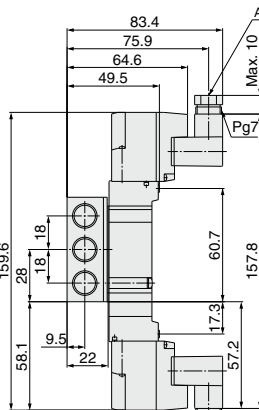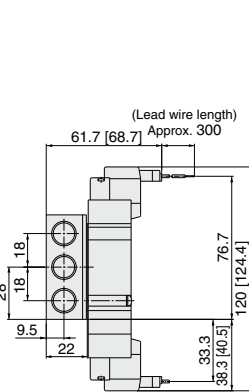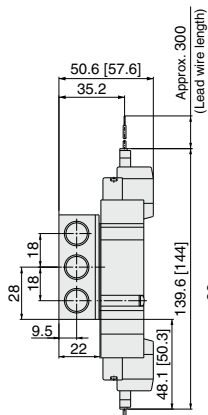

Applicable cable O.D.  
ø3.5 to ø7

Max. 10

Pg7

157.8

60.7

17.3

57.2

22

9.5

18

28

58.1

49.5

64.6

75.9

83.4

157.8

157.8

157.8

157.8

157.8

157.8

157.8

157.8

157.8

157.8

157.8

157.8


Note) Refer to page 523 for dimensions of connector types.

**Dimensions: Series SY7000**


[ ] : AC

**2 position single**


**Grommet (G), (H): SY7140(R)-□<sup>G</sup>□□-02□□<sub>H</sub>**





(Light/surge voltage suppressor)

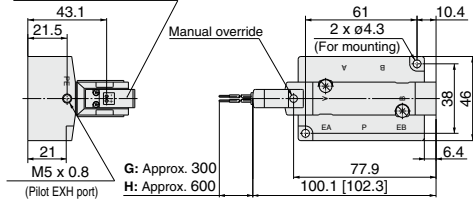

<In the case of external pilot type>  
(Lead wire length)



**With interface regulator**


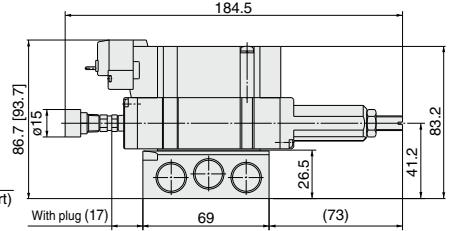



**L plug connector (L): SY7140(R)-□L□□-02□□<sub>03</sub>**

**M plug connector (M): SY7140(R)-□M□□-02□□<sub>03</sub>**

**DIN terminal (D, Y): SY7140(R)-□D□□-02□□<sub>03</sub>**

**M8 connector (WO): SY7140(R)-□WO□□-02□□<sub>03</sub>**

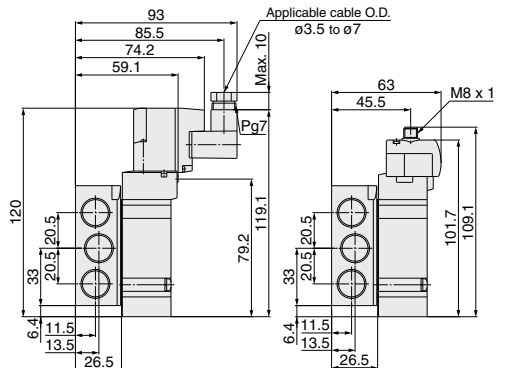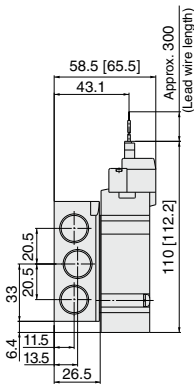

Note) Refer to page 523 for dimensions of connector types.

SJ
SY
<b>SY</b>
SV
SYJ
SZ
VF
VP4
S0700
VQ
VQ4
VQ5
VQC
VQC4
VQZ
SQ
VFS
VFR
VQ7


# Series SY3000/5000/7000/9000

## Dimensions: Series SY7000

[ ] : AC

### 2 position double

Grommet (G), (H): SY7240(R)-□ $\begin{matrix} G \\ H \end{matrix}$ □□-□ $\begin{matrix} 02 \\ 03 \end{matrix}$ □

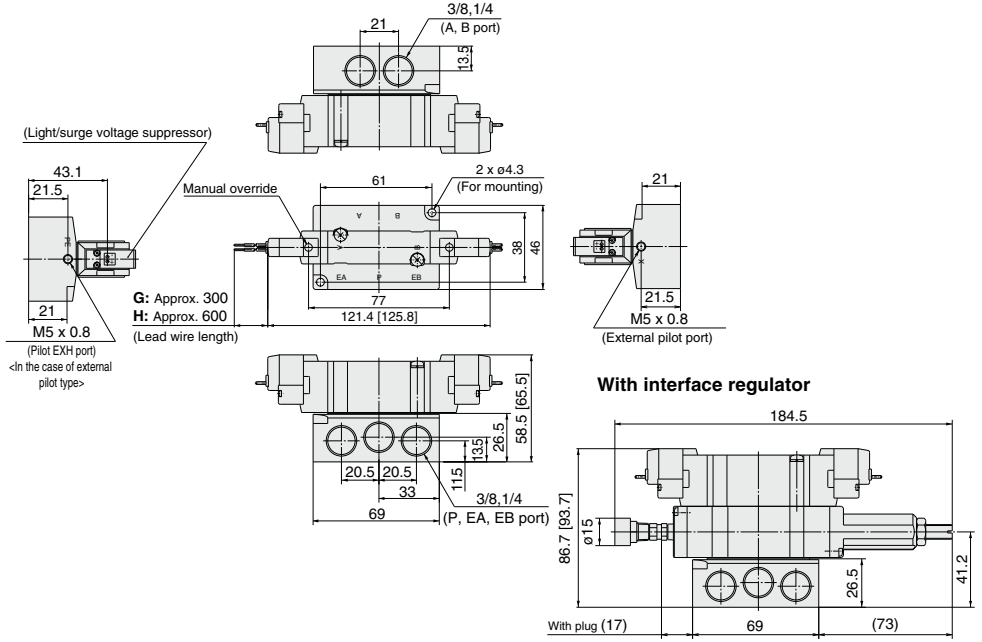


L plug connector (L): SY7240(R)-□L□□-□ $\begin{matrix} 02 \\ 03 \end{matrix}$ □

M plug connector (M): SY7240(R)-□M□□-□ $\begin{matrix} 02 \\ 03 \end{matrix}$ □

DIN terminal (D, Y): SY7240(R)-□D□□-□ $\begin{matrix} 02 \\ 03 \end{matrix}$ □

M8 connector (WO): SY7240(R)-□WO□□-□ $\begin{matrix} 02 \\ 03 \end{matrix}$ □

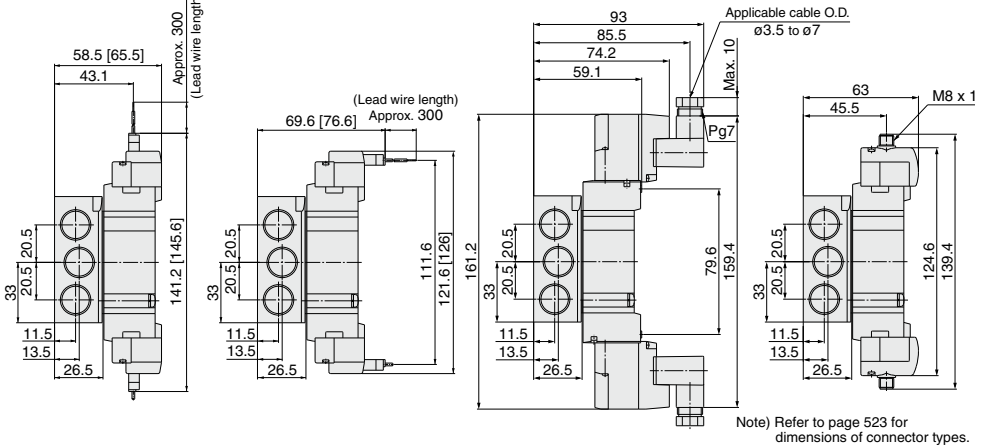


**Dimensions: Series SY7000**

[ ] : AC

**3 position closed center / exhaust center / pressure center**

**Grommet (G), (H): SY7<sup>3</sup>/<sub>5</sub>40(R)-□G□□.02□□**

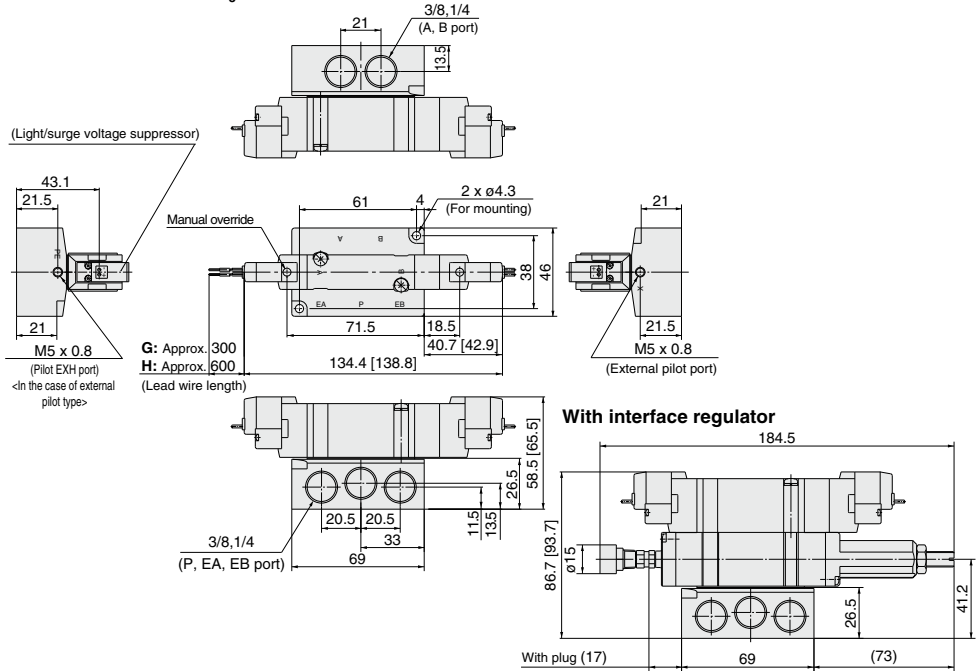


**L plug connector (L): SY7<sup>3</sup>/<sub>5</sub>40(R)-□L□□.02□□**

**M plug connector (M): SY7<sup>3</sup>/<sub>5</sub>40(R)-□M□□.02□□**

**DIN terminal (D, Y): SY7<sup>3</sup>/<sub>5</sub>40(R)-□Y□□.02□□**

**M8 connector (WO): SY7<sup>3</sup>/<sub>5</sub>40(R)-□WO□□.02□□**

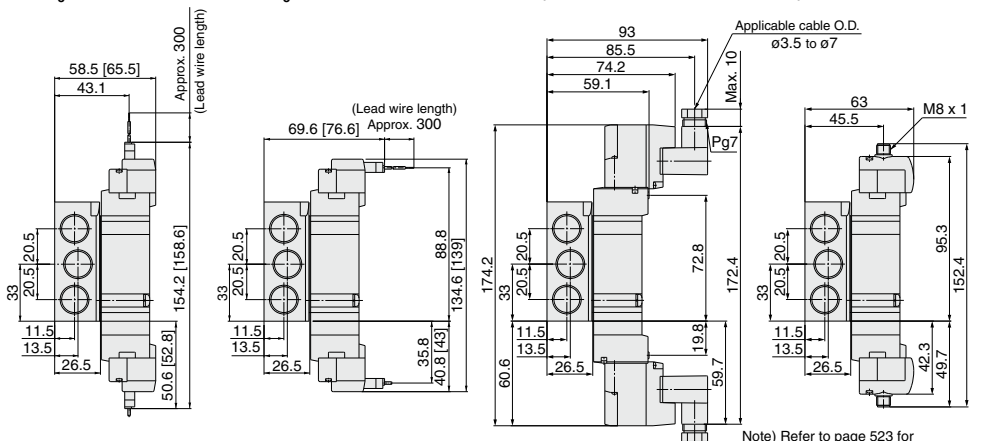

Note) Refer to page 523 for dimensions of connector types.

SJ
SY
<b>SY</b>
SV
SYJ
SZ
VF
VP4
S0700
VQ
VQ4
VQ5
VQC
VQC4
VQZ
SQ
VFS
VFR
VQ7


# Series SY3000/5000/7000/9000

## Dimensions: Series SY9000

[ ]: AC

### 2 position single

Grommet (G), (H): SY9140(R)-□<sub>G</sub>□□-□<sub>03</sub>□<sub>04</sub>

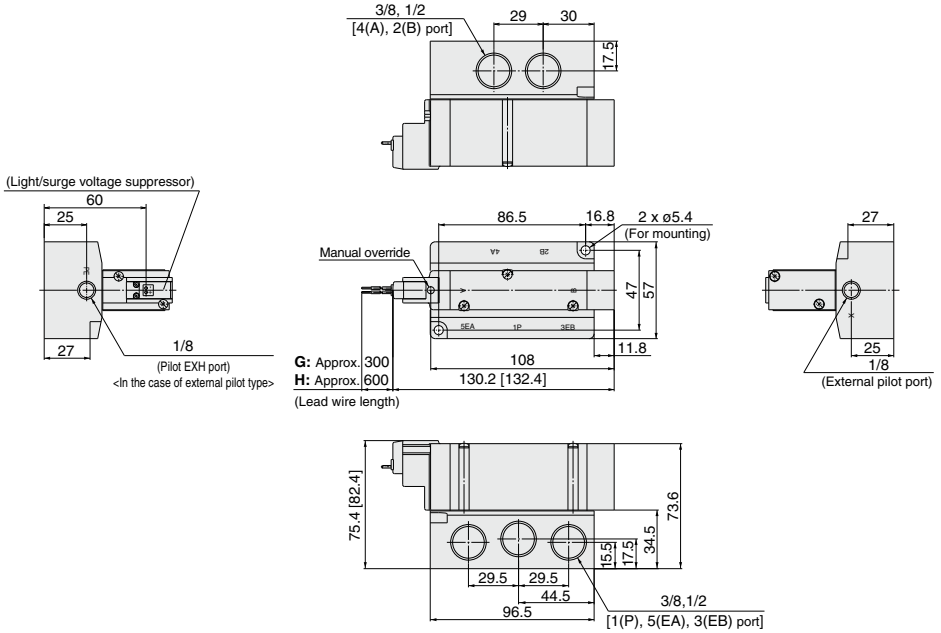


**L plug connector (L):**  
 SY9140(R)-□L□□-□<sub>03</sub>□<sub>04</sub>

**M plug connector (M):**  
 SY9140(R)-□M□□-□<sub>03</sub>□<sub>04</sub>

**DIN terminal (D, Y):**  
 SY9140(R)-□D□□-□<sub>03</sub>□<sub>04</sub>

**M8 connector (WO):**  
 SY9140(R)-□WO□□-□<sub>03</sub>□<sub>04</sub>

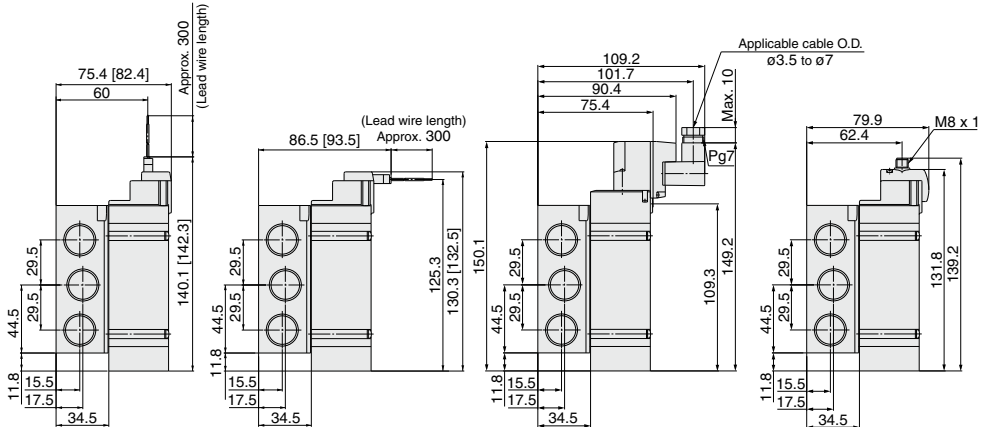


Note) Refer to page 523 for dimensions of connector types.

**Dimensions: Series SY9000**

[ ] : AC

**2 position double**

**Grommet (G), (H): SY9240(R)-□G□□□-03□□**

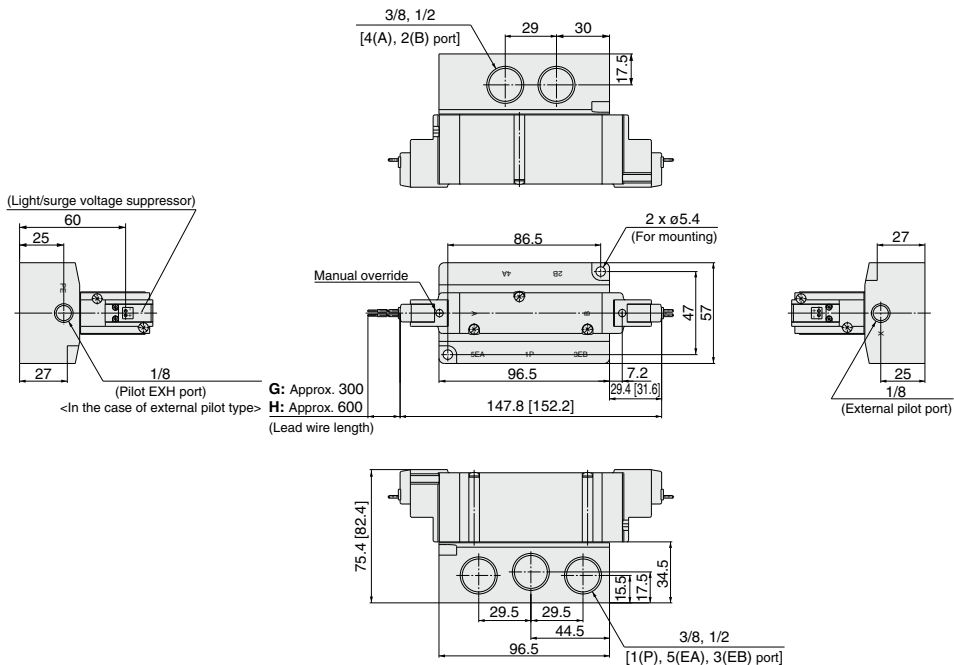


SJ
SY
<b>SY</b>
SV
SYJ
SZ
VF
VP4
S0700
VQ
VQ4
VQ5
VQC
VQC4
VQZ
SQ
VFS
VFR
VQ7

**L plug connector (L): SY9240(R)-□L□□□-03□□**

**M plug connector (M): SY9240(R)-□M□□□-03□□**

**DIN terminal (D, Y): SY9240(R)-□D□□□-03□□**

**M8 connector (WO): SY9240(R)-□WO□□□-03□□**

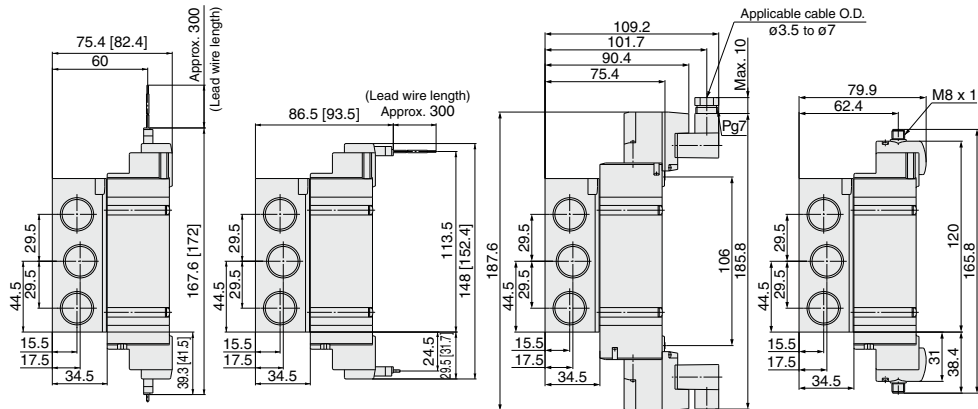

Note) Refer to page 523 for dimensions of connector types.


# Series SY3000/5000/7000/9000

## Dimensions: Series SY9000

[ ]: AC

3 position closed center / exhaust center / pressure center

Grommet (G), (H): SY9<sup>3</sup>/<sub>5</sub>40(R)-□□□□-<sup>03</sup>/<sub>04</sub>□

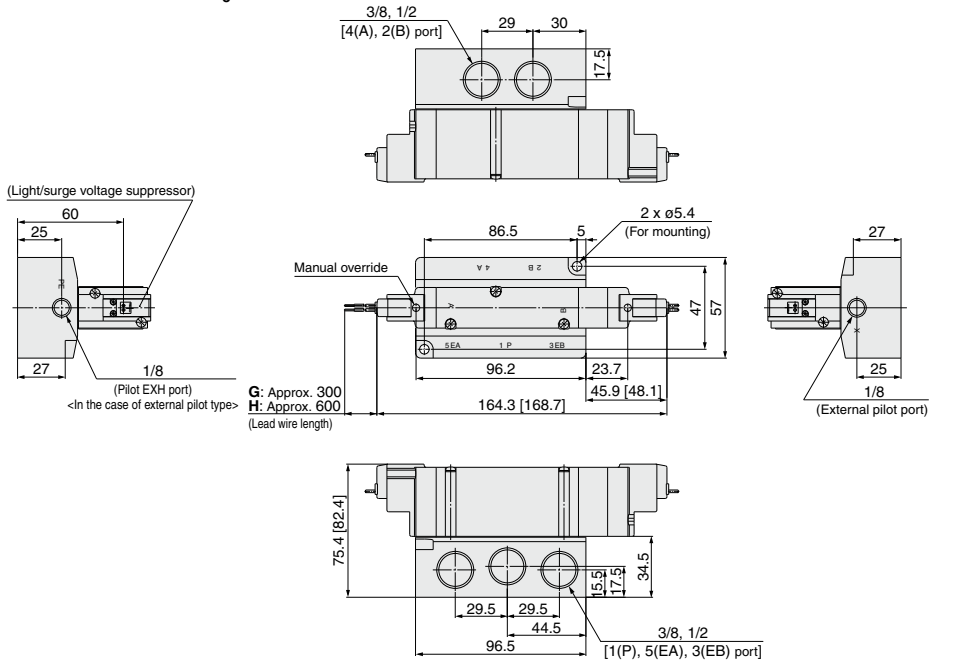


**L plug connector (L):**  
SY9<sup>3</sup>/<sub>5</sub>40(R)-□□□□-<sup>03</sup>/<sub>04</sub>□

**M plug connector (M):**  
SY9<sup>3</sup>/<sub>5</sub>40(R)-□□□□-<sup>03</sup>/<sub>04</sub>□

**DIN terminal (D, Y):**  
SY9<sup>3</sup>/<sub>5</sub>40(R)-□□□□-<sup>03</sup>/<sub>04</sub>□

**M8 connector (WO):**  
SY9<sup>3</sup>/<sub>5</sub>40(R)-□□□□-<sup>03</sup>/<sub>04</sub>□

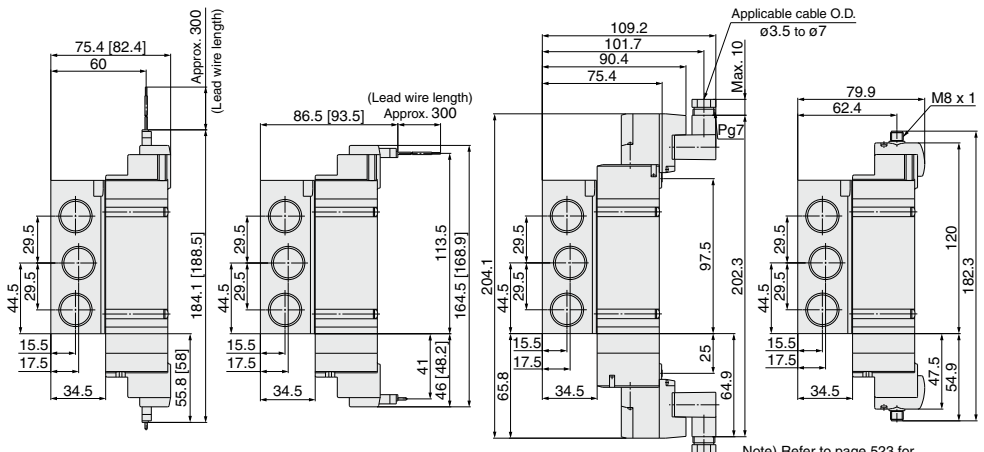

Note) Refer to page 523 for dimensions of connector types.



# 5 Port Solenoid Valve Body Ported Manifold Bar Stock Type/Individual Wiring



Type **20**

# Series SY3000/5000/7000

## How to Order Manifold

SS5Y **5** - **20** - **05** -    -   

### Manifold series

3	SY3000
5	SY5000
7	SY7000

### Stations

02	2 stations
⋮	⋮
20	20 stations

\* This also includes the number of blanking plate assemblies.

### Thread type

NII	Rc
00F	G
00N	NPT
00T	NPTF

### CE-compliant

NII	—
Q	CE-compliant


Note) AC-type models that are CE-compliant have DIN terminals only.

## How to Order Manifold Assembly (Example)

### Example

Cylinder port size

C6: With One-touch fitting for ø6

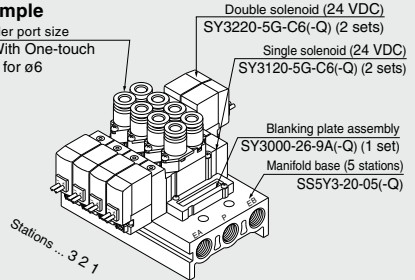

SS5Y3-20-05 (-Q) ..... 1 set (Type 20, 5-station manifold base part no.)

\* SY3000-26-9A (-Q) ..... 1 set (Blanking plate assembly part no.)

\* SY3120-5G-C6 (-Q) ... 2 sets (Single solenoid part no.)

\* SY3220-5G-C6 (-Q) ... 2 sets (Double solenoid part no.)

The asterisk denotes the symbol for assembly.


Prefix it to the part nos. of the solenoid valve, etc.

Add the valve and option part number under the manifold base part number. In the case of complex arrangement, specify them on the manifold specification sheet.



## How to Order Valve


Note) AC-type models that are CE-compliant have DIN terminals only.

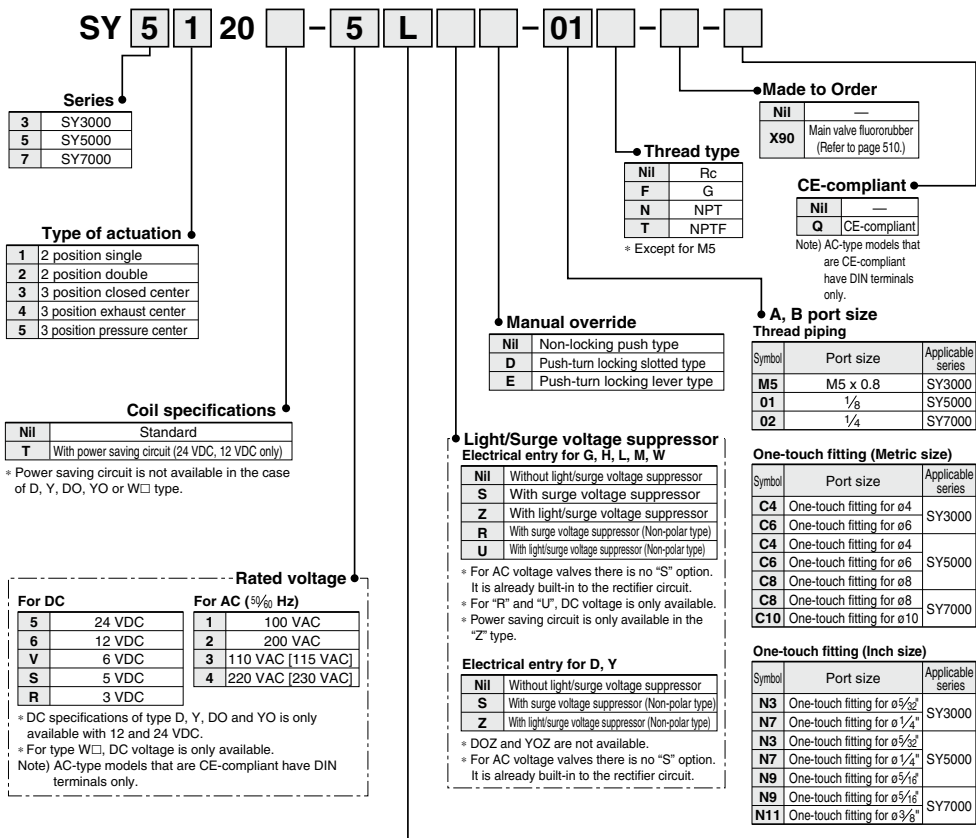

SJ
SY
SY
SV
SYJ
SZ
VF
VP4
S0700
VQ
VQ4
VQ5
VQC
VQC4
VQZ
SQ
VFS
VFR
VQ7


Note) When placing an order for body ported solenoid valve as a single unit, mounting screw for manifold and gasket are not attached. Order them separately, if necessary.

### Gasket assembly part no.



Series	Gasket assembly part no.
SY3000	SY3000-GS-1
SY5000	SY5000-GS-1
SY7000	SY7000-GS-1

Note) The gasket assembly includes 10 sets of mounting screws and a gasket.



## Manifold Specifications

Model	SS5Y3-20(-Q)	SS5Y5-20(-Q)	SS5Y7-20(-Q)	
Applicable valve	SY3□20	SY5□20	SY7□20	
Manifold type	Single base/B mount			
P (SUP)/R (EXH)	Common SUP, Common EXH			
Valve stations	2 to 20 stations <sup>Note1)</sup>			
A, B port location	Valve			
Port size	P, EA, EB port	1/8	1/4	1/4
	A, B port	M5 x 0.8 C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6)	1/8 C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6) C8 (One-touch fitting for ø8)	1/4 C8 (One-touch fitting for ø8) C10 (One-touch fitting for ø10)
Manifold base weight W (g)	W = 13n + 24	W = 36n + 64	W = 43n + 35	
n: Stations				

Note 1) For more than 10 stations (more than 5 stations in case of SS5Y7), supply pressure to P port on both sides and exhaust from EA/EB port on both sides.

Note 2) Refer to "Manifold Option" on page 353.

## Flow Characteristics





Model	Port size		Flow characteristics					
	1, 5, 3 (P, EA, EB)	4, 2 (A, B)	1 → 4/2 (P → A/B)			4/2 → 5/3 (A/B → EA/EB)		
			C (dm <sup>3</sup> /(s·bar))	b	Cv	C (dm <sup>3</sup> /(s·bar))	b	Cv
SS5Y3-20(-Q)	1/8	C6	0.72	0.29	0.18	0.80	0.36	0.21
SS5Y5-20(-Q)	1/4	C8	1.9	0.28	0.48	2.2	0.20	0.53
SS5Y7-20(-Q)	1/4	C10	3.6	0.31	0.93	3.6	0.27	0.88

Note) The value is for manifold base with 5 stations and individually operated 2 position type.


**SY3000: SS5Y3-20-Stations** - [ ]

[ ] : AC


**Grommet (G)**

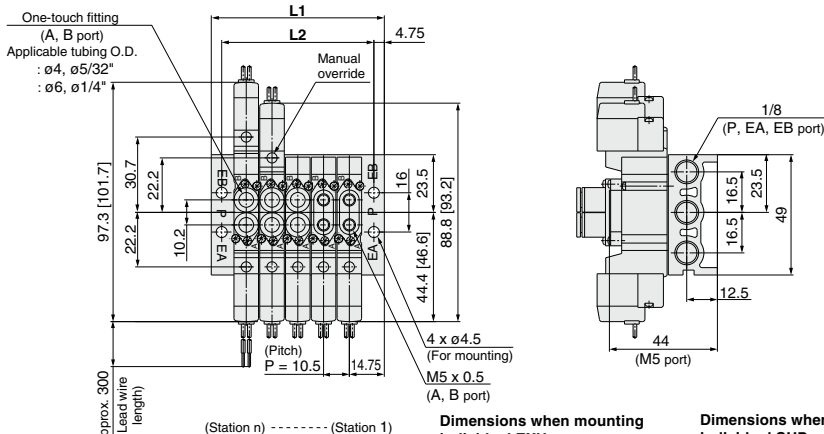


**L plug connector (L)**

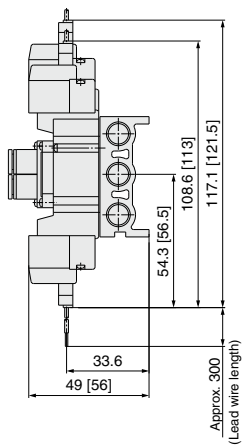

**M plug connector (M)**

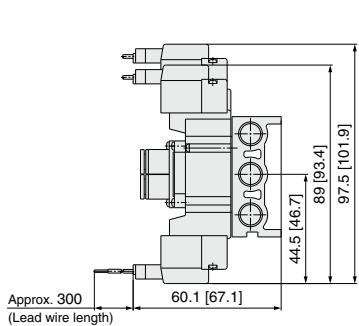

**M8 connector (WO)**

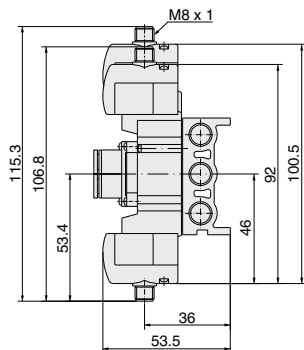

Note) Refer to page 523 for dimensions of connector types.



Stations n	2 stations	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20 stations
L1	40	50.5	61	71.5	82	92.5	103	113.5	124	134.5	145	155.5	166	176.5	187	197.5	208	218.5	229
L2	30.5	41	51.5	62	72.5	83	93.5	104	114.5	125	135.5	146	156.5	167	177.5	188	198.5	209	219.5

- SJ
- SY
- SY**
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

**SY5000: SS5Y5-20- Stations** -

[ ] : AC




**Grommet (G)**

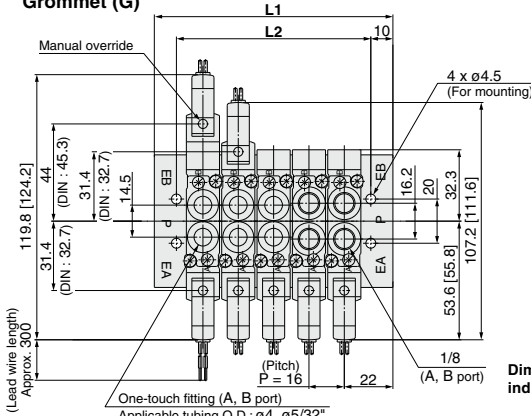

**Dimensions when mounting individual EXH spacer**

**Dimensions when mounting individual SUP spacer**

(SUP port is at the end plate of single solenoid.)




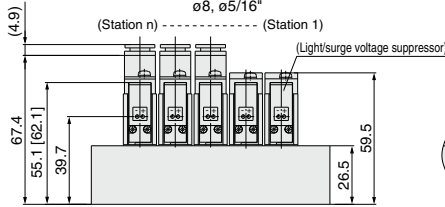


**L plug connector (L)**

**M plug connector (M)**

**DIN terminal (D, Y)**

**M8 connector (WO)**

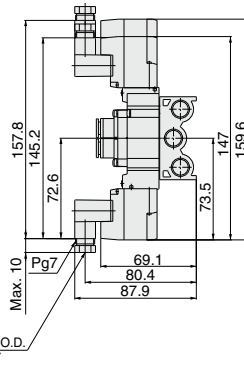





Note) Refer to page 523 for dimensions of connector types.

Stations n	2 stations	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20 stations
L1	60	76	92	108	124	140	156	172	188	204	220	236	252	268	284	300	316	332	348
L2	40	56	72	88	104	120	136	152	168	184	200	216	232	248	264	280	296	312	328

**SY7000: SS5Y7-20-Stations** -

[ ] : AC

**Grommet (G)**



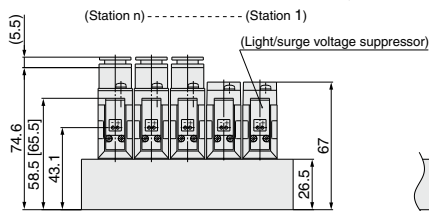
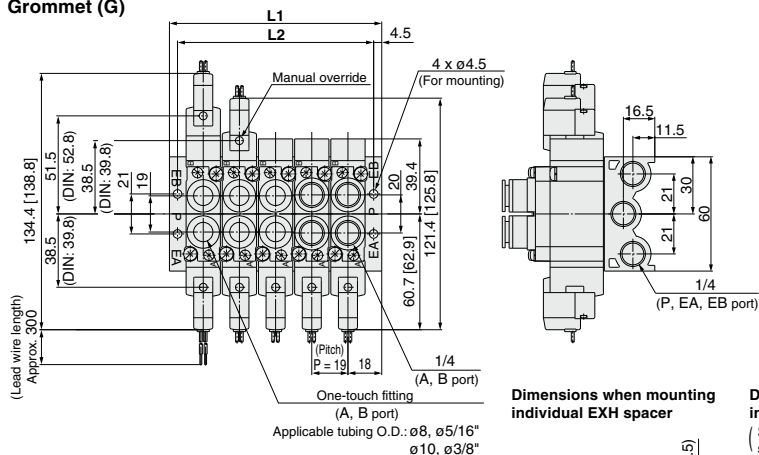


**L plug connector (L)**

**M plug connector (M)**

**DIN terminal (D, Y)**

**M8 connector (WO)**

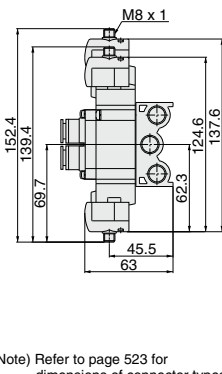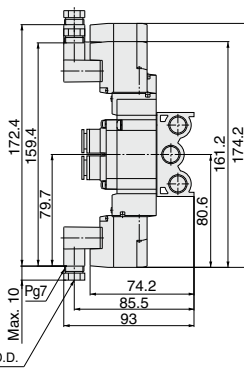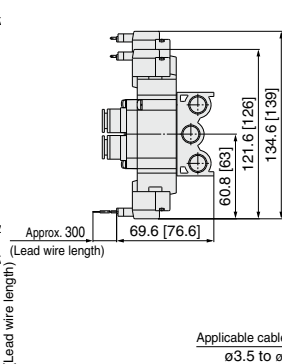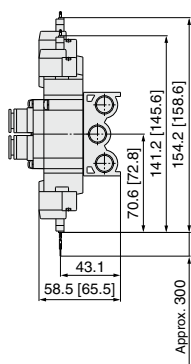

Stations n	2 stations	3	4	5	6	7	8	8	10	11	12	13	14	15	16	17	18	19	20 stations
L1	55	74	93	112	131	150	169	188	207	226	245	264	283	302	321	340	359	378	397
L2	46	65	84	103	122	141	160	179	198	217	236	255	274	293	312	331	350	369	388

- SJ
- SY
- SY**
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

Type **23**

# 5 Port Solenoid Valve Body Ported Manifold Stacking Type/Individual Wiring Series **SY9000**

**CE**  
[Option]

## How to Order Manifold

Type 23/External pilot capable

**SS5Y9-23-05** - [ ] - [ ] - [ ]

Manifold series

9	SY9000
---	--------

Valve stations

Symbol	Stations
02	2 stations
⋮	⋮
20	20 stations

\* This also includes the number of blanking plate assemblies.

Thread type

Nil	Rc
00F	G
00N	NPT
00T	NPTF

Option

Symbol	Mounting
Nil	Direct mounting
D	DIN rail mounting (with DIN rail)
DO	DIN rail mounting (without DIN rail)
D*	When a longer DIN rail is desired than the specified stations, specify the station number to be required into * mark.


CE-compliant

Nil	—
Q	CE-compliant

Note) AC-type models that are CE-compliant have DIN terminals only.

## How to Order Manifold Assembly (Example)

### Example

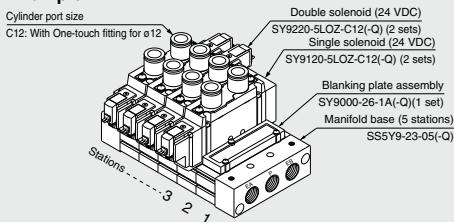

**SS5Y9-23-05 (-Q)** ..... 1 set (Type 23, 5-station manifold base part no.)  
 \* **SY9000-26-1A** ..... 1 set (Blanking plate assembly part no.)  
 \* **SY9120-5LOZ-C12 (-Q)** ... 2 sets (Single solenoid part no.)  
 \* **SY9220-5LOZ-C12 (-Q)** ... 2 sets (Double solenoid part no.)

The asterisk denotes the symbol for assembly. Prefix it to the part nos. of the solenoid valve, etc.

Add the valve and option part number under the manifold base part number. In the case of complex arrangement, specify them on the manifold specification sheet.



Note) AC-type models that are CE-compliant have DIN terminals only.

(Option)

## How to Order Valve

**SY 9 1 20** [ ] [ ] - **5 L** [ ] [ ] - **02** [ ] [ ] [ ]

**Series**

9	SY9000
---	--------

**Type of actuation**

1	2 position single
2	2 position double
3	3 position closed center
4	3 position exhaust center
5	3 position pressure center

**Pilot specifications**

Nil	Internal pilot
R	External pilot

\* In the case of external pilot specifications, it cannot be used as a single unit.

**Coil specifications**

Nil	Standard
T	With power saving circuit (24 VDC, 12 VDC only)

\* Power saving circuit is not available in the case of D, Y, DO, YO or W□ type.

**Rated voltage**

For DC	For AC (%/50 Hz)
5	1
6	2
V	3
S	4
R	

\* DC specifications of type D, Y, DO and YO is only available with 12 and 24 VDC.  
\* For type W□, DC voltage is only available.  
Note) AC-type models that are CE-compliant have DIN terminals only.

**Made to Order**

Nil	—
X90	Main valve fluororubber (Refer to page 500.)

**Thread type**

Nil	Rc
F	G
N	NPT
T	NPTF

**Manual override**

Nil	Non-locking push type
D	Push-turn locking slotted type
E	Push-turn locking lever type

**Light/Surge voltage suppressor**

**Electrical entry for G, H, L, M, W**

Nil	Without light/surge voltage suppressor
S	With surge voltage suppressor
Z	With light/surge voltage suppressor
R	With surge voltage suppressor (Non-polar type)
U	With light/surge voltage suppressor (Non-polar type)

\* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.  
\* For "R" and "U", DC voltage is only available.  
\* Power saving circuit is only available in the "Z" type.

**Electrical entry for D, Y**

Nil	Without light/surge voltage suppressor
S	With surge voltage suppressor
Z	With light/surge voltage suppressor

\* DOZ and YOZ are not available.  
\* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.

**A, B port size Thread piping**

Symbol	Port size
02	1/4
03	3/8

**One-touch fitting (Metric size)**

Symbol	Port size
C8	One-touch fitting for ø8
C10	One-touch fitting for ø10
C12	One-touch fitting for ø12

**One-touch fitting (Inch size)**

Symbol	Port size
N9	One-touch fitting for ø5/16"
N11	One-touch fitting for ø3/8"

- SY
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7


**Electrical entry**

24, 12, 6, 5, 3 VDC/ 100, 110, 200, 220 VAC			24, 12 VDC/ 100, 110, 200, 220 VAC	24, 12, 6, 5, 3 VDC
Grommet	L plug connector	M plug connector	DIN terminal	M8 connector
G: Lead wire length 300 mm H: Lead wire length 600 mm	L: With lead wire (Length 300 mm) LN: Without lead wire LO: Without connector	M: With lead wire (Length 300 mm) MN: Without lead wire MO: Without connector	D: With connector DC: Without connector Y: With connector YO: Without connector	WC: Without connector cable W□: With connector cable (Note)
CE-compliant	DC ● AC —	● —	● —	● —

- \* LN, MN type: with 2 sockets.
- \* "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN43650C). For details, refer to page 519.
- \* For connector cable of M8 connector, refer to page 522.
- \* M8 connector conforming to IEC60947-5-2 standard is also available. Refer to page 509 for details.
- \* Refer to page 519 for the lead wire length of L and M plug connectors.
- \* Refer to page 520 for the connector assembly with cover for L and M plug connectors.
- Note) Enter the cable length symbols in □. Please be sure to fill in the blank referring to page 523.

Note) When placing an order for body ported solenoid valve as a single unit, mounting screw for manifold and gasket are not attached. Order them separately, if necessary.


### Gasket assembly part no.



Series	Gasket assembly part no.
SY9000	SY9000-GS-1

Note) The gasket assembly includes 10 sets of mounting screws and a gasket.





## Manifold Specifications

Model	<b>SS5Y9-23(-Q)</b>	
Applicable valve	<b>SY9□20</b>	
Manifold type	Stacking type	
P (SUP)/R (EXH)	Common SUP, Common EXH	
Valve stations	2 to 20 stations <sup>Note 1)</sup>	
A, B port location	Valve	
Port size	P, EA, EB port	3/8
	A, B port	1/4
		3/8
		C8 (One-touch fitting for ø8) C10 (One-touch fitting for ø10) C12 (One-touch fitting for ø12)
Manifold base weight W (g) n: Stations	W = 66n + 246	

Note 1) For more than 10 stations, supply pressure to P port on both sides and exhaust from EA/EB port on both sides.

Note 2) Refer to "Manifold Option" on page 353.

## Flow Characteristics


Model	Port size		Flow characteristics					
	1, 5, 3 (P, EA, EB)	4, 2 (A, B)	1 → 4/2 (P → A/B)			4/2 → 5/3 (A/B → EA/EB)		
			C (dm <sup>3</sup> /s/bar)	b	Cv	C (dm <sup>3</sup> /s/bar)	b	Cv
<b>SS5Y9-23(-Q)</b>	3/8	C12	6.3	0.20	1.5	8.2	0.28	1.9

Note) The value is for manifold base with 5 stations and individually operated 2 position type.

**SY9000: SS5Y9-23- Stations -(D)**

[ ] : AC

**Grommet (G)**

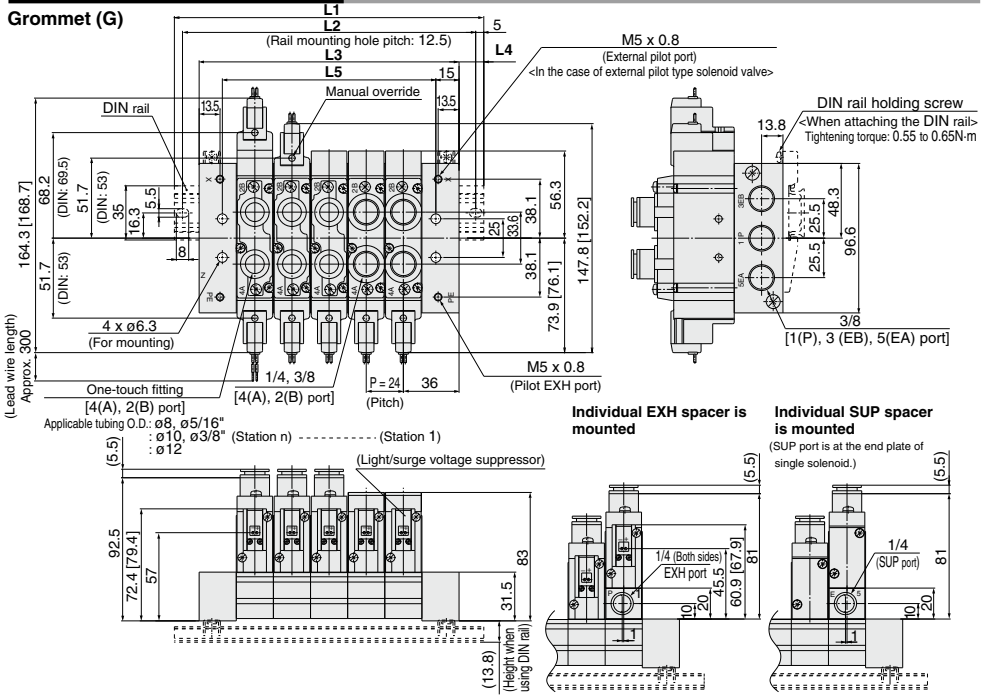


- SJ
- SY
- SY**
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

**L plug connector (L)**


**M plug connector (M)**

**DIN terminal (D, Y)**


**M8 connector (WO)**




Approx. 300  
(Lead wire length)



Approx. 300  
(Lead wire length)



Applicable cable O.D.  
ø3.5 to ø7



Note) Refer to page 523 for dimensions of connector types.

Stations n	2 stations	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20 stations
<b>L1</b>	123	148	173	198	223	248	273	298	323	335.5	360.5	385.5	410.5	435.5	460.5	485.5	510.5	535.5	560.5
<b>L2</b>	112.5	137.5	162.5	187.5	212.5	237.5	262.5	287.5	312.5	325	350	375	400	425	450	475	500	525	550
<b>L3</b>	96	120	144	168	192	216	240	264	288	312	336	360	384	408	432	456	480	504	528
<b>L4</b>	13.5	14	14.5	15	15.5	16	16.5	17	17.5	12	12.5	13	13.5	14	14.5	15	15.5	16	16.5
<b>L5</b>	66	90	114	138	162	186	210	234	258	282	306	330	354	378	402	426	450	474	498

Note) In the case of direct mounting without DIN rail, total width of manifold is L3.

Type **20P**

# 5 Port Solenoid Valve Body Ported Manifold Bar Stock Type/Flat Ribbon Cable Series **SY3000/5000/7000**



## How to Order Manifold

Note) CE-compliant:  
For DC only.

[Option]

SS5Y **5** - 20P - **05** - [ ] - [ ]

**Manifold series**

3	SY3000
5	SY5000
7	SY7000

**Stations**

03	3 stations
:	:
12	12 stations

Note) SS5Y3 has 4 to 12 stations.

**Thread type**

Nil	Rc
00F	G
00N	NPT
00T	NPTF


**CE-compliant**

Nil	—
Q	CE-compliant

Note) CE-compliant: For DC only.

## How to Order Manifold Assembly (Example)

### Example

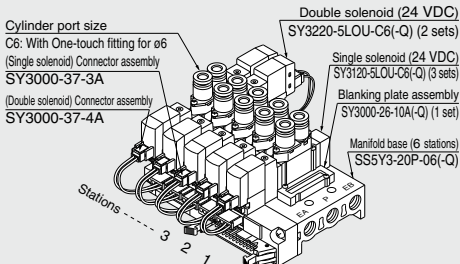

- SS5Y3-20P-06 (-Q) .....1 set (Type 20P, 6-station manifold part no.)
- \* SX3000-26-10A (-Q) .....1 set (Blanking plate assembly part no.)
  - \* SY3120-5LOU-C6 (-Q) ...3 sets (Single solenoid part no.)
  - \* SY3220-5LOU-C6 (-Q) ...2 sets (Double solenoid part no.)
  - \* SY3000-37-3A .....3 sets (Connector assembly part no.)
  - \* SY3000-37-4A .....2 sets (Connector assembly part no.)
- The asterisk denotes the symbol for assembly.  
Prefix it to the part nos. of the solenoid valve, etc.

Add the valve and option part number under the manifold base part number. In the case of complex arrangement, specify them on the manifold specification sheet.

Note) Please indicate the connector assembly part no. below that connects the valve and the manifold.

## Connector Assembly

### For 12, 24 VDC

Specifications	For SY3000	For SY5000/7000
For single solenoid	SY3000-37-3A	SY5000-37-3A
Double solenoid, 3 position type	SY3000-37-4A	SY5000-37-4A
Single with spacer assembly	SY5000-37-3A	SY5000-37-5A
Double, 3 position with spacer assembly	SY3000-37-6A	SY5000-37-6A

Note) Spacer assembly indicates Individual SUP/EXH.

### For 100 VAC

Specifications	For SY3000	For SY5000/7000
For single solenoid	SY3000-37-32A	SY5000-37-15A
Double solenoid, 3 position type	SY3000-37-33A	SY5000-37-16A
Single with spacer assembly	SY5000-37-15A	SY5000-37-17A
Double, 3 position with spacer assembly	SY3000-37-34A	SY5000-37-18A

### For 100 VAC (115 VAC)

Specifications	For SY3000	For SY5000/7000
For single solenoid	SY3000-37-35A	SY5000-37-19A
Double solenoid, 3 position type	SY3000-37-36A	SY5000-37-20A
Single with spacer assembly	SY5000-37-19A	SY5000-37-21A
Double, 3 position with spacer assembly	SY3000-37-37A	SY5000-37-22A

## ⚠ Caution

- For non-polar (U) valves, the electrical DC connections can be used with either positive and negative COM. For type (Z), only use with positive COM as the valve does not operate correctly when used with negative COM.



**How to Order Valve**

Note) CE-compliant: For DC only. [Option]

**Coil specifications**  

Nil	Standard
T	With power saving circuit

**Rated voltage** CE-compliant  

5	24 VDC	●
6	12 VDC	●

**Light/surge voltage suppressor**  

Z	With light/surge voltage suppressor
U	With light/surge voltage suppressor (Non-polar type)

Note) Z: Positive common specifications only.  
 \* Power saving circuit is only available in the "Z" type.

**CE-compliant**  

Nil	—
Q	CE-compliant

Note) CE-compliant: For DC only.

**Thread type**  

Nil	Rc
F	G
N	NPT
T	NPTF

\* Except for M5

**Series**  

3	SY3000
5	SY5000
7	SY7000

**Type of actuation**  

1	2 position single
2	2 position double
3	3 position closed center
4	3 position exhaust center
5	3 position pressure center

**Rated voltage** CE-compliant  

1	100 VAC	—
3	110 VAC (115 VAC)	—

Note) CE-compliant: For DC only.

**Manual override**  

Nil	Non-locking push type
D	Push-turn locking slotted type
E	Push-turn locking lever type

**A, B port size**  
**Thread piping**  

Symbol	Port size	Applicable series
M5	M5 x 0.8	SY3000
01	1/8	SY5000
02	1/4	SY7000

**One-touch fitting (Metric size)**  

Symbol	Port size	Applicable series
C4	One-touch fitting for ø4	SY3000
C4	One-touch fitting for ø4	SY3000
C6	One-touch fitting for ø6	SY5000
C6	One-touch fitting for ø6	SY5000
C8	One-touch fitting for ø8	SY7000
C8	One-touch fitting for ø8	SY7000
C10	One-touch fitting for ø10	SY7000

**One-touch fitting (Inch size)**  


Symbol	Port size	Applicable series
N3	One-touch fitting for ø5/16"	SY3000
N7	One-touch fitting for ø1/4"	SY3000
N3	One-touch fitting for ø5/16"	SY3000
N7	One-touch fitting for ø1/4"	SY5000
N9	One-touch fitting for ø3/8"	SY5000
N9	One-touch fitting for ø3/8"	SY7000
N11	One-touch fitting for ø3/8"	SY7000

Note) When placing an order for body ported solenoid valve as a single unit, mounting screw for manifold and gasket are not attached. Order them separately, if necessary.  
 Note) Since the electrical entry is "LO", select a connector assembly part no. from those stated on page 334.

**Ordering Example:**  
 For DC: SY 5 1 20 [ ] - 5 LO Z [ ] - 01 [ ] - [ ]  
 For AC: SY 5 1 20 - 1 LO Z [ ] - 01 [ ] - [ ]

- SY
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

**Gasket assembly part no.**




Series	Gasket assembly part no.
SY3000	SY3000-GS-1
SY5000	SY5000-GS-1
SY7000	SY7000-GS-1

Note) The gasket assembly includes 10 sets of mounting screws and a gasket.

- Multiple valve wiring is simplified through the use of the flat cable connector
- Clean appearance

In the case of a flat ribbon cable type, each valve is wired on the print board of manifold base to allow the external wiring to be piped all together with 26 pins MIL connector.



## Manifold Specifications

Model	SS5Y3-20P(-Q)	SS5Y5-20P(-Q)	SS5Y7-20P(-Q)
Applicable valve	SY3□20	SY5□20	SY7□20
Manifold type	Single base/B mount		
P (SUP/R (EXH))	Common SUP, Common EXH		
Valve stations	4 to 12 stations <sup>(1)</sup>	3 to 12 stations <sup>(Note 1)</sup>	
A, B port location	Valve		
P, EA, EB port	1/8	1/4	1/4
Port size	M5 x 0.8,	1/8	1/4
	C4 (One-touch fitting for ø4)	C4 (One-touch fitting for ø4)	C8 (One-touch fitting for ø8)
	C6 (One-touch fitting for ø6)	C6 (One-touch fitting for ø6)	C10 (One-touch fitting for ø10)
Manifold base weight W (g)	W = 19n + 45	W = 43n + 77	W = 51n + 81
	n: Stations		
Applicable flat ribbon cable connector	Flat ribbon cable connector, Socket: 26 pins MIL type with strain relief, Conforming to MIL-C-83503		
Internal wiring	In common between +COM and -COM (Z type: +COM only).		
Rated voltage <sup>(Note 4)</sup>	12, 24 VDC 100, 110 VAC		

Note 1) For more than 10 stations (more than 5 stations in case of SS5Y7), supply pressure to P port on both sides and exhaust from EA/EB port on both sides.

Note 2) The withstand voltage specification for the wiring unit section is JIS C 0704, Grade 1 or its equivalent.

Note 3) Refer to "Manifold Option" on page 353.


Note 4) CE-compliant: For DC only.

## Flow Characteristics

Model	Port size		Flow characteristics					
	1, 5, 3 (P, EA, EB)	4, 2 (A, B)	1 → 4/2 (P → A/B)			4/2 → 5/3 (A/B → EA/EB)		
			C [dm <sup>3</sup> /(s·bar)]	b	Cv	C [dm <sup>3</sup> /(s·bar)]	b	Cv
SS5Y3-20P	1/8	C6	0.72	0.29	0.18	0.80	0.36	0.21
SS5Y5-20P	1/4	C8	1.9	0.28	0.48	2.2	0.20	0.53
SS5Y7-20P	1/4	C10	3.6	0.31	0.93	3.6	0.27	0.88

Note) The value is for manifold base with 5 stations and individually operated 2 position type.


## Internal Wiring of Manifold

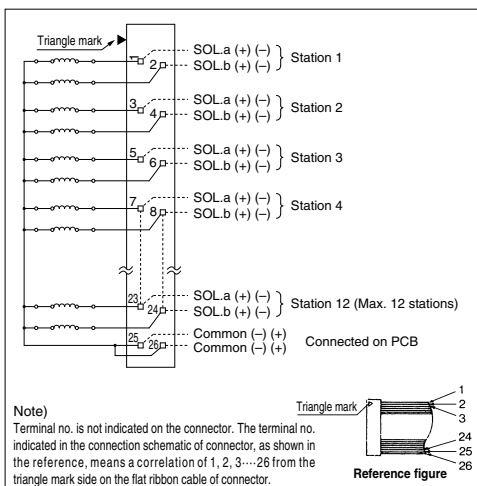

### Caution



- For non-polar (U) valves, the electrical DC connections can be used with either positive and negative COM. For type (Z), only use with positive COM as the valve does not operate correctly when used with negative COM.

- For more than 10 stations, both poles of the common should be wired.
- For single solenoid, connect to the solenoid A side.
- The maximum number of stations that can be accommodated is 12. For more stations, please contact SMC.



**SY3000: SS5Y3-20P- Stations**

[ ]: AC

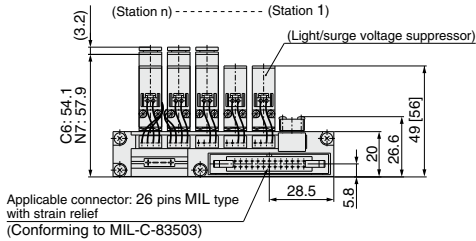
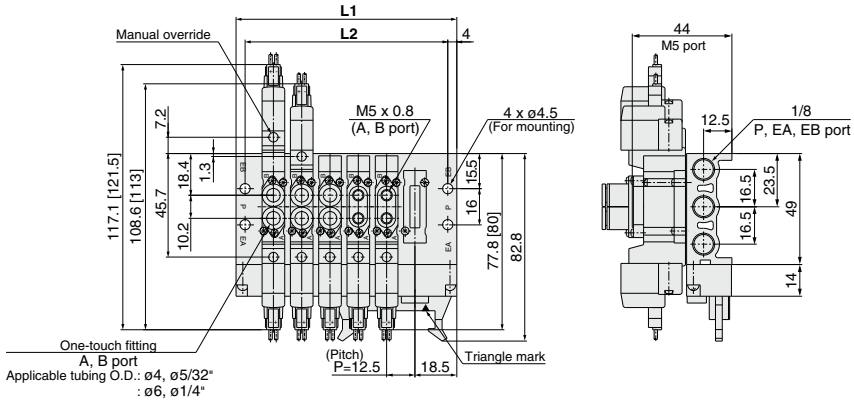


Stations n	4	5	6	7	8	9	10	11	12
<b>L1</b>	72.5	85	97.5	110	122.5	135	147.5	160	172.5
<b>L2</b>	64.5	77	89.5	102	114.5	127	139.5	152	164.5

- SJ
- SY
- SY**
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

**SY5000: SS5Y5-20P-Stations**


[ ]: AC

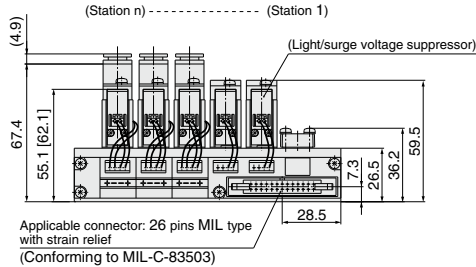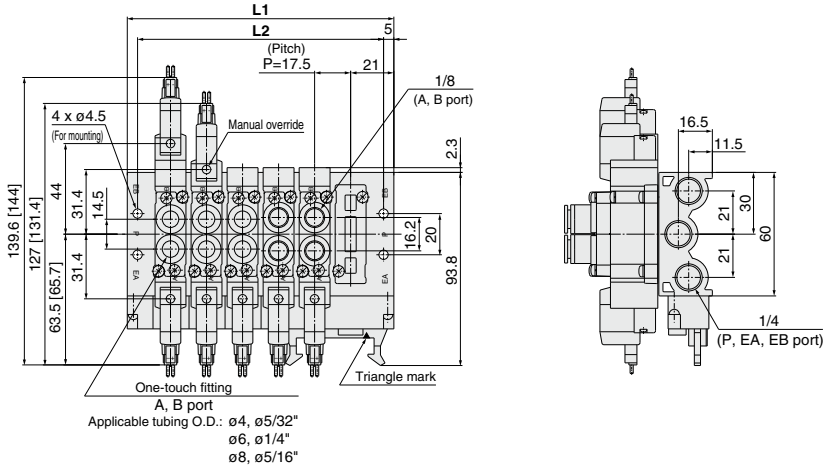


Stations n	3	4	5	6	7	8	9	10	11	12
<b>L1</b>	77	94.5	112	129.5	147	164.5	182	199.5	217	234.5
<b>L2</b>	67	84.5	102	119.5	137	154.5	172	189.5	207	224.5

**SY7000: SS5Y7-20P- Stations**

[ ] : AC

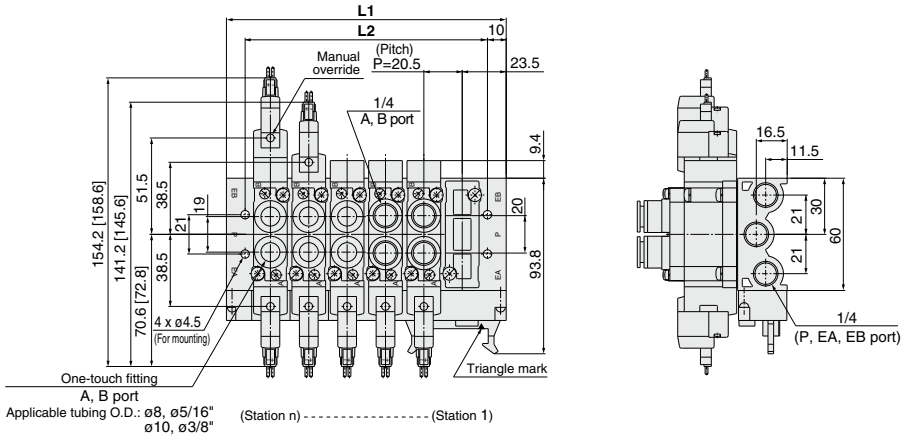

Applicable tubing O.D.:  $\phi 8$ ,  $\phi 5/16"$ ,  $\phi 10$ ,  $\phi 3/8"$

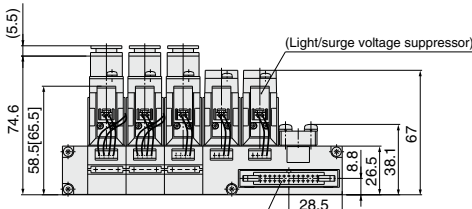

Applicable connector: 26 pins MIL type with strain relief (Conforming to MIL-C-83503)

Stations n	3	4	5	6	7	8	9	10	11	12
<b>L1</b>	88	108.5	129	149.5	170	190.5	211	231.5	252	272.5
<b>L2</b>	68	88.5	109	129.5	150	170.5	191	211.5	232	252.5

- SJ
- SY
- SY**
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7



Type **23P**

# 5 Port Solenoid Valve Body Ported Manifold Stacking Type/Flat Ribbon Cable

# Series SY9000

Note) CE-compliant:  
For DC only. [Option]



## How to Order Manifold

### Type 23P/Common external pilot capable

**SS5Y 9 - 23P - 05** - [ ] - [ ]

Manifold series

**9** SY9000

#### Valve stations

Symbol	Stations
04	4 stations
:	:
12	12 stations

\* This also includes the number of blanking plate assemblies.

#### Thread type

Nll	Rc
00F	G
00N	NPT
00T	NPTF

#### Option

Symbol	Mounting
Nll	Direct mounting
D	DIN rail mounting (with DIN rail)
DO	DIN rail mounting (without DIN rail)
D*	When a longer DIN rail is desired than the specified stations, specify the station number to be required into * mark.


#### CE-compliant

Nll	—
Q	CE-compliant

Note) CE-compliant: For DC only.

## How to Order Manifold Assembly (Example)

### Example

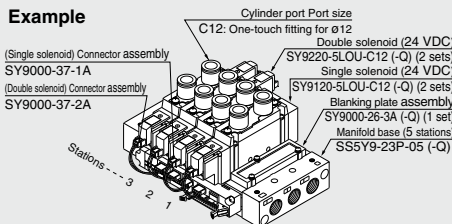

- SS5Y9-23P-05 (-Q)** ..... 1 set (Type 23, 5-station manifold base part no.)  
**SY9000-26-3A (-Q)** ..... 1 set (Blanking plate assembly part no.)  
**SY9120-SLOU-C12 (-Q)** ... 2 sets (Single solenoid part no.)  
**SY9220-SLOU-C12 (-Q)** ... 2 sets (Double solenoid part no.)  
**SY9000-37-1A** ..... 2 sets (Connector assembly part no.)  
**SY9000-37-2A** ..... 2 sets (Connector assembly part no.)
- The asterisk denotes the symbol for assembly. Prefix it to the part nos. of the solenoid valve, etc.

Add the valve and option part number under the manifold base part number. In the case of complex arrangement, specify them on the manifold specification sheet.

Note) Please indicate the connector assembly part no. (page 341) that connects the valve and the manifold.

## How to Order Valve

#### Coil specifications

Nll	Standard
T	With power saving circuit

#### Rated voltage

5	24 VDC	CE-compliant
6	12 VDC	CE-compliant

#### Light/Surge voltage suppressor

Z	With light/surge voltage suppressor	Note) Z: Positive common specifications only.
U	With light/surge voltage suppressor (Non-polar type)	* Power saving circuit is only available in the "Z" type.

#### CE-compliant

Nll	—
Q	CE-compliant

Note) CE-compliant: For DC only.

#### Thread type

Nll	Rc
F	G
N	NPT
T	NPTF

**For DC: SY 9 1 20 [ ] [ ] - 5 LO Z [ ] - 02 [ ] - [ ]**

**For AC: SY 9 1 20 [ ] [ ] - 1 LO Z [ ] - 02 [ ] - [ ]**

#### Series

**9** SY9000

#### Type of actuation

1	2 position single
2	2 position double
3	3 position closed center
4	3 position exhaust center
5	3 position pressure center

#### Pilot specifications

Nll	Internal pilot
R	External pilot

\* Type 23P manifolds can be used for both internal and external pilots.

#### Rated voltage

1	100 VAC	CE-compliant
3	110 VAC (115 VAC)	CE-compliant

Note) CE-compliant: For DC only.

#### Manual override

Nll	Non-locking push type
D	Push-turn locking slotted type
E	Push-turn locking lever type

#### A, B port size

#### Thread piping

Symbol	Port size
02	1/4
03	3/8

#### One-touch fitting (Metric size)

Symbol	Port size
C8	One-touch fitting for ø8
C10	One-touch fitting for ø10
C12	One-touch fitting for ø12

#### One-touch fitting (Inch size)

Symbol	Port size
N9	One-touch fitting for ø5/16"
N11	One-touch fitting for ø3/8"

#### Gasket assembly part no.


Round head combination screw

Series	Gasket assembly part no.
SY9000	SY9000-GS-1

Note) The gasket assembly includes 10 sets of mounting screws and a gasket.

- Multiple valve wiring is simplified through the use of the flat cable connector.
- Clean appearance

In the case of a flat ribbon cable type, each valve is wired on the print board of manifold base to allow the external wiring to be piped all together with 26 pins MIL connector.



## Connector Assembly

### For 12, 24 VDC

Specifications	For SY9000
For single solenoid	SY9000-37-1A
Double solenoid 3 position	SY9000-37-2A
Single with spacer assembly	SY9000-37-3A
Double, 3 position with spacer assembly	SY9000-37-4A

### For 100 VAC

Specifications	For SY9000
For single solenoid	SY9000-37-1B
Double solenoid 3 position	SY9000-37-2B
Single with spacer assembly	SY9000-37-3B
Double, 3 position with spacer assembly	SY9000-37-4B

### For 110 VAC (115 VAC)

Specifications	For SY9000
For single solenoid	SY9000-37-1C
Double solenoid 3 position	SY9000-37-2C
Single with spacer assembly	SY9000-37-3C
Double, 3 position with spacer assembly	SY9000-37-4C

Note) Spacer assembly indicates individual SUP/EXH.

## Manifold Specifications

Model	SS5Y9-23P(-Q)	
Applicable valve	SY9□20	
Manifold type	Stacking type	
P (SUP)/R (EXH)	Common SUP, Common EXH	
Valve stations	4 to 12 stations <sup>Note1)</sup>	
A, B port location	Valve	
Port size	P, EA, EB port	3/8
	A, B port	1/4
		3/8
		C8 (One-touch fitting for ø8) C10 (One-touch fitting for ø10) C12 (One-touch fitting for ø12)
Manifold base weight W (g)	W = 73n + 259	
n: Stations		
Applicable flat ribbon cable connector	Flat ribbon cable connector. Socket: 26 pins MIL with strain relief. Conforming to MIL-C-83503	
Internal wiring	In common between +COM and -COM (Z type: +COM only)	
Rated voltage <sup>Note4)</sup>	12, 24 VDC, 100, 110 VAC	

Note 1) For more than 10 stations, supply pressure to P port on both sides and exhaust from EA/EB port on both sides.

Note 2) The withstand voltage specification for the wiring unit section is JIS C 0704, Grade 1 or its equivalent.

Note 3) Refer to "Manifold Option" on page 353.


Note 4) CE-compliant: For DC only.

## Flow Characteristics


Model	Port size		Flow characteristics					
	1, 5, 3 (P, EA, EB)	4, 2 (A, B)	1 → 4/2 (P → A/B)		4/2 → 5/3 (A/B → EA/EB)			
			C (dm <sup>3</sup> /s/bar)	b	Cv	C (dm <sup>3</sup> /s/bar)	b	Cv
SS5Y9-23P(-Q)	3/8	C12	6.3	0.20	1.5	8.2	0.28	1.9

Note) The value is for manifold base with 5 stations and individually operated 2 position type.

## Internal Wiring of Manifold

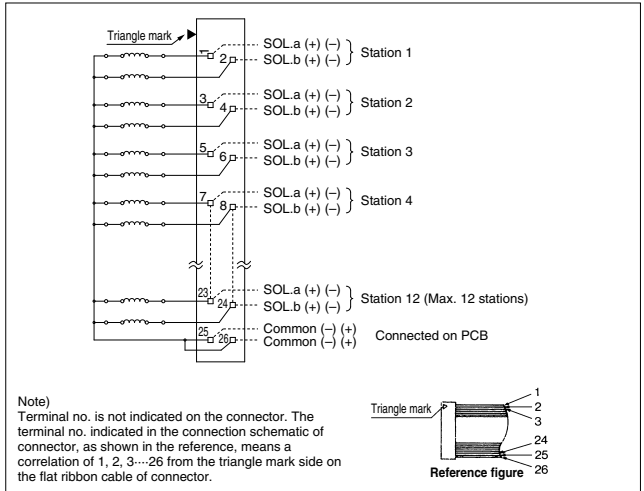


Note)  
Terminal no. is not indicated on the connector. The terminal no. indicated in the connection schematic of connector, as shown in the reference, means a correlation of 1, 2, 3...26 from the triangle mark side on the flat ribbon cable of connector.



- For more than 10 stations, both poles of the common should be wired.
- For single solenoid, connect to the solenoid A side.
- The maximum number of stations that can be accommodated is 12. For more stations, please contact SMC.

## Caution



- For non-polar (U) valves, the electrical DC connections can be used with either positive and negative COM. For type (Z), only use with positive COM as the valve does not operate correctly when used with negative COM.



**SY9000: SS5Y9-23P- Stations -(D)**

[ ] : AC

**Grommet (G)**

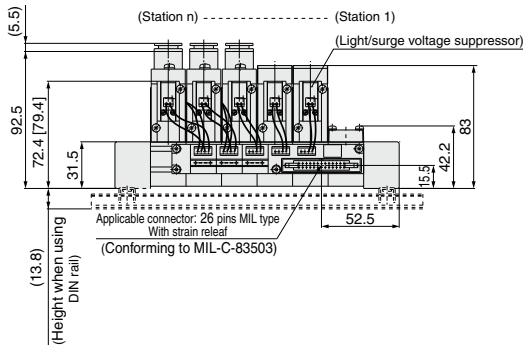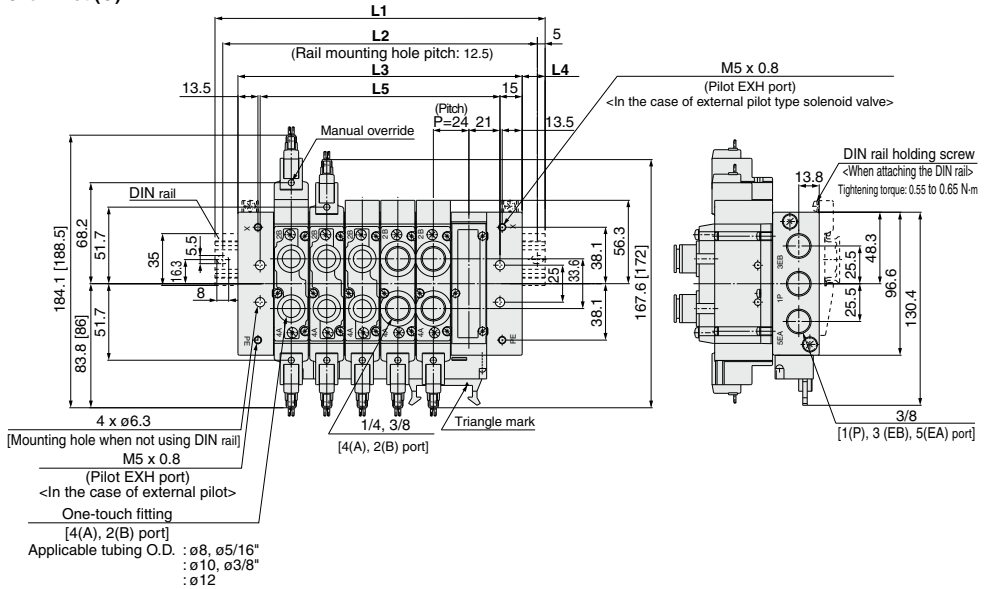

Stations n	4 stations	5	6	7	8	9	10	11	12 stations
<b>L1</b>	173	198	223	248	273	298	323	335.5	360.5
<b>L2</b>	162.5	187.5	212.5	237.5	262.5	287.5	312.5	325	350
<b>L3</b>	144	168	192	216	240	264	288	312	336
<b>L4</b>	14.5	15	15.5	16	16.5	17	17.5	12	12.5
<b>L5</b>	114	138	162	186	210	234	258	282	306

Note) In the case of direct mounting without DIN rail, total width of manifold is L3.

Type **20SA**

# EX510 Gateway-type Serial Transmission System Body Ported Manifold/Integrated Base Series **SY3000/5000/7000**



## How to Order Manifold

**SS5Y 3 - 20SA - 04 - - -**

**Manifold series**

3	SY3000
5	SY5000
7	SY7000

**SI unit**

NII	NPN output (+COM.)
N	PNP output (-COM.)

**SI unit part no.**

Symbol	SI unit specifications	SI unit part no.	Page
NII	NPN output (+COM.)	EX510-S001	P.2143
N	PNP output (-COM.)	EX510-S101	

Refer to page 2124 and the Operation Manual for the details of EX510 Gateway-type Serial Transmission System. Please download the Operation Manual via our website, <http://www.smcworld.com>

**CE-compliant**

NII	—
Q	CE-compliant

**P, R port thread type**

NII	Rc
00F	G
00N	NPT
00T	NPTF

**Valve stations**

Symbol	Stations	Note
03	3 stations	Double wiring <sup>Note 1)</sup>
:	:	
08	8 stations	Specified layout <sup>Note 2)</sup> (Compatible with 16 solenoid valves)
03	3 stations	
:	:	
16	16 stations	

\* SSSY3 can be set from 4 stations.


\* The number of the blanking plate assembly is also included.

Note 1) Double wiring: Use of a single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.

Note 2) Specified layout: Indicate wiring specifications on the manifold specification sheet. (Note that double and 3 position valves cannot be used where single solenoid wiring has been specified.)

## How to Order Manifold Assembly (Example)

### Example

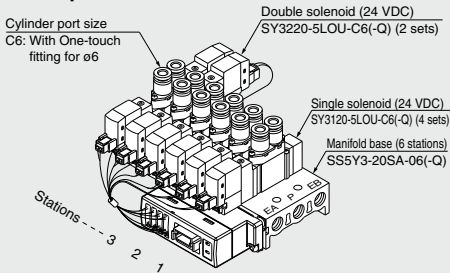

**SS5Y3-20SA-06 (-Q) ..... 1 set (20SA type 6-station manifold part no.)**  
**\*SY3120-5LOU-C6 (-Q) ... 4 sets (Single solenoid part no.)**  
**\*SY3220-5LOU-C6 (-Q) ... 2 sets (Double solenoid part no.)**

—The asterisk denotes the symbol for assembly. Prefix to the part no. of the solenoid valve, etc.

Add the valve and option part number under the manifold base part number.

When entry of part numbers becomes complicated, indicate by the manifold specification sheet. For a manifold for an EX510, the length of the lead wire for a connector assembly depends on the number of stations. Therefore, the manifold assembly is shipped with the valves (including blanking plates) and connector assembly mounted on it, as the standard specification. Be sure to specify the part nos. of the solenoid valves to be mounted.

**How to Order Valves**

**SY 3 1 20**    - **5 LO Z**    - **M5**    -   

**Series**

3	SY3000
5	SY5000
7	SY7000

**Type of actuation**

1	2 position single
2	2 position double
3	3 position closed center
4	3 position exhaust center
5	3 position pressure center

**Coil specifications**

Nil	Standard
T	With power saving circuit

**Rated voltage: 24 VDC**

**Light/Surge voltage suppressor**

Z	With light/surge voltage suppressor
U	Without light/surge voltage suppressor (non-polar type)

Note 1) Power saving circuit is only available in the "Z" type.

Note 2) When the SI unit is the PNP output (-COM.), only the "U" type is available.

**Manual override**

Nil	Non-locking push type
D	Push-turn locking slotted type
E	Push-turn locking lever type

**CE-compliant**

Nil	—
Q	CE-compliant

**Thread type**

Nil	Rc
F	G
N	NPT
T	NPTF

**A, B port size**

**Thread piping**

M5	M5 x 0.8	SY3000
01	1/8	SY5000
02	1/4	SY7000

**One-touch fitting (Metric size)**

C4	One-touch fitting for ø4	SY3000
C6	One-touch fitting for ø6	
C4	One-touch fitting for ø4	
C6	One-touch fitting for ø6	SY5000
C8	One-touch fitting for ø8	
C8	One-touch fitting for ø8	SY7000
C10	One-touch fitting for ø10	


**One-touch fitting (Inch size)**

N3	One-touch fitting for ø5/32"	SY3000
N7	One-touch fitting for ø1/4"	
N3	One-touch fitting for ø5/32"	
N7	One-touch fitting for ø1/4"	SY5000
N9	One-touch fitting for ø5/16"	
N9	One-touch fitting for ø5/16"	SY7000
N11	One-touch fitting for ø3/8"	

- SJ
- SY
- SY**
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

Note) When placing an order for body ported solenoid valve as a single unit, mounting screw for manifold and gasket are not attached. Order them separately, if necessary.


**■ Gasket assembly part no.**




Series	Gasket assembly part no.
<b>SY3000</b>	SY3000-GS-1
<b>SY5000</b>	SY5000-GS-1
<b>SY7000</b>	SY7000-GS-1

Note) The gasket assembly includes 10 sets of mounting screws and a gasket.

**SY3000: SS5Y3-20SA**  - Stations -


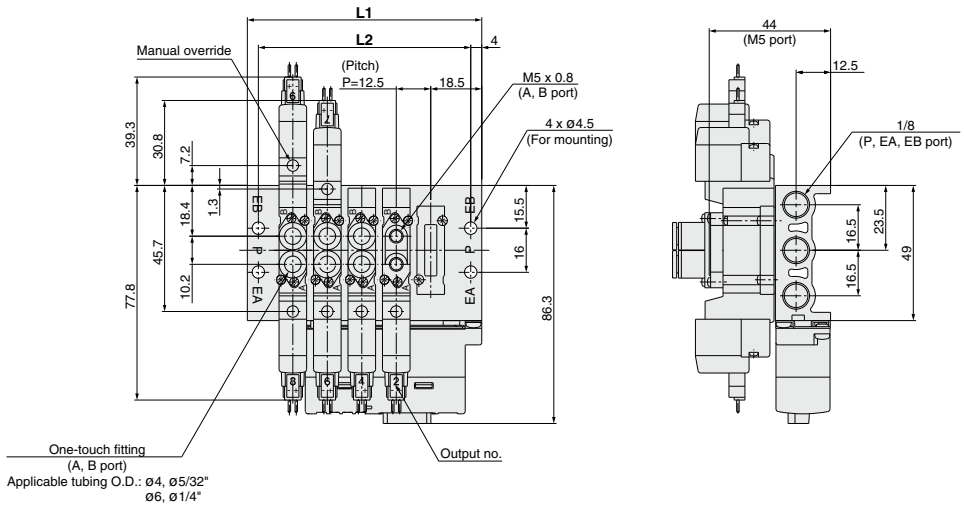


(Station n) ----- (Station 1)

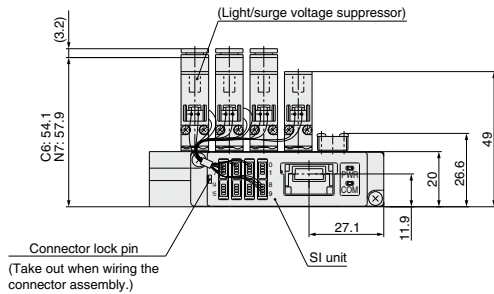

Stations n	4 stations	5	6	7	8	9	10	11	12	13	14	15	16 stations
L1	72.5	85	97.5	110	122.5	135	147.5	160	172.5	185	197.5	210	222.5
L2	64.5	77	89.5	102	114.5	127	139.5	152	164.5	177	189.5	202	214.5


**SY5000: SS5Y5-20SA**  - Stations -

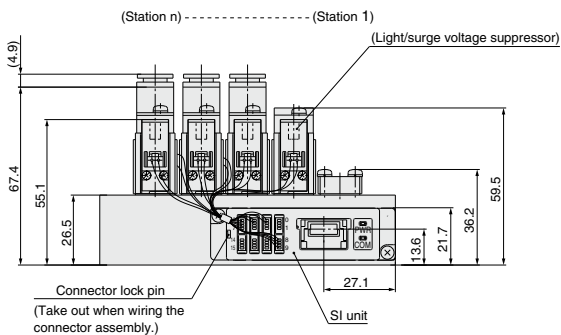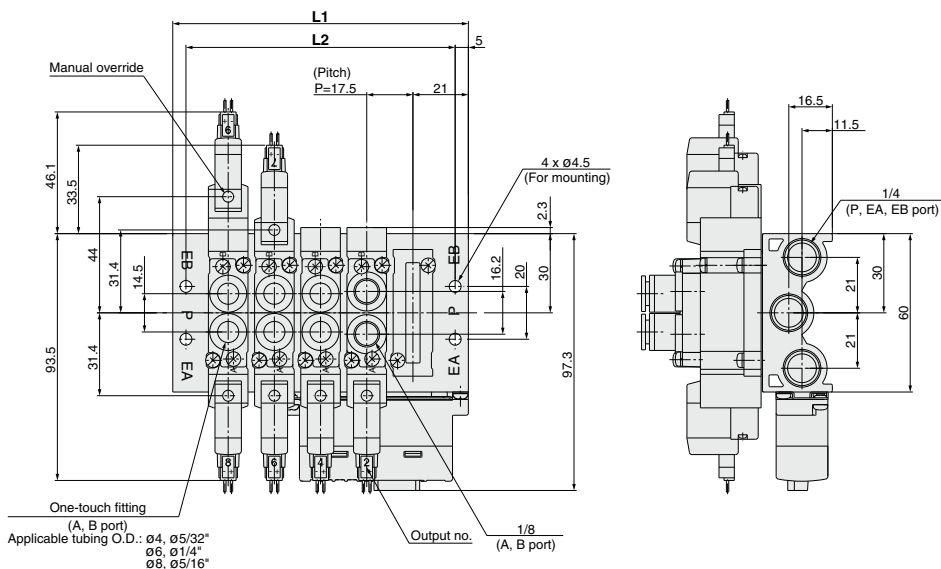


- SJ
- SY
- SY**
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

Stations n	3 stations	4	5	6	7	8	9	10	11	12	13	14	15	16 stations
<b>L1</b>	77	94.5	112	129.5	147	164.5	182	199.5	217	234.5	252	269.5	287	304.5
<b>L2</b>	67	84.5	102	119.5	137	154.5	172	189.5	207	224.5	242	259.5	277	294.5

**SY7000: SS5Y7-20SA**  - Stations -

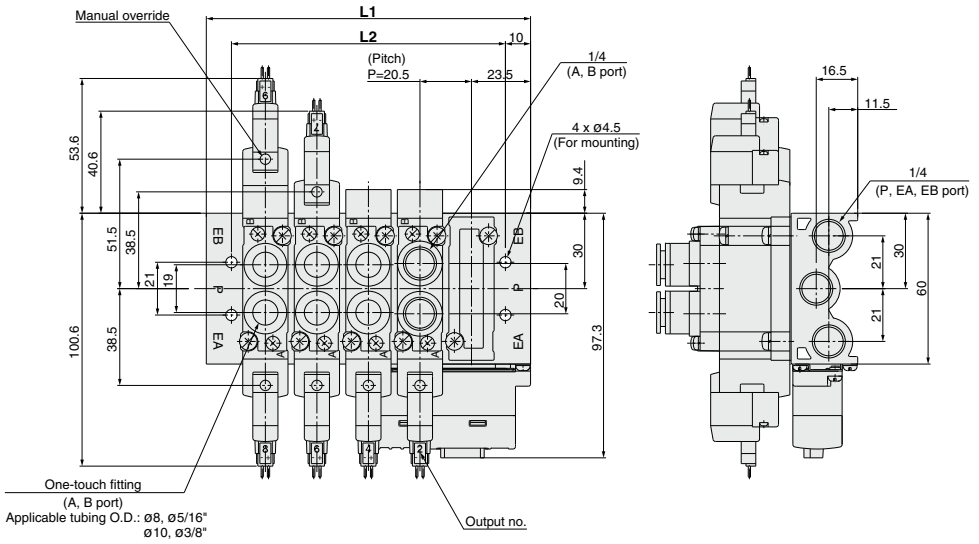

(Station n) ----- (Station 1)

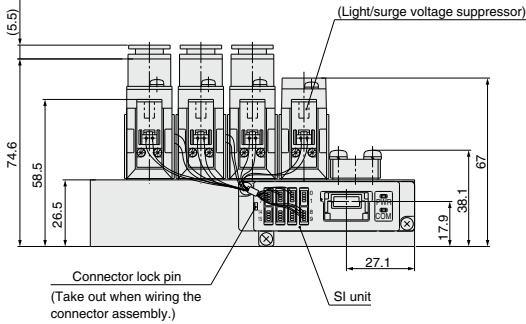

Stations n	3 stations	4	5	6	7	8	9	10	11	12	13	14	15	16 stations
L1	88	108.5	129	149.5	170	190.5	211	231.5	252	272.5	293	313.5	334	354.5
L2	68	88.5	109	129.5	150	170.5	191	211.5	232	252.5	273	293.5	314	334.5



Type **23SA**

# EX510 Gateway-type Serial Transmission System Body Ported Manifold/Stacking Type Series **SY9000**



## How to Order Manifold

**SS5Y9-23SA** [ ] - **03** - [ ] - [ ] - [ ]

### SI unit

<b>NII</b>	NPN output (+COM.)
<b>N</b>	PNP output (-COM.)

### CE-compliant

<b>NII</b>	—
<b>Q</b>	CE-compliant

### Valve stations

Symbol	Stations	Note
<b>03</b>	3 stations	Double wiring <sup>Note 1)</sup>
⋮	⋮	
<b>08</b>	8 stations	
<b>03</b>	3 stations	Specified layout <sup>Note 2)</sup> (Compatible with 16 solenoid valves)
⋮	⋮	
<b>16</b>	16 stations	

• The number of the blanking plate assembly is also included.

Note 1) Double wiring: Use of a single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.

Note 2) Specified layout: Indicate wiring specifications on the manifold specification sheet. (Note that double and 3 position valves cannot be used where single solenoid wiring has been specified.)

### Option

<b>NII</b>	Direct mounting
<b>D</b>	DIN rail mounting (With DIN rail)
<b>DO</b>	DIN rail mounting (Without DIN rail)
<b>D*</b>	When a longer DIN rail is desired than the specified stations, specify the station number to be required into * mark.

### P, R port thread type

<b>NII</b>	Rc
<b>00F</b>	G
<b>00N</b>	NPT
<b>00T</b>	NPTF


### SI unit part no.

Symbol	SI unit specifications	SI unit part no.	Page
<b>NII</b>	NPN output (+COM.)	EX510-S001	P.2143
<b>N</b>	PNP output (-COM.)	EX510-S101	

Refer to page 2124 and the Operation Manual for the details of EX510 Gateway-type Serial Transmission System. Please download the Operation Manual via our website, <http://www.smcworld.com>

## How to Order Manifold Assembly (Example)

### Example

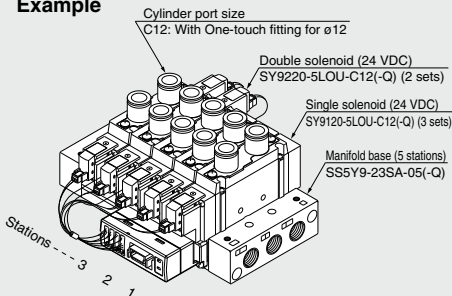

**SS5Y9-23SA-05 (-Q) ..... 1 set (23SA type 5-station manifold part no.)**  
**\*SY9120-5LOU-C12 (-Q) ... 3 sets (Single solenoid part no.)**  
**\*SY9220-5LOU-C12 (-Q) ... 2 sets (Double solenoid part no.)**

↳ The asterisk denotes the symbol for assembly. Prefix to the part no. of the solenoid valve, etc.

Add the valve and option part number under the manifold base part number.

When entry of part numbers becomes complicated, indicate by the manifold specification sheet. For a manifold for an EX510, the length of the lead wire for a connector assembly depends on the number of stations. Therefore, the manifold assembly is shipped with the valves (including blanking plates) and connector assembly mounted on it, as the standard specification. Be sure to specify the part nos. of the solenoid valves to be mounted.

**How to Order Valves**

**SY9 1 20 [ ] [ ] - 5 LO Z [ ] - 02 [ ] - [ ]**

**Type of actuation**

1	2 position single
2	2 position double
3	3 position closed center
4	3 position exhaust center
5	3 position pressure center

**Pilot specifications**

NII	Internal pilot
R	External pilot

**Coil specifications**

NII	Standard
T	With power saving circuit

**Rated voltage: 24 VDC**

**Light/Surge voltage suppressor**

Z	With light/surge voltage suppressor
U	Without light/surge voltage suppressor (non-polar type)

Note 1) Power saving circuit is only available in the "Z" type.

Note 2) When the SI unit is the PNP output (-COM.), only the "U" type is available.

**Manual override**

NII	Non-locking push type
D	Push-turn locking slotted type
E	Push-turn locking lever type

**CE-compliant**

NII	—
Q	CE-compliant

**Thread type**

NII	Rc
F	G
N	NPT
T	NPTF

**A, B port size**

**Thread piping**

02	1/4
03	3/8

**One-touch fitting (Metric size)**

C8	One-touch fitting for ø8
C10	One-touch fitting for ø10
C12	One-touch fitting for ø12


**One-touch fitting (Inch size)**

N9	One-touch fitting for ø5/16"
N11	One-touch fitting for ø3/8"

- SJ
- SY
- SY**
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

Note) When placing an order for body ported solenoid valve as a single unit, mounting screw for manifold and gasket are not attached. Order them separately, if necessary.


**■ Gasket assembly part no.**



Series	Gasket assembly part no.
<b>SY9000</b>	<b>SY9000-GS-1</b>

Note) The gasket assembly includes 10 sets of mounting screws and a gasket.

**SY9000: SS5Y9-23SA**  - Stations -  (-D)

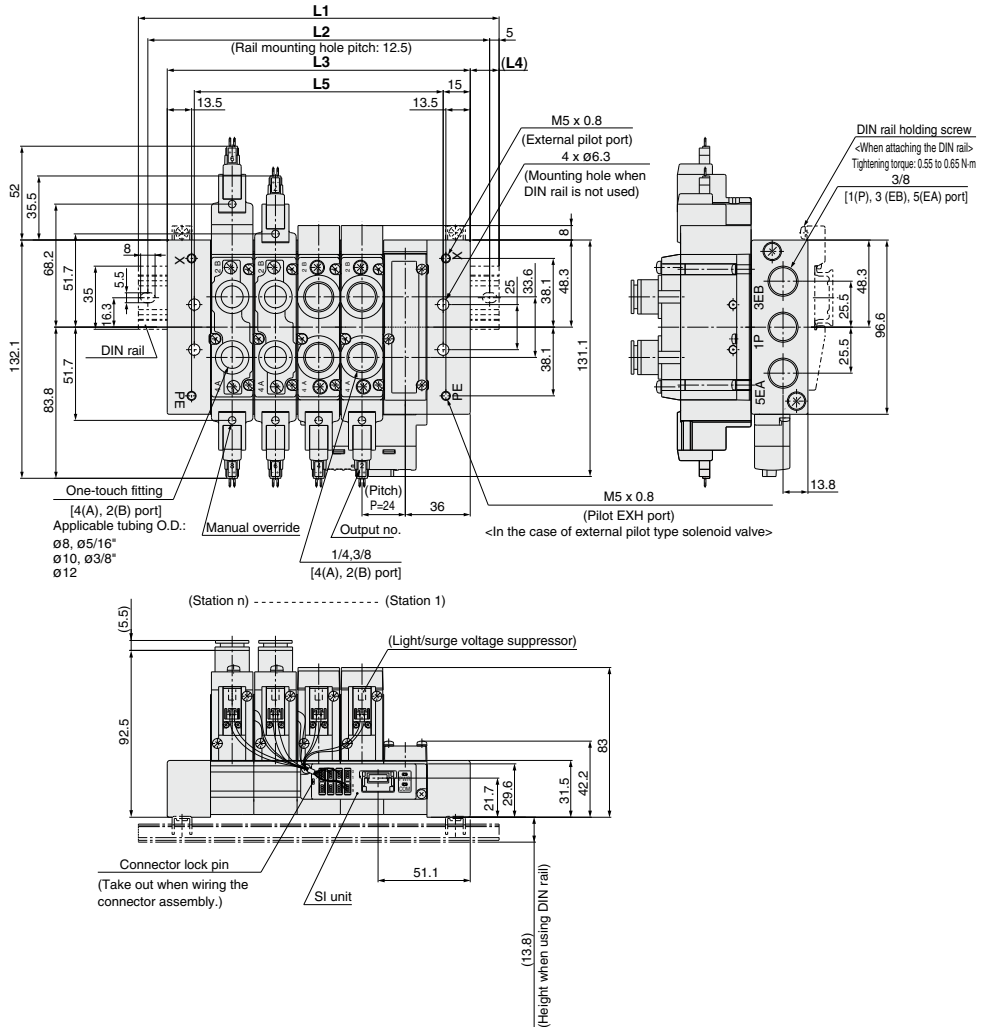


Stations n	3 stations	4	5	6	7	8	9	10	11	12	13	14	15	16 stations
<b>L1</b>	148	173	198	223	248	273	298	323	335.5	360.5	385.5	410.5	435.5	460.5
<b>L2</b>	137.5	162.5	187.5	212.5	237.5	262.5	287.5	312.5	325	350	375	400	425	450
<b>L3</b>	120	144	168	192	216	240	264	288	312	336	360	384	408	432
<b>L4</b>	14	14.5	15	15.5	16	16.5	17	17.5	12	12.5	13	13.5	14	14.5
<b>L5</b>	90	114	138	162	186	210	234	258	282	306	330	354	378	402

Note) In the case of direct mounting without DIN rail, total width of manifold is L3.

## Manifold Option

### ■ Type 20, 23, 20SA, 23SA Blanking plate assembly




#### <Standard>

Series	Assembly part no.
<b>SY3000</b>	SY3000-26-9A
<b>SY5000</b>	SY5000-26-20A
<b>SY7000</b>	SY7000-26-22A
<b>SY9000</b>	SY9000-26-1A

#### <CE-compliant>

Series	Assembly part no.
<b>SY3000</b>	SY3000-26-19A-Q
<b>SY5000</b>	SY5000-26-1A-Q
<b>SY7000</b>	SY7000-26-1A-Q
<b>SY9000</b>	SY9000-26-1A

### ■ Type 20P, 23P Blanking plate assembly




#### <Standard>

Series	Assembly part no.
<b>SY3000</b>	SY3000-26-10A
<b>SY5000</b>	SY5000-26-21A
<b>SY7000</b>	SY7000-26-23A
<b>SY9000</b>	SY9000-26-3A

#### <CE-compliant>

Series	Assembly part no.
<b>SY3000</b>	SY3000-26-20A-Q
<b>SY5000</b>	SY5000-26-3A-Q
<b>SY7000</b>	SY7000-26-3A-Q
<b>SY9000</b>	SY9000-26-3A


### ■ Gasket assembly part no.



Series	Gasket assembly part no.
<b>SY3000</b>	SY3000-GS-1
<b>SY5000</b>	SY5000-GS-1
<b>SY7000</b>	SY7000-GS-1
<b>SY9000</b>	SY9000-GS-1

Note) The gasket assembly includes 10 sets of mounting screws and a gasket.


### ■ Individual SUP spacer assembly



Series	Assembly part no.	Port size	t
<b>SY3000</b>	SY3000-38-20A(-Q)	M5 x 0.8	10.5
<b>SY5000</b>	SY5000-38-1+A(-Q)	1/8	15
<b>SY7000</b>	SY7000-38-1+A(-Q)	1/4	18
<b>SY9000</b>	SY9000-38-1+A	1/4	20

Note) • The SUP port of SY3000/5000/7000 may be either on the lead wire side or on the end plate side. (An assembly is shipped under the conditions shown in the figure.)  
• The end plate side is only available to SY9000.


### ■ Individual EXH spacer assembly



Series	Assembly part no.	Port size	t
<b>SY3000</b>	SY3000-39-20A(-Q)	M5 x 0.8	10.5
<b>SY5000</b>	SY5000-39-1+A(-Q)	1/8	15
<b>SY7000</b>	SY7000-39-1+A(-Q)	1/4	18
<b>SY9000</b>	SY9000-39-1+A	1/4	20

Note) In case of 20P and 23P, for protection of the wiring unit section from drainage, piping at the EA port should be arranged so that it will not be directly exposed to exhaust from the valve.

### ■ Individual SUP spacer assembly + Individual EXH spacer assembly (Double spacer)

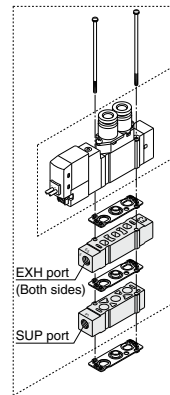

EXH port (Both sides)  
SUP port

## ⚠ Caution

### Mounting screw tightening torques

M2: 0.16 N·m  
M3: 0.8 N·m  
M4: 1.4 N·m

## ⚠ Warning

When mounting a valve or spacer on the manifold base or sub-plate, etc., those mounting directions are determined. If mounted in the wrong direction, the equipment to be connected may cause malfunction. Refer to external dimensions, and then mount it.

### \* Thread type

Nil	Rc
F	G
N	NPT
T	NPTF

### ● Available ×: Not available]

Series	Individual SUP + Individual EXH Assemble part no.	Port size	Applicable manifold types	
			20	20P
<b>SY3000</b>	SY3000-120-1A(-Q)	M5 x 0.8	●	×
<b>SY5000</b>	SY5000-75-2+A(-Q)	1/8	●	×
<b>SY7000</b>	SY7000-73-3+A(-Q)	1/4	●	×


Note) The SUP spacer's port does not have an orientation. As for the EXH ports, adjust the symbol "S" to the pilot valve side. Also, please make sure to connect the individual ports to protect the wiring section of the pilot valve from drainage, etc.  
The individual SUP spacer and EXH spacer can be mounted either on the upper side or lower side. (The above illustration shows the condition when the product is shipped out from a factory.)

SJ  
SY  
SY  
SV  
SYJ  
SZ  
VF  
VP4  
S0700  
VQ  
VQ4  
VQ5  
VQC  
VQC4  
VQZ  
SQ  
VFS  
VFR  
VQ7


## Manifold Option

### ■ Connector assembly

For single solenoid (SY3000-37-81A-□-N)



For double solenoid (SY3000-37-81A-□-□)




Connector assembly order no. (Can be used for the manifold without a specified layout (8 stations or less))  
Integrated type

Model	Part no.	Connector mounting position
SS5Y3-20SA	SY3000-37-81A-3-N	Single : For 1 to 4 stations
	SY3000-37-81A-3-6	Double/3 position: For 1 to 4 stations
	SY3000-37-81A-2-N	Single : For 5 to 8 stations
	SY3000-37-81A-2-4	Double/3 position: For 5 to 8 stations
SS5Y5-20SA	SY3000-37-81A-3-N	Single : For 1 to 8 stations
	SY3000-37-81A-3-6	Double/3 position: For 1 to 8 stations
SS5Y7-20SA	SY3000-37-81A-3-N	Single : For 1 to 4 stations
	SY3000-37-81A-3-6	Double/3 position: For 1 to 4 stations
	SY3000-37-81A-4-N	Single : For 5 to 8 stations
	SY3000-37-81A-4-7	Double/3 position: For 5 to 8 stations

Note) The above is for the station addition or maintenance. When ordering a connector assembly separately, a number would not be printed on the connector.

### ■ Connector assembly

SY3000-37-80A-□



### ■ Housing (8 pcs/set)

SY3000-44-3A



Connector assembly order no. (Can be used for the manifold with a specified layout)

Model	Part no.	Connector mounting position
SS5Y3-20SA	SY3000-37-80A-3	For A side
	SY3000-37-80A-6	For B side
	SY3000-37-80A-4	For A side
	SY3000-37-80A-7	For B side
SS5Y5-20SA	SY3000-37-80A-3	For A side
	SY3000-37-80A-6	For B side
	SY3000-37-80A-7	For A side
	SY3000-37-80A-9	For B side
SS5Y7-20SA	SY3000-37-80A-4	For A side
	SY3000-37-80A-7	For B side
	SY3000-37-80A-8	For A side
	SY3000-37-80A-11	For B side
SS5Y9-23SA	SY3000-37-80A-6	For A side
	SY3000-37-80A-11	For B side
	SY3000-37-80A-9	For A side
	SY3000-37-80A-14	For B side
	SY3000-37-80A-13	For A side
	SY3000-37-80A-18	For B side

Note 1) The above is for station addition or maintenance. When ordering a connector assembly separately, a number will not be printed on the connector.

Note 2) After inserting the connector assembly into the housing, be sure to confirm that the lead wire will not come off by lightly pulling the wire. Furthermore, do not reuse the lead wire after it has been inserted and removed.

Note 3) Wiring is set longer than the actual wiring distance.

## Manifold Option

### ■ SUP blocking disk (For SY9000)

By installing a SUP blocking disk in the pressure supply passage of a manifold valve, it is possible to supply two or more different high and low pressures to one manifold.



Series	Part no.
<b>SY9000</b>	SY9000-61-2A

### ■ EXH blocking disk (For SY9000)

By installing an EXH blocking disk in the exhaust passage of a manifold valve, it is possible to divide the valve's exhaust so that it does not affect another valve. (Two blocking disks are needed to divide both exhausts.)



Series	Part no.
<b>SY9000</b>	SY9000-61-2A

### ■ Label for blocking disk (For SY9000)

The labels shown below are used on manifold stations containing SUP/EXH blocking disk(s) to show their location. (3 pcs. each)

#### VZ3000-123-1A

Label for SUP block disk

Label for EXH block disk

Label for SUP/EXH block disk




\* When a block disk is concurrently ordered by specifying on the manifold specification sheet, etc., a label will be stuck on the position where block disk is mounted.

### ■ DIN Rail Dimensions/Weight for SY9000

#### VZ1000-11-4-□

Refer to L dimensions

\* Fill in □ with an appropriate no. listed on the table of DIN rail dimensions shown below.

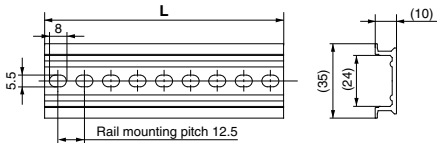


No.	0	1	2	3	4	5	6	7	8	9
L Dimension	98	110.5	123	135.5	148	160.5	173	185.5	198	210.5
Weight (g)	24.8	28	31.1	34.3	37.4	40.6	43.8	46.9	50.1	53.3
No.	10	11	12	13	14	15	16	17	18	19
L Dimension	223	235.5	248	260.5	273	285.5	298	310.5	323	335.5
Weight (g)	56.4	59.6	62.7	65.9	69.1	72.2	75.4	78.6	81.7	84.9
No.	20	21	22	23	24	25	26	27	28	29
L Dimension	348	360.5	373	385.5	398	410.5	423	435.5	448	460.5
Weight (g)	88	91.2	94.4	97.5	100.7	103.9	107	110.2	113.3	116.5

Note) For DIN rail, refer to page 521.

- Refer to L1 dimension on pages 314, 342 and 352 for lengths that correspond to the number of manifold stations.

### ■ Cable assembly (For 20P, 23P)

#### AXT100-FC26-1

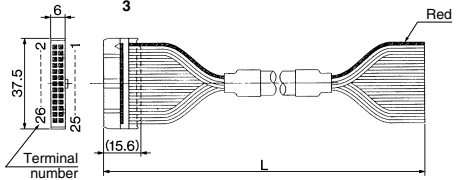

### Connector Assembly for Flat Ribbon Cables

Cable length (L)	Assembly part no.	Note
1.5 m	AXT100-FC26-1	Cable 26 core x 28 AWG
3 m	AXT100-FC26-2	
5 m	AXT100-FC26-3	


\* For other commercial connectors, use a 26 pins with strain relief conforming to MIL-C-83503.

### Connector manufacturers' example

- Hirose Electric Company
- Japan Aviation Electronics Industry, Ltd.
- Sumitomo 3M Limited
- J.S.T. Mfg. Co., Ltd.
- Fujitsu Limited

### ■ Plug (white)

These are inserted in unused cylinder ports and SUP, EXH ports. Purchasing order is available in units of 10 pieces.



### Dimensions

Applicable fittings size od	Model	A	L	D
4	<b>KQ2P-04</b>	16	32	6
6	<b>KQ2P-06</b>	18	35	8
8	<b>KQ2P-08</b>	20.5	39	10
10	<b>KQ2P-10</b>	22	43	12
12	<b>KQ2P-12</b>	24	44.5	14
1/8"	<b>KQ2P-01</b>	16	31.5	5
5/32"	<b>KQ2P-03</b>	16	32	6
1/4"	<b>KQ2P-07</b>	18	35	8.5
5/16"	<b>KQ2P-09</b>	20.5	39	10
3/8"	<b>KQ2P-11</b>	22	43	11.5

SJ  
SY  
SY  
SV  
SYJ  
SZ  
VF  
VP4  
S0700  
VQ  
VQ4  
VQ5  
VQC  
VQC4  
VQZ  
SQ  
VFS  
VFR  
VQ7

**How to Increase Manifold Bases (Series SY9000 only) Manifold case can be added at any location.**

When a type 23 manifold base is added, tension bolts as well as manifold block assembly will be required. Order the tension bolt suitable for the stations after a station was increased (decreased), since the length of a tension bolt differs by the number of stations. (For changing the number of stations for a type 23P manifold, wiring unit for the stations and lead assembly will be required.)

- 1 Loosen the tension bolts ⑤ connecting the manifold base, and pull out both of 2 tension bolts.  
(When equipped with a DIN rail, loosen one DIN rail holding screw on either U side or D side.)
- 2 Separate the blocks at the location where station expansion is desired.
- 3 Mount additional manifold block assembly.
- 4 Press block-to-block so that there's no gap. After connection, insert a tension bolt for desired stations and then tighten it.


**⚠ Caution** (Tightening torque: 2.9 N·m)  
(When equipped with a DIN rail, be sure to tighten the DIN rail holding screws after tightening the tension bolts. Tightening torque: 1.4 N·m)

**⚠ Caution**

1. Be sure to shut off the power and air supplies before disassembly. Furthermore, since air may remain inside the actuator, piping and manifold, confirm that the air is completely exhausted before performing any work.
2. When disassembly and assembly are performed, air leakage may result if connections between blocks and tightening of the end block's holding screw, is inadequate.
3. By adding wiring unit assembly to type 23 manifold, it can be changed to type 23P manifold, too.

**Body Ported Manifold Exploded View, 23/23P Common**


As for body ported manifold, it is available only for Series SY9000 to disassemble or increase the manifold.

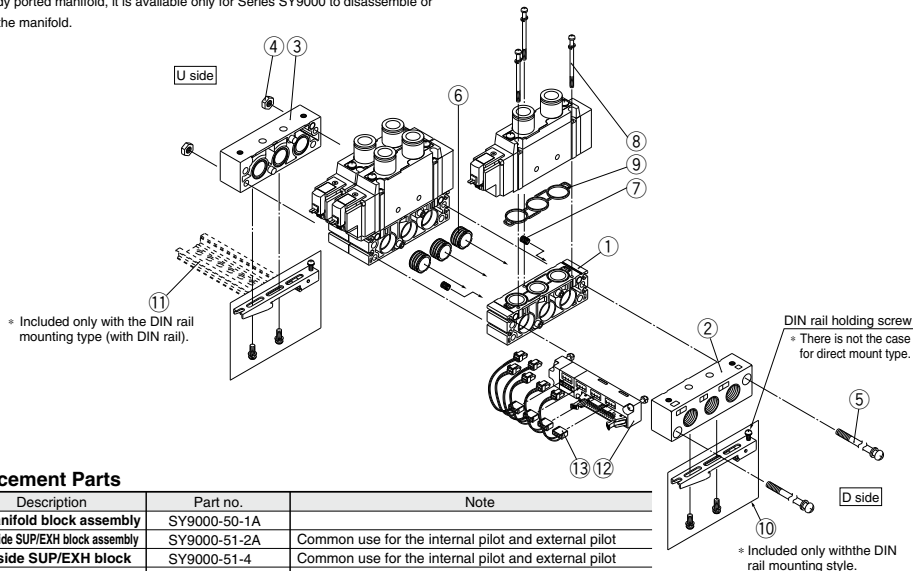

**Replacement Parts**

No.	Description	Part no.	Note
1	<b>Manifold block assembly</b>	SY9000-50-1A	
2	<b>D side SUP/EXH block assembly</b>	SY9000-51-2A	Common use for the internal pilot and external pilot
3	<b>U side SUP/EXH block</b>	SY9000-51-4	Common use for the internal pilot and external pilot
4	<b>Hexagon nut</b>	SY9000-25-1	M5 x 0.8
5	<b>Tension bolt</b>	SY9000-23-□	Since □ at the end of part number corresponds with the number of stations, fill in the same number as the number of stations.
6	<b>Bush assembly</b>	SY9000-61-1A	Included in the Manifold block assembly and the D side SUP/EXH block assembly.
7	<b>Bush assembly</b>	SY9000-61-3A	Included in the Manifold block assembly and the D side SUP/EXH block assembly.
8	<b>Round head combination screw</b>	SY9000-18-2	Included in the Manifold block assembly.
9	<b>Manifold gasket</b>	SY9000-11-1	Included in the Manifold block assembly.
10	<b>Clamp sub assembly</b>	SY9000-29-1A	
11	<b>DIN rail</b>	VZ1000-11-4-□	Refer to page 355.
12	<b>Wiring unit assembly</b>	SY9000-36-□A	Since □ in part number corresponds with the number of stations, fill in the number of stations (4 to 12).
13	<b>Connector assembly</b>	SY9000-37-□□	Refer to page 341.


# 5 Port Solenoid Valve Body Ported Manifold Cassette Type



Type **60**

# Series SY3000/5000/7000

An order cannot be placed with only the manifold part no. Be sure to order solenoid valves for mounting at the same time while referring to the ordering example.



## How to Order

SS5Y **3** - 60 - **05** **D** - [ ] - [ ]

Series	
3	SY3000
5	SY5000
7	SY7000

Valve stations	
02	2 stations
:	:
20	20 stations

### CE-compliant

NII	—
Q	CE-compliant

Note) AC-type models that are CE-compliant have DIN terminals only.

### Option

When a DIN rail longer than standard is required, enter the number of manifold stations that corresponds with the length of DIN rail needed. Max. 20 stations


### SUP/EXH block assembly mounting position

Symbol	Mounting position	Applicable stations
U	U side	2 to 10 stations
D	D side	
B	Both sides	2 to 20 stations
M	Special location	

\* For special specifications, indicate separately by the manifold specification sheet.

## How to Order Manifold Assembly (Example)

### Example

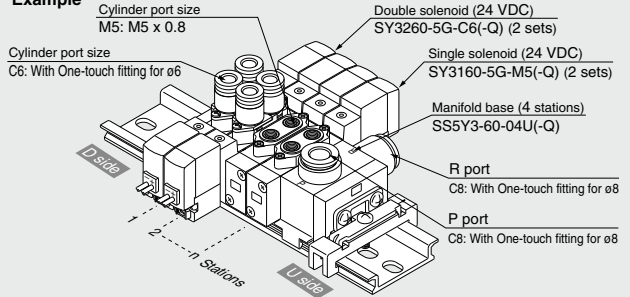

SS5Y3-60-04U (-Q) ..... 1 set (Type 60, 4-station manifold base part no.)  
 \* SY3260-5G-C6 (-Q) ..... 2 sets (Double solenoid part no.)  
 \* SY3160-5G-M5 (-Q) ..... 2 sets (Single solenoid part no.)

→ The asterisk denotes the symbol for assembly. Prefix it to the part nos. of the solenoid valve, etc.

Add the valve and option part number under the manifold base part number. In the case of complex arrangement, specify them on the manifold specification sheet.



## Manifold Specifications

<b>Model</b>		<b>SS5Y3-60(-Q)</b>	<b>SS5Y5-60(-Q)</b>	<b>SS5Y7-60(-Q)</b>
<b>Applicable valve</b>		SY3□60	SY5□60	SY7□60
<b>Manifold type</b>		Stacking type/DIN rail mounted		
<b>P (SUP)/R (EXH)</b>		Common SUP/Common EXH		
<b>Valve stations</b>		2 to 20 stations <sup>Note 1)</sup>		
<b>A, B port location</b>		Valve		
<b>Port size</b>	<b>P, R port</b>	C8 (One-touch fitting for ø8) M5 x 0.8	C10 (One-touch fitting for ø10) 1/8	C12 (One-touch fitting for ø12) 1/4
	<b>A, B port</b>	C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6)	C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6) C8 (One-touch fitting for ø8)	C8 (One-touch fitting for ø8) C10 (One-touch fitting for ø10)
<b>Manifold base weight W (g)</b> <sup>Note 2)</sup> (n: Number of SUP/EXH blocks, m: Weight of DIN rail)		W = 13n + m + 36	W = 41.2n + m + 77.6	W = 65.4n + m + 128.2

Note 1) In cases such as those where many valves are operated simultaneously, use "-[station]B (SUP/EXH block on both sides)", applying pressure to the P ports on both sides and exhausting from the R ports on both sides.

Note 2) For DIN rail weight, refer to page 364.

## Flow Characteristics

Model	Port size		Flow characteristics					
	1,5/3 (P,R)	4,2 (A,B)	1 → 4/2(P → A/B)			4/2 → 5/3(A/B → R)		
			C (dm <sup>3</sup> /(s·bar))	b	Cv	C (dm <sup>3</sup> /(s·bar))	b	Cv
SS5Y3-60(-Q)	C8	M5	0.55	0.29	0.14	0.72	0.24	0.18
		C4	0.57	0.24	0.14	0.71	0.20	0.17
		C6	0.68	0.28	0.17	0.77	0.24	0.19
SS5Y5-60(-Q)	C10	1/8	1.8	0.24	0.44	2.1	0.17	0.47
		C6	1.5	0.30	0.37	2.0	0.16	0.46
		C8	1.8	0.20	0.45	2.2	0.17	0.50
SS5Y7-60(-Q)	C12	1/4	3.7	0.25	0.96	3.8	0.19	0.94
		C8	3.2	0.26	0.81	4.0	0.18	0.96
		C10	3.7	0.28	0.98	4.1	0.19	1.0

Note) The value is for manifold base with 5 stations and individually operated 2 position type.

SJ

SY

SY

SV

SYJ

SZ

VF

VP4

S0700

VQ

VQ4

VQ5

VQC

VQC4

VQZ

SQ

VFS

VFR

VQ7

## How to Order Valve

Note) AC-type models that are CE-compliant have DIN terminals only.



SY **3** **1** **60**    - **5** **L**       - **C6**            

### Series

3	SY3000
5	SY5000
7	SY7000

### Type of actuation

1	2 position single (A)4 2(B)  (EA)5 1 3(EB) (P)
2	2 position double (A)4 2(B)  (EA)5 1 3(EB) (P)
3	3 position closed center (A)4 2(B)  (EA)5 1 3(EB) (P)
4	3 position exhaust center (A)4 2(B)  (EA)5 1 3(EB) (P)
5	3 position pressure center (A)4 2(B)  (EA)5 1 3(EB) (P)

### Coil specifications

Nil	Standard
T	With power saving circuit (24 VDC, 12 VDC only)

\* Power saving circuit is not available in the case of D, Y, DO, YO or W□ type.

### Rated voltage

For DC	
5	24 VDC
6	12 VDC
V	6 VDC
S	5 VDC
R	3 VDC

### For AC (50/60Hz)

1	100 VAC
2	200 VAC
3	110 VAC [115 VAC]
4	220 VAC [230 VAC]

\* DC specifications of type D, Y, DO and YO is only available with 12 and 24 VDC.  
\* D, Y, DO and YO only available for SY5000, SY7000.  
\* For type W□, DC voltage is only available.  
Note) AC-type models that are CE-compliant have DIN terminals only.

### A, B port size Thread piping


Symbol	Port size	Applicable series
M5	M5 x 0.8	SY3000
01	1/8	SY5000
02	1/4	SY7000

### One-touch fitting (Metric size)


Symbol	Port size	Applicable series
C4	One-touch fitting for ø4	SY3000
C6	One-touch fitting for ø6	SY3000
C4	One-touch fitting for ø4	SY5000
C6	One-touch fitting for ø6	SY5000
C8	One-touch fitting for ø8	SY5000
C8	One-touch fitting for ø8	SY7000
C10	One-touch fitting for ø10	SY7000

### Manual override


Nil: Non-locking push type



D: Push-turn locking slotted type



E: Push-turn locking lever type



### Light/Surge voltage suppressor

#### Electrical entry for G, H, L, M, W

Nil	Without light/surge voltage suppressor
S	With light/surge voltage suppressor
Z	With light/surge voltage suppressor
R	With surge voltage suppressor (Non-polar type)
U	With light/surge voltage suppressor (Non-polar type)

\* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.  
\* Power saving circuit is only available in the "Z" type.

#### Electrical entry for D, Y (SY500/7000 only)

Nil	Without light/surge voltage suppressor
S	With surge voltage suppressor (Non-polar type)
Z	With light/surge voltage suppressor (Non-polar type)

\* DOZ and YOZ are not available.  
\* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.

### Made to Order

Nil	—
X20	Body ported external pilot (Refer to page 510).
X90	Main valve fluoro rubber (Refer to page 510).

### Thread type

Nil	Rc
F	G
N	NPT
T	NPTF

\* Except for M5

### CE-compliant

Nil	—
Q	CE-compliant

Note) AC-type models that are CE-compliant have DIN terminals only.

### One-touch fitting (Inch size)

Symbol	Port size	Applicable series
N3	One-touch fitting for ø5/32"	SY3000
N7	One-touch fitting for ø1/4"	SY3000
N3	One-touch fitting for ø5/32"	SY5000
N7	One-touch fitting for ø1/4"	SY5000
N9	One-touch fitting for ø5/16"	SY7000
N11	One-touch fitting for ø3/8"	SY7000

### Electrical entry

CE-compliant	DC	24, 12, 6, 5, 3 VDC/100, 110, 200, 220 VAC					24, 12 VDC/100, 110, 200, 220 VAC	24, 12, 6, 5, 3 VDC	
		Grommet	L plug connector	M plug connector	DIN terminal	M8 connector			
		<b>G:</b> Lead wire length 300 mm 	<b>L:</b> With lead wire (Length 300 mm) 	<b>M:</b> With lead wire (Length 300 mm) 	<b>MN:</b> Without lead wire 	<b>(SY5000, 7000)</b> <b>D, Y:</b> With connector 	<b>WO:</b> Without connector cable 		
		<b>H:</b> Lead wire length 600 mm 	<b>LN:</b> Without lead wire 	<b>LO:</b> Without connector 	<b>MO:</b> Without connector 	<b>DO, YO:</b> Connector 	<b>W□:</b> With connector cable Note) 		
	AC	●	●	●	●	●	●	●	●

\* LN, MN type: with 2 sockets.  
\* "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN43650C). For details, refer to page 519.  
\* For connector cable of M8 connector, refer to page 522.  
\* M8 connector conforming to IEC60947-5-2 standard is also available. Refer to page 509 for details.  
\* Refer to page 519 for the lead wire length of L and M plug connectors.  
\* Refer to page 520 for the connector assembly with cover for L and M plug connectors.  
Note) Enter the cable length symbols in □. Please be sure to fill in the blank referring to page 523.  
Note) When ordering single unit of the cassette type solenoid valve, the bushing assembly is included.

## Specifications

Series		<b>SY3000</b>	<b>SY5000</b>	<b>SY7000</b>
Fluid		Air		
Internal pilot	<b>2 position single</b>	0.15 to 0.7		
Operating pressure range (MPa)	<b>2 position double</b>	0.1 to 0.7		
	<b>3 position</b>	0.2 to 0.7		
Ambient and fluid temperature (°C)		Max. 50		
Max. operating frequency (Hz)	<b>2 position double</b>	10	5	5
	<b>3 position</b>	3	3	3
Manual override (Manual operation)		Non-locking push type, Push-turn locking slotted type, Push-turn locking lever type		
Pilot exhaust method		Common exhaust type for main and pilot valve		
Lubrication		Not required		
Mounting position		Unrestricted		
Impact/Vibration resistance <sup>Note)</sup>		150/30		
Enclosure		Dust proof (+ DIN terminal, M8 connector: IP65)		

Note) Impact resistance: No malfunction occurred when it is tested in the axial direction and at the right angles to the main valve and armature in both energized and de-energized states every once for each condition.

Vibration resistance: No malfunction occurred in a one-sweep test between 45 and 2000 Hz.  
Test was performed at both energized and de-energized states in the axial direction and at the right angles to the main valve and armature. (Values in the initial stage)

\* Based on IEC60529

## Solenoid Specifications

Electrical entry		Grommet (G), (H) L plug connector (L) M plug connector (M) DIN terminal (D), (Y) M8 connector (W)	
		G, H, L, M, W	D, Y
Coil rated voltage (V)	DC	24, 12, 6, 5, 3	
	AC 50/60 Hz	100, 110, 200, 220	
Allowable voltage fluctuation		±10% of rated voltage *	
Power consumption (W)	DC	Standard	0.35 [With indicator light: 0.4 (DIN terminal with indicator light: 0.45)]
		With power saving circuit	0.1 (With indicator light only)
Apparent power (VA) *	AC	100 V	0.78 (With indicator light: 0.81) 0.78 (With indicator light: 0.87)
		110 V [115 V]	0.86 (With indicator light: 0.89) 0.86 (With indicator light: 0.97) 0.94 (With indicator light: 0.97) 0.94 (With indicator light: 1.07)
		200 V	1.18 (With indicator light: 1.22) 1.15 (With indicator light: 1.30)
		220 V [230 V]	1.30 (With indicator light: 1.34) 1.27 (With indicator light: 1.46) 1.42 (With indicator light: 1.46) 1.39 (With indicator light: 1.60)
Surge voltage suppressor		Diode (Varistor is for DIN terminal and non-polar)	
Indicator light		LED (AC of DIN connector is neon light.)	

\* In common between 110 VAC and 115 VAC, and between 220 VAC and 230 VAC.

\* For 115 VAC and 230 VAC, the allowable voltage is -15% to +5% of rated voltage.

\* S, Z and T type (with power saving circuit) should be used within the following allowable voltage fluctuation range due to a voltage drop caused by the internal circuit.

S and Z type: 24 VDC: -7% to +10%  
12 VDC: -4% to +10%  
T type: 24 VDC: -8% to +10%  
12 VDC: -6% to +10%

## Response Time

Note) Based on dynamic performance test, JIS B 8375-1981. (Coil temperature: 20°C, at rated voltage)

### SY3000

Type of actuation	Response time (ms) (at the pressure of 0.5 MPa)		
	Without surge voltage suppressor	With surge voltage suppressor	
		S, Z type	R, U type
2 position single	12 or less	15 or less	12 or less
2 position double	10 or less	13 or less	10 or less
3 position	15 or less	20 or less	16 or less

### SY5000

Type of actuation	Response time (ms) (at the pressure of 0.5 MPa)		
	Without surge voltage suppressor	With surge voltage suppressor	
		S, Z type	R, U type
2 position single	19 or less	26 or less	19 or less
2 position double	18 or less	22 or less	18 or less
3 position	32 or less	38 or less	32 or less

### SY7000

Type of actuation	Response time (ms) (at the pressure of 0.5 MPa)		
	Without light/surge voltage suppressor	With light/surge voltage suppressor	
		S, Z type	R, U type
2 position single	31 or less	38 or less	33 or less
2 position double	27 or less	30 or less	28 or less
3 position	50 or less	56 or less	50 or less

SJ

SY

SY

SV

SYJ

SZ

VF

VP4

S0700

VQ

VQ4

VQ5

VQC

VQC4

VQZ

SQ

VFS

VFR

VQ7

**Weight**

**Series SY3000**

Valve model	Type of actuation		Port size A, B	Weight (g)		
				Gro-mmet	L/M plug connector	M8 Connector
SY3□60-□-M5	2 position	Single	M5 x 0.8	49	51	55
		Double		70	73	81
	3 position	Closed center		73	76	84
		Exhaust center Pressure center				
SY3□60-□-C4	2 position	Single	C4 (One-touch fitting for ø4)	62	61	65
		Double		80	83	91
	3 position	Closed center		82	86	94
		Exhaust center Pressure center				
SY3□60-□-C6	2 position	Single	C6 (One-touch fitting for ø6)	55	57	61
		Double		76	79	87
	3 position	Closed center		78	82	90
		Exhaust center Pressure center				

Note) [ ] : denotes normal position.

**Series SY7000**


Valve model	Type of actuation		Port size A, B	Weight (g)			
				Gro-mmet	L/M plug connector	DIN terminal	M8 Connector
SY7□60-□-02	2 position	Single	1/4	103	105	126	109
		Double		125	128	170	136
	3 position	Closed center		133	136	178	144
		Exhaust center Pressure center					
SY7□60-□-C8	2 position	Single	C8 (One-touch fitting for ø8)	138	139	160	143
		Double		160	163	205	171
	3 position	Closed center		168	171	213	179
		Exhaust center Pressure center					
SY7□60-□-C10	2 position	Single	C10 (One-touch fitting for ø10)	123	125	146	129
		Double		145	149	191	157
	3 position	Closed center		153	157	199	165
		Exhaust center Pressure center					

**Series SY5000**

Valve model	Type of actuation		Port size A, B	Weight (g)			
				Gro-mmet	L/M plug connector	DIN terminal	M8 Connector
SY5□60-□-01	2 position	Single	1/8	67	69	90	71
		Double		91	94	136	102
	3 position	Closed center		97	100	142	108
		Exhaust center Pressure center					
SY5□60-□-C4	2 position	Single	C4 (One-touch fitting for ø4)	91	93	114	97
		Double		113	116	158	124
	3 position	Closed center		119	122	164	130
		Exhaust center Pressure center					
SY5□60-□-C6	2 position	Single	C6 (One-touch fitting for ø6)	86	88	109	92
		Double		108	111	153	119
	3 position	Closed center		114	117	159	125
		Exhaust center Pressure center					
SY5□60-□-C8	2 position	Single	C8 (One-touch fitting for ø8)	78	80	101	84
		Double		100	103	145	111
	3 position	Closed center		106	109	151	117
		Exhaust center Pressure center					

## Manifold Option

### ■ Individual SUP block assembly




#### One-touch fitting (Metric size)

Port size	Assembly part no.	Applicable series
One-touch fitting for ø6	SY3000-54-2C(-Q)	SY3000
One-touch fitting for ø8	SY3000-54-1C(-Q)	SY3000
One-touch fitting for ø10	SY5000-54-1C(-Q)	SY5000
One-touch fitting for ø12	SY7000-54-1C(-Q)	SY7000

#### One-touch fitting (Inch size)

Port size	Assembly part no.	Applicable series
One-touch fitting for ø5/16"	SY3000-54-3C(-Q)	SY3000
One-touch fitting for ø3/8"	SY5000-54-2C(-Q)	SY5000
One-touch fitting for ø3/8"	SY7000-54-3C(-Q)	SY7000

### ■ Individual EXH block assembly



#### One-touch fitting (Metric size)

Port size	Assembly part no.	Applicable series
One-touch fitting for ø6	SY3000-55-1B(-Q)	SY3000
One-touch fitting for ø10	SY5000-55-1B(-Q)	SY5000
One-touch fitting for ø12	SY7000-55-1B(-Q)	SY7000


#### One-touch fitting (Inch size)

Port size	Assembly part no.	Applicable series
One-touch fitting for ø5/16"	SY3000-55-2B(-Q)	SY3000
One-touch fitting for ø3/8"	SY5000-55-2B(-Q)	SY5000
One-touch fitting for ø3/8"	SY7000-55-3B(-Q)	SY7000

### [When supplying the manifold with 2 different supply pressures.]

Specify arrangement of individual SUP block assembly on the manifold specification sheet. (When using SSSY□-60-□□□, blocking disk is assembled on D side.)


<Manifold model no.: SSSY<sub>3</sub>-60-□□□>

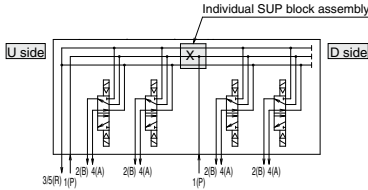

### [When 2 different EXH passages are required.]

Specify arrangement of individual EXH block assembly on the manifold specification sheet. (When using SS5Y□-60-□□□, blocking disk is assembled on D side.)


<Manifold model no.: SS5Y<sub>3</sub>-60-□□□>

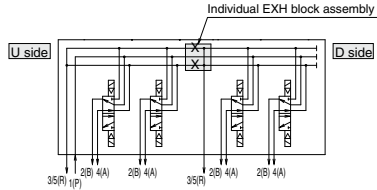

### [When a different supply pressure is required for only a middle valve.]

Specify arrangement of individual SUP block assembly and SUP blocking disk on the manifold specification sheet.


(Applicable manifold model no.: SSSY□-60-□□B)

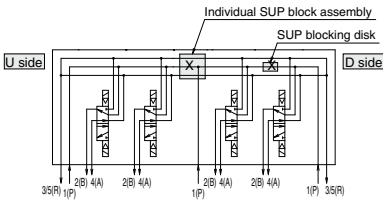

### [When a separate exhaust passage is needed on only a middle valve.]

Specify arrangement of individual EXH block assembly and EXH blocking disk on the manifold specification sheet.

(Applicable manifold model no.: SS5Y□-60-□□B)

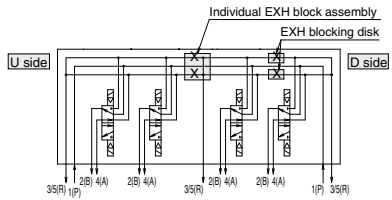

- JS
- SY
- SY
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

## Manifold Option

### ■ SUP blocking disk

By installing a SUP blocking disk in the pressure supply passage of a manifold valve, it is possible to supply two or more different high and low pressures to one manifold. (This is the same block disk used with the individual SUP block assembly.)



Series	Part no.
<b>SY3000</b>	SY3000-52-6A
<b>SY5000</b>	SY5000-52-4A
<b>SY7000</b>	SY7000-70-2A

### ■ EXH blocking disk

By installing an EXH blocking disk in the exhaust passage of a manifold valve, it is possible to divide the valve's exhaust so that it does not affect another valve. (Two blocking disks are needed to separate both EXH passages. It is the same block disk that is used in the individual EXH block assembly.)



Series	Part no.
<b>SY3000</b>	SY3000-52-6A
<b>SY5000</b>	SY5000-52-4A
<b>SY7000</b>	SY7000-70-2A

### ■ Label for block disk

The labels shown below are used on manifold stations containing SUP/EXH blocking disk(s) to show their location. (3 pcs. each)

#### VZ3000-123-1A

Label for SUP block disk




Label for EXH block disk



Label for SUP/EXH block disk




\* When a block disk is concurrently ordered by specifying on the manifold specification sheet, etc., a label will be stuck on the position where block disk is mounted.

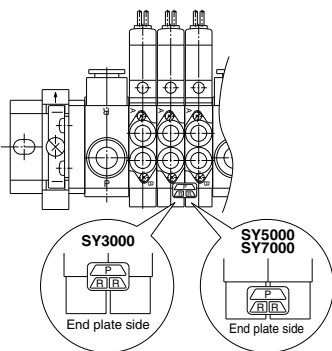

### ■ Silencer with One-touch fitting


The silencer plugs directly into the One-touch fittings of the manifold.



Series	Model	Effective area mm <sup>2</sup>	A	B	C
<b>SY3000</b> (for ø8)	AN15-C08	20	ø13	20	45
<b>SY5000</b> (for ø10)	AN20-C10	30	ø16.5	30.5	57.5
<b>SY7000</b> (for ø12)	AN30-C12	41	ø20	43.5	71.5

### ■ Plug (white)

These are inserted in unused cylinder ports and SUP, EXH ports. Purchasing order is available in units of 10 pieces.



### Dimensions


Applicable fittings size ød	Model	A	L	D
4	<b>KQ2P-04</b>	16	32	6
6	<b>KQ2P-06</b>	18	35	8
8	<b>KQ2P-08</b>	20.5	39	10
10	<b>KQ2P-10</b>	22	43	12
12	<b>KQ2P-12</b>	24	45.5	14
5/32"	<b>KQ2P-03</b>	16	32	6
1/4"	<b>KQ2P-07</b>	18	35	8.5
5/16"	<b>KQ2P-09</b>	20.5	39	10
3/8"	<b>KQ2P-11</b>	22	43	11.5

### ■ DIN Rail Dimensions/Weight for SY3000/5000

#### VZ1000-11-1-□

Refer to the L dimension tables

\* Enter a number from the DIN rail dimension table below in them.

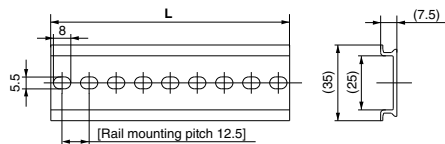

No.	0	1	2	3	4	5	6	7	8	9
L dimension	98	110.5	123	135.5	148	160.5	173	185.5	198	210.5
Weight (g)	17.6	19.9	22.1	24.4	26.6	28.9	31.1	33.4	35.6	37.9

No.	10	11	12	13	14	15	16	17	18	19
L dimension	223	235.5	248	260.5	273	285.5	298	310.5	323	335.5
Weight (g)	40.1	42.4	44.6	46.9	49.1	51.4	53.6	55.9	58.1	60.4


No.	20	21	22	23	24	25	26	27	28	29
L dimension	348	360.5	373	385.5	398	410.5	423	435.5	448	460.5
Weight (g)	62.6	64.9	67.1	69.4	71.6	73.9	76.1	78.4	80.6	82.9

### ■ DIN Rail Dimensions/Weight for SY7000

#### VZ1000-11-4-□

Refer to the L dimension tables

\* Enter a number from the DIN rail dimension table below in them.

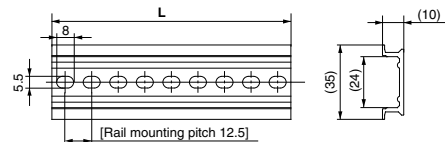

No.	0	1	2	3	4	5	6	7	8	9
L dimension	98	110.5	123	135.5	148	160.5	173	185.5	198	210.5
Weight (g)	24.8	28	31.1	34.3	37.4	40.6	43.8	46.9	50.1	53.3

No.	10	11	12	13	14	15	16	17	18	19
L dimension	223	235.5	248	260.5	273	285.5	298	310.5	323	335.5
Weight (g)	56.4	59.6	62.7	65.9	69.1	72.2	75.4	78.6	81.7	84.9

No.	20	21	22	23	24	25	26	27	28	29
L dimension	348	360.5	373	385.5	398	410.5	423	435.5	448	460.5
Weight (g)	88	91.2	94.4	97.5	100.7	103.9	107	110.2	113.3	116.5


Note) For DIN rail mounting, refer to page 521.

## Construction


### Series SY

#### Symbol

##### 2 position single




##### 2 position single

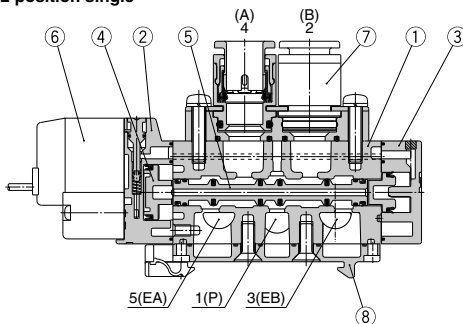


#### Symbol

##### 2 position double




##### 2 position double

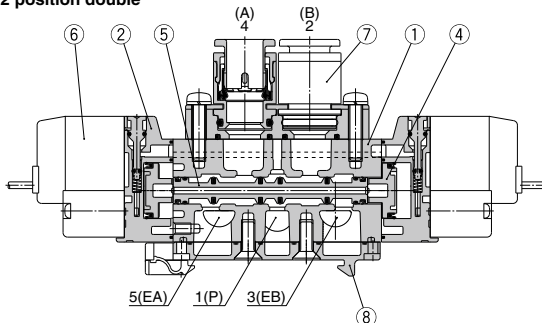


#### Symbol


##### 3 position closed center




##### 3 position exhaust center



##### 3 position pressure center



##### 3 position closed center / exhaust center / pressure center

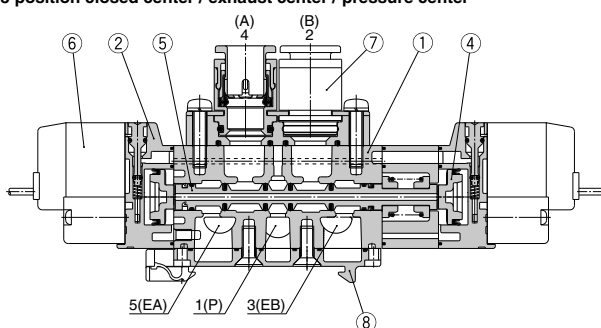

(This figure shows a closed center type.)

### Component Parts

No.	Description	Material	Note
1	Body	Aluminum die-casted SY3000: Zinc die-casted	White
2	Adapter plate	Resin	White
3	End plate	Resin	White
4	Piston	Resin	—
5	Spool valve assembly	Aluminum/H-NBR	—

### Replacement Parts

No.	Description	No.
6	Pilot valve assembly	Refer to "How to Order Pilot Valve Assembly" on page 511.
7	Port block assembly	Refer to "How to Order Port Block Assembly" on page 511.
8	Bottom cover assembly <sup>(Note)</sup>	SY3000-41-2A (with screw, gasket) SY5000-41-2A (with screw, gasket)




Note) There is no bottom cover assembly available for SY7000.

SJ
SY
SY
SV
SYJ
SZ
VF
VP4
S0700
VQ
VQ4
VQ5
VQC
VQC4
VQZ
SQ
VFS
VFR
VQ7

**Dimensions**




[ ]: AC

**SS5Y3-60- Stations U**

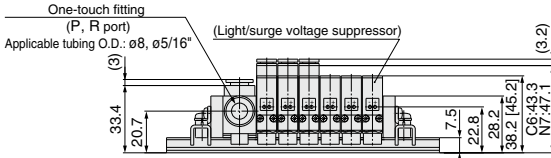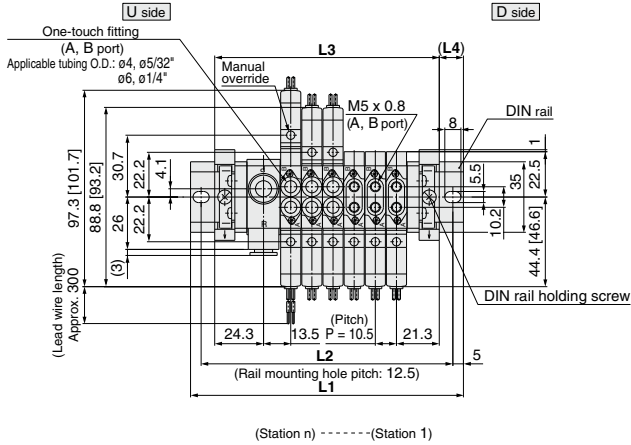

Stations	2 stations	3	4	5	6	7	8	9	10 stations
<b>L1</b>	98	110.5	123	135.5	135.5	148	160.5	173	185.5
<b>L2</b>	87.5	100	112.5	125	125	137.5	150	162.5	175
<b>L3</b>	69.5	80	90.5	101	111.5	122	132.5	143	153.5
<b>L4</b>	14	15	16	17	12	13	14	15	16



**SS5Y3-60- Stations D**

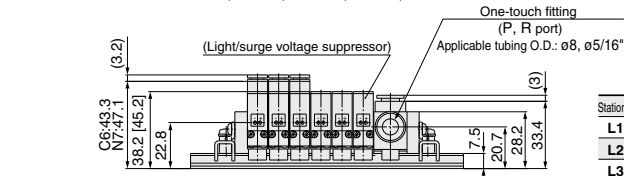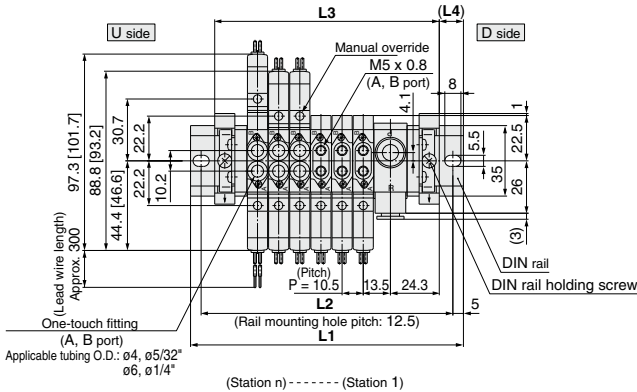

Stations	2 stations	3	4	5	6	7	8	9	10 stations
<b>L1</b>	98	110.5	123	135.5	135.5	148	160.5	173	185.5
<b>L2</b>	87.5	100	112.5	125	125	137.5	150	162.5	175
<b>L3</b>	69.5	80	90.5	101	111.5	122	132.5	143	153.5
<b>L4</b>	14	15	16	17	12	13	14	15	16




**SS5Y3-60-Stations B**

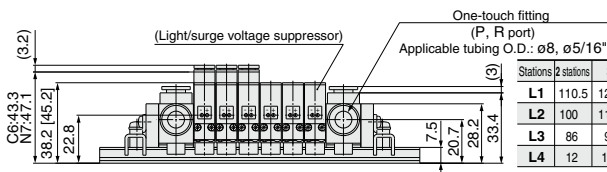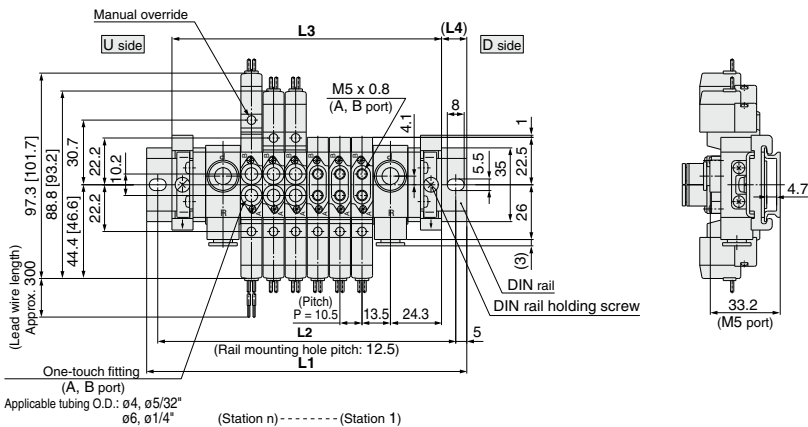


Stations	2 stations	3	4	5	6	7	8	9	10 stations
L1	110.5	123	135.5	148	160.5	173	173	185.5	198
L2	100	112.5	125	137.5	150	162.5	162.5	175	187.5
L3	86	96.5	107	117.5	128	138.5	149	159.5	170
L4	12	13	14	15	16	17	12	13	14

Stations	11 stations	12	13	14	15	16	17	18	19	20 stations
L1	210.5	223	235.5	235.5	248	260.5	273	285.5	298	310.5
L2	200	212.5	225	225	237.5	250	262.5	275	287.5	300
L3	180.5	191	201.5	212	222.5	233	243.5	254	264.5	275
L4	15	16	17	11.5	12.5	13.5	14.5	15.5	16.5	17.5


**L plug connector (L)**

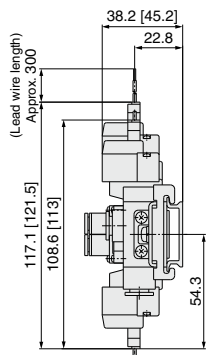

**M plug connector (M)**



**M8 connector (WO)**

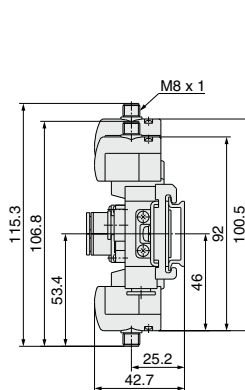


Note) Refer to page 523 for dimensions of connector types.

- SJ
- SY
- SY**
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7


**Dimensions**

[ ] : AC




**SS5Y5-60-Stations U**

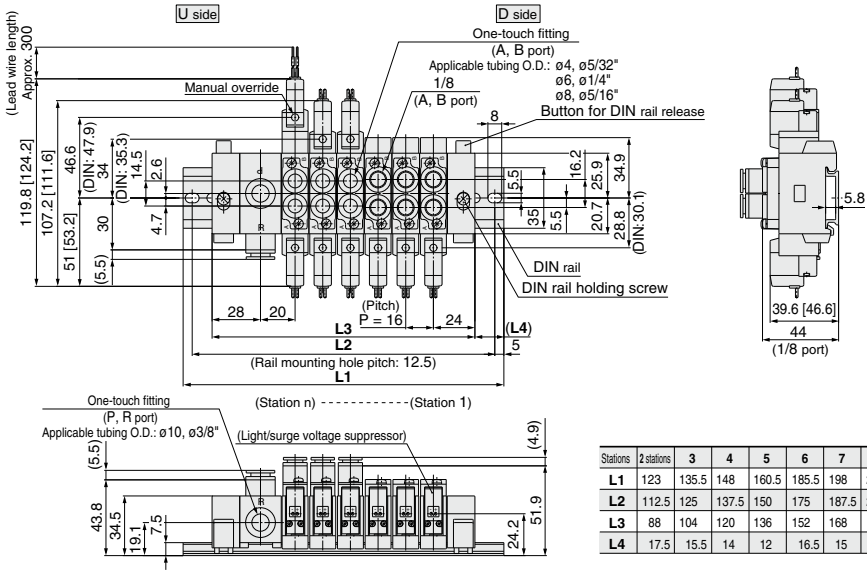

**SS5Y5-60-Stations D**

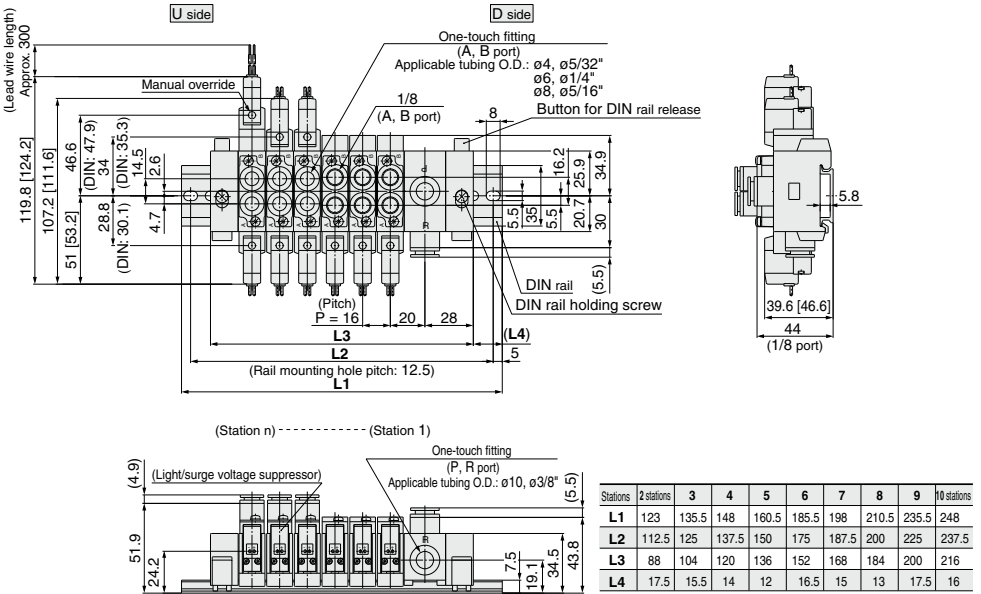

**SS5Y5-60-Stations B**

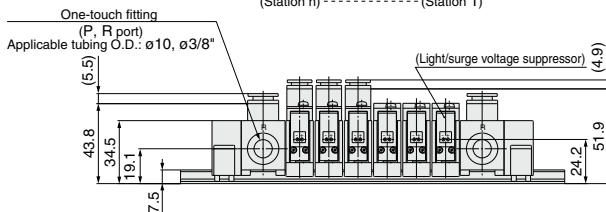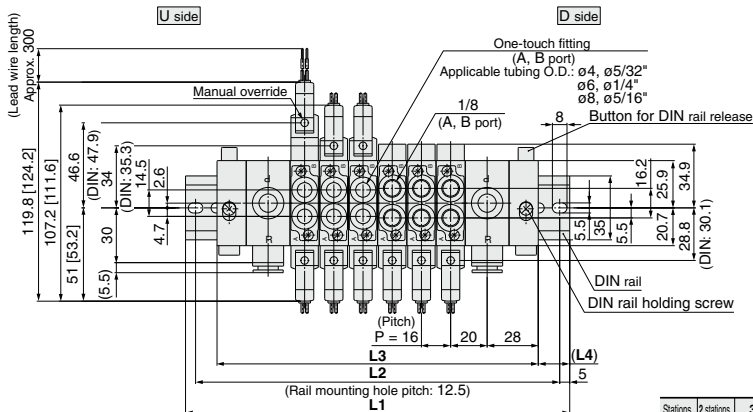


	2 stations	3	4	5	6	7	8 stations
L1	135.5	160.5	173	185.5	210.5	223	235.5
L2	125	150	162.5	175	200	212.5	225
L3	112	128	144	160	176	192	208
L4	11.5	16	14.5	12.5	17.5	15.5	13.5


	9 stations	10	11	12	13	14	15 stations
L1	248	273	285.5	298	323	335.5	348
L2	237.5	262.5	275	287.5	312.5	325	337.5
L3	224	240	256	272	288	304	320
L4	12	16.5	14.5	13	17.5	15.5	14

	16 stations	17	18	19	20 stations
L1	360.5	385.5	398	410.5	435.5
L2	350	375	387.5	400	425
L3	336	352	368	384	400
L4	12	16.5	15	13	17.5


**L plug connector (L)**

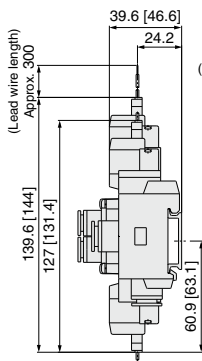


**M plug connector (M)**



**DIN terminal (D, Y)**

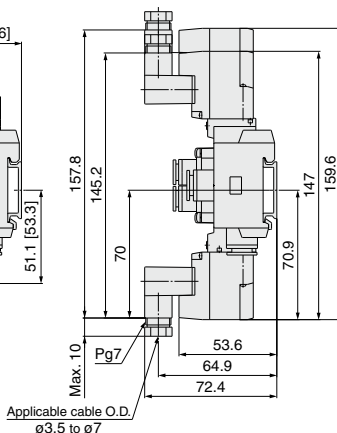

**M8 connector (WO)**




Note) Refer to page 523 for dimensions of connector types.

- SJ
- SY
- SY**
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

**Dimensions**


[ ] : AC

**SS5Y7-60-Stations U**

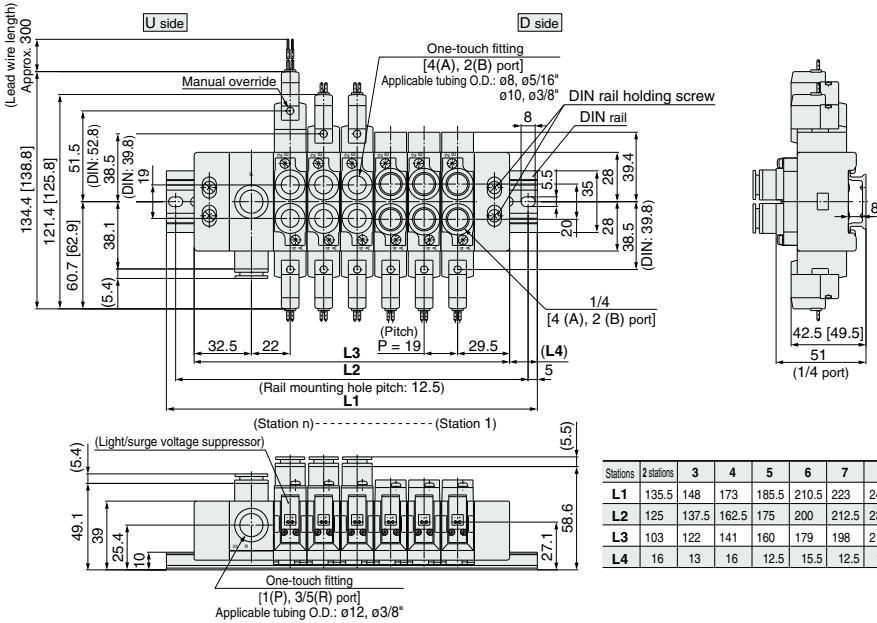


Stations	2 stations	3	4	5	6	7	8	9	10 stations
L1	135.5	148	173	185.5	210.5	223	248	260.5	285.5
L2	125	137.5	162.5	175	200	212.5	237.5	250	275
L3	103	122	141	160	179	198	217	236	255
L4	16	13	16	12.5	15.5	12.5	15.5	12	15

**SS5Y7-60-Stations D**

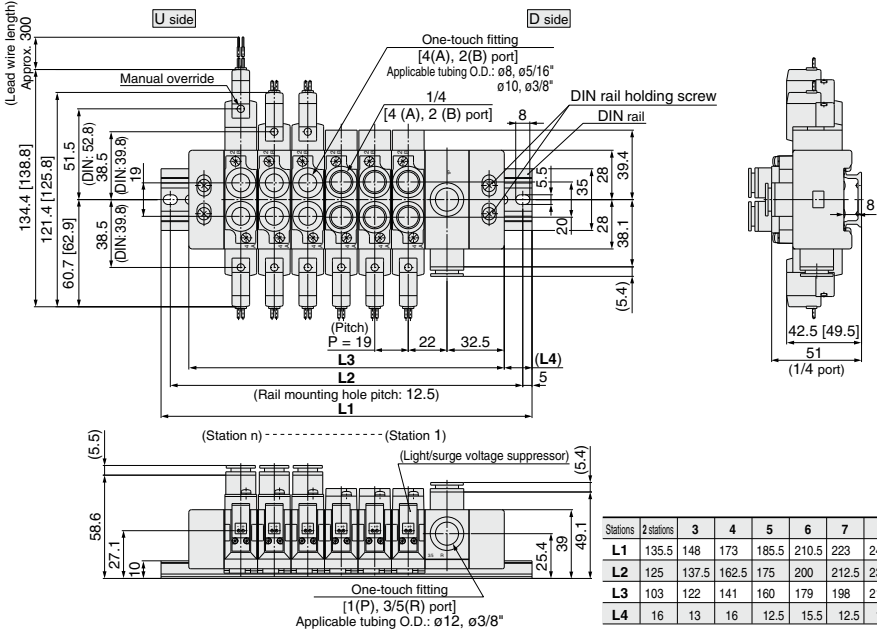





Stations	2 stations	3	4	5	6	7	8	9	10 stations
L1	135.5	148	173	185.5	210.5	223	248	260.5	285.5
L2	125	137.5	162.5	175	200	212.5	237.5	250	275
L3	103	122	141	160	179	198	217	236	255
L4	16	13	16	12.5	15.5	12.5	15.5	12	15

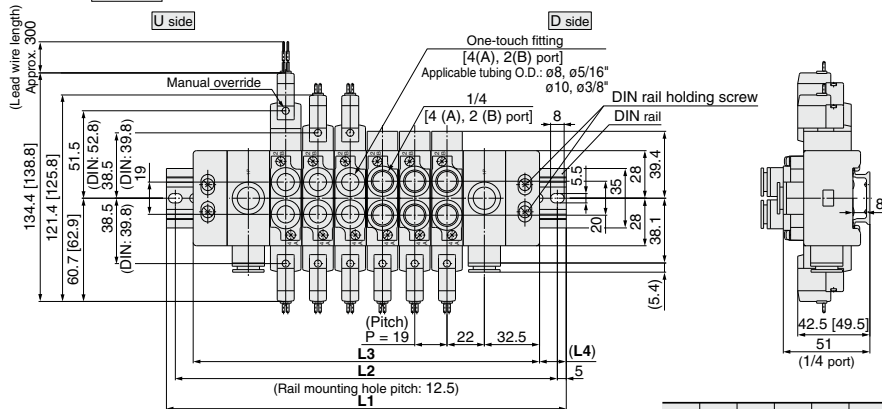**SS5Y7-60-Stations B**


Stations	2 stations	3	4	5	6	7	8 stations
L1	160.5	173	198	210.5	235.5	248	273
L2	150	162.5	187.5	200	225	237.5	262.5
L3	128	147	166	185	204	223	242
L4	16	13	16	12.5	15.5	12.5	15.5

Stations	9 stations	10	11	12	13	14	15 stations
L1	285.5	310.5	323	348	360.5	385.5	410.5
L2	275	300	312.5	337.5	350	375	400
L3	261	280	299	318	337	356	375
L4	12	15	12	15	11.5	14.5	17.5

Stations	16 stations	17	18	19	20 stations
L1	423	448	460.5	485.5	498
L2	412.5	437.5	450	475	487.5
L3	394	413	432	451	470
L4	14.5	17.5	14	17	14

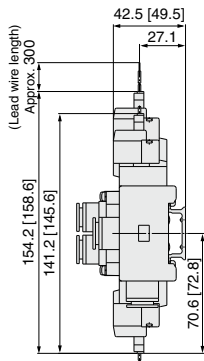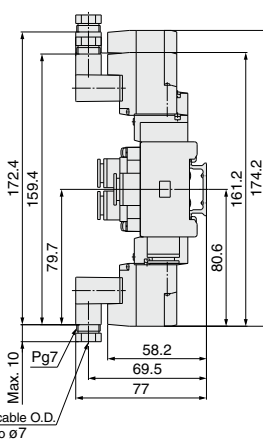**L plug connector (L)**

**M plug connector (M)**

**DIN terminal (D, Y)**

**M8 connector (WO)**


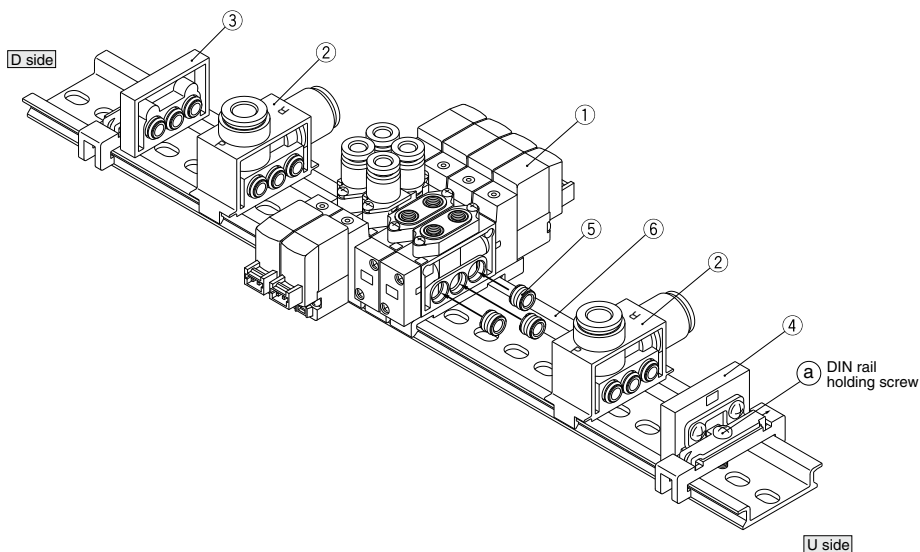
Note) Refer to page 523 for dimensions of connector types.

- SJ
- SY
- SY**
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

## DIN Rail Manifold Exploded View

### SY3000


Type 60



### Replacement Parts

No.	Description	Part no.	Note
1	Valve	SY3□60-□□□(-Q)	□ at the end of part number denotes A. B port size: M5, C4, C6, N3, N7. Includes bushing assembly (SY3000-52-5A) 3 pcs.
2	SUP/EXH block assembly	SY3000-55- $\frac{1}{2}$ A(-Q)	P, R port (1: One-touch fitting for ø8, 2: One-touch fitting for ø5/16") Includes bushing assembly (SY3000-52-5A) 3 pcs.
3	End block assembly	SY3000-56-1A(-Q)	For D side (Bushing assembly: Not available for SY3000-52-5A)
4	End block assembly	SY3000-56-1B(-Q)	For U side (Bushing assembly: Not available for SY3000-52-5A)
5	Bushing assembly	SY3000-52-5A	
6	DIN rail	VZ1000-11-1-□	Refer to page 364.

**SY5000**  
Type 60

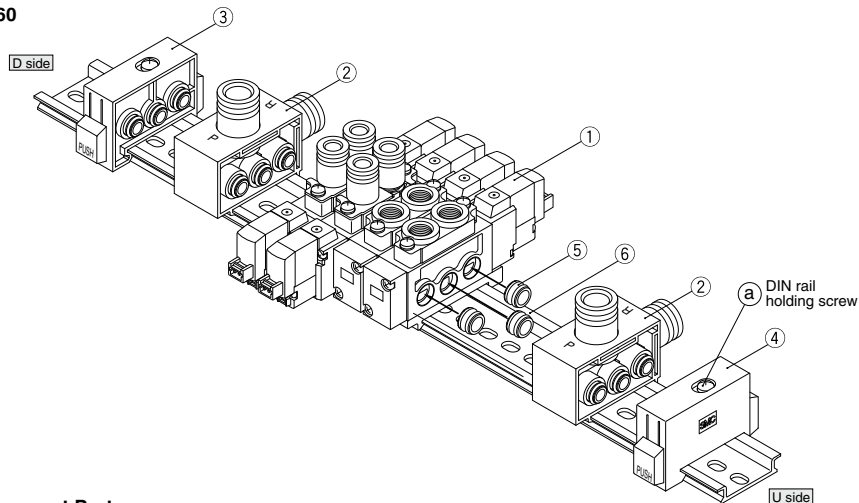

**Replacement Parts**

No.	Description	Part no.	Note
1	Valve	SY5□60-□□□(-Q)	□ at the end of part number denotes A, B port size: 01, C4, C6, C8, N3, N7, N9. Includes bushing assembly (SY5000-52-3A) 3 pcs.
2	SUP/EXH block assembly	SY5000-55- $\frac{1}{2}$ A(-Q)	P, R port (1: One-touch fitting for $\phi 10$ , 2: One-touch fitting for $\phi 3/8$ ) Includes bushing assembly (SY5000-52-3A) 3 pcs.
3	End block assembly	SY5000-56-1A(-Q)	For D side (Bushing assembly: Not available for SY5000-52-3A)
4	End block assembly	SY5000-56-1B(-Q)	For U side (Bushing assembly: Not available for SY5000-52-3A)
5	Bushing assembly	SY5000-52-3A	
6	DIN rail	VZ1000-11-1-□	Refer to page 364.

**How to Add Additional Valves to the DIN Rail** Valves can be added at any station on the rail.

- 1 Loosen the manifold base clamping screw ②.
- 2 Separate the valves at the point where more valves are to be added.
- 3 Mount the additional valves on the DIN rail as shown in Fig. 1
- 4 Connect them together while pressing the block assemblies toward each other, and tighten the holding screw ③ to fix them to the DIN rail.

**⚠ Caution**

**Tightening torque**

SY3000: 1 N·m


SY5000: 1.4 N·m

(While lightly holding the blocks after fixing an end block on one side, tighten the other end block for better sealing after no gap between valves is confirmed.)

- Bushing assembly must be seated properly to each valve block in order to prevent air leaks from occurring.
- Refer to the fig. 2 when dismantling the valve from the DIN rail.

Fig. 1 Manifold mounting procedure

Fig. 2 Manifold dismantling procedure

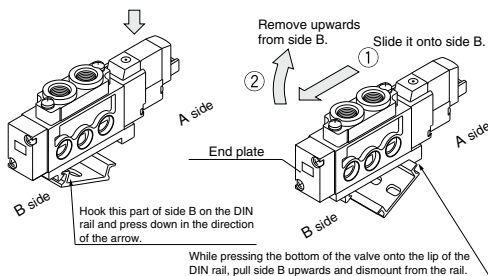


- ⚠ Caution** When clamping screw ③ of the end block is not sufficiently tightened during reassembly, air leakage may result. Before supplying air, check that there are no gaps between valves and that the end block is firmly secured to the DIN rail in order to ensure air supply without leakage.

SY
SV
SYJ
SZ
VF
VP4
S0700
VQ
VQ4
VQ5
VQC
VQC4
VQZ
SQ
VFS
VFR
VQ7

## DIN Rail Manifold Exploded View

### SY7000 Type 60

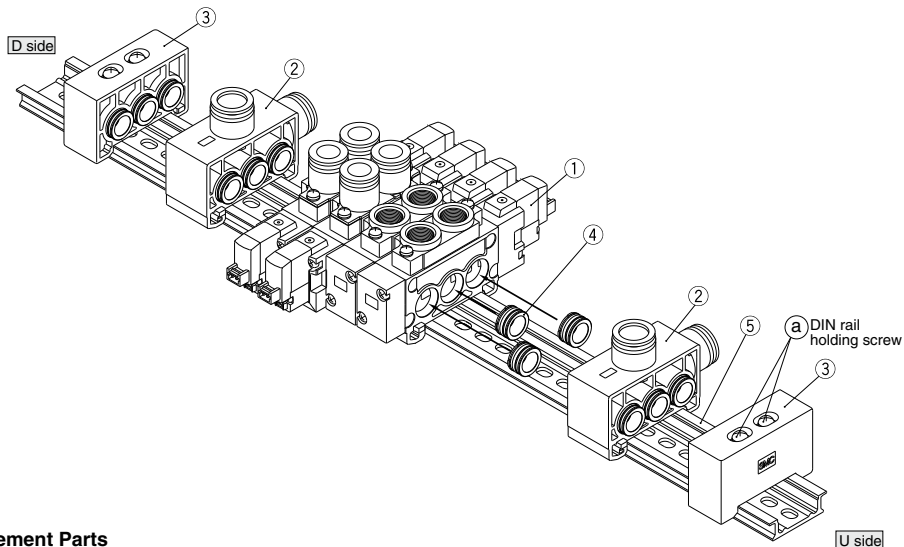

### Replacement Parts

No.	Description	Part no.	Note
1	Valve	SY7□60-□□-□(-Q)	□ at the end of part number denotes A, B port size: 02, C8, C10, N9, N11. Includes bushing assembly (SY7000-70-1A) 3 pcs.
2	SUP/EXH block assembly	SY7000-75- <sup>1</sup> / <sub>3</sub> A(-Q)	P, R port size (1: $\phi 12$ One-touch fitting, 3: 3/8" One-touch fitting) Includes bushing assembly (SY7000-70-1A) 3 pcs.
3	End block assembly	SY7000-56-1A(-Q)	In common for D side and U side (Bushing assembly: Not available for SY7000-70-1A.)
4	Bushing assembly	SY7000-70-1A	
5	DIN rail	VZ1000-11-4-□	Refer to page 364.

### How to Add Additional Valves to the DIN Rail

Valves can be added at any station on the rail.

- 1 Loosen the rail holding screw (a) at both of 2 locations which holds the manifold base either in the U side or D side.  
[When removing the end block assembly from the DIN rail, loosen the holding screws for DIN rail at first, then slide it to the edge of the rail.]
- 2 Separate the valves at the point where more valves are to be added.
- 3 Mount the additional valves on the DIN rail as shown in Fig. 1.
- 4 Connect them together while pressing the block assemblies toward each other, and tighten the 2 holding screws (a) for DIN rail alternately (2 to 3 times) with the prescribed torque (1.4 N·m) to fix them to the DIN rail.

#### ⚠ Caution


#### Tightening torque

SY7000: 1.4 N·m

(While lightly holding the blocks after fixing an end block on one side, tighten the other end block for better sealing after no gap between valves is confirmed.)


- Bushing assembly must be seated properly to each valve block in order to prevent air leaks from occurring.
- Refer to the fig. 2 when dismantling the valve from the DIN rail.

Fig. 1 Manifold mounting procedure



While pressing the B side stopper onto the DIN rail, insert into the rail.

Fig. 2 Manifold dismantling procedure



While pressing the bottom of the valve onto the lip of the DIN rail, pull side A upwards and dismount from the rail.

#### ⚠ Caution

When clamping screw (a) of the end block is not sufficiently tightened during reassembly, air leakage may result. Before supplying air, check that there are no gaps between valves and that the end block is firmly secured to the DIN rail in order to ensure air supply without leakage.



# 5 Port Solenoid Valve Base Mounted Manifold Bar Stock Type/Individual Wiring Series SY3000/5000/7000



[Option]

Note) AC-type models that are CE-compliant have DIN terminals only.

Type **41**

Type **42**

## How to Order Manifold

### Type 41/Compact style

SS5Y **5** - **41** - **05** - **C8** - [ ] - [ ]

#### Manifold series

3	SY3000
5	SY5000

#### Stations

02	2 stations
:	:
20	20 stations

\* This also includes the number of blanking plate assemblies.

#### Thread type

Nll	Rc
F	G
N	NPT
T	NPTF

\* Except for M5

#### CE-compliant

Nll	—
Q	CE-compliant

Note) AC-type models that are CE-compliant have DIN terminals only.

#### A, B port size

##### Thread piping

Symbol	Port size	Applicable series
M5	M5 x 0.8	SY3000
01	1/8	SY5000

#### One-touch fitting (Metric size)

Symbol	Port size	Applicable series
C4	One-touch fitting for ø4	SY3000
C6	One-touch fitting for ø6	SY5000
C6	One-touch fitting for ø6	SY5000
C8	One-touch fitting for ø8	SY5000

#### One-touch fitting (Inch size)

Symbol	Port size	Applicable series
N3	One-touch fitting for ø $\frac{3}{32}$ "	SY3000
N7	One-touch fitting for ø $\frac{1}{4}$ "	SY3000
N7	One-touch fitting for ø $\frac{1}{4}$ "	SY5000
N9	One-touch fitting for ø $\frac{5}{16}$ "	SY5000

### Type 42/External pilot capable

SS5Y **5** - **42** - **05** - **C8** - [ ] - [ ]

#### Manifold series

3	SY3000
5	SY5000
7	SY7000

#### Stations

02	2 stations
:	:
20	20 stations

\* This also includes the number of blanking plate assemblies.

#### Thread type

Nll	Rc
F	G
N	NPT
T	NPTF

#### CE-compliant

Nll	—
Q	CE-compliant

Note) AC-type models that are CE-compliant have DIN terminals only.

#### A, B port size

##### Thread piping

Symbol	Port size	Applicable series
01	1/8	SY3000
02	1/4	SY5000
02	1/4	SY7000

#### One-touch fitting (Metric size)


Symbol	Port size	Applicable series
C4	One-touch fitting for ø4	SY3000
C6	One-touch fitting for ø6	SY5000
C6	One-touch fitting for ø6	SY5000
C8	One-touch fitting for ø8	SY7000
C10	One-touch fitting for ø10	SY7000

#### One-touch fitting (Inch size)

Symbol	Port size	Applicable series
N3	One-touch fitting for ø $\frac{3}{32}$ "	SY3000
N7	One-touch fitting for ø $\frac{1}{4}$ "	SY3000
N7	One-touch fitting for ø $\frac{1}{4}$ "	SY5000
N9	One-touch fitting for ø $\frac{5}{16}$ "	SY5000
N11	One-touch fitting for ø $\frac{3}{8}$ "	SY7000

## How to Order Manifold Assembly (Example)

### Example

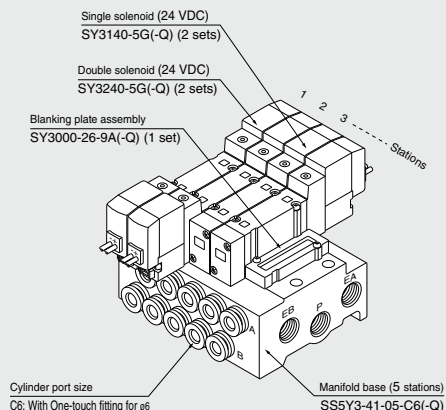

SS5Y31-41-05-C6 (-Q) ..... 1 set (Type 41, 5-station manifold base part no.)  
 \* SY3240-5G (-Q) ..... 2 sets (Double solenoid part no.)  
 \* SY3140-5G (-Q) ..... 2 sets (Single solenoid part no.)  
 \* SY3000-26-9A (-Q) ... 1 set (Blanking plate assembly part no.)

The asterisk denotes the symbol for assembly. Prefix it to the part nos. of the solenoid valve, etc.

Add the valve and option part number under the manifold base part number. In the case of complex arrangement, specify them on the manifold specification sheet.



**How to Order Valve**

(Note) AC-type models that are CE-compliant have DIN terminals only.

**SY 5 2 40** [ ] [ ] - **5 L** [ ] [ ] - [ ] - [ ]

**Series**

3	SY3000
5	SY5000
7	SY7000

**Type of actuation**

1	2 position single
2	2 position double
3	3 position closed center
4	3 position exhaust center
5	3 position pressure center

**Pilot type**

Nil	Internal pilot
R	External pilot

**Coil specifications**

Nil	Standard
T	With power saving circuit (24 VDC, 12 VDC only)

\* Power saving circuit is not available in the case of D, Y, DO, YO or W□ type.

**Rated voltage**

**For DC**

5	24 VDC
6	12 VDC
V	6 VDC
S	5 VDC
R	3 VDC

**For AC (%<sub>50</sub> Hz)**

1	100 VAC
2	200 VAC
3	110 VAC [115 VAC]
4	220 VAC [230 VAC]

\* DC specifications of Type D, Y, DO and YO is only available with 12 and 24 VDC.  
\* For type W□, DC voltage is only available.

(Note) AC-type models that are CE-compliant have DIN terminals only.

**CE-compliant**

Nil	—
Q	CE-compliant

(Note) AC-type models that are CE-compliant have DIN terminals only.

**Made to Order**

Nil	—
X90	Main valve fluororubber (Refer to page 510.)

**Manual override**

Nil	Non-locking push type
D	Push-turn locking slotted type
E	Push-turn locking lever type

**Light/Surge voltage suppressor**

**Electrical entry for G, H, L, M, W**

Nil	Without light/surge voltage suppressor
S	With surge voltage suppressor
Z	With light/surge voltage suppressor
R	With surge voltage suppressor (Non-polar type)
U	With light/surge voltage suppressor (Non-polar type)

\* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.  
\* For "R" and "U", DC voltage is only available.  
\* Power saving circuit is only available in the "Z" type.

**Electrical entry for D, Y**

Nil	Without light/surge voltage suppressor
S	With surge voltage suppressor (Non-polar type)
Z	With light/surge voltage suppressor (Non-polar type)

\* DOZ and YOZ are not available.  
\* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.


(Note) When ordering single unit of the base mounted type solenoid valve, the mounting screws and gaskets for the manifold are included.

**Electrical entry**

		24, 12, 6, 5, 3 VDC/100, 110, 200, 220 VAC			24, 12 VDC/ 100, 110, 200, 220 VAC	24, 12, 6, 5, 3 VDC	
		Grommet	L plug connector	M plug connector	DIN terminal	M8 connector	
G:	Lead wire length 300 mm lead	L:	With lead wire (Length 300 mm)	M:	With lead wire (Length 300 mm)	WO:	Without connector cable
H:	Lead wire length 600 mm	LN:	Without lead wire	MN:	Without lead wire	Y:	With connector
		LO:	Without connector	MO:	Without connector	YO:	Without connector
CE-compliant	DC	●	●	●	●	●	●
AC	AC	—	—	—	—	—	—

\* LN, MN type: with 2 sockets.  
\* "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN43650C). For details, refer to page 519.  
\* For connector cable of M8 connector, refer to page 522.  
\* M8 connector conforming to IEC60947-5-2 standard is also available. Refer to page 509 for details.  
\* Refer to page 519 for the lead wire length of L and M plug connectors.  
\* Refer to page 520 for the connector assembly with cover for L and M plug connectors.  
(Note) Enter the cable length symbols in □. Please be sure to fill in the blank referring to page 523.

- SJ
- SY
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7



## Manifold Specifications

Model	<b>SS5Y3-41(-Q)</b>		<b>SS5Y3-42(-Q)</b>		<b>SS5Y5-41(-Q)</b>		<b>SS5Y5-42(-Q)</b>		<b>SS5Y7-42(-Q)</b>		
Applicable valve	<b>SY3□40</b>				<b>SY5□40</b>						
Manifold type	Single base/B mount										
P(SUP)/R(EXH)	Common SUP, Common EXH										
Valve stations	2 to 20 stations <sup>Note 1)</sup>										
A, B port	Base										
Porting specifications	Side										
	P, EA, EB port		1/8			1/4			1/4		
Port size	A, B port		C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6)	C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6)	C6 (One-touch fitting for ø6) C8 (One-touch fitting for ø8)	C6 (One-touch fitting for ø6) C8 (One-touch fitting for ø8)	C6 (One-touch fitting for ø6) C8 (One-touch fitting for ø8)	C10 (One-touch fitting for ø10)	1/4 C10 (One-touch fitting for ø10)		
	Manifold base weight W (g) n: Stations		W = 30n + 50	W = 37n + 63	W = 61n + 101	W = 79n + 127	W = 100n + 151				

Note 1) For more than 10 stations (more than 5 stations in case of SS5Y7), supply pressure to P port on both sides and exhaust from EA/EB port on both sides.

Note 2) Refer to "Manifold Option" on page 416.

## Flow Characteristics


Model	Port size		Flow characteristics					
	1, 5, 3 (P, EA, EB)	4, 2 (A, B)	1 → 4/2 (P → A/B)			4/2 → 5/3 (A/B → EA/EB)		
			C (dm <sup>3</sup> /s(bar))	b	Cv	C (dm <sup>3</sup> /s(bar))	b	Cv
<b>SS5Y3-41(-Q)</b>	1/8	C6	0.75	0.19	0.18	0.81	0.23	0.20
<b>SS5Y3-42(-Q)</b>	1/8	C6	0.75	0.20	0.18	0.82	0.20	0.20
<b>SS5Y5-41(-Q)</b>	1/4	C8	1.8	0.23	0.44	1.9	0.16	0.45
<b>SS5Y5-42(-Q)</b>	1/4	C8	1.9	0.20	0.46	1.9	0.12	0.43
<b>SS5Y7-42(-Q)</b>	1/4	C10	3.0	0.25	0.75	3.0	0.12	0.66

Note) The value is for manifold base with 5 stations and individually operated 2 position type.


**SY3000: SS5Y3-41-Stations-M5, C4,N3, C6,N7**

[ ]: AC


**Grommet (G)**




**With interface regulator (with gauge)**

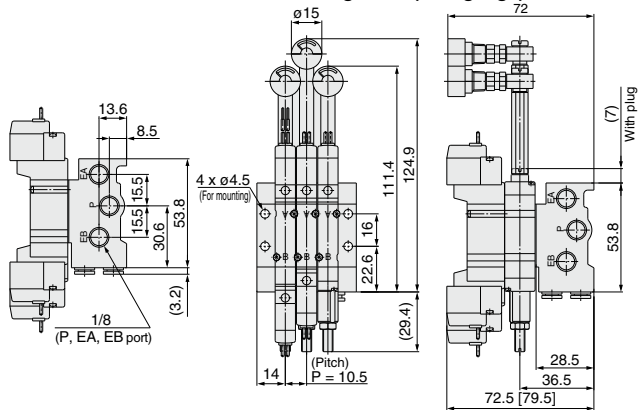


(Station 1) - - - - (Station n)

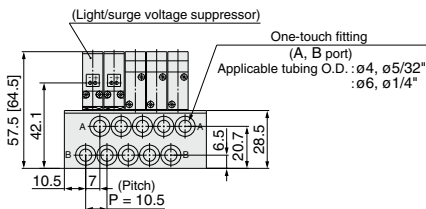


**For M5**




**L plug connector (L)**

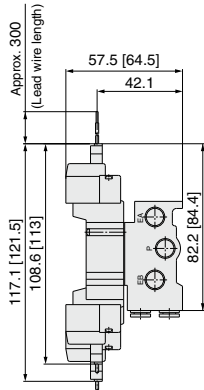

**M plug connector (M)**

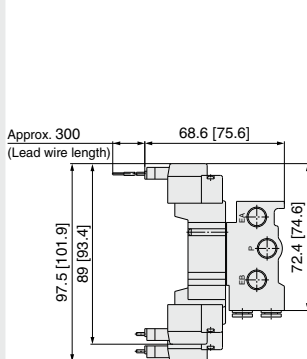

**M8 connector (WO)**

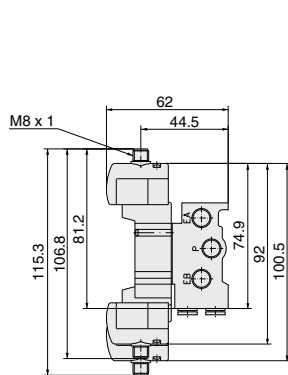

Note) Refer to page 523 for dimensions of connector types.


Stations n	2 stations	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20 stations
L1	38.5	49	59.5	70	80.5	91	101.5	112	122.5	133	143.5	154	164.5	175	185.5	196	206.5	217	227.5
L2	30.5	41	51.5	62	72.5	83	93.5	104	114.5	125	135.5	146	156.5	167	177.5	188	198.5	209	219.5

- SJ
- SY
- SY**
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

**SY5000: SS5Y5-41- Stations -01**, C6, N7, C8, N9

[ ]: AC

**Grommet (G)**

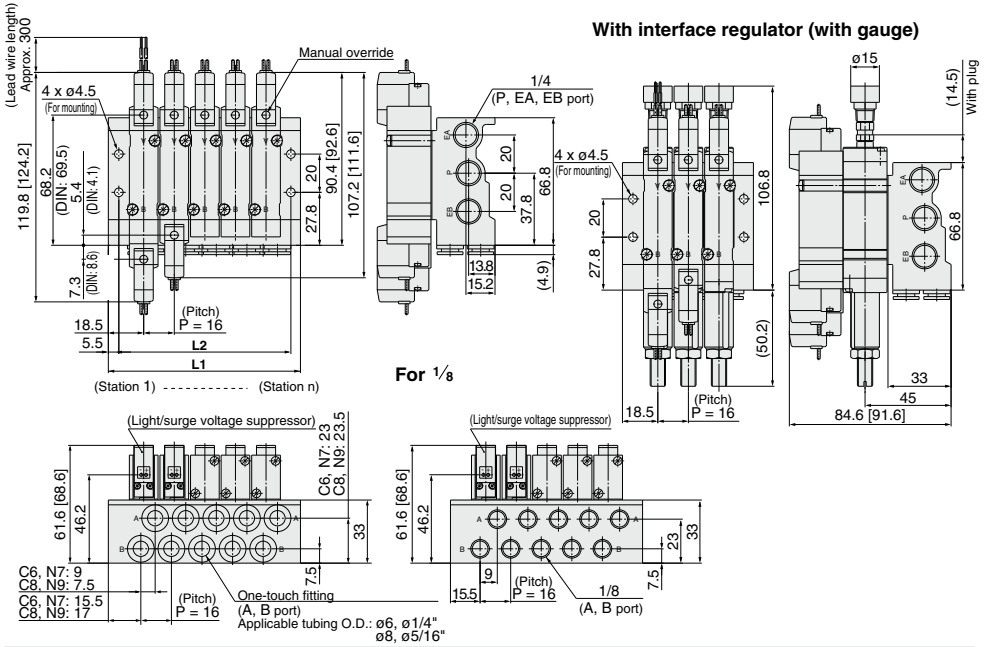


For 1/8

**L plug connector (L)**

**M plug connector (M)**

**DIN terminal (D, Y)**

**M8 connector (WO)**

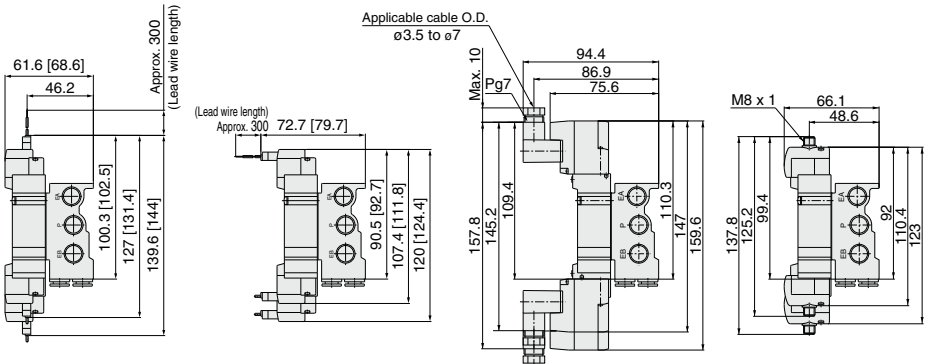


Note) Refer to page 523 for dimensions of connector types.

Stations n	2 stations	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20 stations
L1	52.5	68.5	84.5	100.5	116.5	132.5	148.5	164.5	180.5	196.5	212.5	228.5	244.5	260.5	276.5	292.5	308.5	324.5	340.5
L2	42	58	74	90	106	122	138	154	170	186	202	218	234	250	266	282	298	314	330

**SY3000: SS5Y3-42- Stations** - C4, N3  
C6, N7


[ ]: AC

**Grommet (G)**

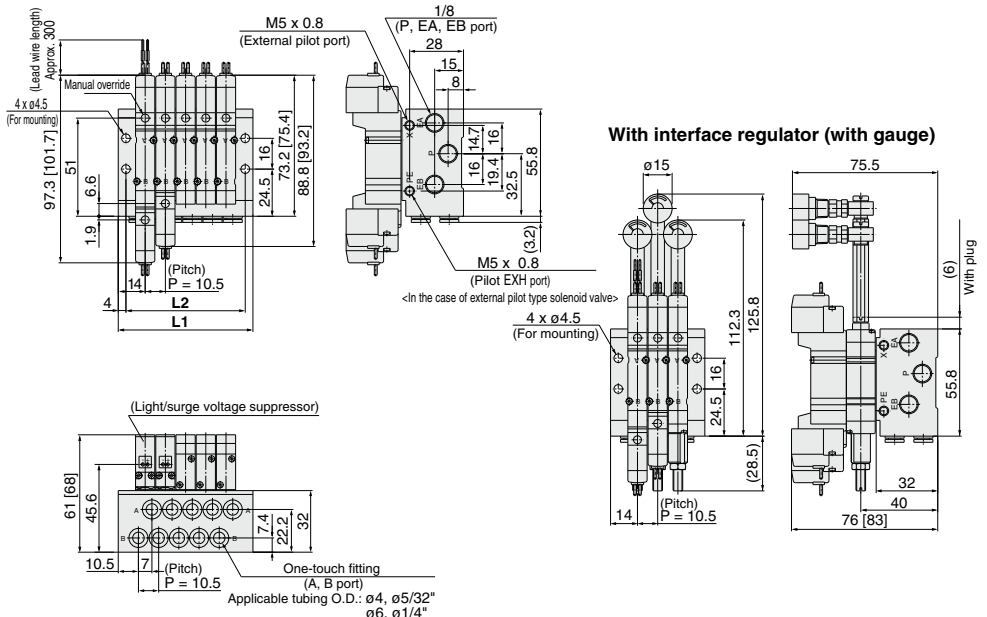


- SJ**
- SY**
- SY**
- SV**
- SYJ**
- SZ**
- VF**
- VP4**
- S0700**
- VQ**
- VQ4**
- VQ5**
- VQC**
- VQC4**
- VQZ**
- SQ**
- VFS**
- VFR**
- VQ7**


**L plug connector (L)**

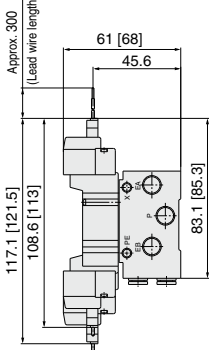

**M plug connector (M)**



**M8 connector (WO)**




Note) Refer to page 523 for dimensions of connector types.

Stations n	2 stations	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20 stations
<b>L1</b>	38.5	49	59.5	70	80.5	91	101.5	112	122.5	133	143.5	154	164.5	175	185.5	196	206.5	217	227.5
<b>L2</b>	30.5	41	51.5	62	72.5	83	93.5	104	114.5	125	135.5	146	156.5	167	177.5	188	198.5	209	219.5


**SY3000: SS5Y3-42- Stations -01**

[ ] : AC


**Grommet (G)**

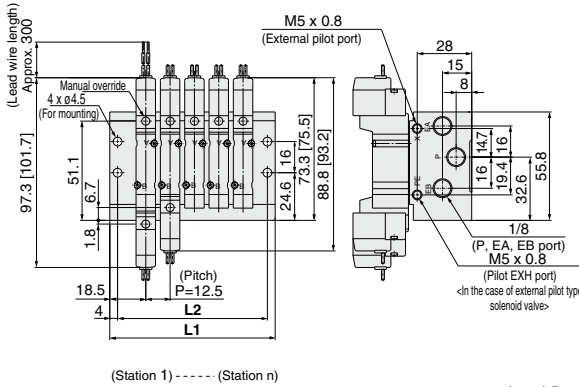


**With interface regulator (with gauge)**

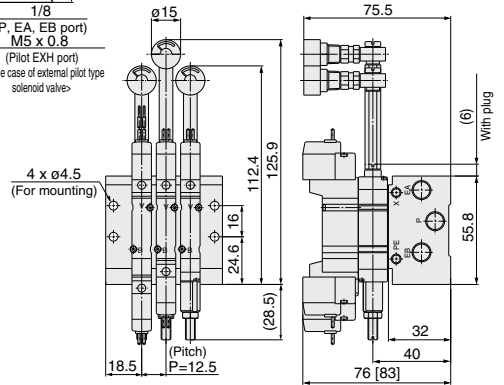


**L plug connector (L)**

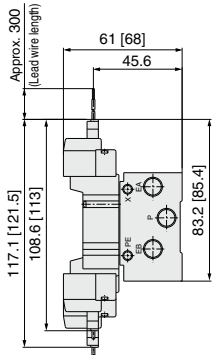

**M plug connector (M)**



**M8 connector (WO)**




Note) Refer to page 523 for dimensions of connector types.

Stations n	2 stations	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20 stations
L1	47.5	60	72.5	85	97.5	110	122.5	135	147.5	160	172.5	185	197.5	210	222.5	235	247.5	260	272.5
L2	39.5	52	64.5	77	89.5	102	114.5	127	139.5	152	164.5	177	189.5	202	214.5	227	239.5	252	264.5

**SY5000: SS5Y5-42- Stations** C6, N7  
C8, N9

[ ] : AC

**Grommet (G)**

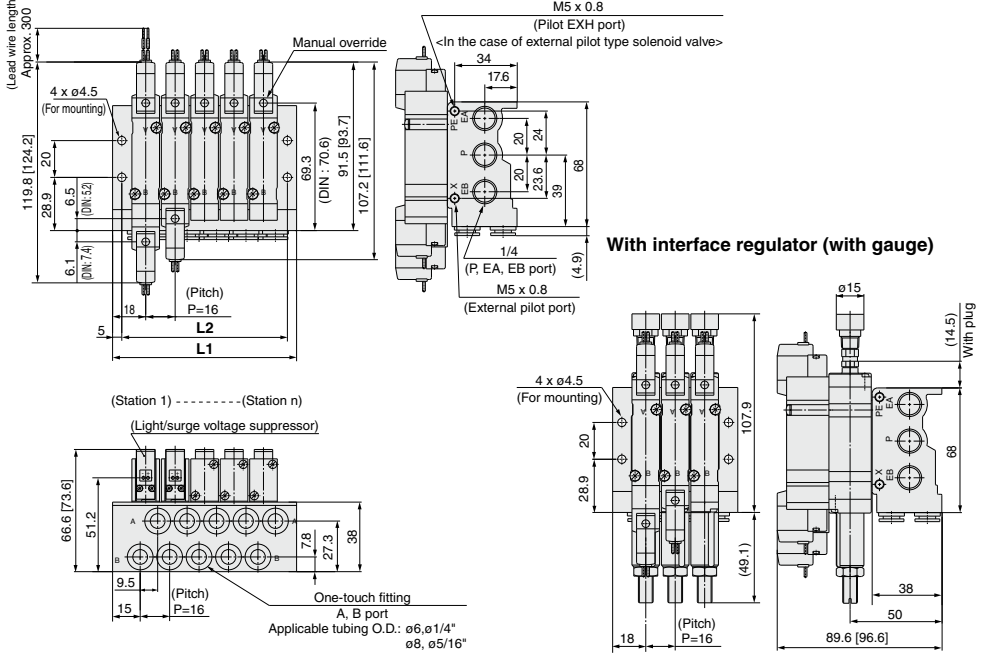


- SJ
- SY
- SY
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

**L plug connector (L)**

**M plug connector (M)**

**DIN terminal (D, Y)**

**M8 connector (WO)**

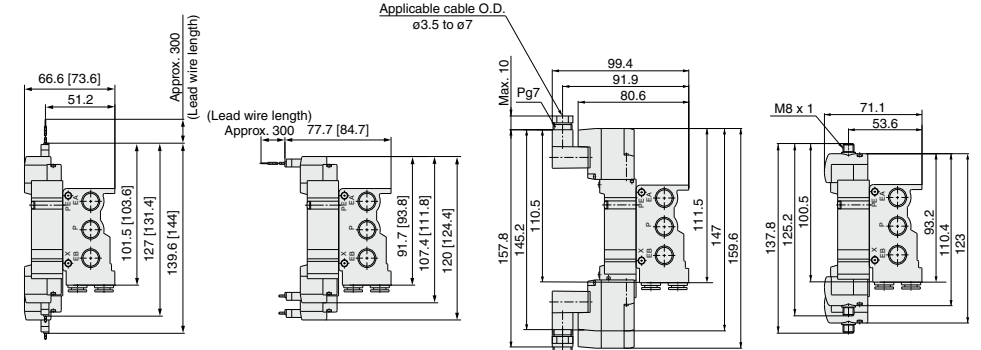

Note) Refer to page 523 for dimensions of connector types.


Stations n	2 stations	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20 stations
<b>L1</b>	52	68	84	100	116	132	148	164	180	196	212	228	244	260	276	292	308	324	340
<b>L2</b>	42	58	74	90	106	122	138	154	170	186	202	218	234	250	266	282	298	314	330



**SY5000: SS5Y5-42- Stations -02**

[ ] : AC

**Grommet (G)**

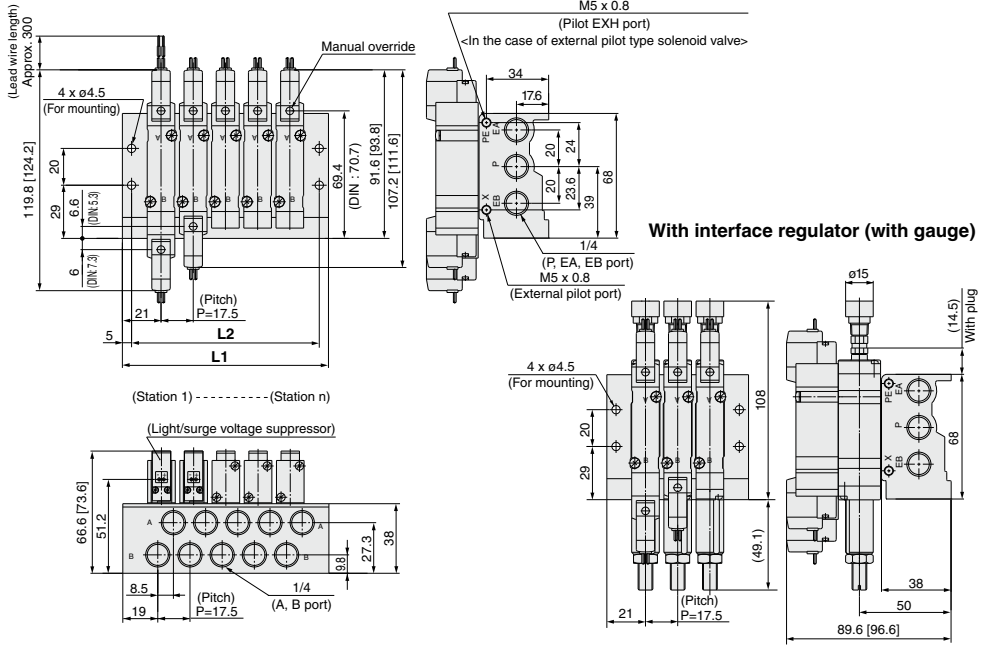


**L plug connector (L)**

**M plug connector (M)**

**DIN terminal (D, Y)**

**M8 connector (WO)**

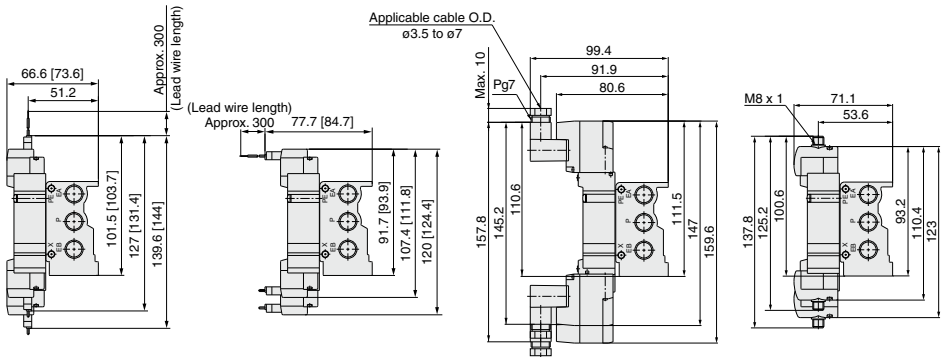


Note) Refer to page 523 for dimensions of connector types.

Stations n	2 stations	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20 stations
L1	59.5	77	94.5	112	129.5	147	164.5	182	199.5	217	234.5	252	269.5	287	304.5	322	339.5	357	374.5
L2	49.5	67	84.5	102	119.5	137	154.5	172	189.5	207	224.5	242	259.5	277	294.5	312	329.5	347	364.5

**SY7000: SS5Y7-42- Stations -02, C10, N11**

[ ] : AC

**Grommet (G)**




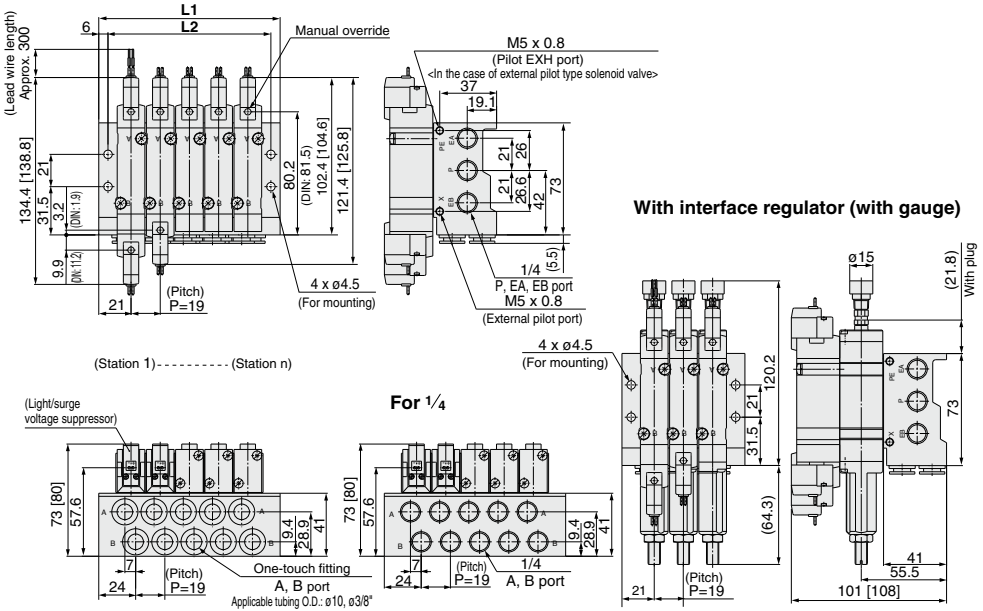


**L plug connector (L)**

**M plug connector (M)**

**DIN terminal (D, Y)**

**M8 connector (WO)**



Note) Refer to page 523 for dimensions of connector types.

Stations n	2 stations	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20 stations
L1	61	80	99	118	137	156	175	194	213	232	251	270	289	308	327	346	365	384	403
L2	49	68	87	106	125	144	163	182	201	220	239	258	277	296	315	334	353	372	391

- SJ
- SY
- SY
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

Type **43**

# 5 Port Solenoid Valve Base Mounted Manifold Stacking Type/Individual Wiring Series **SY9000**



[Option]  
Note) AC-type models that are CE-compliant have DIN terminals only.

## How to Order Manifold

**SS5Y9 - 43 - 05 U [ ] - C8 [ ] - [ ] - [ ]**

- Manifold series**

9	SY9000
---	--------
- Valve stations**

Symbol	Stations
02	2 stations
:	:
20	20 stations

\* This also includes the number of blanking plate assemblies.
- P, R port outlets**

Symbol	Port outlet	Applicable stations
U	U side	2 to 10 stations
D	D side	2 to 10 stations
B	Both sides	2 to 20 stations
- SUP/EXH block assembly specifications**

Symbol	Specifications
NI	Standard/Internal pilot specification
R	External pilot specification
S	Internal pilot/Built-in silencer
RS	External pilot/Built-in silencer
- Thread type**

	Rc
NI	Rc
F	G
N	NPT
T	NPTF
- Option**

Symbol	Mounting
NI	Direct mounting
D	DIN rail mounting (with DIN rail)
DO	DIN rail mounting (without DIN rail)
D*	When a longer DIN rail is desired than the specified stations, specify the station number to be required into * mark.
- A, B port size**

Symbol	Port size
02	1/4
03	3/8
- Thread piping**

Symbol	Port size
C8	One-touch fitting for ø8
C10	One-touch fitting for ø10
C12	One-touch fitting for ø12
M	Mixed
- One-touch fitting (Metric size)**

Symbol	Port size
C8	One-touch fitting for ø8
C10	One-touch fitting for ø10
C12	One-touch fitting for ø12
M	Mixed
- One-touch fitting (Inch size)**

Symbol	Port size
N9	One-touch fitting for ø5/16"
N11	One-touch fitting for ø3/8"
M	Mixed

\* In the case of mixed specifications (M), indicate separately on the manifold specification sheet.


### CE-compliant

NI	—
Q	CE-compliant

Note) AC-type models that are CE-compliant have DIN terminals only.

## How to Order Manifold Assembly (Example)

### Example

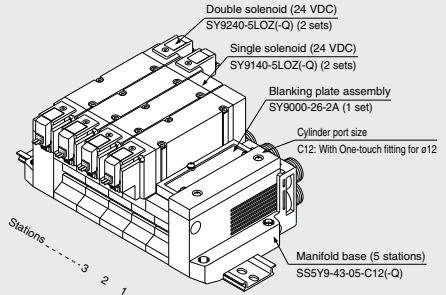

SS5Y9-43-05B-C12 (-Q) ... 1 set (Type 43, 5-station manifold base part no.)  
 \* SY9000-26-2A ..... 1 set (Blanking plate assembly part no.)  
 \* SY9140-5LOZ (-Q) ..... 2 sets (Single solenoid part no.)  
 \* SY9220-5LOZ (-Q) ..... 2 sets (Double solenoid part no.)

The asterisk denotes the symbol for assembly.  
Prefix it to the part nos. of the solenoid valve, etc.

Add the valve and option part number under the manifold base part number. In the case of complex arrangement, specify them on the manifold specification sheet.



Note) AC-type models that are CE-compliant have DIN terminals only.

[Option]

## How to Order Valve

**SY 9 2 40** [ ] [ ] - **5 L** [ ] [ ] - [ ] - [ ]

**Series**

9	SY9000
---	--------

**Type of actuation**

1	2 position single
2	2 position double
3	3 position closed center
4	3 position exhaust center
5	3 position pressure center

**Pilot type**

Nil	Internal pilot
R	External pilot

**Coil specifications**

Nil	Standard
T	With power saving circuit (24, 12 VDC only)

\* Power saving circuit is not available in the case of D, Y, DO, YO or W□ type.

**Rated voltage**

For DC	
5	24 VDC
6	12 VDC
V	6 VDC
S	5 VDC
R	3 VDC

For AC (%/60 Hz)	
1	100 VAC
2	200 VAC
3	110 VAC [115 VAC]
4	220 VAC [230 VAC]

\* DC specifications of Type D, Y, DO and YO is only available with 12 and 24 VDC.  
\* For type W□, DC voltage is only available.

Note) AC-type models that are CE-compliant have DIN terminals only.

**CE-compliant**

Nil	—
Q	CE-compliant

Note) AC-type models that are CE-compliant have DIN terminals only.

**Made to Order**

Nil	—
X90	Main valve fluororubber (Refer to page 510).

**Manual override**

Nil	Non-locking push type
D	Push-turn locking slotted type
E	Push-turn locking lever type

**Light/Surge voltage suppressor**

**Electrical entry for G, H, L, M, W**

Nil	Without light/surge voltage suppressor
S	With surge voltage suppressor
Z	With indicator light and surge voltage suppressor
R	With surge voltage suppressor (Non-polar type)
U	With light/surge voltage suppressor (Non-polar type)

\* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.  
\* For "R" and "U", DC voltage is only available.  
\* Power saving circuit is only available in the "Z" type.

**Electrical entry for D, Y**

Nil	Without light/surge voltage suppressor
S	With surge voltage suppressor (Non-polar type)
Z	With light/surge voltage suppressor (Non-polar type)

\* DOZ and YOZ are not available.  
\* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.

**Electrical entry**


CE-compliant	DC	24, 12, 6, 5, 3 VDC/ 100, 110, 200, 220 VAC				24, 12, 6, 5, 3 VDC
		Grommet	L plug connector	M plug connector	DIN terminal	
	DC	●	●	●	●	●
	AC	—	—	—	●	—

Note) When ordering single unit of the base mounted type solenoid valve, the mounting screws and gaskets for the manifold are included.

- \* LN, MN type: with 2 sockets.
- \* DIN terminal type "Y" which conforms to EN-175301-803C (former DIN43650C) is also available. For details, refer to page 519.
- \* For connector cable of M8 connector, refer to page 522.
- \* M8 connector conforming to IEC60947-5-2 standard is also available. Refer to page 509 for details.
- \* Refer to page 519 for the lead wire length of L and M plug connectors.
- \* Refer to page 520 for the connector assembly with cover for L and M plug connectors.

Note) Enter the cable length symbols in □. Please be sure to fill in the blank referring to page 523.

- SY
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7



## Manifold Specifications

Model		<b>SS5Y9-43(-Q)</b>	
Applicable valve		<b>SY9□40</b>	
Manifold type		Stacking type	
P(SUP)/R(EXH)		Common SUP, Common EXH	
Valve stations		2 to 20 stations <sup>(1)</sup>	
A, B port	Location	Base	
Porting specifications	Direction	Side	
Port size	P, EA, EB port	C12 (One-touch fitting for ø12)	
	A, B port	$\frac{1}{4}$ $\frac{3}{8}$ C8 (One-touch fitting for ø8) C10 (One-touch fitting for ø10) C12 (One-touch fitting for ø12)	
Manifold base weight W (g), n: Stations		W = 107n + 330	

Note 1) For more than 10 stations, supply pressure to P port on both sides and exhaust from EA/EB port on both sides.

Note 2) Refer to "Manifold Option" on page 416.

## Flow Characteristics

Model	Port size		Flow characteristics					
	1, 5, 3 (P, EA, EB)	4, 2 (A, B)	1→4/2 (P→A/B)			4/2→5/3 (A/B→EA/EB)		
			C (dm <sup>3</sup> /sbar)	b	Cv	C (dm <sup>3</sup> /sbar)	b	Cv
<b>SS5Y9-43(-Q)</b>	C12	C12	6.4	0.29	1.6	7.3	0.29	1.8


Note) The value is for manifold base with 5 stations and individually operated 2 position type.

**SY9000: SS5Y9-43- Stations D** 02, C8, N9  
03, C10, N11  
C12 (-D)


[ ] : AC

**Grommet (G)**




\* When P, R port outlets are indicated on the D side, the P, R ports on the opposite side are plugged.

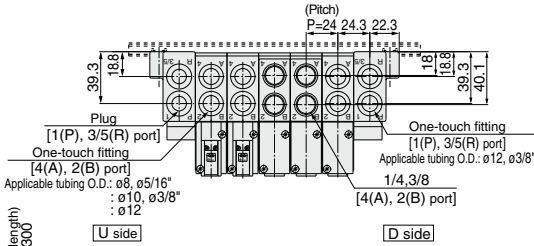

**With External Pilot Specifications**

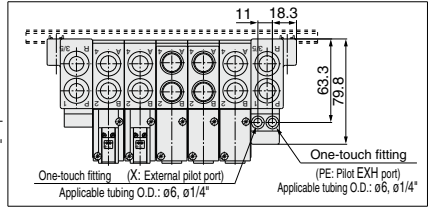

\* Air discharge port on the built-in silencer type and the external pilot's extracting position are in the D side.

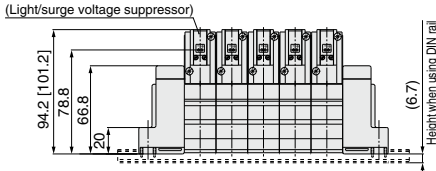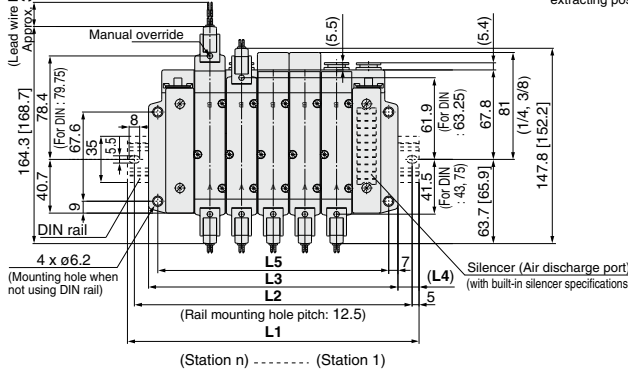





Stations n	2 stations	3	4	5	6	7	8	9	10 stations
L1	148	173	198	223	248	260.5	285.5	310.5	335.5
L2	137.5	162.5	187.5	212.5	237.5	250	275	300	325
L3	117	141	165	189	213	237	261	285	309
L4	15.5	16	16.5	17	17.5	12	12.5	13	13.5
L5	103	127	151	175	199	223	247	271	295

**L plug connector (L)**

**M plug connector (M)**

**DIN terminal (D, Y)**

**M8 connector (WO)**



Applicable cable O.D.  
ø3.5 to ø7


Note) Refer to page 523 for dimensions of connector types.

- SJ**
- SY**
- SY**
- SV**
- SYJ**
- SZ**
- VF**
- VP4**
- S0700**
- VQ**
- VQ4**
- VQ5**
- VQC**
- VQC4**
- VQZ**
- SQ**
- VFS**
- VFR**
- VQ7**

**SY9000: SS5Y9-43- Stations** U  -02 C9, N9  
03. C10, N11  (-D)


[ ] : AC

**Grommet (G)**


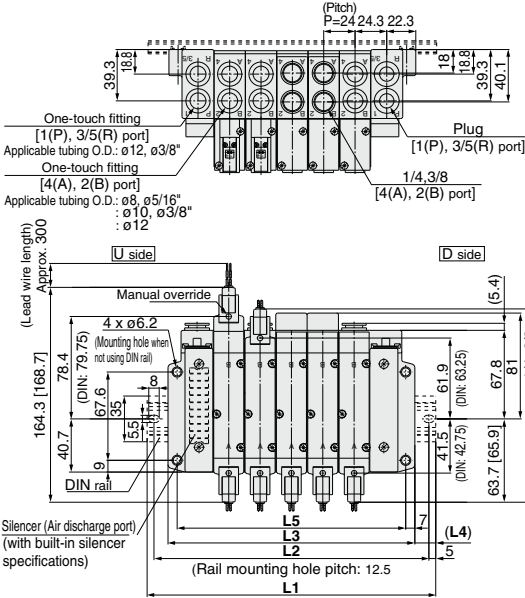


\* When P, R port outlets are indicated on the U side, the P, R ports on the opposite side are plugged.

**With External Pilot Specifications**

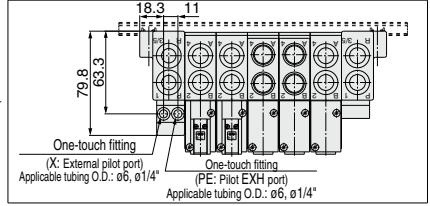


\* Air discharge port on the built-in silencer type and the external pilot's extracting position are in the D side.

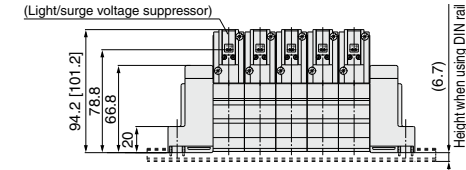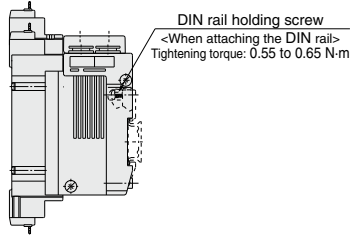


Stations n	2 stations	3	4	5	6	7	8	9	10 stations
L1	148	173	198	223	248	260.5	285.5	310.5	335.5
L2	137.5	162.5	187.5	212.5	237.5	250	275	300	325
L3	117	141	165	189	213	237	261	285	309
L4	15.5	16	16.5	17	17.5	12	12.5	13	13.5
L5	103	127	151	175	199	223	247	271	295


**L plug connector (L)**




**M plug connector (M)**



**DIN terminal (D, Y)**

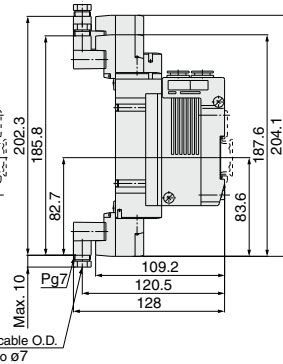

**M8 connector (WO)**




Note) Refer to page 523 for dimensions of connector types.

## SY9000: SS5Y9-43- Stations **B** 02, C8, N9 03, C10, N11 (-D)


[ ]: AC

### Grommet (G)


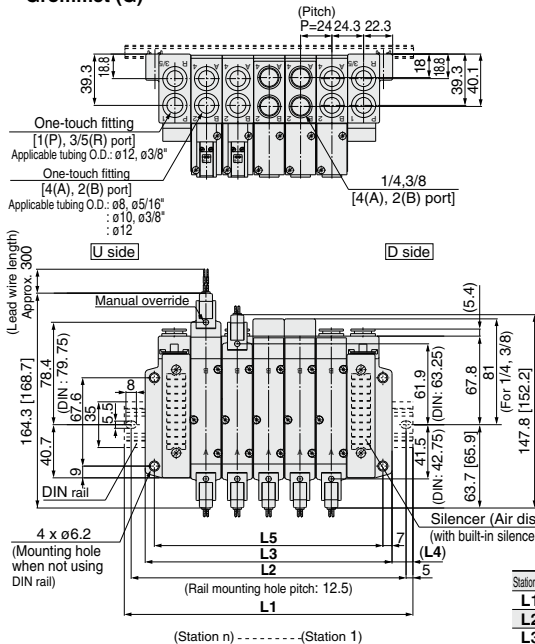


\* When P, R port outlets are indicated on the B side, the P, R ports on the both sides are in the open state.

### With External Pilot Specifications

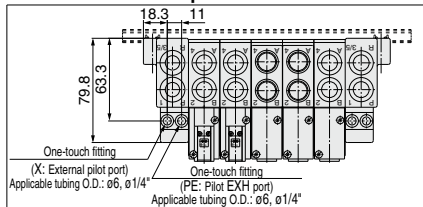


\* Air discharge port on the built-in silencer type and the external pilot's extracting position are in the B side (both sides).

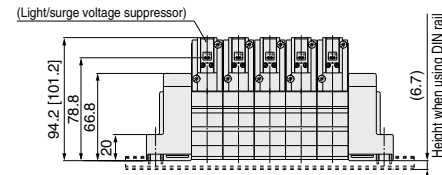


Stations	2 stations	3	4	5	6	7	8	9	10 stations
<b>L1</b>	148	173	198	223	248	260.5	285.5	310.5	335.5
<b>L2</b>	137.5	162.5	187.5	212.5	237.5	250	275	300	325
<b>L3</b>	117	141	165	189	213	237	261	285	309
<b>L4</b>	15.5	16	16.5	17	17.5	12	12.5	13	13.5
<b>L5</b>	103	127	151	175	199	223	247	271	295

Stations	n	11 stations	12	13	14	15	16	17	18	19	20 stations
<b>L1</b>		360.5	385.5	410.5	435.5	460.5	485.5	510.5	535.5	560.5	573
<b>L2</b>		350	375	400	425	450	475	500	525	550	562.5
<b>L3</b>		333	357	381	405	429	453	477	501	525	549
<b>L4</b>		14	14.5	15	15.5	16	16.5	17	17.5	18	12
<b>L5</b>		319	343	367	391	415	439	463	487	511	535


### L plug connector (L)




### M plug connector (M)



### DIN terminal (D, Y)

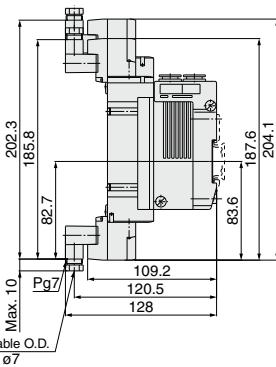

### M8 connector (WO)



Note) Refer to page 523 for dimensions of connector types.

- SJ
- SY
- SY
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7



Type **41P**  
Type **42P**

# 5 Port Solenoid Valve Base Mounted Manifold Bar Stock Type/Flat Ribbon Cable Series **SY3000/5000/7000**

Note) CE-compliant:  
For DC only. [Option]



## How to Order Manifold

### Type 41P/Compact style

**SS5Y 5 - 41P - 05 - C8** [ ] [ ] [ ]

Manifold series ●

3	SY3000
5	SY5000

Stations ●

03	3 stations
:	:
12	12 stations

\* SS5Y3 has 4 to 12 stations.  
\* This also includes the number of blanking plate assemblies.

● A, B port size  
Thread piping

Symbol	Port size	Applicable series
M5	M5 x 0.8	SY3000
01	1/8	SY5000

Thread type ●

	Nil	Rc	CE-compliant ●
F	F	G	Nil
N	NPT		Q
T	NPTF		Q

\* Except for M5 (Note) CE-compliant: For DC only.

One-touch fitting (Metric size)

Symbol	Port size	Applicable series
C4	One-touch fitting for ø4	SY3000
C6	One-touch fitting for ø6	SY3000
C6	One-touch fitting for ø6	SY5000
C8	One-touch fitting for ø8	SY5000

One-touch fitting (Inch size)

Symbol	Port size	Applicable series
N3	One-touch fitting for ø <sup>9</sup> / <sub>32</sub>	SY3000
N7	One-touch fitting for ø <sup>1</sup> / <sub>4</sub> "	SY3000
N7	One-touch fitting for ø <sup>1</sup> / <sub>4</sub> "	SY5000
N9	One-touch fitting for ø <sup>5</sup> / <sub>16</sub> "	SY5000

### Type 42P/Common external pilot capable

**SS5Y 5 - 42P - 05 - C8** [ ] [ ] [ ]

Manifold series ●

3	SY3000
5	SY5000
7	SY7000

Stations ●

03	3 stations
:	:
12	12 stations

\* SS5Y3 has 4 to 12 stations.  
\* This also includes the number of blanking plate assemblies.

● A, B port size  
Thread piping

Symbol	Port size	Applicable series
01	1/8	SY3000
02	1/4	SY5000
02	1/4	SY7000

Thread type ●

	Nil	Rc	CE-compliant ●
F	F	G	Nil
N	NPT		Q
T	NPTF		Q

(Note) CE-compliant: For-DC only.

One-touch fitting (Metric size)


Symbol	Port size	Applicable series
C4	One-touch fitting for ø4	SY3000
C6	One-touch fitting for ø6	SY3000
C6	One-touch fitting for ø6	SY5000
C8	One-touch fitting for ø8	SY5000
C10	One-touch fitting for ø10	SY7000

One-touch fitting (Inch size)

Symbol	Port size	Applicable series
N3	One-touch fitting for ø <sup>9</sup> / <sub>32</sub>	SY3000
N7	One-touch fitting for ø <sup>1</sup> / <sub>4</sub> "	SY3000
N7	One-touch fitting for ø <sup>1</sup> / <sub>4</sub> "	SY5000
N9	One-touch fitting for ø <sup>5</sup> / <sub>16</sub> "	SY5000
N11	One-touch fitting for ø <sup>3</sup> / <sub>8</sub> "	SY7000

## How to Order Manifold Assembly (Example)

### Example

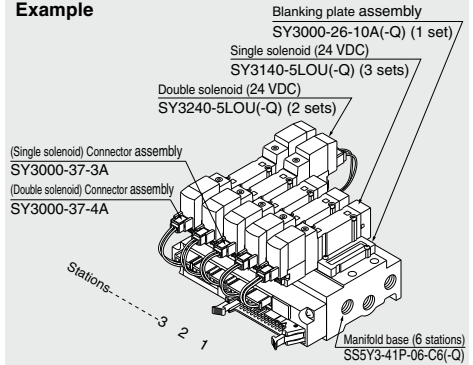

**SS5Y3-41P-06-C6 (-Q)..... 1 set (Type 41P, 6-station manifold base part no.)**  
**\* SX3000-26-10A (-Q)..... 1 set (Blanking plate assembly part no.)**  
**\* SY3140-5LOU (-Q)..... 3 sets (Single solenoid part no.)**  
**\* SY3240-5LOU (-Q)..... 2 sets (Double solenoid part no.)**  
**\* SY3000-37-3A ..... 3 sets (Connector assembly part no.)**  
**\* SY3000-37-4A ..... 2 sets (Connector assembly part no.)**

→ The asterisk denotes the symbol for assembly.  
Prefix it to the part nos. of the solenoid valve, etc.


Add the valve and option part number under the manifold base part number. In the case of complex arrangement, specify them on the manifold specification sheet.

Note) Please indicate the connector assembly part no. (page 393) that connects the valve and the manifold.



Note) CE-compliant:  
For DC only. [Option]

## How to Order Valve

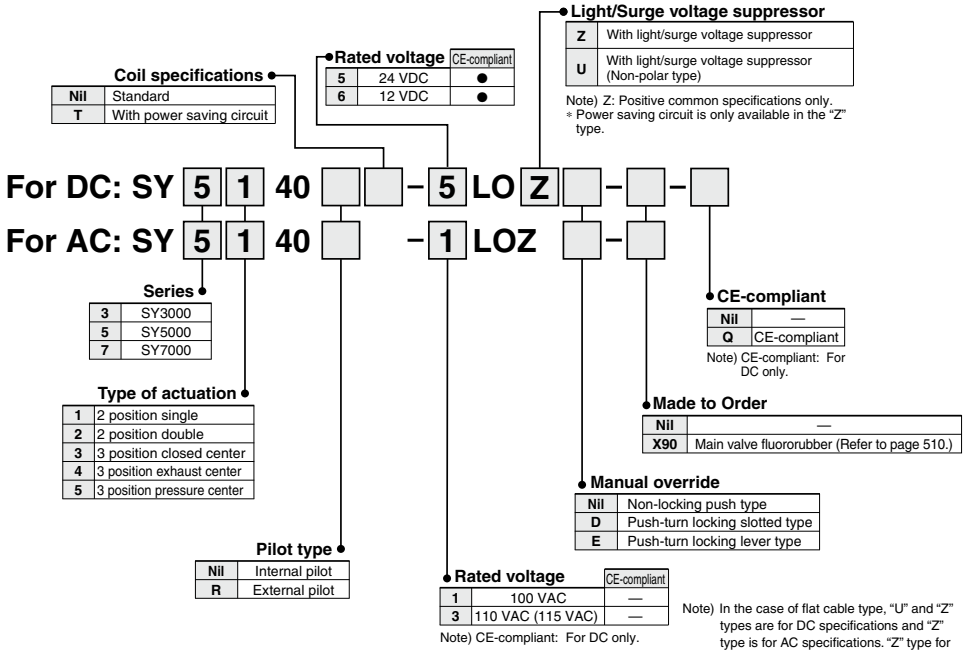

Note) When ordering single unit of the base mounted type solenoid valve, the mounting screws and gaskets for the manifold are included.

Note) In the case of flat cable type, "U" and "Z" types are for DC specifications and "Z" type is for AC specifications. "Z" type for DC is positive common specification only. For the other combination, please contact SMC.

Note) Since the electrical entry is "LO", select an appropriate connector assembly part no.

## Connector Assembly

### For 12, 24 VDC

Specifications	For SY3000	For SY5000/7000
For single solenoid	SY3000-37-3A	SY5000-37-3A
Double solenoid, 3 position type	SY3000-37-4A	SY5000-37-4A
Single with spacer assembly	SY5000-37-3A	SY5000-37-5A
Double, 3 position with spacer assembly	SY3000-37-6A	SY5000-37-6A

Note) Spacer assembly indicates Individual SUP/EXH spacer.

### For 100 VAC

Specifications	For SY3000	For SY5000/7000
For single solenoid	SY3000-37-32A	SY5000-37-15A
Double solenoid, 3 position type	SY3000-37-33A	SY5000-37-16A
Single with spacer assembly	SY5000-37-15A	SY5000-37-17A
Double, 3 position with spacer assembly	SY3000-37-34A	SY5000-37-18A

### For 100 VAC (115 VAC)

Specifications	For SY3000	For SY5000/7000
For single solenoid	SY3000-37-35A	SY5000-37-19A
Double solenoid, 3 position type	SY3000-37-36A	SY5000-37-20A
Single with spacer assembly	SY5000-37-19A	SY5000-37-21A
Double, 3 position with spacer assembly	SY3000-37-37A	SY5000-37-22A


- SY
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

## Flat Ribbon Cable Manifold Specifications

- Multiple valve wiring is simplified through the use of the flat cable connector.

### • Clean appearance

In the case of a flat ribbon cable type, each valve is wired on the print board of manifold base to allow the external wiring to be piped all together with 26 pins MIL connector.



Model	SSY3-41P(-Q)	SSY3-42P(-Q)	SSY5-41P(-Q)	SSY5-42P(-Q)	SSY7-42P(-Q)
Applicable valve	SY3□40		SY5□40		
Manifold type	Single base/B mount				
P(SUP)/R(EXH)	Common SUP, Common EXH				
Valve stations	4 to 12 stations <sup>(1)</sup>		3 to 12 stations <sup>(Note 1)</sup>		
A, B port	Location	Base			
	Porting specifications	Side			
Port size	P, EA, EB port	1/8		1/4	
	A, B port	C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6)	C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6)	C6 (One-touch fitting for ø6) C8 (One-touch fitting for ø8)	C6 (One-touch fitting for ø6) C8 (One-touch fitting for ø8)
Manifold base weight W (g), n: Stations	W = 39n + 83	W = 48n + 99	W = 67n + 118	W = 88n + 151	W = 109n + 174
Applicable flat ribbon cable connector	Flat ribbon cable connector, Socket: 26 pins MIL type with strain relief, Conforming to MIL-C-83503				
Internal wiring	In common between +COM and -COM (Z type: +COM only).				
Rated voltage <sup>(Note 4)</sup>	12, 24 VDC, 100, 110 VAC				

Note 1) For more than 10 stations (more than 5 stations in case of SSY7), supply pressure to P port on both sides and exhaust from EA/EB port on both sides.

Note 2) The withstand voltage specification for the wiring unit section is JIS C 0704, Grade 1 or its equivalent.

Note 3) Refer to "Manifold Option" on page 416.


Note 4) CE-compliant: For DC only.

## Flow Characteristics


Model	Port size		Flow characteristics					
	1, 5, 3 (P, EA, EB)	4, 2 (A, B)	1 → 4/2 (P → A/B)			4/2 → 5/3 (A/B → EA/EB)		
			C (dm³/(s·bar))	b	Cv	C (dm³/(s·bar))	b	Cv
SSY3-41P	1/8	C6	0.75	0.19	0.18	0.81	0.23	0.20
SSY3-42P	1/8	C6	0.75	0.20	0.18	0.82	0.20	0.20
SSY5-41P	1/4	C8	1.8	0.23	0.44	1.9	0.16	0.45
SSY5-42P	1/4	C8	1.9	0.20	0.46	1.9	0.12	0.43
SSY7-42P	1/4	C10	3.0	0.25	0.75	3.0	0.12	0.66

Note) The value is for manifold base with 5 stations and individually operated 2 position type.

## Internal Wiring of Manifold

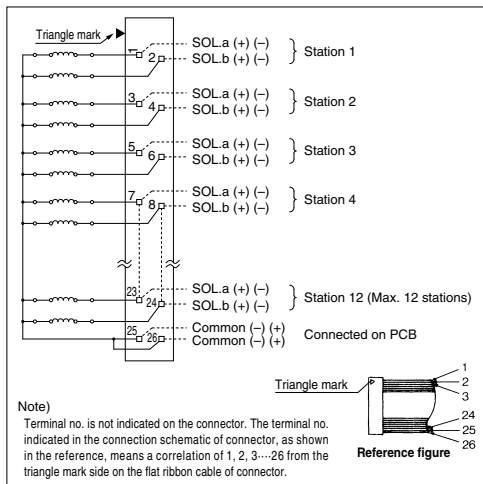

- For more than 10 stations, both poles of the common should be wired.
- For single solenoid, connect to the solenoid A side.
- The maximum number of stations that can be accommodated is 12. For more stations, please contact SMC.




### Caution




- For non-polar (U) valves, the electrical DC connections can be used with either positive and negative COM. For type (Z), only use with positive COM as the valve does not operate correctly when used with negative COM.

**SY3000: SS5Y3-41P-Stations -M5, C4, N3**  
C6, N7



[ ]: AC

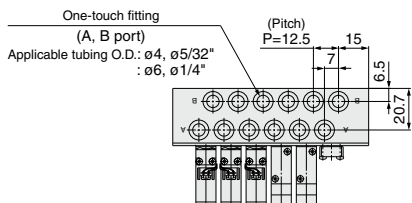

**For M5 x 0.8**

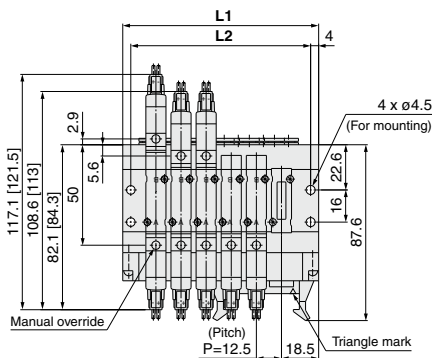

**With interface regulator (with gauge)**



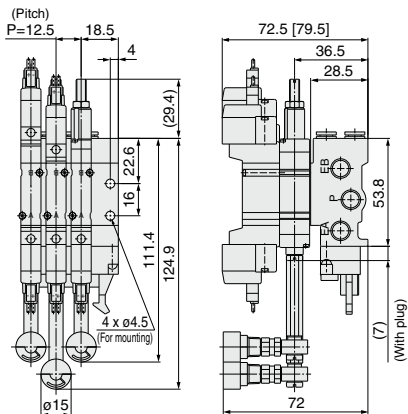
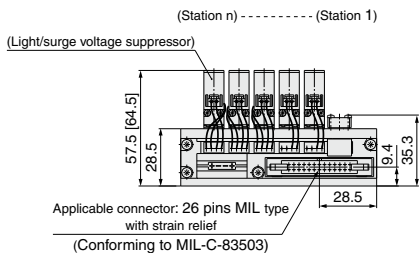


Stations n	4	5	6	7	8	9	10	11	12
L1	72.5	85	97.5	110	122.5	135	147.5	160	172.5
L2	64.5	77	89.5	102	114.5	127	139.5	152	164.5


SJ
SY
SY
SV
SYJ
SZ
VF
VP4
S0700
VQ
VQ4
VQ5
VQC
VQC4
VQZ
SQ
VFS
VFR
VQ7

**SY5000: SS5Y5-41P-Stations -01**, C6,N7, C8,N9


[ ] : AC

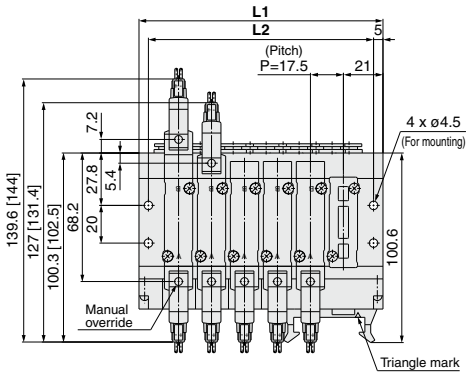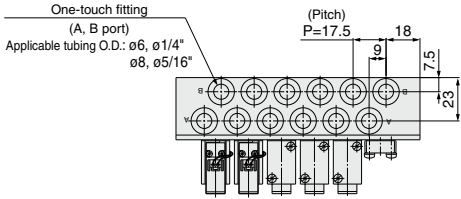

(Station n) ----- (Station 1)

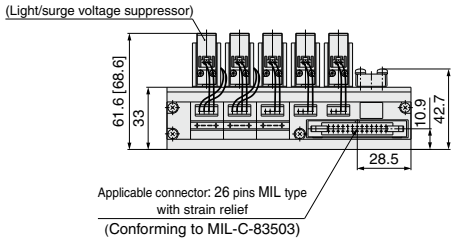






**With interface regulator (with gauge)**

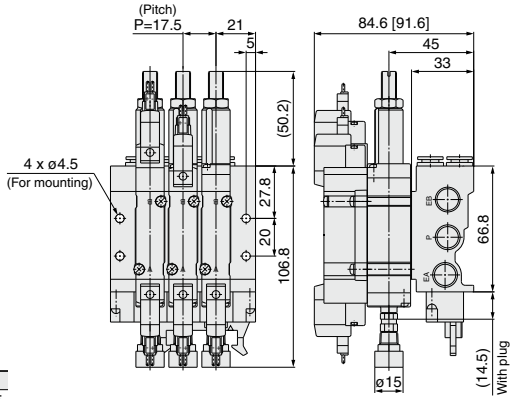


Stations n	3	4	5	6	7	8	9	10	11	12
<b>L1</b>	77	94.5	112	129.5	147	164.5	182	199.5	217	234.5
<b>L2</b>	67	84.5	102	119.5	137	154.5	172	189.5	207	224.5

**SY3000: SS5Y3-42P-Stations -01**, C4, N3  
C6, N7

[ ] : AC

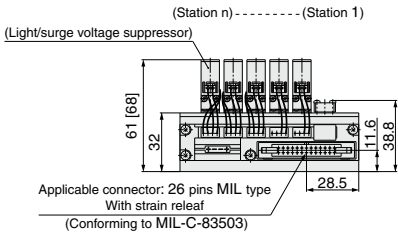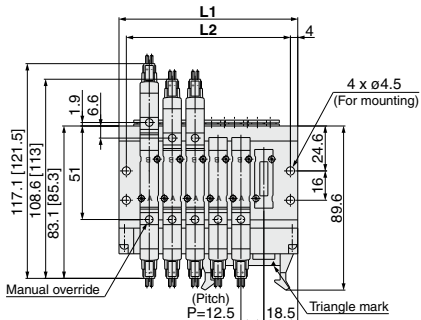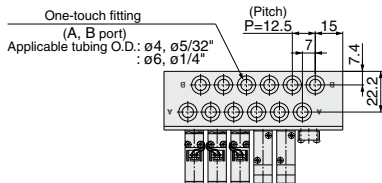

**With interface regulator (with gauge)**

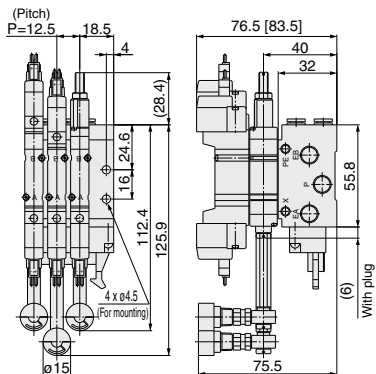


Stations n	4	5	6	7	8	9	10	11	12
<b>L1</b>	72.5	85	97.5	110	122.5	135	147.5	160	172.5
<b>L2</b>	64.5	77	89.5	102	114.5	127	139.5	152	164.5

- SJ
- SY
- SY**
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7




**SY5000: SS5Y5-42P-Stations -02** C6, N7, C8, N9

[ ] : AC

**Grommet (G)**

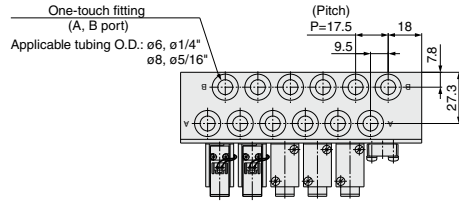


**For 1/4**

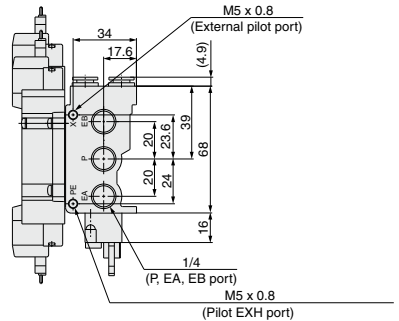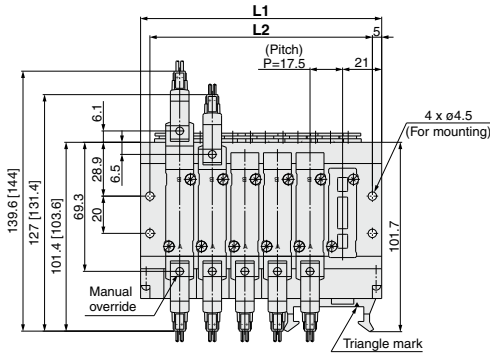


<In the case of external pilot type solenoid valve>

(Station n) ----- (Station 1)  
(Light/surge voltage suppressor)

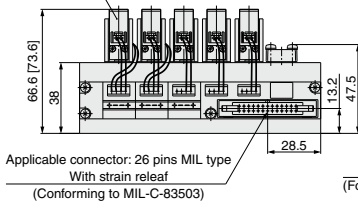

**With interface regulator (with gauge)**

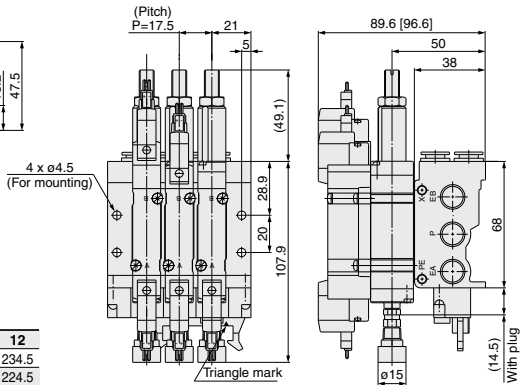


Stations n	3	4	5	6	7	8	9	10	11	12
<b>L1</b>	77	94.5	112	129.5	147	164.5	182	199.5	217	234.5
<b>L2</b>	67	84.5	102	119.5	137	154.5	172	189.5	207	224.5



**SY7000: SS5Y7-42P- Stations -02, C10, N11**

[ ]: AC

**Grommet (G)**

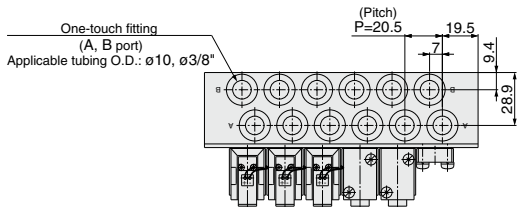


For  $1/4$

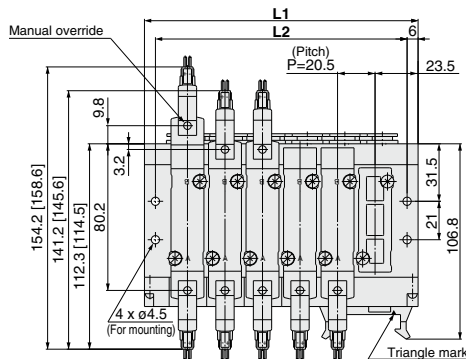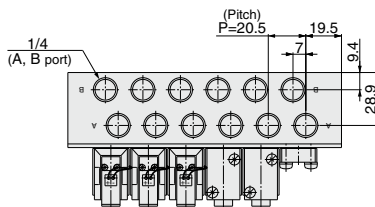


(Station n) ----- (Station 1)

(Light/surge voltage suppressor)

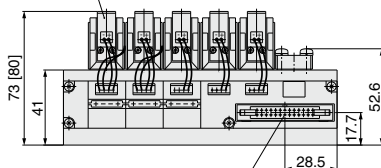


Applicable connector: 26 pins MIL type  
With strain relief  
(Conforming to MIL-C-83503)



<In the case of external pilot type solenoid valve>

**With interface regulator (with gauge)**

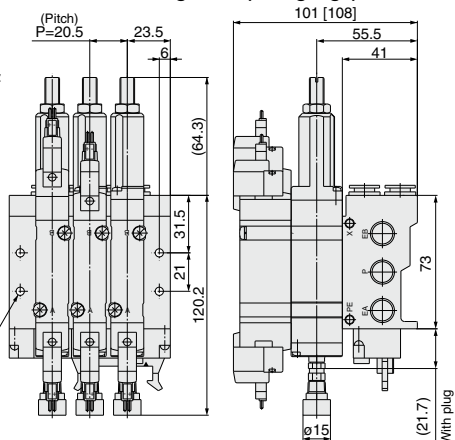

Stations n	3	4	5	6	7	8	9	10	11	12
L1	88	108.5	129	149.5	170	190.5	211	231.5	252	272.5
L2	76	96.5	117	137.5	158	178.5	199	219.5	240	260.5

- SJ
- SY
- SY**
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7




Type **43P**

# 5 Port Solenoid Valve Base Mounted Manifold Stacking Type/Flat Ribbon Cable Series **SY9000**



[Option]  
Note) CE-compliant:  
For DC only.

## How to Order Manifold



### Valve stations

Symbol	Stations
04	4 stations
⋮	⋮
12	12 stations

\* This also includes the number of blanking plate assemblies.

### P, R port outlets

Symbol	Port outlet	Applicable stations
U	U side	4 to 10 stations
D	D side	
B	Both sides	4 to 12 stations

### SUP/EXH block assembly specifications

Symbol	Specifications
NII	Standard/Internal pilot specification
R	External pilot specification
S	Internal pilot/Built-in silencer
RS	External pilot/Built-in silencer

### Thread type

NII	Rc
F	G
N	NPT
T	NPTF

### Option

Symbol	Mounting
NII	Direct mounting
D	DIN rail mounting (with DIN rail)
D0	DIN rail mounting (without DIN rail)
D*	When a longer DIN rail is desired than the specified stations, specify the station number to be required into * mark.

### A, B port size

Symbol	Port size
02	1/4
03	3/8

### One-touch fitting (Metric size)

Symbol	Port size
C8	One-touch fitting for ø8
C10	One-touch fitting for ø10
C12	One-touch fitting for ø12
M	Mixed

### One-touch fitting (Inch size)

Symbol	Port size
N9	One-touch fitting for ø <sup>5</sup> / <sub>16</sub> "
N11	One-touch fitting for ø <sup>3</sup> / <sub>8</sub> "
M	Mixed

\* In the case of mixed specifications (M), indicate separately on the manifold specification sheet.


### CE-compliant

NII	—
Q	CE-compliant

Note) CE-compliant: For DC only.

## How to Order Manifold Assembly (Example)

### Example

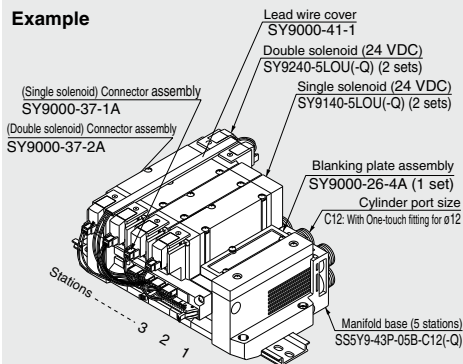

SS5Y9-43P-05B-C12... 1 set (Type 43P, 5-station manifold base part no.)  
\* SY9000-26-4A ..... 1 set (Blanking plate assembly part no.)  
\* SY9140-5LOU (-Q) ..... 2 sets (Single solenoid part no.)  
\* SY9240-5LOU (-Q) ..... 2 sets (Double solenoid part no.)  
\* SY9000-37-1A ..... 2 sets (Connector assembly part no.)  
\* SY9000-37-2A ..... 2 sets (Connector assembly part no.)

The asterisk denotes the symbol for assembly. Prefix it to the part nos. of the solenoid valve, etc.


Add the valve and option part number under the manifold base part number. In the case of complex arrangement, specify them on the manifold specification sheet.

Note) Please indicate the connector assembly part no. (page 401) that connects the valve and the manifold.



Note) CE-compliant:  
For DC only. [Option]

## How to Order Valve

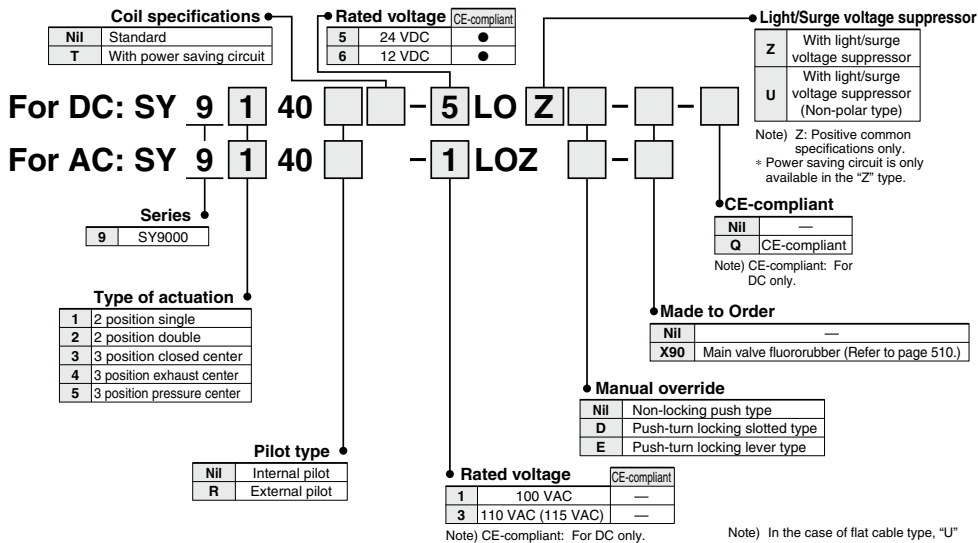

Note) When ordering single unit of the base mounted type solenoid valve, the mounting screws and gaskets for the manifold are included.

Note) In the case of flat cable type, "U" and "Z" types are for DC specifications and "Z" type is for AC specifications. "Z" type for DC is positive common specification only. For the other combination, please contact SMC.

Note) Since the electrical entry is "LO", select an appropriate connector assembly part no.

## Connector Assembly

### For 12, 24 VDC

Specifications	For SY9000
For single solenoid	SY9000-37-1A
Double solenoid, 3 position type	SY9000-37-2A
Single with spacer assembly	SY9000-37-3A
Double, 3 position with spacer assembly	SY9000-37-4A

Note) Spacer indicates Individual SUP/EXH spacer.

### For 100 VAC

Specifications	For SY9000
For single solenoid	SY9000-37-1B
Double solenoid, 3 position type	SY9000-37-2B
Single with spacer assembly	SY9000-37-3B
Double, 3 position with spacer assembly	SY9000-37-4B

### For 110 VAC (115 VAC)


Specifications	For SY9000
For single solenoid	SY9000-37-1C
Double solenoid, 3 position type	SY9000-37-2C
Single with spacer assembly	SY9000-37-3C
Double, 3 position with spacer assembly	SY9000-37-4C

- SJ
- SY
- SY
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

- **Multiple valve wiring is simplified through the use of the flat ribbon cable connector.**

• **Clean appearance**

In the case of a flat ribbon cable type, each valve is wired on the print board of manifold base to allow the external wiring to be piped all together with 26 pins MIL connector.



### Flat Ribbon Cable Manifold Specifications

Model		SS5Y9-43P	
Applicable valve		SY9□40	
Manifold type		Stacking type	
P (SUP)/R (EXH)		Common SUP, Common EXH	
Valve stations		4 to 12 stations <sup>Note 1)</sup>	
A, B port	Location	Base	
	Direction	Side	
Porting specifications	P, EA, EB port	C12 (One-touch fitting for ø12)	
	A, B port	$\frac{1}{4}$ $\frac{3}{8}$ C8 (One-touch fitting for ø8) C10 (One-touch fitting for ø10) C12 (One-touch fitting for ø12)	
Manifold base weight W (g) n: Stations		W = 114n + 343	
Applicable flat ribbon cable connector		Flat ribbon cable connection, Socket: 26 pins MIL with strain relief, Conforming to MIL-C-83503	
Internal wiring		In common between +COM and -COM (Z type: +COM only)	
Rated voltage <sup>Note 4)</sup>		12, 24 VDC, 100, 110 VAC	

Note 1) For more than 10 stations, supply pressure to P port on both sides and exhaust from EA/EB port on both sides.

Note 2) The withstand voltage specification for the wiring unit section is JIS C 0704, Grade 1 or its equivalent.

Note 3) Refer to "Manifold Option" on page 416.


Note 4) CE-compliant: For DC only.

### Flow Characteristics

Model	Port size		Flow characteristics					
	1, 5, 3 (P, EA, EB)	4, 2 (A, B)	1 → 4/2 (P → A/B)			4/2 → 5/3 (A/B → EA/EB)		
			C (dm <sup>3</sup> /s·bar)	b	Cv	C (dm <sup>3</sup> /s·bar)	b	Cv
SS5Y9-43P	C12	C12	6.4	0.29	1.6	7.3	0.29	1.8

Note) The value is for manifold base with 5 stations and individually operated 2 position type.


### Internal Wiring of Manifold (Non-polar type)

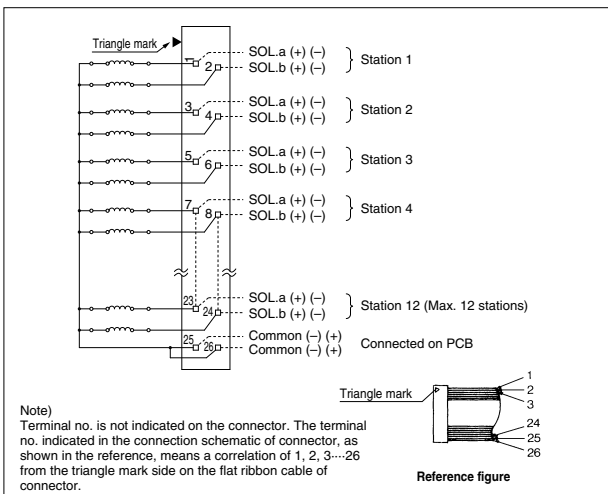

**Caution**

- For non-polar (U) valves, the electrical DC connections can be used with either positive and negative COM. For type (Z), only use with positive COM as the valve does not operate correctly when used with negative COM.


- For more than 10 stations, both poles of the common should be wired.
- For single solenoid, connect to the solenoid A side.
- The maximum number of stations that can be accommodated is 12. For more stations, please contact SMC.




**SY9000: SS5Y9-43P- Stations D**  <sup>02</sup> C8, N9  <sup>03</sup> C10, N11  (-D)

[ ] : AC




\* When P, R port outlets are indicated on the D side, the P, R ports on the opposite side are plugged.

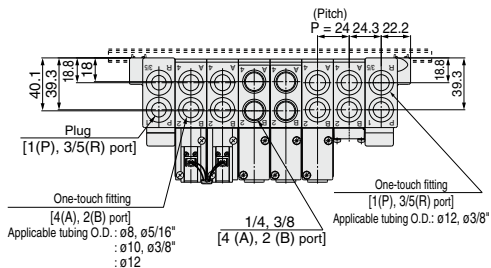

**With External Pilot Specifications**

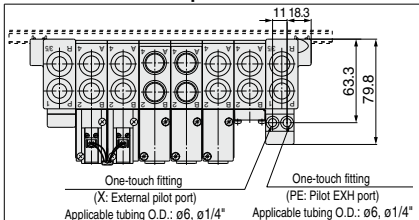

\* Air discharge port on the built-in silencer type and the external pilot's extracting position are in the D side.

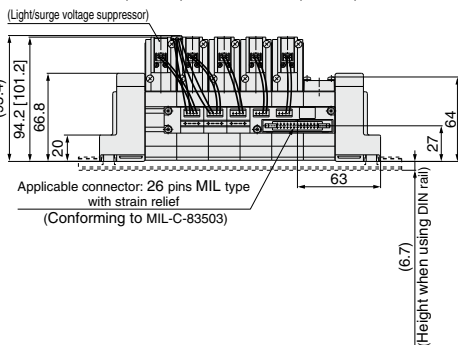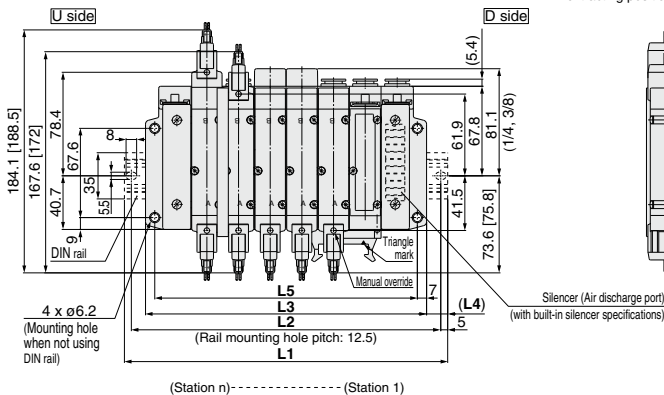


Stations n	4 stations	5	6	7	8	9	10 stations
L1	198	223	248	260.5	285.5	310.5	335.5
L2	187.5	212.5	237.5	250	275	300	325
L3	165	189	213	237	261	285	309
L4	16.5	17	17.5	12	12.5	13	13.5
L5	151	175	199	223	247	271	295

- SJ**
- SY**
- SY**
- SV**
- SYJ**
- SZ**
- VF**
- VP4**
- S0700**
- VQ**
- VQ4**
- VQ5**
- VQC**
- VQC4**
- VQZ**
- SQ**
- VFS**
- VFR**
- VQ7**


**SY9000: SS5Y9-43P- Stations U**  <sup>02</sup> C8, N9  <sup>03</sup> C10, N11  **(-D)**

[ ] : AC



\* When P, R port outlets are indicated on the U side, the P, R ports on the opposite side are plugged.

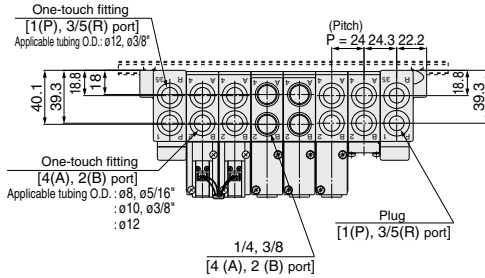

**With External Pilot Specifications**

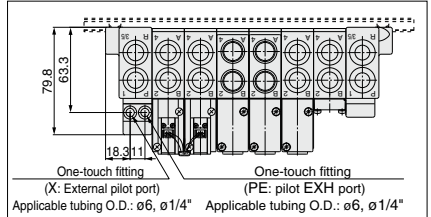


\* Air discharge port on the built-in silencer type and the external pilot's extracting position are in the U side.

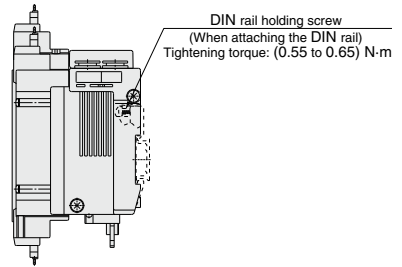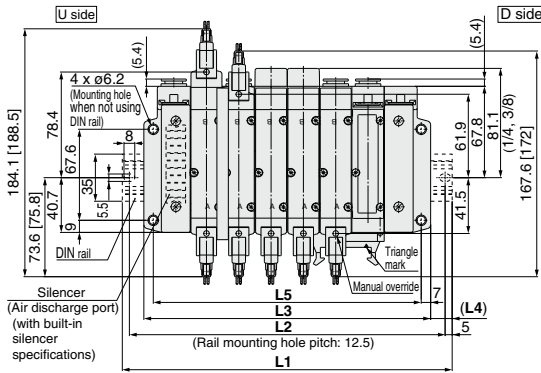

(Station n) ----- (Station 1)

(Light/surge voltage suppressor)

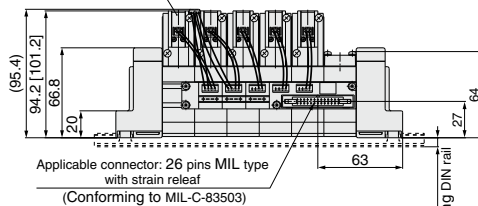


(6.7)  
Height when using DIN rail

Stations n	4 stations	5	6	7	8	9	10 stations
L1	198	223	248	260.5	285.5	310.5	335.5
L2	187.5	212.5	237.5	250	275	300	325
L3	165	189	213	237	261	285	309
L4	16.5	17	17.5	12	12.5	13	13.5
L5	151	175	199	223	247	271	295


**SY9000: SS5Y9-43P- Stations B**  <sup>02</sup> C8, N9  <sup>03</sup> C10, N11  (-D)

[ ] : AC



\* When P, R port outlets are indicated on the B side, the P, R ports on the both sides are in the open state.

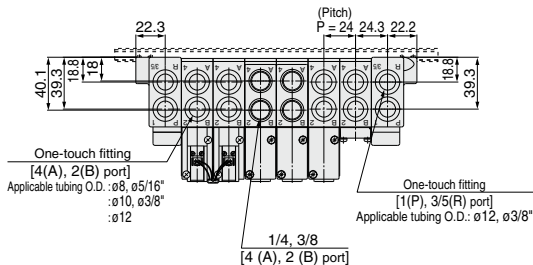


**With External Pilot Specifications**

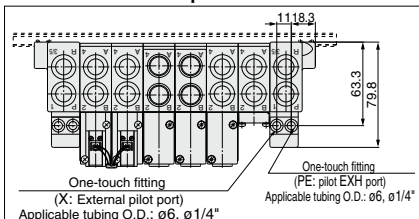

\* Air discharge port on the built-in silencer type and the external pilot's extracting position are in the B side (both sides).

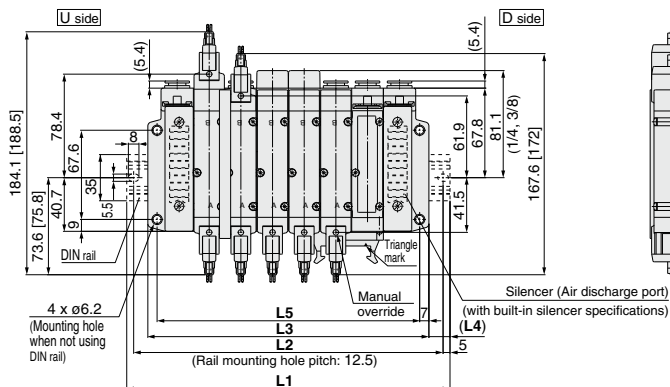

(Station n)------(Station 1)

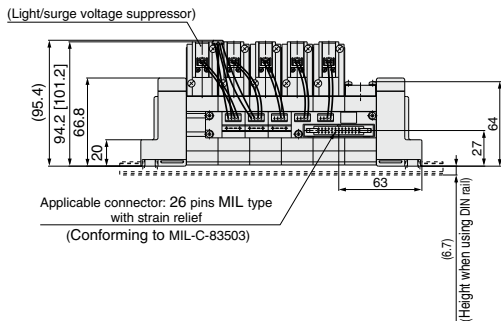

Stations n	4 stations	5	6	7	8	9	10	11	12 stations
L1	198	223	248	260.5	285.5	310.5	335.5	360.5	385.5
L2	187.5	212.5	237.5	250	275	300	325	350	375
L3	165	189	213	237	261	285	309	333	357
L4	16.5	17	17.5	12	12.5	13	13.5	14	14.5
L5	151	175	199	223	247	271	295	319	343

- SJ
- SY
- SY**
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

Type **42SA**

# EX510 Gateway-type Serial Transmission System Base Mounted Manifold/Integrated Type Series **SY3000/5000/7000**



## How to Order Manifold

**SS5Y 3 - 42SA - 03 - 01 - - -**

Manifold series

3	SY3000
5	SY5000
7	SY7000

SI unit

Nil	NPN output (+COM.)
N	PNP output (-COM.)

CE-compliant

Nil	—
Q	CE-compliant

Thread type

Nil	Rc
F	G
N	NPT
T	NPTF

Valve stations

Symbol	Stations	Note
03	3 stations	Double wiring <sup>Note 1)</sup>
:	:	
08	8 stations	Specified layout <sup>Note 2)</sup> (Compatible with 16 solenoid valves)
03	3 stations	
:	:	
16	16 stations	

- SS5Y3 can be set from 4 stations.
- The number of the blanking plate assembly is also included.
- Note 1) Double wiring: Use of a single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.
- Note 2) Specified layout: Indicate wiring specifications on the manifold specification sheet. (Note that double and 3 position valves cannot be used where single solenoid wiring has been specified.)

A, B port size

Thread piping

01	1/8	SY3000
02	1/4	SY5000/7000

One-touch fitting (Metric size)


C4	One-touch fitting for ø4	SY3000
C6	One-touch fitting for ø6	
C6	One-touch fitting for ø6	SY5000
C8	One-touch fitting for ø8	
C10	One-touch fitting for ø10	SY7000

One-touch fitting (Inch size)

N3	One-touch fitting for ø5/32"	SY3000
N7	One-touch fitting for ø1/4"	
N7	One-touch fitting for ø1/4"	SY5000
N9	One-touch fitting for ø5/16"	
N11	One-touch fitting for ø3/8"	SY7000

## How to Order Manifold Assembly (Example)

### Example

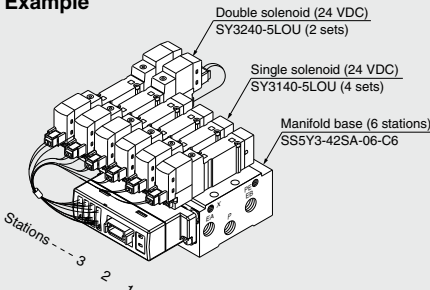

- SS5Y3-42SA-06-C6 (-Q) ..... 1 set (42SA type 6-station manifold part no.)
- SY3140-5LOU (-Q) ..... 4 sets (Single solenoid part no.)
- SY3240-5LOU (-Q) ..... 2 sets (Double solenoid part no.)

The asterisk denotes the symbol for assembly. Prefix to the part no. of the solenoid valve, etc.

Add the valve and option part number under the manifold base part number. When entry of part numbers becomes complicated, indicate by the manifold specification sheet. For a manifold for an EX510, the length of the lead wire for a connector assembly depends on the number of stations. Therefore, the manifold assembly is shipped with the valves (including blanking plates) and connector assembly mounted on it, as the standard specification. Be sure to specify the part nos. of the solenoid valves to be mounted.

### SI unit part no.

Symbol	SI unit specifications	SI unit part no.	Page
Nil	NPN output (+COM.)	EX510-S001	P.2143
N	PNP output (-COM.)	EX510-S101	

Refer to page 2124 and the Operation Manual for the details of EX510 Gateway-type Serial Transmission System. Please download the Operation Manual via our website, <http://www.smcworld.com>

**How to Order Valves**

**SY 3 1 40**   **- 5 LO Z**

**Series**

3	SY3000
5	SY5000
7	SY7000

**Type of actuation**

1	2 position single
2	2 position double
3	3 position closed center
4	3 position exhaust center
5	3 position pressure center

**Pilot specifications**

Nil	Internal pilot
R	External pilot

**Coil specifications**

Nil	Standard
T	With power saving circuit

**CE-compliant**

Nil	—
Q	CE-compliant

**Made to Order**

Nil	—
X90	Main valve fluororubber (Refer to page 510.)

**Manual override**

Nil	Non-locking push type
D	Push-turn locking slotted type
E	Push-turn locking lever type

**Light/Surge voltage suppressor**

Z	With light/surge voltage suppressor
U	Without light/surge voltage suppressor (non-polar type)

Note 1) Power saving circuit is only available in the "Z" type.

Note 2) When the SI unit is the PNP output (-COM.), only the "U" type is available.

**Rated voltage: 24 VDC**

Note) When ordering single unit of the base mounted type solenoid valve, the mounting screws and gaskets for the manifold are included.






- SJ
- SY
- SY**
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7





**Dimensions**

SY3000: SS5Y3-42SA □ - Stations -01 □, C4, N3  
C6, N3

For 1/8

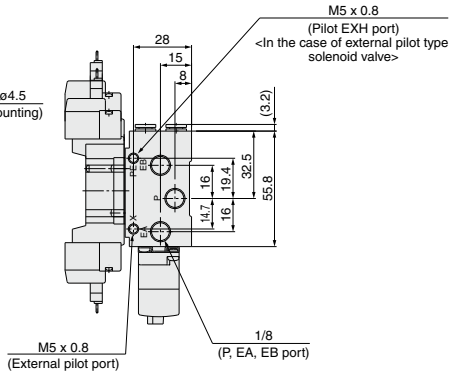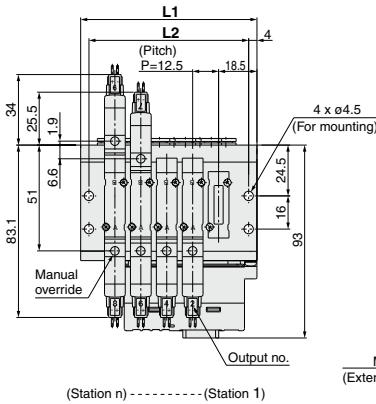


**With interface regulator (with gauge)**


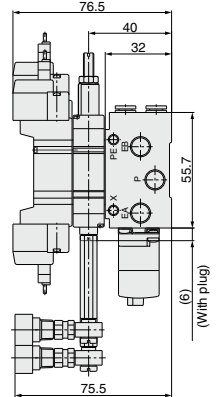
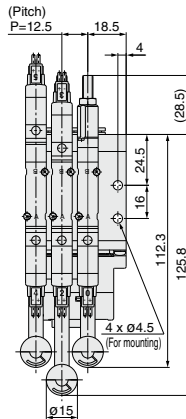


Stations n	4 stations	5	6	7	8	9	10	11	12	13	14	15	16 stations
L1	72.5	85	97.5	110	122.5	135	147.5	160	172.5	185	197.5	210	222.5
L2	64.5	77	89.5	102	114.5	127	139.5	152	164.5	177	189.5	202	214.5


**SY5000: SS5Y5-42SA**  -Stations- **02**  C6, N7  
C8, N9

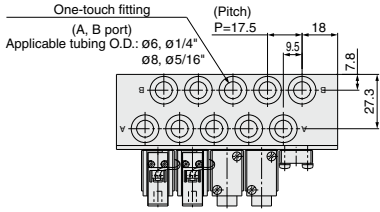


**For 1/4**

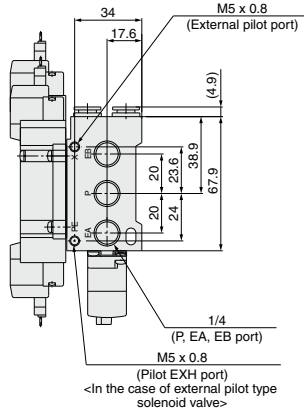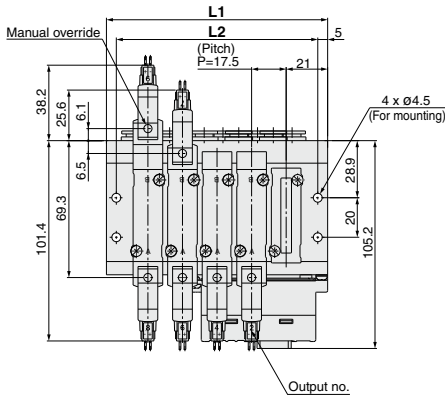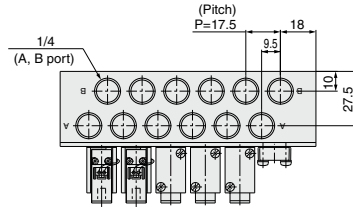

(Station n) ----- (Station 1)



**With interface regulator (with gauge)**




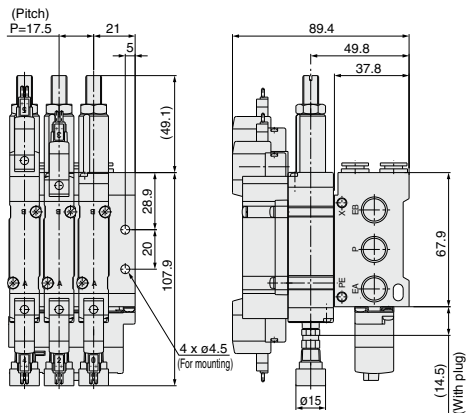


Stations n	3 stations	4	5	6	7	8	9	10	11	12	13	14	15	16 stations
<b>L1</b>	77	94.5	112	129.5	147	164.5	182	199.5	217	234.5	252	269.5	287	304.5
<b>L2</b>	67	84.5	102	119.5	137	154.5	172	189.5	207	224.5	242	259.5	277	294.5

- SJ
- SY
- SY**
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7


**Dimensions**

SY7000: SS5Y7-42SA □ - Stations -02 □, C10, N11

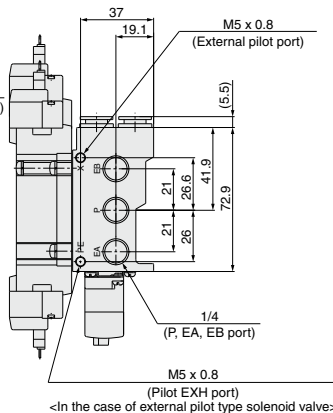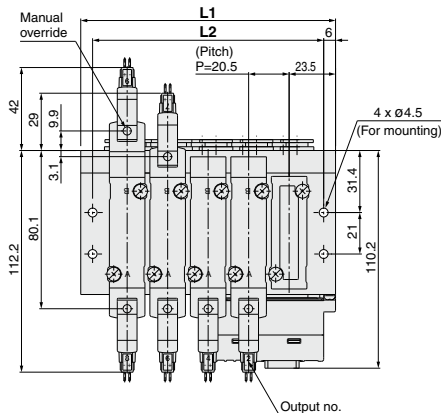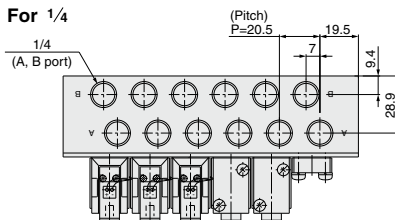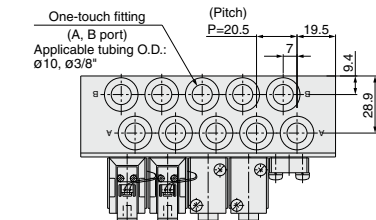


<In the case of external pilot type solenoid valve>

(Station n) ----- (Station 1)

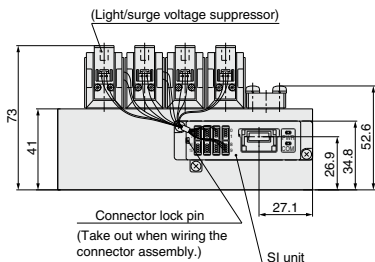

**With interface regulator (with gauge)**

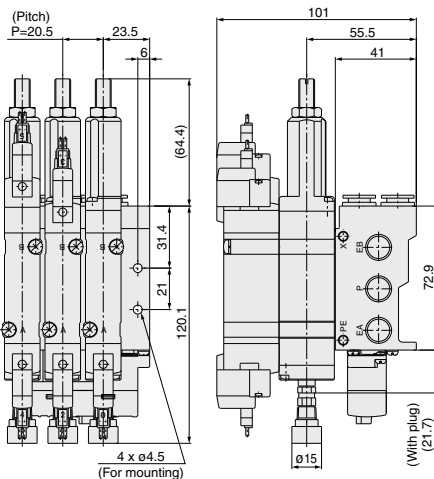

Stations n	3 stations	4	5	6	7	8	9	10	11	12	13	14	15	16 stations
<b>L1</b>	88	108.5	129	149.5	170	190.5	211	231.5	252	272.5	293	313.5	334	354.5
<b>L2</b>	76	96.5	117	137.5	158	178.5	199	219.5	240	260.5	281	301.5	322	342.5

Type **43SA**

# EX510 Gateway-type Serial Transmission System Base Mounted Manifold/Stacking Type Series **SY9000**



## How to Order Manifold

**SS5Y9 - 43SA** [ ] - **03** **U** [ ] - **02** [ ] - [ ] - [ ]

### SI unit

<b>NII</b>	NPN output (+COM.)
<b>N</b>	PNP output (-COM.)

### CE-compliant

<b>NII</b>	—
<b>Q</b>	CE-compliant

### Valve stations

Symbol	Stations	Note
<b>03</b>	3 stations	Double wiring <sup>Note 1)</sup>
⋮	⋮	
<b>08</b>	8 stations	Specified layout <sup>Note 2)</sup> (Compatible with 16 solenoid valves)
<b>03</b>	3 stations	
⋮	⋮	
<b>16</b>	16 stations	

- The number of the blanking plate assembly is also included.
- Note 1) Double wiring: Use of a single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.
- Note 2) Specified layout: Indicate wiring specifications on the manifold specification sheet. (Note that double and 3 position valves cannot be used where single solenoid wiring has been specified.)

### Option

<b>NII</b>	Direct mounting
<b>D</b>	DIN rail mounting (With DIN rail)
<b>DO</b>	DIN rail mounting (Without DIN rail)
<b>D*</b>	When a longer DIN rail is desired than the specified stations, specify the station number to be required into * mark.

### Thread type

<b>NII</b>	Rc
<b>F</b>	G
<b>N</b>	NPT
<b>T</b>	NPTF

### A, B port size Thread piping

<b>02</b>	1/4
<b>03</b>	3/8

### One-touch fitting (Metric size)

<b>C8</b>	One-touch fitting for ø8
<b>C10</b>	One-touch fitting for ø10
<b>C12</b>	One-touch fitting for ø12
<b>M</b>	Mixed

### One-touch fitting (Inch size)

<b>N9</b>	One-touch fitting for ø5/16"
<b>N11</b>	One-touch fitting for ø3/8"
<b>M</b>	Mixed

- For the mixed specification, indicate separately on a manifold specification sheet.

### SUP/EXH block assembly specifications

<b>NII</b>	Standard/Internal pilot
<b>R</b>	External pilot
<b>S</b>	Internal pilot, Built-in silencer
<b>RS</b>	External pilot, Built-in silencer

### P, R port outlets

<b>U</b>	U side	3 to 10 stations
<b>D</b>	D side	3 to 10 stations
<b>B</b>	Both sides	3 to 16 stations


### SI unit part no.

Symbol	SI unit specifications	SI unit part no.	Page
<b>NII</b>	NPN output (+COM.)	EX510-S001	P.2143
<b>N</b>	PNP output (-COM.)	EX510-S101	

Refer to page 2124 and the Operation Manual for the details of EX510 Gateway-type Serial Transmission System. Please download the Operation Manual via our website, <http://www.smcworld.com>

## How to Order Manifold Assembly (Order Example)

### Example

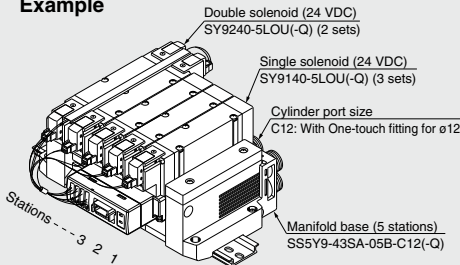

SS5Y9-43SA-05B-C12 (-Q) ... 1 set (43SA type 5-station manifold part no.)  
 \* SY9140-5LOU (-Q) ..... 3 sets (Single solenoid part no.)  
 \* SY9240-5LOU (-Q) ..... 2 sets (Double solenoid part no.)

The asterisk denotes the symbol for assembly. Prefix to the part no. of the solenoid valve, etc.

Add the valve and option part number under the manifold base part number. When entry of part numbers becomes complicated, indicate by the manifold specification sheet. For a manifold for an EX510, the length of the lead wire for a connector assembly depends on the number of stations. Therefore, the manifold assembly is shipped with the valves (including blanking plates) and connector assembly mounted on it, as the standard specification. Be sure to specify the part nos. of the solenoid valves to be mounted.

- SJ
- SY
- SY**
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

**How to Order Valves**

**SY9 1 40 [ ] [ ] - 5 LO Z [ ] - [ ] - [ ]**

**Type of actuation**

<b>1</b>	2 position single
<b>2</b>	2 position double
<b>3</b>	3 position closed center
<b>4</b>	3 position exhaust center
<b>5</b>	3 position pressure center

**Pilot specifications**

<b>Nii</b>	Internal pilot
<b>R</b>	External pilot

**Coil specifications**

<b>Nii</b>	Standard
<b>T</b>	With power saving circuit

**Rated voltage: 24 VDC**

**CE-compliant**

<b>Nii</b>	—
<b>Q</b>	CE-compliant

**Made to Order**

<b>Nii</b>	—
<b>X90</b>	Main valve fluororubber (Refer to page 510.)

**Manual override**

<b>Nii</b>	Non-locking push type
<b>D</b>	Push-turn locking slotted type
<b>E</b>	Push-turn locking lever type

**Light/Surge voltage suppressor**

<b>Z</b>	With light/surge voltage suppressor
<b>U</b>	Without light/surge voltage suppressor (non-polar type)

Note) When ordering single unit of the base mounted type solenoid valve, the mounting screws and gaskets for the manifold are included.


Note 1) Power saving circuit is only available in the "Z" type.

Note 2) When the SI unit is the PNP output (-COM.), only the "U" type is available.




**Dimensions**




SY9000: SS5Y9-43SA □ - Stations D □ □ □ <sup>C8, N9</sup> <sub>C10, N11 (-D)</sub> <sub>C12</sub>

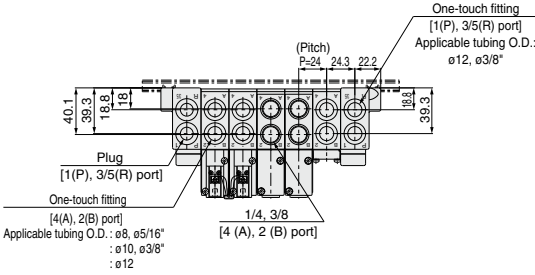

**With External Pilot Specifications**

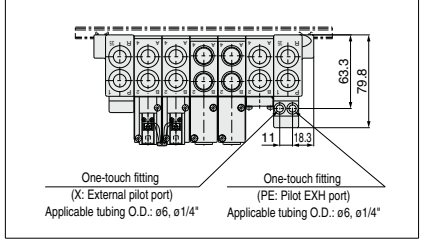


- When P, R port outlets are indicated on the D side, the P, R ports on the opposite side are plugged.
- Air discharge port on the built-in silencer type and the external pilot's extracting position are in the D side.

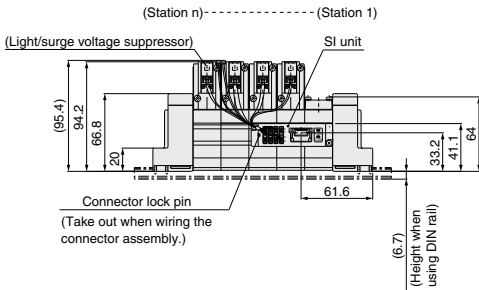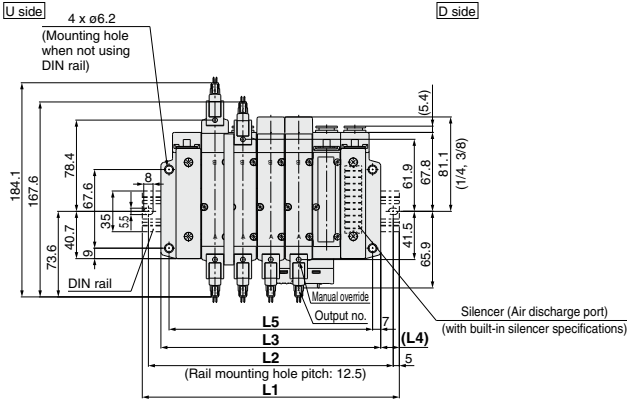


Stations n	3 stations	4	5	6	7	8	9	10 stations
L1	173	198	223	248	260.5	285.5	310.5	335.5
L2	162.5	187.5	212.5	237.5	250	275	300	325
L3	141	165	189	213	237	261	285	309
L4	16	16.5	17	17.5	12	12.5	13	13.5
L5	127	151	175	199	223	247	271	295

**SY9000: SS5Y9-43SA** □ - Stations **B** □ □ □ □ **C8, N9** □ □ □ □ **C10, N11 ( -D)**  
C12

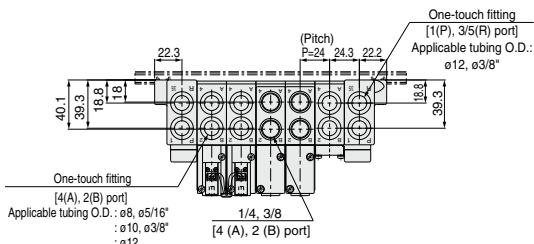


**With External Pilot Specifications**

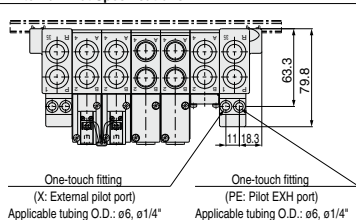


- \* When P, R port outlets are indicated on the B side, the P, R ports on the both sides are in the open state.
- \* Air discharge port on the built-in silencer type and the external pilot's extracting position are in the B side (both sides).

**U side**


**D side**

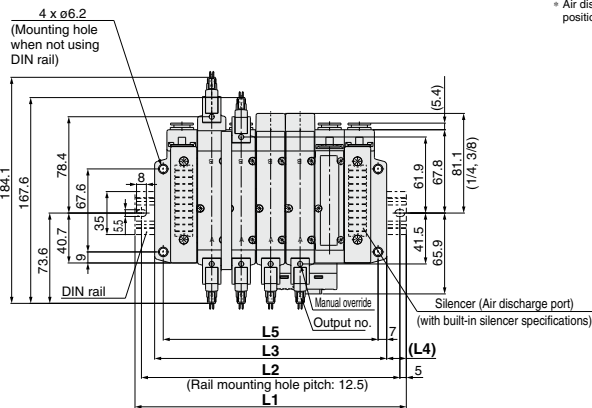

DIN rail holding screw  
 (When attaching the DIN rail)  
 Tightening torque: (0.55 to 0.65) N·m



(Station n)----- (Station 1)

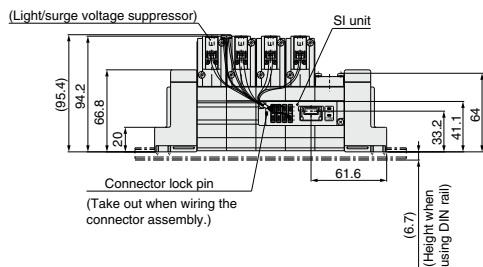


Stations n	3 stations	4	5	6	7	8	9	10	11	12	13	14	15	16 stations
<b>L1</b>	173	198	223	248	260.5	285.5	310.5	335.5	360.5	385.5	410.5	435.5	460.5	485.5
<b>L2</b>	162.5	187.5	212.5	237.5	250	275	300	325	350	375	400	425	450	475
<b>L3</b>	141	165	189	213	237	261	285	309	333	357	381	405	429	453
<b>L4</b>	16	16.5	17	17.5	12	12.5	13	13.5	14	14.5	15	15.5	16	16.5
<b>L5</b>	127	151	175	199	223	247	271	295	319	343	367	391	415	439

- SJ
- SY
- SY
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7




## Manifold Option

### ■ Type 41, 42, 43, 42SA, 43SA Blanking plate assembly




Series	Assembly part no.
<b>SY3000</b>	SY3000-26-9A(-Q)
<b>SY5000</b>	SY5000-26-20A(-Q)
<b>SY7000</b>	SY7000-26-22A(-Q)
<b>SY9000</b>	SY9000-26-2A

### ■ Type 41P, 42P, 43P Blanking plate assembly



Series	Assembly part no.
<b>SY3000</b>	SY3000-26-10A(-Q)
<b>SY5000</b>	SY5000-26-21A(-Q)
<b>SY7000</b>	SY7000-26-23A(-Q)
<b>SY9000</b>	SY9000-26-4A


### ■ Gasket assembly part no.



Series	Gasket assembly part no.
<b>SY3000</b>	SY3000-GS-2
<b>SY5000</b>	SY5000-GS-2(-Q)
<b>SY7000</b>	SY7000-GS-2(-Q)
<b>SY9000</b>	SY9000-GS-2

Note) The gasket assembly includes 10 sets of mounting screws and a gasket.

### ■ Individual SUP spacer assembly




Series	Assembly part no.	Port size	t
<b>SY3000</b>	SY3000-38-2A(-Q)	M5 x 0.8	11
<b>SY5000</b>	SY5000-38-16*A(-Q)	1/8	15
<b>SY7000</b>	SY7000-38-16*A(-Q)	1/4	18
<b>SY9000</b>	SY9000-38-2*A	1/4	20

Note) • The SUP port of SY3000, 5000 and 7000 may be either on the lead wire side or on the end plate side. (An assembly is shipped under the condition shown in the figure.)

- The end plate side is only available to SY9000.


### ■ Individual EXH spacer assembly



Series	Assembly part no.	Port size	t
<b>SY3000</b>	SY3000-39-2A(-Q)	M5 x 0.8	11
<b>SY5000</b>	SY5000-39-16*A(-Q)	1/8	15
<b>SY7000</b>	SY7000-39-16*A(-Q)	1/4	18
<b>SY9000</b>	SY9000-39-2*A	1/4	20

Note) In case of 41P, 42P and 43P, for protection of the wiring unit section from drainage, piping at the EA port should be arranged so that it will not be directly exposed to exhaust from the valve.

### ■ Individual SUP spacer assembly + Individual EXH spacer assembly (Double spacer)

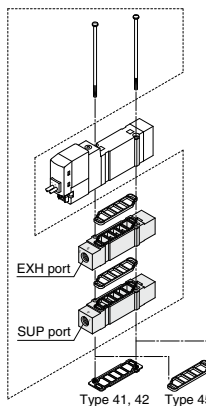

## ⚠ Caution

### Mounting screw tightening torques

M2: 0.16 N·m  
M3: 0.8 N·m  
M4: 1.4 N·m

### \* Thread type

NII	Rc
F	G
N	NPT
T	NPTF

## ⚠ Warning

When mounting a valve or spacer on the manifold base or sub-plate, etc., those mounting directions are determined. If mounted in the wrong direction, the equipment to be connected may cause malfunction. Refer to external dimensions, and then mount it.

●: Available X: Not available —: Not applicable manifold]

Series	Individual SUP + Individual EXP Assemble part no.	Port size	Applicable manifold types						
			41	41P	42	42P	45	45-A 45-NA	45*
<b>SY3000</b>	SY3000-120-2A(-Q)	M5 x 0.8	●	X	●	X	●	X	X
<b>SY5000</b>	SY5000-75-1*A(-Q)	1/8	●	X	●	X	●	X	X
<b>SY7000</b>	SY7000-73-1*A(-Q)	1/4	●	X	●	X	—	—	—


Note) The port on a spacer can be directed to the pilot valve side or end plate side. For mounting the port to the pilot valve side, please make sure to connect the ports to protect the pilot valve wiring section from drainage.

The individual SUP spacer and EXH spacer can be mounted either on the upper side or lower side. (The above illustration shows the condition when the product is shipped out from a factory.)


## Manifold Option

### ■ Connector assembly

For single solenoid (SY3000-37-81A-□-N)



For double solenoid (SY3000-37-81A-□-□)




**Connector assembly order no. (Can be used for the manifold without a specified layout (8 stations or less))**  
Integrated type

Model	Part no.	Connector mounting position
SS5Y3-42SA	SY3000-37-81A-3-N	Single: For 1 to 4 stations
	SY3000-37-81A-3-6	Double/3 position: For 1 to 4 stations
	SY3000-37-81A-2-N	Single: For 5 to 8 stations
	SY3000-37-81A-2-4	Double/3 position: For 5 to 8 stations
SS5Y5-42SA	SY3000-37-81A-3-N	Single: For 1 to 8 stations
	SY3000-37-81A-3-6	Double/3 position: For 1 to 8 stations
SS5Y7-42SA	SY3000-37-81A-3-N	Single: For 1 to 4 stations
	SY3000-37-81A-3-6	Double/3 position: For 1 to 4 stations
	SY3000-37-81A-4-N	Single: For 5 to 8 stations
	SY3000-37-81A-4-7	Double/3 position: For 5 to 8 stations

Note) The above is for the station addition or maintenance. When ordering a connector assembly separately, a number would not be printed on the connector.

### ■ Connector assembly

SY3000-37-80A-□



### ■ Housing (8 pcs./set)

SY3000-44-3A



**Connector assembly order no. (Can be used for the manifold with a specified layout)**

Model	Part no.	Connector mounting position
SS5Y3-42SA	SY3000-37-80A-3	For A side
	SY3000-37-80A-6	For B side
	SY3000-37-80A-4	For A side
	SY3000-37-80A-7	For B side
SS5Y5-42SA	SY3000-37-80A-3	For A side
	SY3000-37-80A-6	For B side
	SY3000-37-80A-7	For A side
	SY3000-37-80A-9	For B side
SS5Y7-42SA	SY3000-37-80A-4	For A side
	SY3000-37-80A-7	For B side
	SY3000-37-80A-8	For A side
	SY3000-37-80A-11	For B side
SS5Y9-43SA	SY3000-37-80A-6	For A side
	SY3000-37-80A-11	For B side
	SY3000-37-80A-9	For A side
	SY3000-37-80A-14	For B side
	SY3000-37-80A-13	For A side
	SY3000-37-80A-18	For B side

Note 1) The above is for station addition or maintenance. When ordering a connector assembly separately, a number will not be printed on the connector.

Note 2) After inserting the connector assembly into the housing, be sure to confirm that the lead wire will not come off by lightly pulling the wire. Furthermore, do not reuse the lead wire after it has been inserted and removed.

Note 3) Wiring is set longer than the actual wiring distance.

- SJ
- SY
- SY
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

## Manifold Option

### ■ SUP blocking disk (For SY9000)

By installing a SUP blocking disk in the pressure supply passage of a manifold base, it is possible to supply two or more different high and low pressures to one manifold.



Series	No.
<b>SY9000</b>	SY9000-57-1A

### ■ EXH blocking disk (For SY9000)

By installing an EXH blocking disk in the exhaust passage of a manifold base, it is possible to divide the valve's exhaust so that it does not affect another valve. (Two blocking disks are needed to divide both exhausts.)




Series	No.
<b>SY9000</b>	SY9000-57-1A

### ■ Label for block disk (For SY9000)

The labels shown below are used on manifold stations containing SUP/EXH block disk(s) to show their location. (3 pcs. each)

#### VZ3000-123-1A


Label for SUP block disk    Label for EXH block disk    Label for SUP/EXH block disk



Note) When a block disk is concurrently ordered by specifying on the manifold specification sheet, etc., a label will be stuck on the position where block disk is mounted.

### ■ Silencer with One-touch fitting (For SY9000)

The silencer plugs directly into the One-touch fittings of the manifold R (exhaust) port.




For Series	Model	Effective area mm <sup>2</sup>	A	B	C
<b>SY9000</b> (ø12)	AN30-C12	41	ø20	43.5	71.5

### ■ DIN Rail Dimensions/Weight for SY9000

#### VZ1000-11-4-□

##### ● Refer to L dimensions

\* Fill in □ with an appropriate no. listed on the table of DIN rail dimensions shown below.



No.	0	1	2	3	4	5	6	7	8	9
L Dimension	98	110.5	123	135.5	148	160.5	173	185.5	198	210.5
Weight (g)	24.8	28	31.1	34.3	37.4	40.6	43.8	46.9	50.1	53.3

No.	10	11	12	13	14	15	16	17	18	19
L Dimension	223	235.5	248	260.5	273	285.5	298	310.5	323	335.5
Weight (g)	56.4	59.6	62.7	65.9	69.1	72.2	75.4	78.6	81.7	84.9


No.	20	21	22	23	24	25	26	27	28	29
L Dimension	348	360.5	373	385.5	398	410.5	423	435.5	448	460.5
Weight (g)	88	91.2	94.4	97.5	100.7	103.9	107	110.2	113.3	116.5

Note) • Refer to page 521 for DIN rail.

• Refer to L1 dimension on pages 389 to 391, 403 to 405 and 413 to 415 for lengths that correspond to the number of manifold stations.

### ■ Cable assembly

#### AXT100-FC26-<sup>1</sup>/<sub>3</sub>

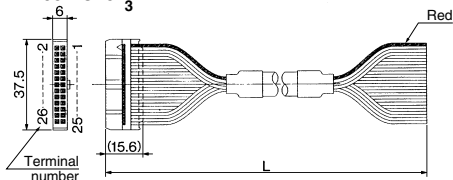

### Connector Assembly for Flat Ribbon Cables

Cable length (L)	Assembly part no.	Note
1.5m	AXT100-FC26-1	Cable 26 core x 28 AWG
3m	AXT100-FC26-2	
5m	AXT100-FC26-3	


\* For other commercial connectors, use a 26 pins with strain relief conforming to MIL-C-83503.

### Connector manufacturers' example

- Hirose Electric Company
- Japan Aviation Electronics Industry, Ltd.
- Sumitomo 3M Limited
- J.S.T. Mfg. Co., Ltd.
- Fujitsu Limited

### ■ Plug (white)

These are inserted in unused cylinder ports and SUP, EXH ports. Purchasing order is available in units of 10 pieces.



### Dimensions

Applicable fittings size ød	Model	A	L	D
4	<b>KQ2P-04</b>	16	32	6
6	<b>KQ2P-06</b>	18	35	8
8	<b>KQ2P-08</b>	20.5	39	10
10	<b>KQ2P-10</b>	22	43	12
12	<b>KQ2P-12</b>	24	44.5	14
1/8"	<b>KQ2P-01</b>	16	31.5	5
5/32"	<b>KQ2P-03</b>	16	32	6
1/4"	<b>KQ2P-07</b>	18	35	8.5
5/16"	<b>KQ2P-09</b>	20.5	39	10
3/8"	<b>KQ2P-11</b>	22	43	11.5

## Manifold Option

### How to Order Interface Regulator

#### Series SY3000

ARBY3000 - **05** - **P** - 2

Pressure gauge connection port

<b>05</b>	Pressure gauge (G15-10-01) (for odd number station)
<b>06</b>	Pressure gauge (G15-10-01) (for even number station)
<b>M1</b>	Plug (M-5P)

Regulating port

<b>P</b>	P port
<b>A1</b>	A port (P controlled type, A port regulation)
<b>B1</b>	B port (P controlled type, B port regulation)

Note) In the case of Series ARBY3000 with a pressure gauge when mounting on the manifold, use caution that the part numbers are different between the odd no. stations and the even no. stations to avoid gauges from interfering with each others.

#### Series SY5000

ARBY5000 - **00** - **P** - 2

Pressure gauge connection port

<b>00</b>	Pressure gauge (G15-10-01)
<b>M1</b>	Plug (M-5P)

Regulating port

<b>P</b>	P port
<b>A1</b>	A port (P controlled type, A port regulation)
<b>B1</b>	B port (P controlled type, B port regulation)






ARBY3000-05-□-2  
(For odd number stations)

ARBY3000-06-□-2  
(For even number stations)

ARBY3000-M1-□-2

ARBY5000-00-□-2

ARBY5000-M1-□-2



Note) The M8 connector for wiring cannot be mounted for the ARBY3000 series.

#### Series SY7000

ARBY7000 - **00** - **P** - 2

Pressure gauge connection port

<b>00</b>	Pressure gauge (G15-10-01)
<b>M1</b>	Plug (M-5P)



Regulating port

<b>P</b>	P port
<b>A1</b>	A port (P controlled type, A port regulation)
<b>B1</b>	B port (P controlled type, B port regulation)

Note) ARBY is not CE compliant.

ARBY7000-00-□-2

ARBY7000-M1-□-2



### Accessory

Series	Round head combination screw Reference screw size	Gasket
<b>ARBY3000</b>	SY3000-23-10 (M2 x 36)	SX3000-57-4
<b>ARBY5000</b>	AC00283 (M3 x 48.5)	SX5000-57-6
<b>ARBY7000</b>	AC00282 (M4 x 58)	SX7000-57-5


### Caution

Mounting screw  
tightening torques

M2: 0.16 N·m  
M3: 0.8 N·m  
M4: 1.4 N·m

- SJ
- SY
- SY**
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

**Base Mounted Manifold Exploded View**

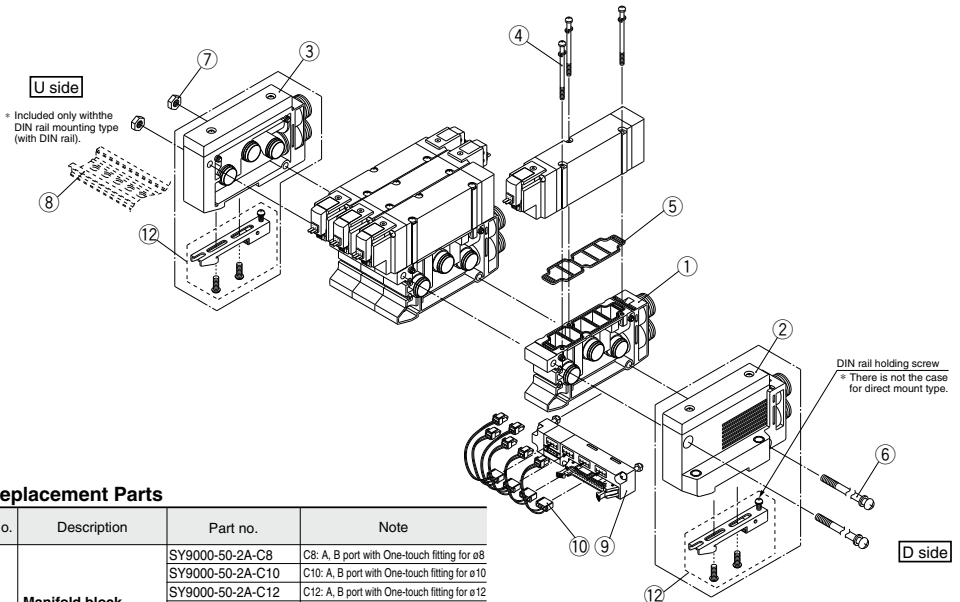


**Replacement Parts**

No.	Description	Part no.	Note
1	Manifold block assembly	SY9000-50-2A-C8	C8: A, B port with One-touch fitting for ø8
		SY9000-50-2A-C10	C10: A, B port with One-touch fitting for ø10
		SY9000-50-2A-C12	C12: A, B port with One-touch fitting for ø12
		SY9000-50-2A-N9	N9: A, B port with One-touch fitting for ø $\frac{5}{16}$ "
		SY9000-50-2A-N11	N11: A, B port with One-touch fitting for ø $\frac{3}{8}$ "
		SY9000-50-2A-02*	02: A, B port $\frac{1}{4}$ " (+ thread type)
		SY9000-50-2A-03*	03: A, B port $\frac{3}{8}$ " (+ thread type)
4	Round head combination screw	SY9000-18-2	M3 x 42, Matt nickel plated
5	Gasket	SY9000-11-2	
6	Tension bolt	SY9000-23-□	□ at the end of part number corresponds with the number of manifold station. Specify the same number as the number of stations.
7	Hexagon nut	SY9000-25-1	
8	DIN rail	VZ1000-11-4-□	Refer to page 418.
9	Wiring unit assembly	SY9000-36-□A	□ at the end of part number corresponds with the number of manifold station. Specify the same number as the number of stations (4 to 12 stations).
10	Connector assembly	SY9000-37-□□	Refer to page 401.
11	Lead wire cover	SY9000-41-1	
12	Clamp sub assembly	SY9000-30-1A	Included only with the DIN rail mounting type.

**⑪ How to assemble lead wire cover**

Lead wire cover is only usable for double solenoid valves. Lead wire is inserted into the lead wire cover as magnifying figure, then push it until it touches the valve body.




**⚠ Caution**

For type 43P (Flat cable manifold) of Series SY9000, the lead wire cover is attached for bundling the lead wires for each solenoid. In case such as adding double solenoid valve, etc., order separately lead wire cover as well.

**② SUP/EXH block assembly no. (D side mounting)**

• Direct mount type: **SY9000-70-□□A-□□**

• DIN rail mount type: **SY9000-72-□□A-□□**




**• Specifications**

1	Internal pilot type
3	External pilot type
4	Internal pilot / Built-in silencer type
5	External pilot / Built-in silencer type

**③ SUP/EXH block assembly no. (U side mounting)**

• Direct mount type: **SY9000-71-□□A-□□**

• DIN rail mount type: **SY9000-73-□□A-□□**



**• Specifications**

1	Internal pilot type
3	External pilot type
4	Internal pilot / Built-in silencer type
5	External pilot / Built-in silencer type

**How to Increase Manifold Bases (Series SY9000 only) Manifold case can be added at any location.**

When a type 43 manifold base is added, tension bolts as well as manifold block assembly will be required. Order the tension bolt suitable for the stations after a station was increased (decreased), since the length of a tension bolt differs by the number of stations. (For changing the number of stations for a type 43P manifold, wiring unit for the stations and lead assembly will be required.)


- 1 Loosen the tension bolts connecting the manifold base, and pull out both of 2 tension bolts.  
(When equipped with a DIN rail, loosen one DIN rail holding screw on either U side or D side.)
- 2 Separate the blocks at the location where station expansion is desired.
- 3 Mount additional manifold block assembly.
- 4 Press block-to-block so that there's no gap. After connection, insert a tension bolt for desired stations and then tighten it.  
**Caution** (Tightening torque: 2.9 N·m)  
(When equipped with a DIN rail, be sure to tighten the DIN rail holding screws after tightening the tension bolts. Tightening torque: 1.4 N·m)

**Caution**

1. Be sure to shut off the power and air supplies before disassembly. Furthermore, since air may remain inside the actuator, piping and manifold, confirm that the air is completely exhausted before performing any work.
2. When disassembly and assembly are performed, air leakage may result if connections between blocks and tightening of the end block's holding screw, is inadequate.
3. By adding wiring unit assembly to type 43 manifold, it can be changed to type 43P manifold, too.

**How to Replace A, B Port Fitting Assembly**

By replacing manifold block fitting assemblies or the threaded port block assembly of a type 43(P) manifold, the port size of the A and B ports can be changed. To replace these parts, remove the clip with a flat head screwdriver after the valve has been removed. Insert the fitting assemblies or threaded port block assembly, and then reinsert the clip so that it does not protrude from the manifold block.

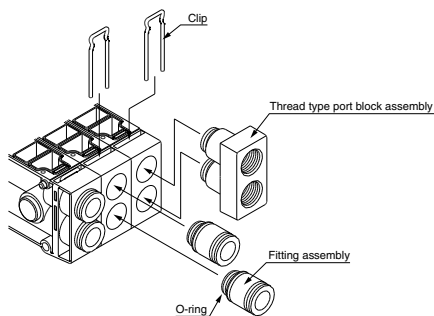

**Fitting Assembly Part No.**

Port size	No.	Note
One-touch fitting assembly for $\phi 8$	VVQ4000-50B-C8	
One-touch fitting assembly for $\phi 10$	VVQ4000-50B-C10	
One-touch fitting assembly for $\phi 12$	VVQ4000-50B-C12	
One-touch fitting for $\phi 3/16"$	VVQ4000-50B-N9	
One-touch fitting for $\phi 3/8"$	VVQ4000-50B-N11	
1/4 threaded type port block assembly	SY9000-58A-02*	--* at the end of part number denotes the thread type.
3/8 threaded type port block assembly	SY9000-58A-03*	--* at the end of part number denotes the thread type.
Plug assembly	SY9000-62-1A	

Note 1) Be careful to avoid damage or contamination of O-rings, as this can cause air leakage.  
 Note 2) Although replacing One-touch fittings of P, R port is also possible, use caution to the cases, etc. in which solenoid valves are often used at the same time by using the smaller sized fittings than the standard size ( $\phi 12$ ). Because there may not be able to supply or exhaust air sufficiently in comparison with the valve performances. Besides, although fittings used for A, B port are the same, it is not possible to use the threaded type port block assembly.  
 Note 3) The basic order unit of the One-touch fitting is 10 pcs.

- SJ
- SY
- SY
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

# 5 Port Solenoid Valve Base Mounted Manifold

Note) AC-type models that are CE-compliant have DIN terminals only.



## Stacking Type/DIN Rail Mounted/Individual Wiring

Type **45**

# Series SY3000/5000

### How to Order Manifold

SS5Y **3** - 45 - **05** **U** - **C6** - [ ] - [ ]

• **Series**

3	SY3000
5	SY5000

• **Valve stations**

02	2 stations
⋮	⋮
20	20 stations

• **SUP/EXH block assembly mounting position**

Symbol	Mounting position	Applicable no. of stations
U	U side	2 to 10 stations
D	D side	2 to 10 stations
B	(Both sides)	2 to 20 stations
M*	Special specifications	

\* For special specifications, indicate separately by the manifold specification sheet.

• **Option**

When a longer DIN rail is desired than the specified stations, specify the station number to be required. (20 stations at maximum)

• **CE-compliant**

Nil	—
Q	CE-compliant

Note) AC-type models that are CE-compliant have DIN terminals only.

• **A, B port size**

Symbol	Port size	Applicable series
C4	One-touch fitting for ø4	SY3000
C6	One-touch fitting for ø6	
M	Mixed	
C4	One-touch fitting for ø4	SY5000
C6	One-touch fitting for ø6	
M	Mixed	


Symbol	Port size	Applicable series
N3	One-touch fitting for ø 5/32"	SY3000
N7	One-touch fitting for ø 1/4"	
M	Mixed	
N3	One-touch fitting for ø 5/32"	SY5000
N7	One-touch fitting for ø 1/4"	
M	Mixed	

\* In the case of mixed specifications (M), indicate separately on the manifold specification sheet.

\* Refer to pages 502 to 506 for external pilot specifications and built-in silencer.

### How to Order Manifold Assembly (Example)

**Example**

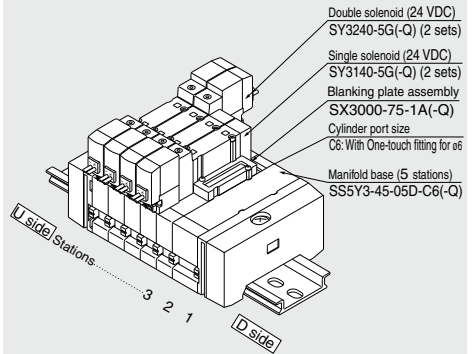

**SS5Y3-45-05D-C6 (-Q) ..... 1 set (Type 45, 5-station manifold base part no.)**  
**\*SX3000-75-1A (-Q) ..... 1 set (Blanking plate assembly part no.)**  
**\*SY3140-5G (-Q) ..... 2 sets (Single solenoid part no.)**  
**\*SY3240-5G (-Q) ..... 2 sets (Double solenoid part no.)**

The asterisk denotes the symbol for assembly. Prefix it to the part nos. of the solenoid valve, etc.

The valve arrangement is numbered as the 1st. station from D side regardless of the mounting position of SUP/EXH block assembly. In ordering, specify the part nos. in the order from the 1st. station on D side. Besides, when the arrangement will be complicated, fill out the manifold specification sheet to instruct us.



**How to Order Valve**

Note) AC-type models that are CE-compliant have DIN terminals only.

[Option]

**SY** 5 2 40   - 5 L     -   -   -  

• **Series**

3	SY3000
5	SY5000

• **Type of actuation**

1	2 position single
2	2 position double
3	3 position closed center
4	3 position exhaust center
5	3 position pressure center

• **Coil specifications**

Nil	Standard
T	With power saving circuit (24, 12 VDC only)

\* Power saving circuit is not available in the case of D, Y, DO, YO or W□ type.

• **Rated voltage**

**For DC**

5	24 VDC
6	12 VDC
V	6 VDC
S	5 VDC
R	3 VDC

**AC ( Hz )<sup>50/60</sup>**

1	100 VAC
2	200 VAC
3	110 VAC [115 VAC]
4	220 VAC [230 VAC]

\* DC specifications of type D, Y, DO and YO is only available with 12 and 24 VDC.  
 \* For type W□, DC voltage is only available.  
 \* D and DO only available for SY5000.  
 Note) AC-type models that are CE-compliant have DIN terminals only.

• **CE-compliant**

Nil	—
Q	CE-compliant

Note) AC-type models that are CE-compliant have DIN terminals only.

• **Made to Order**

Nil	—
X90	Main valve fluororubber (Refer to page 510.)

• **Manual override**

Nil	Non-locking push type
D	Push-turn locking slotted type
E	Push-turn locking lever type

• **Light/Surge voltage suppressor**

**Electrical entry for G, H, L, M, W**

Nil	Without light/surge voltage suppressor
S	With surge voltage suppressor
Z	With indicator light and surge voltage suppressor
R	With surge voltage suppressor (Non-polar type)
U	With light/surge voltage suppressor (Non-polar type)

\* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.  
 \* For "R" and "U", DC voltage is only available.  
 \* Power saving circuit is only available in the "Z" type.

**Electrical entry for D, Y**

Nil	Without light/surge voltage suppressor
S	With surge voltage suppressor (Non-polar type)
Z	With light/surge voltage suppressor (Non-polar type)

\* DOZ and YOZ are not available.  
 \* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.

• **Electrical entry**


24, 12, 6, 5, 3 VDC/100, 110, 200, 220 VAC			24, 12 VDC 100, 110, 200, 220 VAC	24, 12 VDC 6, 5, 3 VDC
Grommet	L plug connector	M plug connector	DIN terminal	M8 connector
<b>G:</b> Lead wire length 300 mm	<b>L:</b> With lead wire (Length 300 mm)	<b>M:</b> With lead wire (Length 300 mm)	<b>(SY5000)</b> <b>D:</b> With connector <b>DO:</b> Without connector	<b>WO:</b> Without connector cable
<b>H:</b> Lead wire length 600 mm	<b>LN:</b> Without lead wire <b>LO:</b> Without connector	<b>MN:</b> Without lead wire <b>MO:</b> Without connector	<b>Y:</b> With connector <b>YO:</b> Without connector	<b>W□:</b> With connector cable (Note 1)
CE-compliant	DC	●	●	●
—	AC	—	●	—

\* LN, MN type: with 2 sockets.  
 \* D and DO only available for SY5000.  
 \* "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN43650C). Refer to page 519 for details.  
 \* Refer to page 522 for connector cable of M8 connector.  
 \* M8 connector conforming to IEC60947-5-2 standard is also available. Refer to page 509 for details.  
 \* Refer to page 519 for the lead wire length of L and M plug connectors.  
 \* Refer to page 520 for the connector assembly with cover for L and M plug connectors.  
 Note) Enter the cable length symbols in □. Please be sure to fill in the blank referring to page 523.

\* When ordering single unit of the base mounted type solenoid valve, the mounting screws and gaskets for the integrated manifold are supplied with the solenoid valve, but the stacking type gaskets are not included. When the stacking type gaskets are required, order them separately.

- SJ
- SY
- SY
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7





## Manifold Specifications

Model	<b>SS5Y3-45(-Q)</b>		<b>SS5Y5-45(-Q)</b>	
Applicable valve	<b>SY3□40</b>		<b>SY5□40</b>	
Manifold type	Stacking type/DIN rail mounted			
P (SUP)/R (EXH)	Common SUP, Common EXH			
Valve stations	2 to 20 stations <sup>Note 1)</sup>			
A, B port Porting specifications	Location	Base		
	Direction	Side		
Port size	P, R port	C8 (One-touch fitting for ø8)	C10 (One-touch fitting for ø10)	
	A, B port	C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6)	C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6) C8 (One-touch fitting for ø8)	
Manifold base weight W (g), n: Stations	2 to 10 stations: W = 22n + 118 11 to 20 stations: W = 22n + 140		2 to 10 stations: W = 47n + 156 11 to 20 stations: W = 47n + 190	

Note 1) For more than 11 stations, supply pressure to P port on both sides and exhaust from R port on both sides.


## Flow Characteristics

Model	Port size		Flow characteristics					
	1, 5, 3 (P, EA, EB)	4, 2 (A, B)	1 → 4/2 (P → A/B)			4/2 → 5/3 (A/B → EA/EB)		
			C (dm <sup>3</sup> /(sbar))	b	Cv	C (dm <sup>3</sup> /(sbar))	b	Cv
<b>SS5Y3-45</b>	C8	C6	0.88	0.21	0.22	0.95	0.18	0.22
<b>SS5Y5-45</b>	C10	C8	2.2	0.24	0.53	2.5	0.18	0.58

Note) The value is for manifold base with 5 stations and individually operated 2 position type.

## Manifold Option

■ Individual SUP spacer assembly ■ Individual EXH spacer assembly

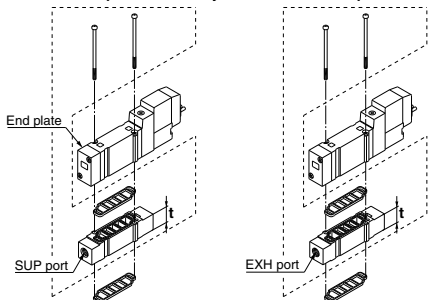

Series	Assembly part no.	Port size	t
<b>SY3000</b>	SY3000-38-2A(-Q)	M5 x 0.8	11
<b>SY5000</b>	SY5000-38-16-A(-Q)	1/8"	15

Note) The SUP port may be either on the lead wire side or on the end plate side. (An assembly is shipped under the condition shown in the figure.)

Series	Assembly part no.	Port size	t
<b>SY3000</b>	SY3000-39-2A(-Q)	M5 x 0.8	11
<b>SY5000</b>	SY5000-39-16-A(-Q)	1/8"	15


Note) The EXH port may be either on the lead wire side or on the end plate side. (An assembly is shipped under the condition shown in the figure.)

## ■ Dimensions/DIN rail

VZ1000-11-1-□

● Refer to L dimensions

\* Fill in □ with an appropriate no. listed on the table of DIN rail dimensions shown below.



No.	0	1	2	3	4	5	6	7	8	9	10
L Dimension	98	110.5	123	135.5	148	160.5	173	185.5	198	210.5	223
No.	11	12	13	14	15	16	17	18	19	20	21
L Dimension	235.5	248	260.5	273	285.5	298	310.5	323	335.5	348	360.5
No.	22	23	24	25	26	27	28	29	30	31	32
L Dimension	373	385.5	398	410.5	423	435.5	448	460.5	473	485.5	498
No.	33	34	35	36	37	38	39	40	41	42	43
L Dimension	510.5	523	535.5	548	560.5	573	585.5	598	610.5	623	635.5
No.	44	45	46	47	48	49	50	51	52	53	54
L Dimension	648	660.5	673	685.5	698	710.5	723	735.5	748	760.5	773
No.	55	56	57	58	59	60	61	62	63	64	65
L Dimension	785.5	798	810.5	823	835.5	848	860.5	873	885.5	898	910.5
No.	66	67	68	69	70	71					
L Dimension	923	935.5	948	960.5	973	985.5					

\* Refer to L1 dimension on pages starting with pages 428 to 431 for lengths that correspond to the number of manifold stations.

## ■ SUP blocking disk

By installing a SUP blocking disk in the pressure supply passage of a manifold valve, it is possible to supply two or more different high and low pressures to one manifold.



Series	Part no.
<b>SY3000</b>	SX3000-77-1A
<b>SY5000</b>	SX5000-77-1A

## ■ EXH blocking disk

By installing an EXH blocking disk in the exhaust passage of a manifold valve, it is possible to divide the valve's exhaust so that it does not affect another valve. (Two blocking disks are needed to divide both exhausts.)




Series	Part no.
<b>SY3000</b>	SX3000-77-1A
<b>SY5000</b>	SX5000-77-1A

## ■ Label for block disk

The labels shown below are used on manifold stations containing SUP/EXH blocking disk(s) to show their location. (3 pcs. each)

### VZ3000-123-1A


Label for SUP block disk    Label for EXH block disk    Label for SUP/EXH block disk



Note) When a block disk is concurrently ordered by specifying on the manifold specification sheet, etc., a label will be stuck on the position where block disk is mounted.

## ■ Silencer with One-touch fitting


The silencer plugs directly into the One-touch fittings of the manifold.



Series	Model	Effective area mm <sup>2</sup>	A	B	C
<b>For SY3000</b> (ø8)	AN15-C08	20	ø13	20	45
<b>For SY5000</b> (ø10)	AN20-C10	30	ø16.5	30.5	57.5

## ■ Plug (white)

These are inserted in unused cylinder ports and SUP, EXH ports. Purchasing order is available in units of 10 pieces.



## Dimensions

Applicable fittings size $\phi D$	Model	A	L	D
4	<b>KQ2P-04</b>	16	32	6
6	<b>KQ2P-06</b>	18	35	8
8	<b>KQ2P-08</b>	20.5	39	10
10	<b>KQ2P-10</b>	22	43	12
1/8"	<b>KQ2P-01</b>	16	31.5	5
5/32"	<b>KQ2P-03</b>	16	32	6
1/4"	<b>KQ2P-07</b>	18	35	8.5
5/16"	<b>KQ2P-09</b>	20.5	39	10

## Manifold Option

•How to Order Interface Regulator (SY3000, 5000 only)

### Series SY3000

ARBY3000 - **05** - **P** - 2

• **Regulating port**

<b>P</b>	P port
<b>A1</b>	A port (P controlled type, A port regulation)
<b>B1</b>	B port (P controlled type, B port regulation)

• **Pressure gauge connection port**

<b>05</b>	Pressure gauge (G15-10-01) [for odd number station]
<b>06</b>	Pressure gauge (G15-10-01) [for even number station]
<b>M1</b>	Plug (M-5P)

\* In the case of Series ARBY3000 with a pressure gauge when mounting on the manifold, use caution that the part numbers are different between the odd no. stations and the even no. stations to avoid gauges from interfering with each others.

### Series SY5000

ARBY5000 - **00** - **P** - 2


• **Regulating port**

<b>P</b>	P port
<b>A1</b>	A port (P controlled type, A port regulation)
<b>B1</b>	B port (P controlled type, B port regulation)


• **Pressure gauge connection port**

<b>00</b>	Pressure gauge (G15-10-01)
<b>M1</b>	Plug (M-5P)


ARBY3000-05-□-2  
(For mounting odd number stations)




ARBY3000-06-□-2  
(For mounting even number stations)




ARBY3000-M1-□-2



ARBY5000-00-□-2



ARBY5000-M1-□-2



Note) ARBY is not CE-compliant.

### Accessory

Series	Round head combination screw Reference screw size	Gasket
ARBY3000	SY3000-23-10 (M2 x 36)	SX3000-57-4
ARBY5000	AC00283 (M3 x 48.5)	SX5000-57-6

### ⚠ Caution

Mounting screw  
tightening torques




M2: 0.17 N·m

M3: 0.8 N·m



**Dimensions: Series SY3000**

[ ] : AC

**SS5Y3-45- Stations D- C4, N3  
C6, N7**

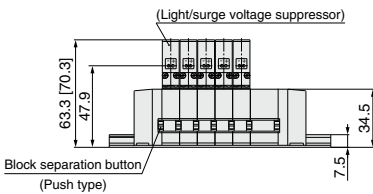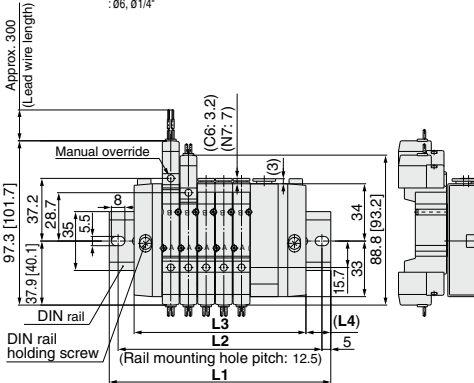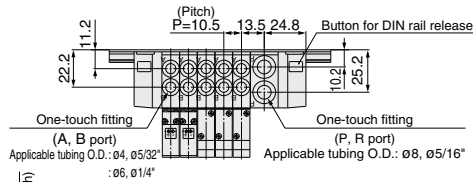


**SS5Y3-45- Stations U- C4, N3  
C6, N7**

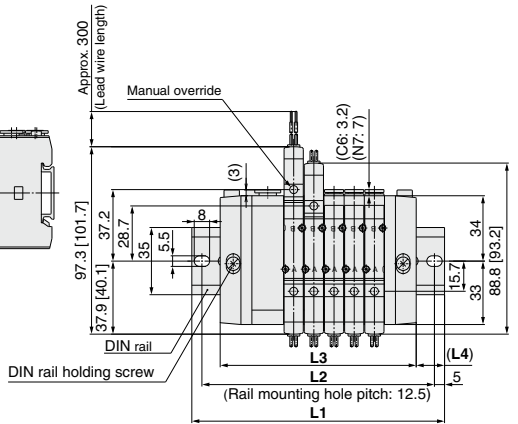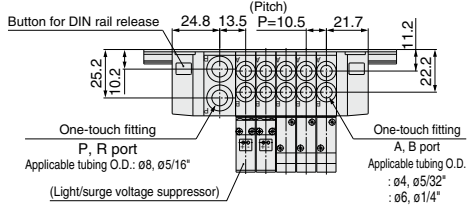

Stations n	2 stations	3	4	5	6	7	8	9	10 stations
L1	98	110.5	123	135.5	148	148	160.5	173	185.5
L2	87.5	100	112.5	125	137.5	137.5	150	162.5	175
L3	70.5	81	91.5	102	112.5	123	133.5	144	154.5
L4	13.5	14.5	15.5	16.5	17.5	12.5	13.5	14.5	15.5


**With interface regulator (with gauge)**

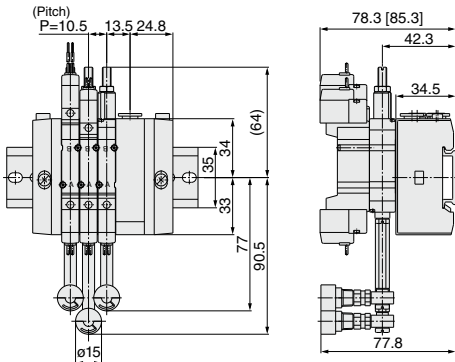



**Dimensions: Series SY3000**

[ ] : AC


**SS5Y3-45- Stations B- C4, N3  
C6, N7**

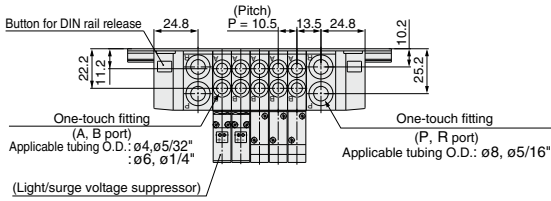


**L plug connector**

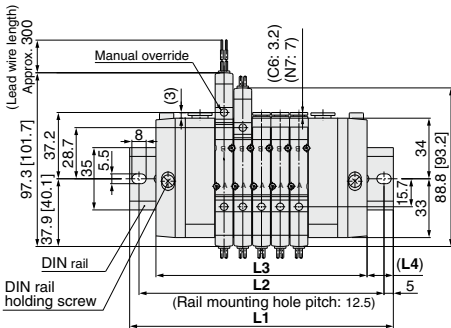

**M plug connector**



**M8 connector (WO)**



Note) Refer to page 523 for dimensions of connector types.

Stations n	2 stations	3	4	5	6	7	8	9	10 stations
<b>L1</b>	110.5	123	135.5	148	160.5	173	185.5	185.5	198
<b>L2</b>	100	112.5	125	137.5	150	162.5	175	175	187.5
<b>L3</b>	87	97.5	108	118.5	129	139.5	150	160.5	171
<b>L4</b>	11.5	12.5	13.5	14.5	15.5	16.5	17.5	12.5	13.5


Stations n	11 stations	12	13	14	15	16	17	18	19	20 stations
<b>L1</b>	210.5	223	235.5	248	248	260.5	273	285.5	298	310.5
<b>L2</b>	200	212.5	225	237.5	237.5	250	262.5	275	287.5	300
<b>L3</b>	181.5	192	202.5	213	223.5	234	244.5	255	265.5	276
<b>L4</b>	14.5	15.5	16.5	17.5	12	13	14	15	16	17

- SJ
- SY
- SY**
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7




**Dimensions: Series SY5000**

[ ]: AC

**SS5Y5-45- Stations D-** C4, N3  
C6, N7  
C8, N9

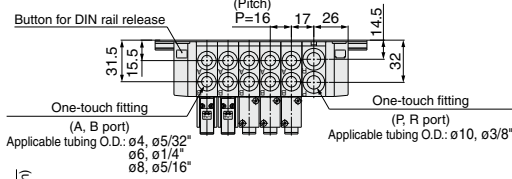


**SS5Y5-45- Stations U-** C4, N3  
C6, N7  
C8, N9

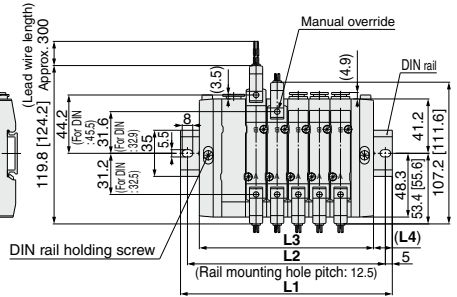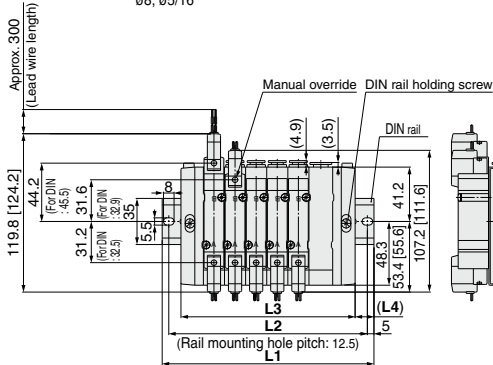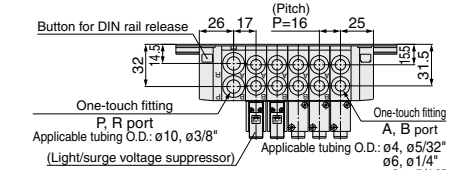


(Station n) --- (Station 1)

(Light/surge voltage suppressor)

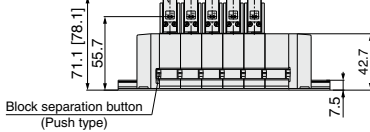

Stations n	2 stations	3	4	5	6	7	8	9	10 stations
L1	110.5	135.5	148	160.5	173	198	210.5	223	235.5
L2	100	125	137.5	150	162.5	187.5	200	212.5	225
L3	84	100	116	132	148	164	180	196	212
L4	13	17.5	16	14	12.5	17	15	13.5	11.5


**With interface regulator (with gauge)**

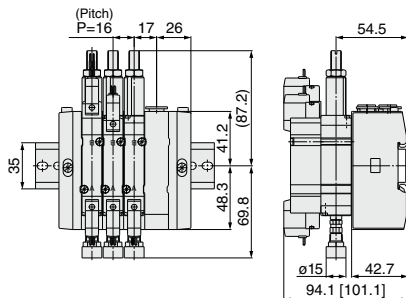


**Dimensions: Series SY5000**

[ ] : AC


**SS5Y3-45- Stations B-C4, N3  
C6, N7  
C8, N9**

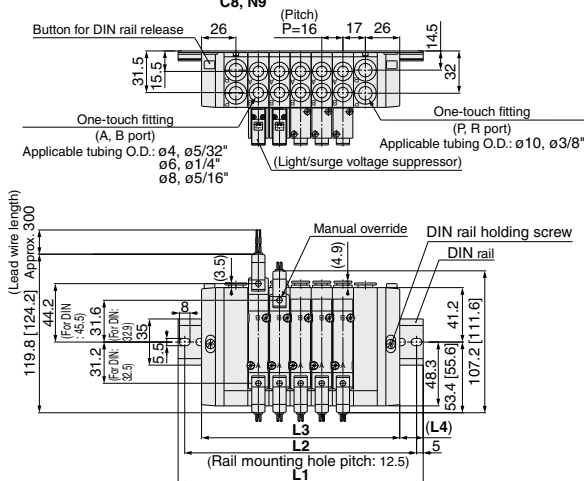

**L plug connector**



**M plug connector**




Stations n	2 stations	3	4	5	6	7	8	9	10 stations
L1	135.5	148	160.5	185.5	198	210.5	223	248	260.5
L2	125	137.5	150	175	187.5	200	212.5	237.5	250
L3	102	118	134	150	166	182	198	214	230
L4	16.5	15	13	17.5	16	14	12.5	17	15


Stations n	11 stations	12	13	14	15	16	17	18	19	20 stations
L1	273	285.5	310.5	323	335.5	360.5	373	385.5	398	423
L2	262.5	275	300	312.5	325	350	362.5	375	387.5	412.5
L3	246	262	278	294	310	326	342	358	374	390
L4	13.5	11.5	16	14.5	12.5	17	15.5	13.5	12	16.5

**M8 connector (WO)**



Note) Refer to page 523 for dimensions of connector types.


**DIN terminal (D, Y)**



- SJ
- SY
- SY**
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

### DIN Rail Manifold Exploded View

Type 45

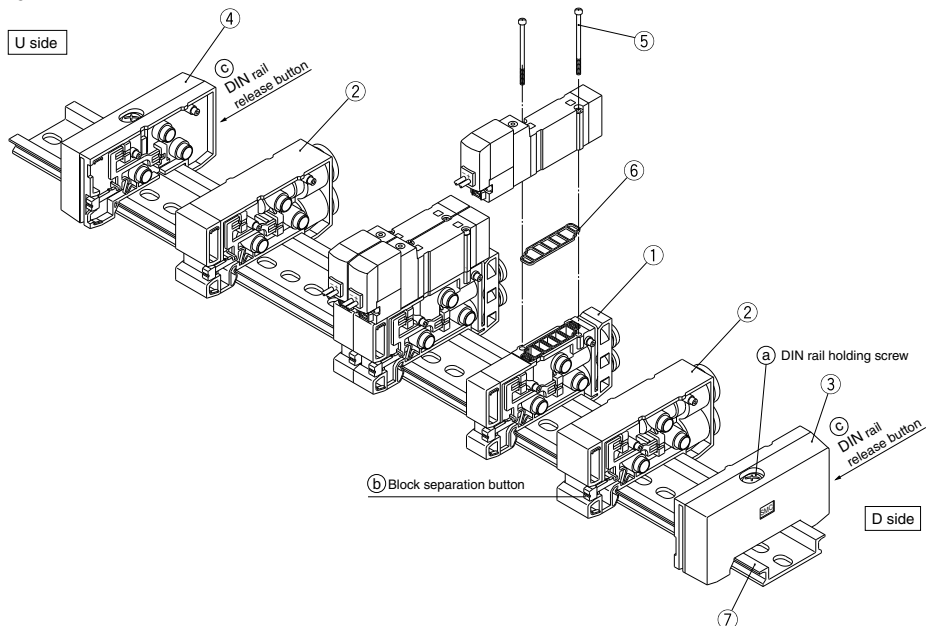

### Replacement Parts

No.	Description	Part no.		Note
		SY3000	SY5000	
1	Manifold block assembly	SX3000-50-1A-□□(-Q)	SX5000-50-1A-□□(-Q)	□□: SY3000 (Metric size) C4: With One-touch fitting for ø4 (Inch size) N3: With One-touch fitting for ø5/32" SY5000 (Metric size) C6: With One-touch fitting for ø6 (Inch size) N7: With One-touch fitting for ø1/4" C4: With One-touch fitting for ø4 (Inch size) N3: With One-touch fitting for ø5/32" C6: With One-touch fitting for ø6 (Inch size) N7: With One-touch fitting for ø1/4" C8: With One-touch fitting for ø8 (Inch size) N9: With One-touch fitting for ø5/16" (Gasket 6 is supplied as an accessory.)
2	SUP/EXH block assembly	(Metric size) SX3000-51-1A (Inch size) SX3000-51-15A	(Metric size) SX3000-51-1A (Inch size) SX5000-51-15A	P, R port SY3000 (Metric size) With One-touch fitting for ø8 (Inch size) With One-touch fitting for ø9/16" P, R port SY5000 (Metric size) With One-touch fitting for ø10 (Inch size) With One-touch fitting for ø3/8"
3	End block assembly R	SX3000-52-1A(-Q)	SX5000-52-1A(-Q)	For D side
4	End block assembly L	SX3000-53-1A(-Q)	SX5000-53-1A(-Q)	For U side
5	Round head combination screw Reference screw size	SY3000-23-4 (M2 x 21)	AC00077 (M3 x 26)	
6	Gasket	SX3000-57-4	SX5000-57-6	
7	DIN rail	VZ1000-11-1-□		Refer to page 425.



## DIN Rail Manifold Exploded View

### How to Increase Manifold Bases Station expansion is possible at any position.


- 1 Loosen DIN rail holding screw ③ fixing the manifold base until it begins to turn idly. (While pressing DIN rail releasing buttons ①, at two locations, separate the manifold base from the DIN rail.)
- 2 Press manifold block assembly dividing button ②, that are at the location where manifold bases are to be added, until button ② locks, and then separate the block assemblies.
- 3 Mount additional manifold block assembly on the DIN rail as shown in the figure 1.
- 4 Press the block assemblies until a click sound is produced, and tighten the DIN rail holding screw ③ to fix them to the DIN rail.  
**⚠Caution** (Tightening torque: 1.4 N·m)  
 (While lightly holding the blocks after fixing an end block on one side, tighten the other end block for for better sealing.)

#### ⚠Caution


Note 1) When there are 10 or fewer manifold block assemblies, and more are added to make a total of 11 or more, a supply/exhaust block assembly must also be added.

Note 2) When disassembly and assembly are performed, air leakage may result if connections between blocks and tightening of the end block's holding screw, is inadequate. Before supplying air, confirm that there are no gaps, etc. between blocks, and that manifold blocks are securely fastened to the DIN rail. Then supply air and confirm that there is no air leakage before operating.

Fig. (1) Block mounting procedure

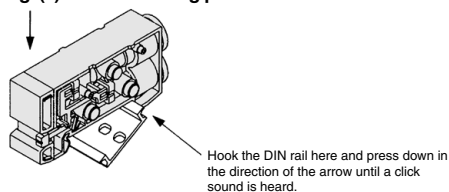

### How to Change Fitting Assembly



Type 45 manifold permits change in the A and B port sizes by changing the manifold block fitting assembly. After removing the valve, remove the clip with a screwdriver, etc. For mounting a new fitting assembly, insert it and then insert a clip until it will not come out of the manifold block.

### Fitting Assembly Part No.

#### Metric size

SY3000	One-touch fitting for $\phi 4$	VVQ1000-50A-C4
	One-touch fitting for $\phi 6$	VVQ1000-50A-C6
SY5000	One-touch fitting for $\phi 4$	VVQ1000-51A-C4
	One-touch fitting for $\phi 6$	VVQ1000-51A-C6
	One-touch fitting for $\phi 8$	VVQ1000-51A-C8

#### Inch size

SY3000	One-touch fitting for $\phi 5/32$ "	VVQ1000-50A-N3
	One-touch fitting for $\phi 1/4$ "	VVQ1000-50A-N7
SY5000	One-touch fitting for $\phi 5/32$ "	VVQ1000-51A-N3
	One-touch fitting for $\phi 1/4$ "	VVQ1000-51A-N7
	One-touch fitting for $\phi 5/16$ "	VVQ1000-51A-N9

Note 1) P and R ports cannot be changed.

Note 2) Use caution that O-rings must be free from scratches and dust. Otherwise, air leakage may result.

Note 3) Purchasing order is available in units of 10 pieces.

SJ

SY

SY

SV

SYJ

SZ

VF

VP4

S0700

VQ

VQ4

VQ5

VQC

VQC4

VQZ

SQ

VFS

VFR

VQ7

# 5 Port Solenoid Valve Base Mounted Manifold Stacking Type/DIN Rail Mounted/Connector Box



Type **45** A NA

# Series SY3000/5000

## How to Order Manifold

SS5Y **3** -45- **A** **U** -05 **D** -C6 - - -

### Series

3	SY3000
5	SY5000

### Specifications

Symbol	Specifications
<b>A</b>	With connector box (+COM spec.)
<b>NA</b>	With connector box (-COM spec.)

\* The style of attached lead wire assembly is different.

### Connector box mounting position

Symbol	Mounting position
<b>U</b>	U side
<b>D</b>	D side

### Valve stations

Symbol	Stations	Note
<b>02</b>	2 stations	Applicable up to 16 solenoid valves.
⋮	⋮	
<b>16</b>	16 stations	

### SUP/EXH block assembly mounting position

Symbol	Mounting position	Applicable stations
<b>U</b>	U side	2 to 10 stations
<b>D</b>	D side	
<b>B</b>	Both sides	2 to 16 stations
<b>M</b> *	Special specifications	

\* For special specifications, indicate separately by the manifold specification sheet.

### Option

When a longer DIN rail is desired than the specified stations, specify the station number to be required. (Max. 20 stations)

### A/B port size

Symbol	Port size	Applicable series
<b>C4</b>	One-touch fitting for ø4	SY3000
<b>C6</b>	One-touch fitting for ø6	
<b>M</b>	Mixed	SY5000
<b>C4</b>	One-touch fitting for ø4	
<b>C6</b>	One-touch fitting for ø6	
<b>C8</b>	One-touch fitting for ø8	
<b>M</b>	Mixed	

Symbol	Port size	Applicable series
<b>N3</b>	One-touch fitting for ø <sup>3</sup> / <sub>32</sub> "	SY3000
<b>N7</b>	One-touch fitting for ø <sup>7</sup> / <sub>16</sub> "	
<b>M</b>	Mixed	SY5000
<b>N3</b>	One-touch fitting for ø <sup>3</sup> / <sub>32</sub> "	
<b>N7</b>	One-touch fitting for ø <sup>7</sup> / <sub>16</sub> "	
<b>N9</b>	One-touch fitting for ø <sup>9</sup> / <sub>16</sub> "	
<b>M</b>	Mixed	

\* In the case of mixed specifications, indicate separately on the manifold specification sheet.


### CE-compliant

<b>NII</b>	—
<b>Q</b>	CE-compliant

\* Refer to pages 502 to 506 for external pilot specifications and built-in silencer.

## How to Order Manifold Assembly (Example)

### Example (SY3000, +COM, U side)

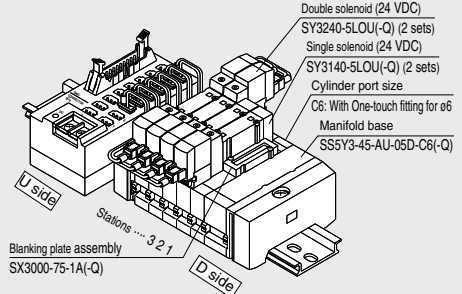

### SS5Y3-45-AU-05D-C6 (-Q) ... 1 set (Type 45, 5-station manifold base part no.)

- \* SX3000-75-1A (-Q) ..... 1 set (Blanking plate assembly part no.)
- \* SY3140-5LOU (-Q) ..... 2 sets (Single solenoid part no.)
- \* SY3240-5LOU (-Q) ..... 2 sets (Double solenoid part no.)

The asterisk denotes the symbol for assembly. Prefix it to the part nos. of the solenoid valve, etc.

The valve arrangement is numbered as the 1st. station from D side regardless of the mounting position of connector box. In ordering, specify the part nos. in the order from the 1st. station on D side. Besides, when the arrangement will be complicated, fill out the manifold specification sheet to instruct us. SS5Y3-45-AU-05D-C6(-Q) is assembled with solenoid valve and lead wire assembly when shipping. When ordering manifold only (without valves/wires/options), refer to how to order on page 422 and list the connector box (VZ3000-106-1A) and the rail stopper (TXE1-SMC) below the manifold to allow for the connector box mounting at U side. (Be sure to order DIN rail 3 station longer than number of the manifold stations.) In this case, please note that dimensions, L1 and L2 on pages 438 and 439 may vary slightly.) For other components, refer to page 440.

## How to Order Valve

SY **5** **2** **40** -5 LOU - - -

### Series

3	SY3000
5	SY5000

### Rated voltage

5	24 VDC
---	--------

### Type of actuation

1	2 position single
2	2 position double
3	3 position closed center
4	3 position exhaust center
5	3 position pressure center

### Manual override

<b>NII</b>	Non-locking push type
<b>D</b>	Push-turn locking slotted type
<b>E</b>	Push-turn locking lever type


### Made to Order

<b>NII</b>	—
<b>X90</b>	Main valve fluoro rubber (Refer to page 510.)

### CE-compliant

<b>NII</b>	—
<b>Q</b>	CE-compliant

\* When ordering single unit of the base mounted type solenoid valve, the mounting screws and gaskets for the integrated manifold are supplied with the solenoid valve, but the stacking type gaskets are not included. When the stacking type gaskets are required, order them separately.



### Manifold Specifications

Model	<b>SS5Y3-45-A-NA (Q)</b>		<b>SS5Y5-45-A-NA (Q)</b>		
Applicable valve	<b>SY3□40</b>		<b>SY5□40</b>		
Manifold type	Stacking type/DIN rail mounted				
P (SUP)/R (EXH)	Common SUP, Common EXH				
Valve stations	2 to 16 stations <sup>Note 1, 2)</sup>				
A, B port	Base				
	Location		Side		
Porting specifications	Direction		Side		
	P, R port	C8 (One-touch fitting for ø8)	C10 (One-touch fitting for ø10)		
Port size	A, B port		C4 (One-touch fitting for ø4)		
			C6 (One-touch fitting for ø6)		
Manifold base weight W (g)		2 to 10 stations: W = 26n + 207		2 to 10 stations: W = 52n + 245	
n: Stations		11 to 20 stations: W = 26n + 229		11 to 16 stations: W = 52n + 279	
Applicable flat ribbon cable connector		Flat ribbon cable connector Socket: 20 pins MIL type with strain relief conforming to MIL-C-83503			
Wiring specifications		+COM specifications (Type 45-A), -COM specifications (Type 45-NA)			

Note 1) For more than 11 stations, supply pressure to P port on both sides and exhaust from R port on both sides.


Note 2) There is a limit depending on the number of solenoids. Refer to "How to Order".

### Flow Characteristics

Model	Port size		Flow characteristics					
	1, 5, 3 (P, EA, EB)	4, 2 (A, B)	1 → 4/2 (P → A/B)			4/2 → 5/3 (A/B → EA/EB)		
			C (dm³/(s·bar))	b	Cv	C (dm³/(s·bar))	b	Cv
SS5Y3-45-□	C8	C6	0.88	0.21	0.22	0.95	0.18	0.22
SS5Y5-45-□	C10	C8	2.2	0.24	0.53	2.5	0.18	0.58

Note) The value is for manifold base with 5 stations and individually operated 2 position type.


### Manifold Wiring Diagram (Circuit diagram for the reference layout)

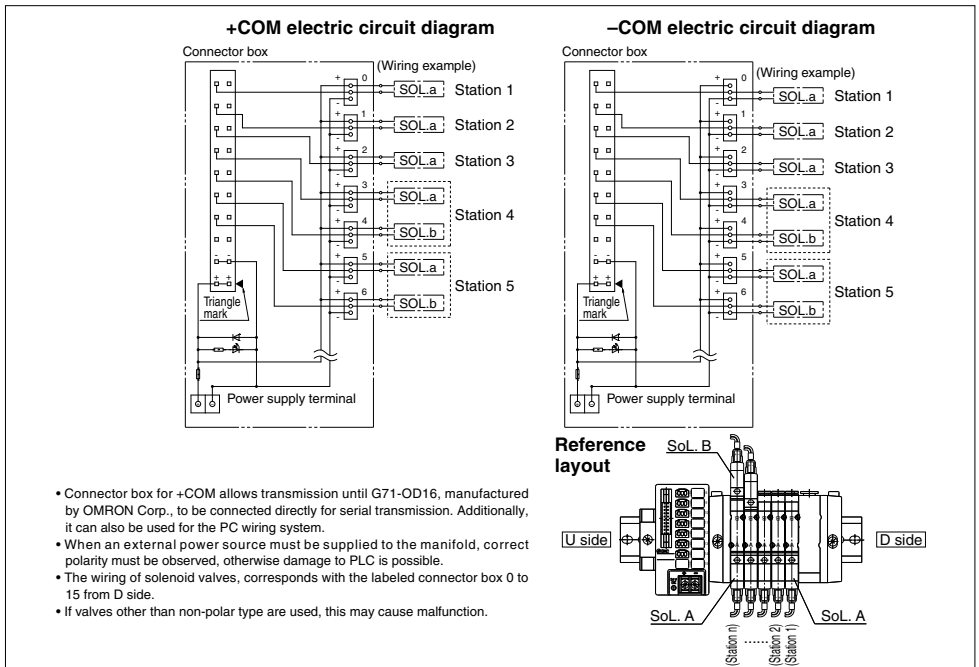

SJ  
SY  
SY  
SV  
SYJ  
SZ  
VF  
VP4  
S0700  
VQ  
VQ4  
VQ5  
VQC  
VQC4  
VQZ  
SQ  
VFS  
VFR  
VQ7

## Manifold Option

- Individual SUP spacer assembly
- Individual EXH spacer assembly

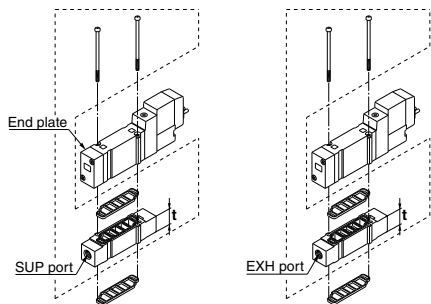

Series	Assembly part no.	Port size	t
<b>SY3000</b>	SY3000-38-2A(-Q)	M5 x 0.8	11
<b>SY5000</b>	SY5000-38-16-A(-Q)	1/8"	15


Note) The SUP port may be either on the lead wire side or on the end plate side. (An assembly is shipped under the condition shown in the figure.)

Series	Assembly part no.	Port size	t
<b>SY3000</b>	SY3000-39-2A(-Q)	M5 x 0.8	11
<b>SY5000</b>	SY5000-39-16-A(-Q)	1/8"	15

Note) The EXH port may be either on the lead wire side or on the end plate side. (An assembly is shipped under the condition shown in the figure.)

### Cable assembly

#### AXT100-FC20-1<sub>3</sub>

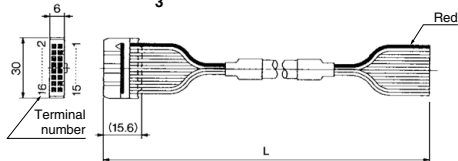

### Connector Assembly for Flat Ribbon Cables

Cable length (L)	Assembly part no.	Note
1.5 m	AXT100-FC20-1	Cable 20 core x 22 AWG
3 m	AXT100-FC20-2	
5 m	AXT100-FC20-3	

\* For other commercial connectors, use a 20 pins with strain relief conforming to MIL-C-83503.

### Connector manufacturers' example

- Sumitomo 3M Limited
- Fujitsu Limited
- Japan Aviation Electronics Industry, Ltd.
- J.S.T. Mfg. Co., Ltd.

### SUP blocking disk

By installing a SUP blocking disk in the pressure supply passage of a manifold valve, it is possible to supply two or more different high and low pressures to one manifold.



Series	Part no.
<b>SY3000</b>	SX3000-77-1A
<b>SY5000</b>	SX5000-77-1A

### EXH blocking disk

By installing an EXH blocking disk in the exhaust passage of a manifold valve, it is possible to divide the valve's exhaust so that it does not affect another valve. (Two blocking disks are needed to divide both exhausts.)



Series	Part no.
<b>SY3000</b>	SX3000-77-1A
<b>SY5000</b>	SX5000-77-1A

### Label for block disk


The labels shown below are used on manifold stations containing SUP/EXH blocking disk(s) to show their location. (3 pcs. each)

#### VZ3000-123-1A

Label for SUP block disk

Label for EXH block disk


Label for SUP/EXH block disk



Note) When a block disk is concurrently ordered by specifying on the manifold specification sheet, etc., a label will be stuck on the position where block disk is mounted.

### Silencer with One-touch fitting


The silencer plugs directly into the One-touch fittings of the manifold.



Series	Model	Effective area mm <sup>2</sup>	A	B	C
For <b>SY3000</b> (ø8)	AN15-C08	20	ø13	20	45
For <b>SY5000</b> (ø10)	AN20-C10	30	ø16.5	30.5	57.5

### Plug (white)

These are inserted in unused cylinder ports and SUP, EXH ports. Purchasing order is available in units of 10 pieces.



### Dimensions

Applicable fittings size <math>\phi D</math>	Model	A	L	D
4	<b>KQ2P-04</b>	16	32	6
6	<b>KQ2P-06</b>	18	35	8
8	<b>KQ2P-08</b>	20.5	39	10
10	<b>KQ2P-10</b>	22	43	12
1/8"	<b>KQ2P-01</b>	16	31.5	5
5/32"	<b>KQ2P-03</b>	16	32	6
1/4"	<b>KQ2P-07</b>	18	35	8.5
5/16"	<b>KQ2P-09</b>	20.5	39	10

## Warning

When mounting a valve or spacer on the manifold base or sub-plate, etc., those mounting directions are determined. If mounted in the wrong direction, the equipment to be connected may cause malfunction. Refer to external dimensions, and then mount it.

## Manifold Option

• How to Order Interface regulator (SY3000, 5000 only)

### Series SY3000

**ARBY3000 - 05 - P - 2**

• **Regulating port**

P	P port
A1	A port (P controlled type, A port regulation)
B1	B port (P controlled type, B port regulation)

• **Pressure gauge connection port**

05	Pressure gauge (G15-10-01) [for odd number station]
06	Pressure gauge (G15-10-01) [for even number station]
M1	Plug (M-5P)

\* In the case of Series ARBY3000 with a pressure gauge when mounting on the manifold, use caution that the part numbers are different between the odd no. stations and the even no. stations to avoid gauges from interfering with each others.

### Series SY5000

**ARBY5000 - 00 - P - 2**

• **Regulating port**

P	P port
A1	A port (P controlled type, A port regulation)
B1	B port (P controlled type, B port regulation)

• **Pressure gauge connection port**

00	Pressure gauge (G15-10-01)
M1	Plug (M-5P)


**ARBY3000-05-□-2**  
(For odd number stations)

**ARBY3000-06-□-2**  
(For even number stations)

**ARBY3000-M1-□-2**

**ARBY5000-00-□-2**

**ARBY5000-M1-□-2**

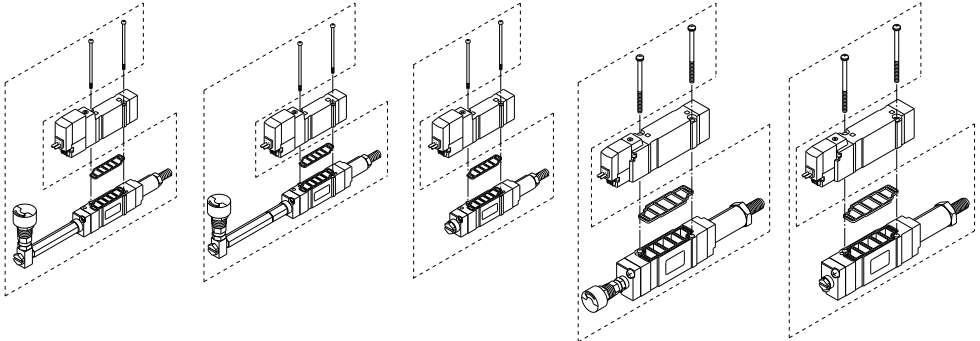

Note) ARBY is not CE-compliant.

## Accessory

Series	Round head combination screw Reference screw size	Gasket
<b>ARBY3000</b>	SY3000-23-10 (M2 x 36)	SX3000-57-4
<b>ARBY5000</b>	AC00283 (M3 x 48.5)	SX5000-57-6

## **⚠ Caution**


**Mounting screw tightening torques**

M2: 0.16 N·m  
M3: 0.8 N·m


- SJ
- SY
- SY**
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

**Dimensions: Series SY3000**

**SS5Y3-45-AU- Stations D- C4, N3  
C6, N7**

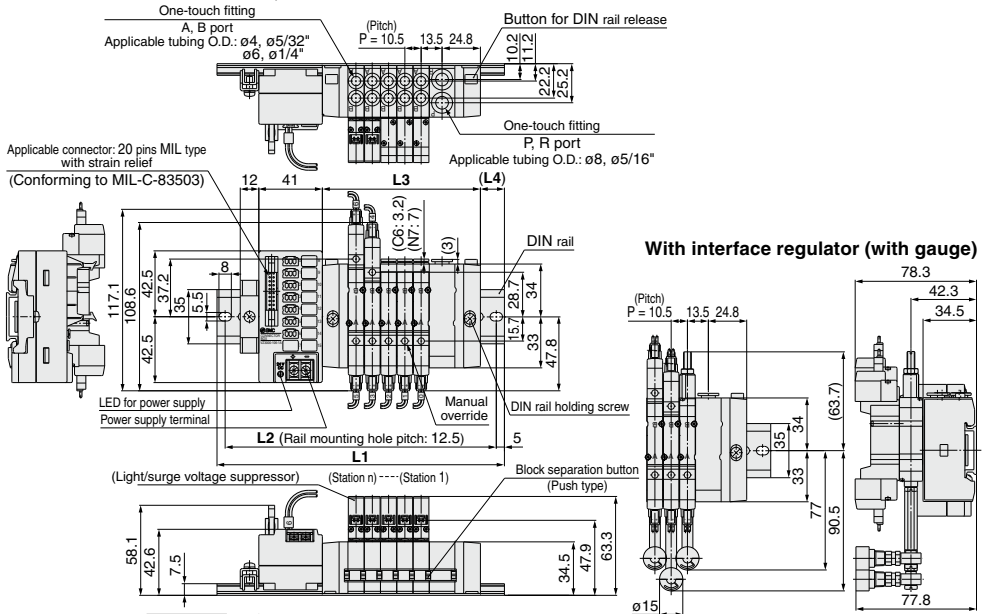

**SS5Y3-45-AD- Stations U- C4, N3  
C6, N7**

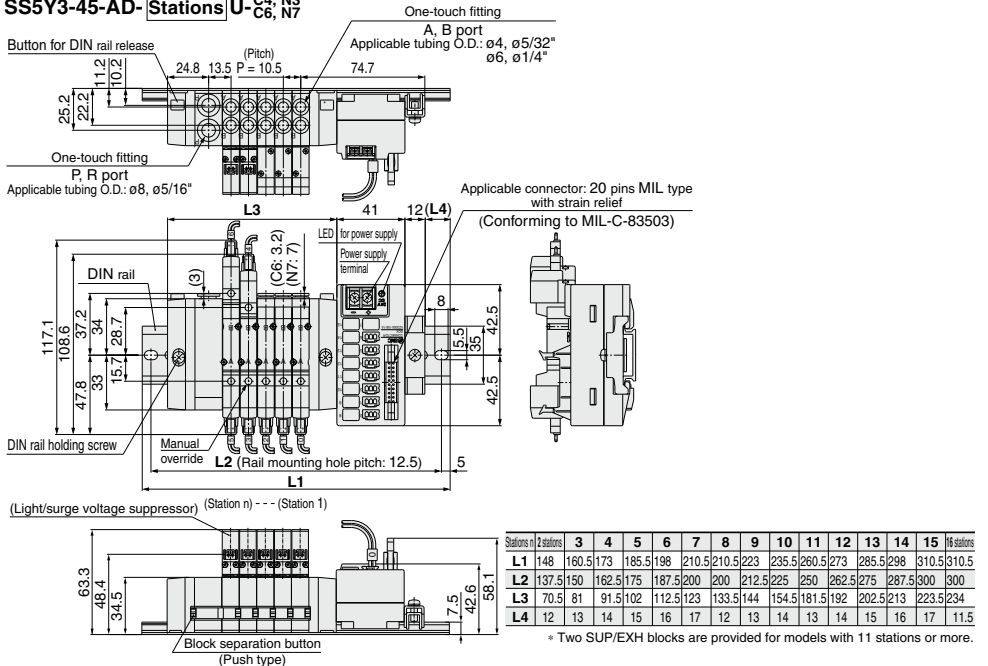

Stations n	2 stations	3	4	5	6	7	8	9	10	11	12	13	14	15	16 stations
L1	148	160.5	173	185.5	198	210.5	210.5	223	235.5	260.5	273	285.5	298	310.5	310.5
L2	137.5	150	162.5	175	187.5	200	200	212.5	225	250	262.5	275	287.5	300	300
L3	70.5	81	91.5	102	112.5	123	133.5	144	154.5	181.5	192	202.5	213	223.5	234
L4	12	13	14	15	16	17	12	13	14	13	14	15	16	17	11.5


\* Two SUP/EXH blocks are provided for models with 11 stations or more.

**Dimensions: Series SY5000**


**SS5Y5-45-AU- Stations D-**

C4, N3  
C6, N7  
C8, N9


One-touch fitting (A, B port)  
Applicable tubing O.D.:  $\phi 4, \phi 5/32''$   
 $\phi 6, \phi 1/4''$   
 $\phi 8, \phi 5/16''$

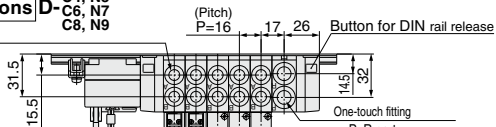


Applicable connector: 20 pins MIL type  
With strain relief  
(Conforming to MIL-C-83503)

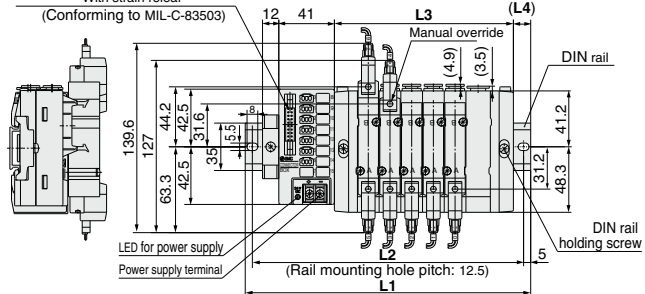

**With interface regulator (with gauge)**




(Light/surge voltage suppressor) (Station n) - - - - (Station 1)

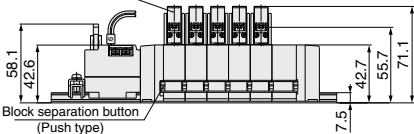


**SS5Y5-45-AD- Stations U-**

C4, N3  
C6, N7  
C8, N9

One-touch fitting (A, B port)  
P, R port  
Applicable tubing O.D.:  $\phi 4, \phi 5/32''$   
 $\phi 6, \phi 1/4''$   
 $\phi 8, \phi 5/16''$

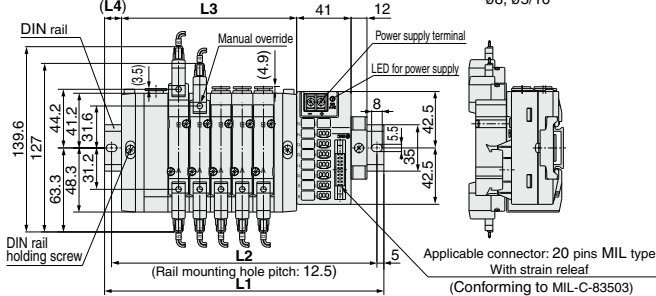

(Light/surge voltage suppressor) (Station n) - - - - (Station 1)

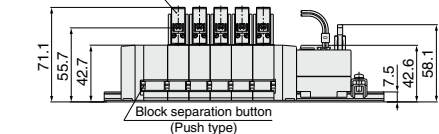


Stations n	2 stations	3	4	5	6	7	8	9	10	11	12	13	14	15	16 stations
L1	160.5	185.5	198	210.5	235.5	248	260.5	273	298	323	348	360.5	373	398	410.5
L2	150	175	187.5	200	225	237.5	250	262.5	287.5	312.5	337.5	350	362.5	387.5	400
L3	84	100	116	132	148	164	180	196	212	246	262	278	294	310	326
L4	11.5	16	14.5	12.5	17	15.5	13.5	12	16.5	12	16.5	14.5	13	17.5	15.5

\* Two SUP/EXH blocks are provided for models with 11 stations or more.

- SJ
- SY
- SY
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

### DIN Rail Manifold Exploded View

Type 45<sup>A</sup>-NA

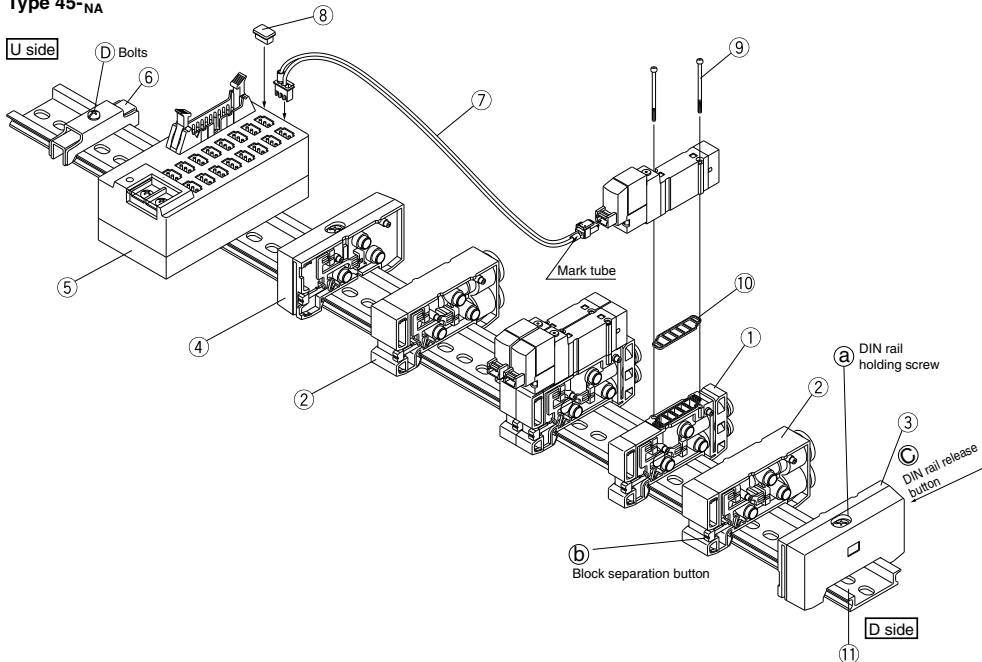

### Replacement Parts


No.	Description	Part no.		Note
		SY3000	SY5000	
1	Manifold block assembly	SX3000-50-1A-□□(-Q)	SX5000-50-1A-□□(-Q)	*SY3000 (Metric size) C4: With One-touch fitting for ø4 N3: With One-touch fitting for ø5/32" C6: With One-touch fitting for ø6 N7: With One-touch fitting for ø1/4" *SY5000 (Metric size) C4: With One-touch fitting for ø4 N3: With One-touch fitting for ø5/32" C6: With One-touch fitting for ø6 N7: With One-touch fitting for ø1/4" C8: With One-touch fitting for ø8 N9: With One-touch fitting for ø5/16" (Gasket 10 is supplied as an accessory.)
2	SUP/EXH block assembly	(Metric size) SX3000-51-1A (Inch size) SX3000-51-15A	(Metric size) SX3000-51-1A (Inch size) SX5000-51-15A	P, R port SY3000 (Metric size) With One-touch fitting for ø8 (Inch size) With One-touch fitting for ø5/16" P, R port SY5000 (Metric size) With One-touch fitting for ø10 (Inch size) With One-touch fitting for ø3/8"
3	End block assembly R	SX3000-52-1A(-Q)	SX5000-52-1A(-Q)	For D side
4	End block assembly L	SX3000-53-1A(-Q)	SX5000-53-1A(-Q)	For U side
5	Connector box	VZ3000-106-1A		For 24 VDC only
6	Rail stopper	TXE1-SMC		Made by Kasuga Electric Works
7	Connector assembly	SY3000-43-1A-□	SY3000-43-2A-□	+COM Type D, 2 to 8 stations Type U, 9 to 16 stations SY3000-43-2A-□ SY3000-43-3A-□ +COM Type D, 9 to 16 stations Type U, 2 to 8 stations SY3000-43-1NA-□ SY3000-43-2NA-□ -COM Type D, 2 to 8 stations Type U, 9 to 16 stations SY3000-43-2NA-□ SY3000-43-3NA-□ -COM Type D, 9 to 16 stations Type U, 2 to 8 stations
8	Dust cap	VZ3000-63-2		
9	Round head combination screw Reference screw size	SY3000-23-4 (M2 x 21)	AC00077 (M3 x 26)	
10	Gasket	SX3000-57-4	SX5000-57-6	
11	DIN rail	VZ1000-11-1-□		Refer to page 425.



**How to Increase Manifold Bases** Station expansion is possible at any position.

- 1 Loosen DIN rail holding screw (A) fixing the manifold base until it begins to turn idly. (While pressing DIN rail releasing buttons (C), at two locations, separate the manifold base from the DIN rail.)
- 2 Press manifold block assembly dividing button (B), that are at the location where manifold bases are to be added, until button (D) locks, and then separate the block assemblies.
- 3 Mount additional manifold block assembly on the DIN rail as shown in the figure 1.
- 4 Press the block assemblies until a click sound is produced, and tighten the DIN rail holding screw (A) to fix them to the DIN rail.  
**⚠Caution** (Tightening torque: 1.4 N·m)  
 (While lightly holding the blocks after fixing an end block on one side, tighten the other end block for for better sealing.)
- 5 Untighten the rail stopper bolt (E) to demount the connector box from the DIN rail, and when remounting it, tighten the bolt while pressing it against the rail.

**Fig. (1) Block mounting procedure**



**⚠Caution**

- Note 1) When there are 10 or fewer manifold block assemblies, and more are added to make a total of 11 or more, a supply/exhaust block assembly must also be added.
- Note 2) When disassembly and assembly are performed, air leakage may result if connections between blocks and tightening of the end block's holding screw, is inadequate. Before supplying air, confirm that there are no gaps, etc. between blocks, and that manifold blocks are securely fastened to the DIN rail. Then supply air and confirm that there is no air leakage before operating.
- Note 3) One connector assembly is necessary for one solenoid.  
 When a number is necessary for the connector assembly mark tube, suffix the number to the part no. (0 to 15 are provided as mark tube numbers.)  
 Ex) +COM spec.: D type for 2 to 8 stations: No. 10  
**SY3000-43-1A-10**

**How to Change Fitting Assembly**

Type 45 manifold permits change in the A and B port sizes by changing the manifold block fitting assembly.  
 After removing the valve, remove the clip with a screwdriver, etc. For mounting a new fitting assembly, insert it and then insert a clip until it will not come out of the manifold block.


**Fitting Assembly Part No.**

Metric size		
SY3000	One-touch fitting for ø4	VVQ1000-50A-C4
	One-touch fitting for ø6	VVQ1000-50A-C6
SY5000	One-touch fitting for ø4	VVQ1000-51A-C4
	One-touch fitting for ø6	VVQ1000-51A-C6
	One-touch fitting for ø8	VVQ1000-51A-C8

Inch size		
SY3000	One-touch fitting for ø5/32"	VVQ1000-50A-N3
	One-touch fitting for ø 1/4"	VVQ1000-50A-N7
SY5000	One-touch fitting for ø5/32"	VVQ1000-51A-N3
	One-touch fitting for ø 1/4"	VVQ1000-51A-N7
	One-touch fitting for ø5/16"	VVQ1000-51A-N9

- Note 1) P and R ports cannot be changed.  
 Note 2) Use caution that O-rings must be free from scratches and dust.  
 Otherwise, air leakage may result.  
 Note 3) Purchasing order is available in units of 10 pieces.

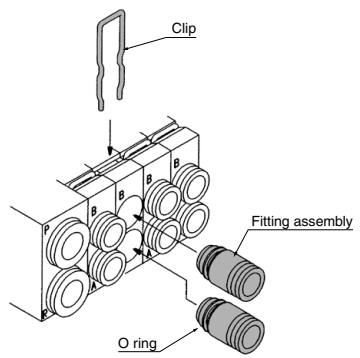

- SJ
- SY
- SY**
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

# EX510 Gateway-type Serial Transmission System Base Mounted Manifold/Stacking Type [Option]

## Series SY3000/5000



Type **45S6A**

### How to Order Manifold

**SS5Y 3 - 45S6A [ ] U - 02 U [ ] - C4 - [ ] - [ ]**

**Manifold series**

3	SY3000
5	SY5000

**SI unit**

Nil	NPN output (+COM.)
N	PNP output (-COM.)

**CE-compliant**

Nil	—
Q	CE-compliant

**SI unit mounting position**

U	U side
D	D side

**Valve stations**

Symbol	Stations	Note
02	2 stations	Double wiring <sup>Note 1)</sup>
:	:	
08	8 stations	Specified layout <sup>Note 2)</sup> (Compatible with 16 solenoid valves)
02	2 stations	
:	:	
16	16 stations	

• The number of the blanking plate assembly is also included.  
Note 1) Double wiring: Use of a single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.

Note 2) Specified layout: Indicate wiring specifications on the manifold specification sheet. (Note that double and 3 position valves cannot be used where single solenoid wiring has been specified.)

**Option**

When a DIN rail that is longer than the specified stations is desired, specify the required station number. (Max. 20 stations)

**A, B port size**

**One-touch fitting (Metric size)**

C4	One-touch fitting for ø4	SY3000
C6	One-touch fitting for ø6	
M	Mixed	SY5000
C4	One-touch fitting for ø4	
C6	One-touch fitting for ø6	
C8	One-touch fitting for ø8	
M	Mixed	

**One-touch fitting (Inch size)**

N3	One-touch fitting for ø5/32"	SY3000
N7	One-touch fitting for ø1/4"	
M	Mixed	SY5000
N3	One-touch fitting for ø5/32"	
N7	One-touch fitting for ø1/4"	
N9	One-touch fitting for ø5/16"	
M	Mixed	

• For the mixed specification, indicate separately on a manifold specification sheet.

**Pilot specifications**

Nil	Internal pilot
S	Internal pilot/built-in silencer
R	External pilot
RS	External pilot/built-in silencer


**SUP/EXH block assembly mounting position**

U	U side	2 to 10 stations
D	D side	
B	Both sides	2 to 16 stations
M	Special specifications*	

\*For the special specifications, indicate separately on a manifold specification sheet.

### How to Order Manifold Assembly (Order Example)

**Example**

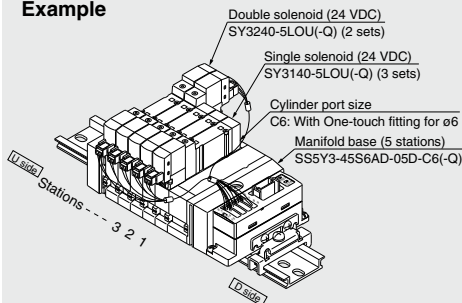

SSSY3-45S6AD-05D-C6 (-Q) 1 set (45S6A type 5-station manifold part no.)  
 SY3140-5LOU (-Q) 3 sets (Single solenoid part no.)  
 SY3240-5LOU (-Q) 2 sets (Double solenoid part no.)

—The asterisk denotes the symbol for assembly. Prefix to the part no. of the solenoid valve, etc.


Add the valve and option part number under the manifold base part number.  
 When entry of part numbers becomes complicated, indicate by the manifold specification sheet. For a manifold for an EX510, the length of the lead wire for a connector assembly depends on the number of stations. Therefore, the manifold assembly is shipped with the valves (including blanking plates) and connector assembly mounted on it, as the standard specification. Be sure to specify the part nos. of the solenoid valves to be mounted.

**SI unit part no.**

Symbol	SI unit specifications	SI unit part no.	Page
Nil	NPN output (+COM.)	EX510-S001	P.2143
N	PNP output (-COM.)	EX510-S101	

Refer to page 2124 and the Operation Manual for the details of EX510 Gateway-type Serial Transmission System. Please download the Operation Manual via our website, <http://www.smcworld.com>

**How to Order Valves**

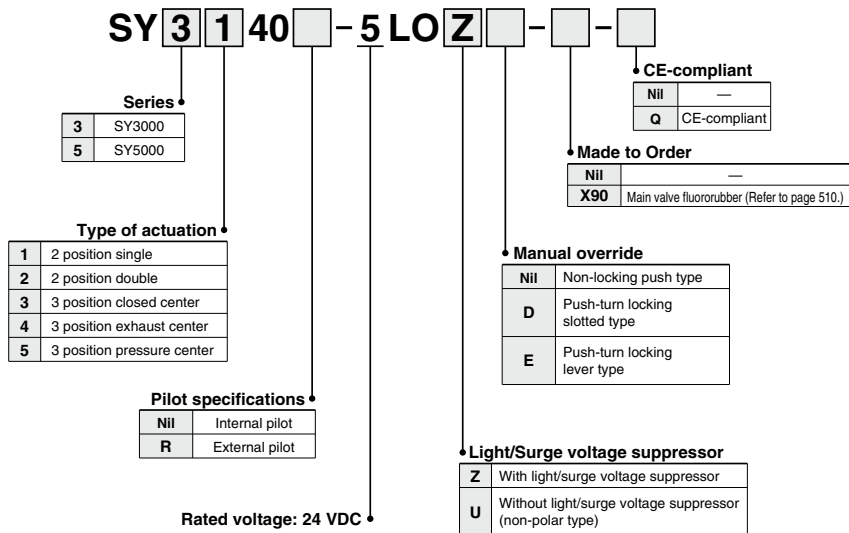





\* When ordering single unit of the base mounted type solenoid valve, the mounting screws and gaskets for the integrated manifold are supplied with the solenoid valve, but the stacking type gaskets are not included. When the stacking type gaskets are required, order them separately.

SJ
SY
SY
SV
SYJ
SZ
VF
VP4
S0700
VQ
VQ4
VQ5
VQC
VQC4
VQZ
SQ
VFS
VFR
VQ7

# Type **45S6A** Series **SY3000/5000**


## Dimensions

SY3000: SS5Y3-45S6A □ D- Stations U-<sup>C4, N3</sup><sub>C6, N7</sub>

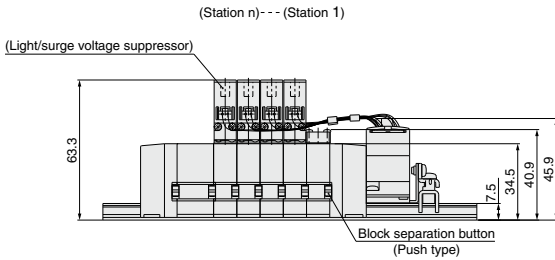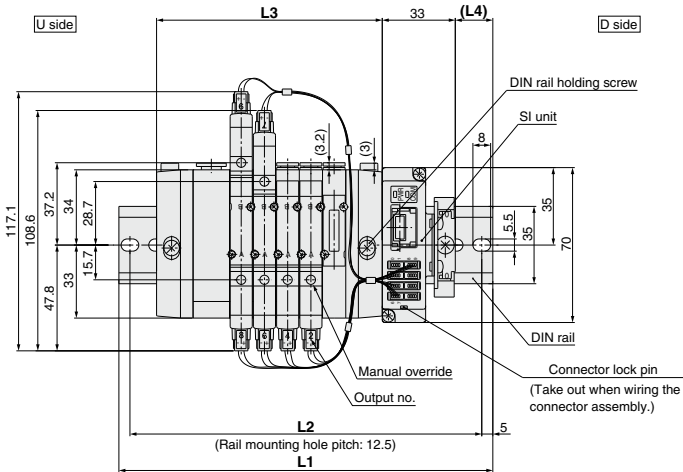
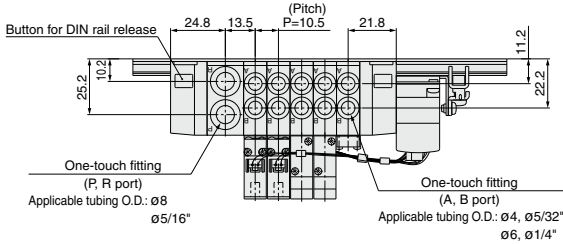


Stations n	2 stations	3	4	5	6	7	8	9	10 stations
L1	135.5	148	148	160.5	173	185.5	198	210.5	223
L2	125	137.5	137.5	150	162.5	175	187.5	200	212.5
L3	70.5	81	91.5	102	112.5	123	133.5	144	154.5
L4	16	17	12	13	14	15	16	17	18


**SY3000: SS5Y3-45S6A** U-Stations B-C4, N3  
C6, N7

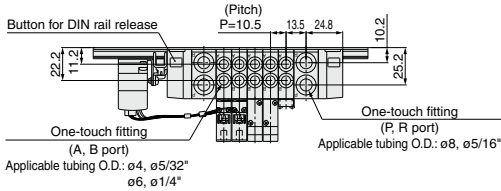

**With interface regulator (with gauge)**

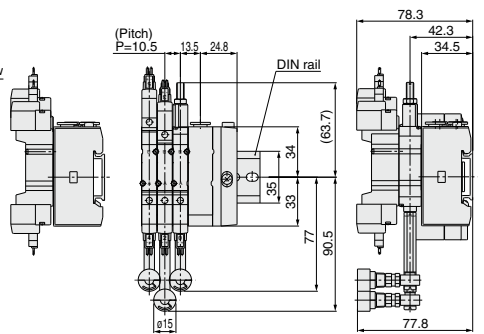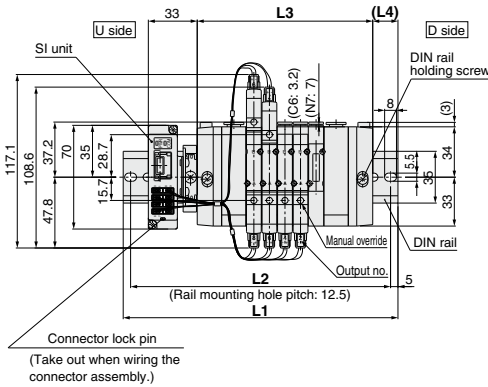

(Station n) --- (Station 1)

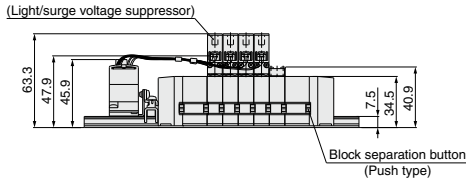





Stations n	2 stations	3	4	5	6	7	8	9	10	11	12	13	14	15	16 stations
<b>L1</b>	148	160.5	173	185.5	185.5	198	210.5	223	235.5	248	260.5	260.5	273	285.5	298
<b>L2</b>	137.5	150	162.5	175	175	187.5	200	212.5	225	237.5	250	250	262.5	275	287.5
<b>L3</b>	87	97.5	108	118.5	129	139.5	150	160.5	171	181.5	192	202.5	213	223.5	234
<b>L4</b>	14	15	16	17	12	13	14	15	16	17	18	12.5	13.5	14.5	15.5

- SJ
- SY
- SY**
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

# Type **45S6A** Series **SY3000/5000**



## Dimensions

**SY5000: SS5Y5-45S6A** □ **D-Stations** **U-** C4, N3  
C6, N7  
C8, N9

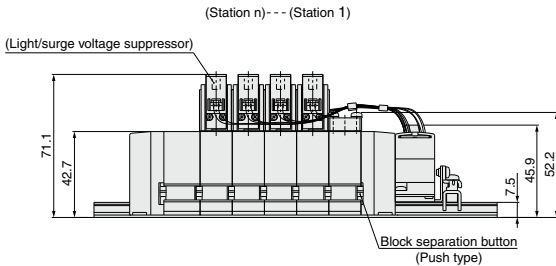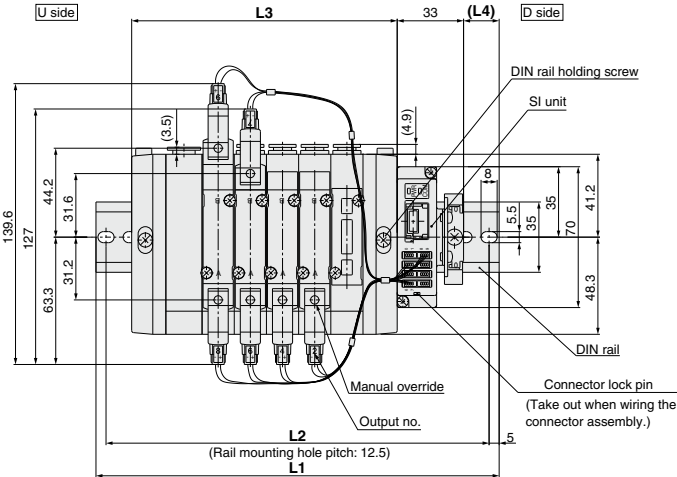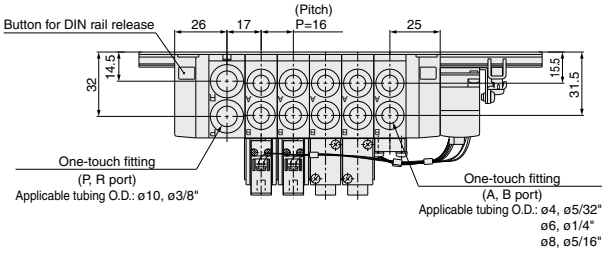


Stations n	2 stations	3	4	5	6	7	8	9	10 stations
<b>L1</b>	148	160.5	173	198	210.5	223	248	260.5	273
<b>L2</b>	137.5	150	162.5	187.5	200	212.5	237.5	250	262.5
<b>L3</b>	84	100	116	132	148	164	180	196	212
<b>L4</b>	15.5	14	12	16.5	15	13	17.5	16	14


**SY5000: SS5Y5-45S6A**  **U- Stations B-** C4, N3  
C6, N7  
C8, N9

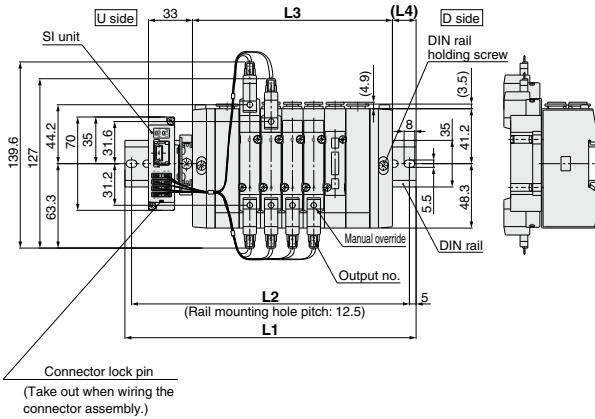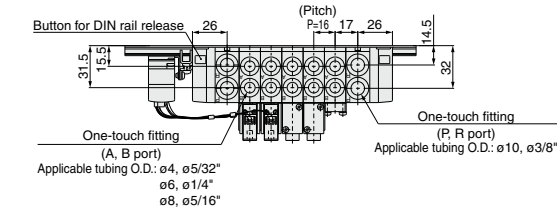

**With interface regulator (with gauge)**



(Station n) --- (Station 1)

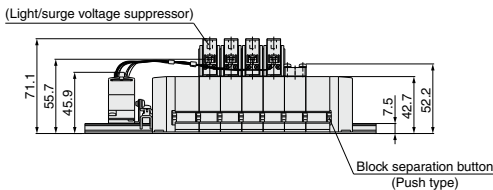

Stations n	2 stations	3	4	5	6	7	8	9	10	11	12	13	14	15	16 stations
<b>L1</b>	160.5	185.5	198	210.5	223	248	260.5	273	298	310.5	323	335.5	360.5	373	385.5
<b>L2</b>	150	175	187.5	200	212.5	237.5	250	262.5	287.5	300	312.5	325	350	362.5	375
<b>L3</b>	102	118	134	150	166	182	198	214	230	246	262	278	294	310	326
<b>L4</b>	13	17.5	15.5	14	12	16.5	15	13	17.5	16	14	12.5	17	15	13.5



- SJ**
- SY**
- SY**
- SV**
- SYJ**
- SZ**
- VF**
- VP4**
- S0700**
- VQ**
- VQ4**
- VQ5**
- VQC**
- VQC4**
- VQZ**
- SQ**
- VFS**
- VFR**
- VQ7**

## Manifold Option

### ■ Connector assembly

For single solenoid (SY3000-37-81A-□-□)

For double solenoid (SY3000-37-81A-□-□)



Connector assembly order no. (Can be used for the manifold without a specified layout (8 stations or less))  
Integrated type

Model	Part no.	Connector mounting position	
SS5Y3-45S6A	SY3000-37-81A-3-N	Single	: Starting from the SI unit side From unit 1 to unit 4
	SY3000-37-81A-3-3	Double/3 position	: Starting from the SI unit side From unit 1 to unit 4
	SY3000-37-81A-4-N	Single	: Starting from the SI unit side From unit 5 to unit 8
	SY3000-37-81A-4-4	Double/3 position	: Starting from the SI unit side From unit 5 to unit 8
SS5Y5-45S6A	SY3000-37-81A-4-N	Single	: Starting from the SI unit side From unit 1 to unit 4
	SY3000-37-81A-4-4	Double/3 position	: Starting from the SI unit side From unit 1 to unit 4
	SY3000-37-81A-6-N	Single	: Starting from the SI unit side From unit 5 to unit 8
	SY3000-37-81A-6-6	Double/3 position	: Starting from the SI unit side From unit 5 to unit 8
SS5Y9- <sup>23</sup> SA	SY3000-37-81A-4-N	Single	: For 1 to 4 stations
	SY3000-37-81A-4-9	Double/3 position	: For 1 to 4 stations
	SY3000-37-81A-6-N	Single	: For 5 to 8 stations
	SY3000-37-81A-6-11	Double/3 position	: For 5 to 8 stations


Note) The above is for the station addition or maintenance. When ordering a connector assembly separately, a number would not be printed on the connector.

### ■ Connector assembly

SY3000-37-80A-□

### ■ Housing (8 pcs./set)

SY3000-44-3A



Connector assembly order no. (Can be used for the manifold with a specified layout)

Model	Part no.	Connector mounting position
SS5Y3-45S6A	SY3000-37-80A-3	Starting from the SI unit side: From unit 1 to unit 4
	SY3000-37-80A-4	Starting from the SI unit side: From unit 5 to unit 8
	SY3000-37-80A-6	Starting from the SI unit side: From unit 9 to unit 12
	SY3000-37-80A-7	Starting from the SI unit side: From unit 13 to unit 16
SS5Y5-45S6A	SY3000-37-80A-4	Starting from the SI unit side: From unit 1 to unit 4
	SY3000-37-80A-6	Starting from the SI unit side: From unit 5 to unit 8
	SY3000-37-80A-8	Starting from the SI unit side: From unit 9 to unit 12
	SY3000-37-80A-10	Starting from the SI unit side: From unit 13 to unit 16

Note 1) The above is for station addition or maintenance. When ordering a connector assembly separately, a number will not be printed on the connector.

Note 2) After inserting the connector assembly into the housing, be sure to confirm that the lead wire will not come off by lightly pulling the wire.


Furthermore, do not reuse the lead wire after it has been inserted and removed.

Note 3) Wiring is set longer than the actual wiring distance.



**Stacking Type/DIN Rail Mounted/Individual Wiring: Common Manifold Option**

■ **Blanking plate assembly**



(The shape varies depending on the series.)

Series	Assembly part no.
<b>SY3000</b>	SX3000-75-1A(-Q)
<b>SY5000</b>	SX5000-76-5A(-Q)

\* **Thread type**

Nil	Rc
F	G
N	NPT
T	NPTF

**Caution**

**Mounting screw tightening torques**

M2: 0.16 N·m  
 M3: 0.8 N·m  
 M4: 1.4 N·m

SJ
SY
<b>SY</b>
SV
SYJ
SZ
VF
VP4
S0700
VQ
VQ4
VQ5
VQC
VQC4
VQZ
SQ
VFS
VFR
VQ7

# 5 Port Solenoid Valve Base Mounted Manifold Stacking Type/DIN Rail Mounted/Plug-in



Type **45**

# Series SY3000/5000

## How to Order Manifold

### Type 45F (D-sub connector, 25 pins)

SS5Y **3** - 45 **F** **D** - 05 **U** - **C4** - - - -

#### Series

3	SY3000
5	SY5000

#### Common specifications

NII	Positive common
N	Negative common

#### Connector mounting position

Symbol	Mounting position
U	U side
D	D side

#### Voltage

NII	24 VDC
12V	12 VDC

#### Valve stations

Symbol	Stations	Note
02	2 stations	Single wiring spec. (Applicable up to 20 solenoid valves.)
:	:	
20	20 stations	

\* This also includes the number of blanking plate assemblies.

\* Two stations are necessary for the double, 3 position (Dual body type).

#### SUP/EXH block assembly mounting position

Symbol	Mounting position	Stations
U	U side	2 to 10 stations
D	D side	2 to 10 stations
B	(Both sides)	2 to 20 stations
M	Special specifications	

\* For special specifications, indicate separately by the manifold specification sheet.

#### A, B port size

##### One-touch fitting (Metric size)

Symbol	Port size	Applicable series
C4	One-touch fitting for ø4	SY3000
C6	One-touch fitting for ø6	
M	Mixed	
C4	One-touch fitting for ø4	SY5000
C6	One-touch fitting for ø6	
C8	One-touch fitting for ø8	
M	Mixed	

##### One-touch fitting (Inch size)

Symbol	Port size	Applicable series
N3	One-touch fitting for ø $\frac{9}{32}$ "	SY3000
N7	One-touch fitting for ø $\frac{1}{4}$ "	
M	Mixed	
N3	One-touch fitting for ø $\frac{9}{32}$ "	SY5000
N7	One-touch fitting for ø $\frac{1}{4}$ "	
N9	One-touch fitting for ø $\frac{9}{16}$ "	
M	Mixed	

\* In the case of mixed specifications (M), indicate separately on the manifold specification sheet.

#### Option

When a longer DIN rail is desired than the specified stations, specify the station number to be required. (20 stations at maximum)


#### CE-compliant

NII	—
Q	CE-compliant

\* Refer to pages 502 to 506 for external pilot specifications and built-in silencer.

## How to Order Manifold Assembly (Example)

### Example (Type 45F/D-sub connector (25 pin))

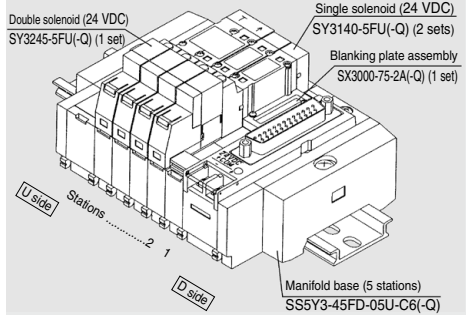

SS5Y3-45FD-05U-C6 (-Q) ... 1 set (Type 45F, D-sub connector 5-station manifold base part no.)  
 \* SX3000-75-2A (-Q) ..... 1 set (Blanking plate assembly part no.)  
 \* SY3140-5FU (-Q) ..... 2 sets (Single solenoid part no.)  
 \* SY3245-5FU (-Q) ..... 1 set (Double solenoid part no.)

→ The asterisk denotes the symbol for assembly. Prefix it to the part nos. of the solenoid valve, etc.

\* The valve arrangement is numbered as the 1st. station from D side regardless of the mounting position of connector box.

\* When ordering double solenoid valves/3 position (Dual body type), please keep in mind that they require two manifold stations.

## How to Order Valve

(Type 45F, 45P□, 45T, 45T1)

2 position single **SY 3 1 40 - 5 FU** - - - -  
 Double, 3 position **SY 3 2 45 - 5 FU** - - - -

#### Series

3	SY3000
5	SY5000

#### Type of actuation

2	2 position double
3	3 position closed center
4	3 position exhaust center
5	3 position pressure center

#### Rated voltage

5	24 VDC
6	12 VDC

#### Dual body type (Double, 3 position)

#### Manual override

NII	Non-locking push type
D	Push-turn locking slotted type
E	Push-turn locking lever type

#### Made to Order

NII	—	CE-compliant
X90	Main valve fluororubber (Refer to page 510.)	Q CE-compliant

\* When ordering plug-in type solenoid valve as a single unit, gaskets are not included. Order them separately, if necessary. (Refer to page 478 for details.)



## How to Order Manifold

### Type 45P (Flat ribbon cable)

**SS5Y 3 - 45 P D - 05 U - C4 - [ ] - [ ] - [ ]**

Series

3	SY3000
5	SY5000

Common specifications

Nil	Positive common
N	Negative common

Connector poles

Symbol	Poles	Stations
Nil	26	2 to 20 stations
G	20	2 to 16 stations
H	10	2 to 8 stations

Connector mounting position

Symbol	Mounting position
U	U side
D	D side

Voltage

Nil	24 VDC
12V	12 VDC

A, B port size

One-touch fitting (Metric size)

Symbol	Port size	Applicable series
C4	One-touch fitting for ø4	SY3000
C6	One-touch fitting for ø6	
M	Mixed	
C4	One-touch fitting for ø4	SY5000
C6	One-touch fitting for ø6	
C8	One-touch fitting for ø8	
M	Mixed	

One-touch fitting (Inch size)

Symbol	Port size	Applicable series
N3	One-touch fitting for ø5/32	SY3000
N7	One-touch fitting for ø1/4	
M	Mixed	
N3	One-touch fitting for ø5/32	SY5000
N7	One-touch fitting for ø1/4	
N9	One-touch fitting for ø9/16	
M	Mixed	

\* In the case of mixed specifications, indicate separately on the manifold specification sheet.

SUP/EXH block assembly mounting position

Symbol	Mounting position	Stations
U	U side	2 to 10 stations
D	D side	2 to 10 stations
B	Both sides	2 to 20 stations
M	Special specifications	

When a longer DIN rail is desired than the specified stations, specify the station number to be required. (20 stations at maximum)

Option

CE-compliant

Nil	—
Q	CE-compliant

Valve stations (Blanking plate assemblies are included.)

\* For special specifications, indicate separately by the manifold specification sheet.

26 pins (P) connector

Symbol	Stations	Note
02	2 stations	Single wiring spec. (Applicable up to 20 solenoid valves.)
:	:	
20	20 stations	

20 pins (PG) connector

Symbol	Stations	Note
02	2 stations	Single wiring spec. (Applicable up to 16 solenoid valves.)
:	:	
16	16 stations	

10 pins (PH) connector

Symbol	Stations	Note
02	2 stations	Single wiring spec. (Applicable up to 8 solenoid valves)
:	:	
08	8 stations	

\* Two stations are necessary for the double, 3 position (Dual body type).

### Type 45T (9 pins terminal block)

**SS5Y 3 - 45T D - 05 U - C4 - [ ] - [ ] - [ ]**

Series

3	SY3000
5	SY5000

Terminal block mounting position

Symbol	Mounting position
U	U side
D	D side

Option

When a longer DIN rail is desired than the specified stations, specify the station number to be required. (20 stations at maximum)

CE-compliant

Nil	—
Q	CE-compliant

Valve stations

Symbol	Stations	Note
02	2 stations	Single wiring spec. (Applicable up to 8 solenoid valves)
:	:	
08	8 stations	

\* This also includes the number of blanking plate assemblies.

\* Two stations are necessary for the double, 3 position (Dual body type).

SUP/EXH block assembly mounting position

Symbol	Mounting position	Stations
U	U side	2 to 8 stations
D	D side	2 to 8 stations
B	Both sides	2 to 8 stations
M	Special specifications	

\* For special specifications, indicate separately by the manifold specification sheet.

A, B port size

One-touch fitting (Metric size)

Symbol	Port size	Applicable series
C4	One-touch fitting for ø4	SY3000
C6	One-touch fitting for ø6	
M	Mixed	
C4	One-touch fitting for ø4	SY5000
C6	One-touch fitting for ø6	
C8	One-touch fitting for ø8	
M	Mixed	

One-touch fitting (Inch size)

Symbol	Port size	Applicable series
N3	One-touch fitting for ø5/32	SY3000
N7	One-touch fitting for ø1/4	
M	Mixed	
N3	One-touch fitting for ø5/32	SY5000
N7	One-touch fitting for ø1/4	
N9	One-touch fitting for ø9/16	
M	Mixed	

\* In the case of mixed specifications (M), indicate separately on the manifold specification sheet.

### Type 45T1 (18 pins terminal block)

**SS5Y 3 - 45T1 D - 15 B - C4 - [ ] - [ ] - [ ]**

Series

3	SY3000
5	SY5000

Terminal block mounting position

Symbol	Mounting position
U	U side
D	D side

Option

When a longer DIN rail is desired than the specified stations, specify the station number to be required. (20 stations at maximum)

CE-compliant

Nil	—
Q	CE-compliant

Valve stations

Symbol	Stations	Note
02	2 stations	Single wiring spec. (Applicable up to 17 solenoid valves.)
:	:	
17	17 stations	

\* This also includes the number of blanking plate assemblies.

\* Two stations are necessary for the double, 3 position (Dual body type).

A, B port size

One-touch fitting (Metric size)

Symbol	Port size	Applicable series
C4	One-touch fitting for ø4	SY3000
C6	One-touch fitting for ø6	
M	Mixed	
C4	One-touch fitting for ø4	SY5000
C6	One-touch fitting for ø6	
C8	One-touch fitting for ø8	
M	Mixed	

One-touch fitting (Inch size)

Symbol	Port size	Applicable series
N3	One-touch fitting for ø5/32	SY3000
N7	One-touch fitting for ø1/4	
M	Mixed	
N3	One-touch fitting for ø5/32	SY5000
N7	One-touch fitting for ø1/4	
N9	One-touch fitting for ø9/16	
M	Mixed	

\* In the case of mixed specifications (M), indicate separately on the manifold specification sheet.

Note) The terminal block (45T□) manifold has no common polarity. It can be used for both positive and negative common.



## How to Order Manifold

### Type 45G (Flat ribbon cable, PC wiring system compatible)

**SS5Y 3 - 45G D - 05 U - C4**

**Series**

3	SY3000
5	SY5000

**Connector mounting position**

Symbol	Mounting position
U	U side
D	D side

**Valve stations**

Symbol	Stations	Note
02	2 stations	Single wiring spec. (Applicable up to 16 solenoid valves.)
:	:	
16	16 stations	

\* Two stations are necessary for the double, 3 position (Dual body type).  
\* This also includes the number of blanking plate assemblies.

**CE-compliant**

NII	—
Q	CE-compliant

**Option**  
When a longer DIN rail is desired than the specified stations, specify the station number to be required. (20 stations at maximum)

**A, B port size**

Symbol	Port size	Applicable series
C4	One-touch fitting for ø4	SY3000
C6	One-touch fitting for ø6	
M	Mixed	
C4	One-touch fitting for ø4	SY5000
C6	One-touch fitting for ø6	
C8	One-touch fitting for ø8	
M	Mixed	

Symbol	Port size	Applicable series
N3	One-touch fitting for ø $\frac{5}{8}$ "	SY3000
N7	One-touch fitting for ø $\frac{1}{4}$ "	
M	Mixed	
N3	One-touch fitting for ø $\frac{5}{8}$ "	SY5000
N7	One-touch fitting for ø $\frac{1}{4}$ "	
N9	One-touch fitting for ø $\frac{3}{4}$ "	
M	Mixed	

\* In the case of mixed specifications, indicate separately on the manifold specification sheet.

**SUP/EXH block assembly mounting position**

Symbol	Mounting position	Stations
U	U side	2 to 10 stations
D	D side	2 to 10 stations
B	Both sides	2 to 16 stations
M	Special specifications	

\* For special specifications, indicate separately by the manifold specification sheet.

**SUP/EXH block assembly specifications**

Symbol	Specifications
NII	Internal pilot specifications
R	External pilot specifications
S	Internal pilot / Built-in silencer
RS	External pilot / Built-in silencer

## How to Order Valve

2 position single **SY 3 1 4 0 - 5 FU**

Double, 3 position **SY 3 2 4 5 - 5 FU**

**Series**

3	SY3000
5	SY5000

**Type of actuation**

2	2 position double
3	3 position closed center
4	3 position exhaust center
5	3 position pressure center

**Rated voltage**

5	24 VDC
---	--------

**Pilot type**

NII	Internal pilot
R	External pilot

**Manual override**

NII	Non-locking push type
D	Push-turn locking slotted type
E	Push-turn locking lever type

**Made to Order**

NII	—
X90	Main valve fluororubber (Refer to page 510.)


**CE-compliant**

NII	—
Q	CE-compliant

**Dual body type (Double, 3 position)**

\* When ordering plug-in type valve as a single unit, gaskets are not included. Order them separately, if necessary. (Refer to page 478 for details.)

## Manifold Specifications

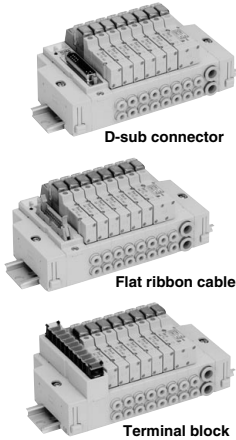

Model	D-sub connector	Flat ribbon cable Type 45PI			Terminal block		Flat ribbon cable PC wiring system compatible
	Type 45F	Type 45P	Type 45PG	Type 45PH	Type 45T	Type 45T1	Type 45G
<b>Manifold</b>	Plug-in						
<b>P (SUP/R (EXH))</b>	Common SUP, Common EXH						
<b>Valve stations</b> <sup>Note 1, 2)</sup>	2 to 20 stations	2 to 16 stations	2 to 8 stations		2 to 17 stations	2 to 16 stations	
<b>A, B port</b>	Base						
<b>Porting specifications</b>	Side						
<b>Port size</b>	<b>P, R port</b>	C8 (One-touch fitting for ø8)					
		C10 (One-touch fitting for ø10)					
	<b>A, B port</b>	C4 (One-touch fitting for ø4)/C6 (One-touch fitting for ø6)/C8 (One-touch fitting for ø8)					
<b>Applicable connector</b>	D-sub connector Complies with MIL-C-24308 JIS-X-5101	Flat ribbon cable connector Socket: 26 pins MIL type with strain relief Conforming to MIL-C-83503	Flat ribbon cable connector Socket: 20 pins MIL type with strain relief Conforming to MIL-C-83503	Flat ribbon cable connector Socket: 10 pins MIL type with strain relief Conforming to MIL-C-83503	Terminal block (M3) 9 pins	Terminal block (M3) 18 pins	Flat ribbon cable connector Socket: 20 pins MIL type with strain relief Conforming to MIL-C-83503
<b>Internal wiring</b>	+COM (Type 45□), -COM (Type 45N□)				In common between -COM and -COM.		+ COM
<b>Manifold base weight W (g)</b>	SY3000	2 to 10 stations: W = 26n + 172 11 to 20 stations: W = 26n + 199					
<b>n: Stations (D-sub connector)</b>		SY5000	2 to 10 stations: W = 54n + 227 11 to 20 stations: W = 52n + 264				

Note 1) For more than 11 stations, supply pressure to P port on both sides and exhaust from R port on both sides.  
 Note 2) There is a limit depending on the number of solenoids. Refer to "How to Order".

## Flow Characteristics

Model	Port size		Flow characteristics					
	1, 5, 3 (P, EA, EB)	4, 2 (A, B)	1 → 4/2 (P → A/B)			4/2 → 5/3 (A/B → EA/EB)		
			C (dm <sup>3</sup> /s·bar)	b	Cv	C (dm <sup>3</sup> /s·bar)	b	Cv
SS5Y3-45□	C8	C6	0.88	0.21	0.22	0.95	0.18	0.22
SS5Y5-45□	C10	C8	2.2	0.24	0.53	2.5	0.18	0.58


Note) The value is for manifold base with 5 stations and individually operated 2 position type.

- SJ
- SY
- SY
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

## Manifold Option

### D-sub connector (25 pins)/Cable assembly

015  
AXT100-DS25- 030  
050

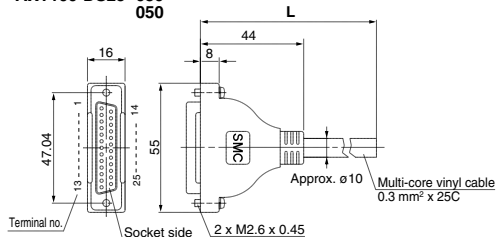

#### D-sub connector cable

Cable length (L)	Assembly part no.	Note
1.5 m	AXT100-DS25-015	Cable 25 core x 24 AWG
3 m	AXT100-DS25-030	
5 m	AXT100-DS25-050	

\* When a commercially available connector is required, use a 25 pin female connector conforming to MIL-C24308.

#### Electric characteristics

Item	Characteristics
Conductor resistance Ω/km, 20°C	65 or less
Voltage limit V, 1 min, AC	1000
Insulation resistance MΩkm, 20°C	5 or more

Note) The min. bending radius of D-sub cable assembly is 20 mm.

#### D-sub connector cable assembly

##### Terminal numbers


Terminal no.	Lead wire color	Dot marking
1	Black	None
2	Brown	None
3	Red	None
4	Orange	None
5	Yellow	None
6	Pink	None
7	Blue	None
8	Purple	White
9	Gray	Black
10	White	Black
11	White	Red
12	Yellow	Red
13	Orange	Red
14	Yellow	Black
15	Pink	Black
16	Blue	White
17	Purple	None
18	Gray	None
19	Orange	Black
20	Red	White
21	Brown	White
22	Pink	Red
23	Gray	Red
24	Black	White
25	White	None

#### Connector manufacturers' example

- Hirose Electric Co., Ltd.
- Fujitsu Limited
- Japan Aviation Electronics Industry, Ltd.
- J.S.T. Mfg. Co., Ltd.

### Flat Ribbon Cable Connector/Cable assembly

AXT100-FC   $\frac{1}{3}$

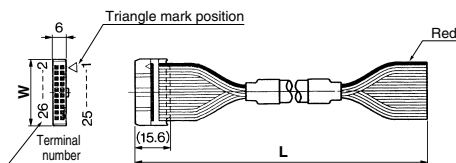

#### Flat Ribbon Cable Assembly

Cable length (L)	10 pins	20 pins	26 pins
1.5 m	AXT100-FC10-1	AXT100-FC20-1	AXT100-FC26-1
3 m	AXT100-FC10-2	AXT100-FC20-2	AXT100-FC26-2
5 m	AXT100-FC10-3	AXT100-FC20-3	AXT100-FC26-3
Connector width (W)	17.2	30	37.5

\* For other commercial connectors, use a type with strain relief that conform to MIL-C-83503.

#### Connector manufacturers' example


- Hirose Electric Co., Ltd.
- Sumitomo 3M Limited
- Fujitsu Limited
- Japan Aviation Electronics Industry, Ltd.
- J.S.T. Mfg. Co., Ltd.

### Dimensions/DIN rail

VZ1000-11-1-

#### Refer to L dimensions

\* Fill in  with an appropriate no. listed on the table of DIN rail dimensions shown below.




No.	0	1	2	3	4	5	6	7	8	9	10
L Dimension	98	110.5	123	135.5	148	160.5	173	185.5	198	210.5	223
No.	11	12	13	14	15	16	17	18	19	20	21
L Dimension	235.5	248	260.5	273	285.5	298	310.5	323	335.5	348	360.5
No.	22	23	24	25	26	27	28	29	30	31	32
L Dimension	373	385.5	398	410.5	423	435.5	448	460.5	473	485.5	498
No.	33	34	35	36	37	38	39	40	41	42	43
L Dimension	510.5	523	535.5	548	560.5	573	585.5	598	610.5	623	635.5
No.	44	45	46	47	48	49	50	51	52	53	54
L Dimension	648	660.5	673	685.5	698	710.5	723	735.5	748	760.5	773
No.	55	56	57	58	59	60	61	62	63	64	65
L Dimension	785.5	798	810.5	823	835.5	848	860.5	873	885.5	898	910.5
No.	66	67	68	69	70	71					
L Dimension	923	935.5	948	960.5	973	985.5					

\* Refer to L1 dimension on pages starting with pages 460 to 477 for lengths that correspond to the number of manifold stations.


## Manifold Internal Wiring

### 45(N)F/D-sub Connector


A D-sub connector used for electric wiring reduces labor during wiring operation. Connectors conforming to MIL are used for interchangeability.



#### <For positive common (45F)>

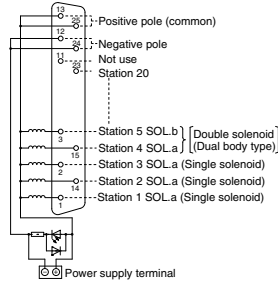


#### <For negative common (45NF)>




- The power source terminal is used for connecting to an external power source.
- The maximum number of stations that can be accommodated is 20 manifold stations, with up to 20 solenoids. (For more stations, please contact SMC.)
- Regardless of the connector mounting position, stations are to be counted from D side as the 1st one.

### Type 45(N)P/Flat Ribbon Cable (26 pins)


A flat ribbon cable connector used for electric wiring reduces labor during wiring operation. Connectors conforming to MIL are used for interchangeability.



#### <For positive common (45P)>

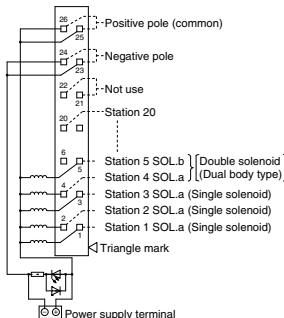


#### <For negative common (45NP)>

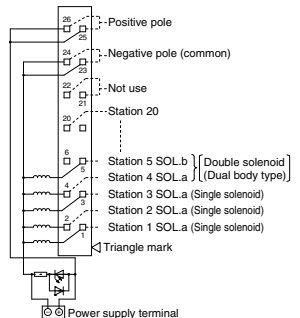

- The power source terminal is used for connecting to an external power source.
- The maximum number of stations that can be accommodated is 20 manifold stations, with up to 20 solenoids. (For more stations, please contact SMC.)
- Regardless of the connector mounting position, stations are to be counted from D side as the 1st one.

Note)  
Terminal no. is not indicated on the connector. The terminal no. indicated in the connection schematic of connector, as shown in the reference, means a correlation of 1, 2, 3...26 from the triangle mark side on the flat ribbon cable of connector.






SJ
SY
SY
SV
SYJ
SZ
VF
VP4
S0700
VQ
VQ4
VQ5
VQC
VQC4
VQZ
SQ
VFS
VFR
VQ7

## Manifold Internal Wiring

### Type 45(N)PG/Flat Ribbon Cable (20 pins)




A flat ribbon cable connector used for electric wiring reduces labor during wiring operation. Connectors conforming to MIL are used for interchangeability.

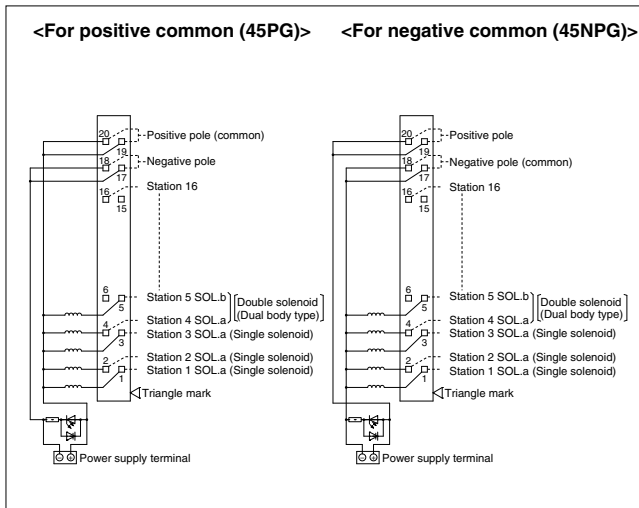

- The power source terminal is used for connecting to an external power source.
- The maximum number of stations that can be accommodated is 16 manifold stations, with up to 16 solenoids. (For more stations, please contact SMC.)
- Regardless of the connector mounting position, stations are to be counted from D side as the 1st one.

### Type 45(N)PH/Flat Ribbon Cable (10 pins)

A flat ribbon cable connector used for electric wiring reduces labor during wiring operation. Connectors conforming to MIL are used for interchangeability.

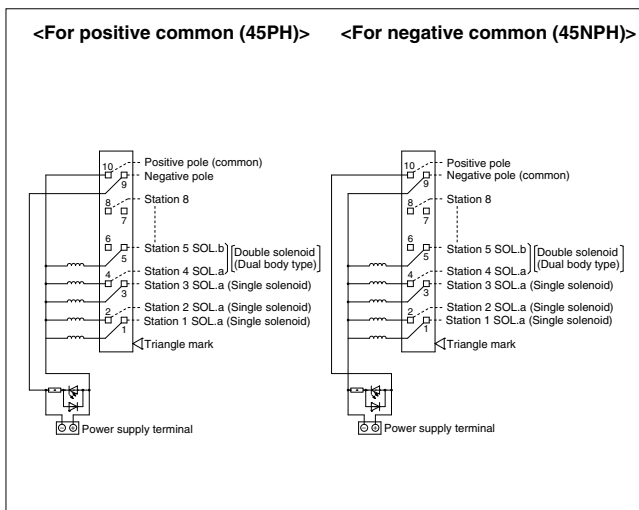


- The power source terminal is used for connecting to an external power source.
- The maximum number of stations that can be accommodated is 8 manifold stations, with up to 8 solenoids. (For more stations, please contact SMC.)
- Regardless of the connector mounting position, stations are to be counted from D side as the 1st one.




## Manifold Internal Wiring

### Type 45T/Terminal Block

A terminal block style permits direct cable connection without treatment of lead wires.




(45T)

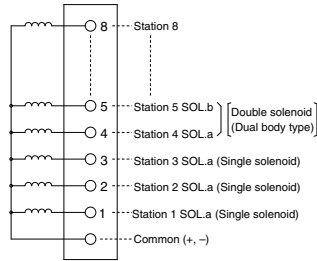


- The maximum number of stations that can be accommodated is 8 manifold stations, with up to 8 solenoids. (For more stations, please contact SMC.)
- Regardless of the connector mounting position, stations are to be counted from D side as the 1st one.
- There is no polarity in the COM wiring. Supply positive power for +COM spec. and negative power for -COM spec.

### Type 45T1/Terminal Block

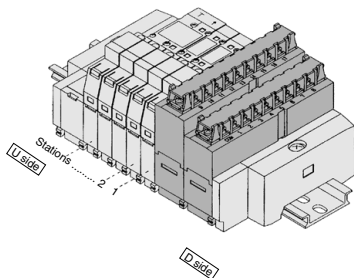

(45T1)

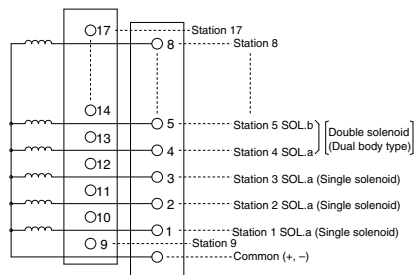


- The maximum number of stations that can be accommodated is 17 manifold stations, with up to 17 solenoids. (For more stations, please contact SMC.)
- Regardless of the connector mounting position, stations are to be counted from D side as the 1st one.
- There is no polarity in the COM wiring. Supply positive power for +COM spec. and negative power for -COM spec.

SJ
SY
<b>SY</b>
SV
SYJ
SZ
VF
VP4
S0700
VQ
VQ4
VQ5
VQC
VQC4
VQZ
SQ
VFS
VFR
VQ7


## Manifold Internal Wiring

### Type 45G Flat Ribbon Cable (PC Wiring System compatible)

It's the manifold for 20 pins flat ribbon cable connector which is compliant for PC wiring system.



Electric circuit diagram

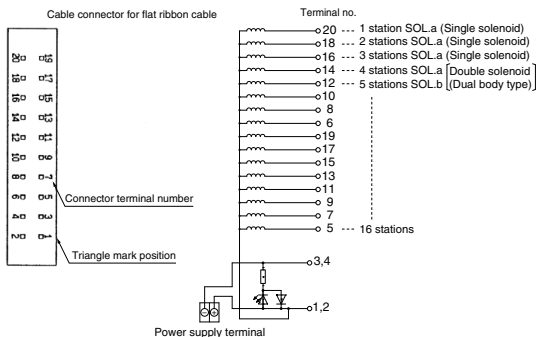


- The maximum number of stations that can be accommodated is 16 manifold stations, with up to 16 solenoids. (For more stations, please contact SMC.)
- Regardless of the connector mounting position, stations are to be counted from D side as the 1st one.

( For details about the PC wiring system, refer to catalog )  
( CAT.E02-20 separately. )


## How to Connect SS5Y□-45□ (Plug-in)

Power terminal is equipped with plug-in manifold of Series SY as standard. Power terminal enables the power supply to valve from either of manifold or controller side. The wiring examples should be used for reference when wiring is performed.

### 1. Wiring example when using manifold power supply terminals

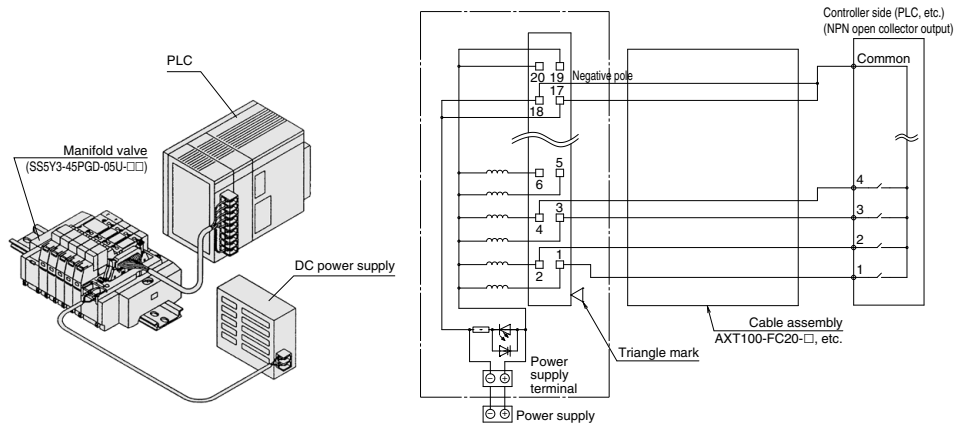

### 2. Wiring example when not using manifold power supply terminals (Power is supplied to the controller side or along the wiring, etc.)

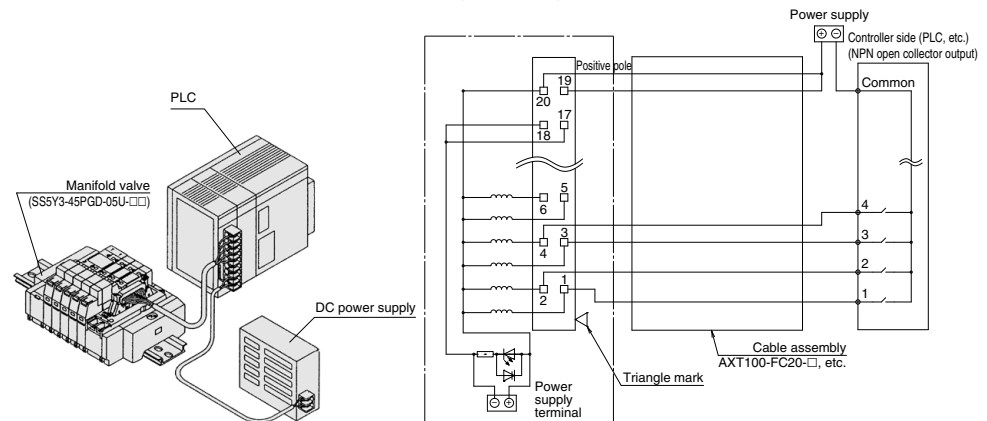


### ⚠ Caution

- Single wire, COM position, etc. of PLC are different from each manufacturer. When connecting with PLC, read the specifications carefully and understand the electrical circuit. Poor wiring could cause damage to PLC, power source, etc. as well as manifold and valve.

SJ
SY
<b>SY</b>
SV
SYJ
SZ
VF
VP4
S0700
VQ
VQ4
VQ5
VQC
VQC4
VQZ
SQ
VFS
VFR
VQ7


### SY3000: D-sub Connector/Plug-in

#### SS5Y3-45FU- Stations D- C4, N3 C6, N7

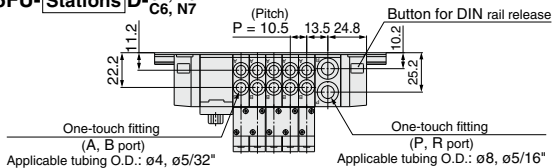


Note) The L1 to L4 dimensions of SS5Y3-45FU- Stations U- C4, N3 C6, N7 are identical to those of SS5Y3-45FU- Stations D- C4, N3 C6, N7.

Equivalent to the applicable D-sub connector (JIS-X-5101, MIL-C-24308)

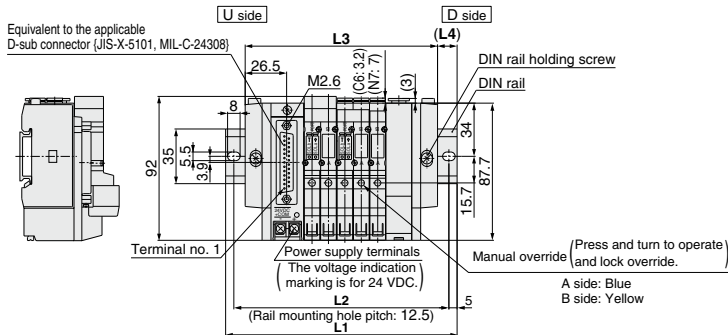


(Station n) --- (Station 1)

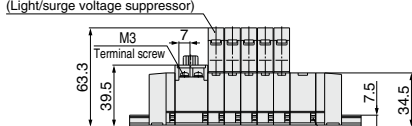


Stations n	2 stations	3	4	5	6	7	8	9	10 stations
<b>L1</b>	123	135.5	148	148	160.5	173	185.5	198	210.5
<b>L2</b>	112.5	125	137.5	137.5	150	162.5	175	187.5	200
<b>L3</b>	91.5	102	112.5	123	133.5	144	154.5	165	175.5
<b>L4</b>	15.5	16.5	17.5	12.5	13.5	14.5	15.5	16.5	17.5

#### SS5Y3-45FU- Stations B- C4, N3 C6, N7

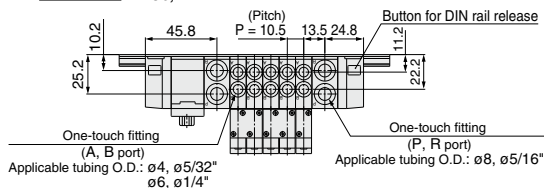

Equivalent to the applicable D-sub connector (JIS-X-5101, MIL-C-24308)

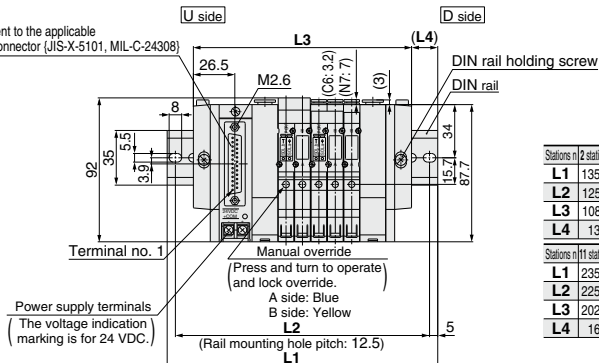


Stations n	2 stations	3	4	5	6	7	8	9	10 stations
<b>L1</b>	135.5	148	160.5	173	185.5	185.5	198	210.5	223
<b>L2</b>	125	137.5	150	162.5	175	175	187.5	200	212.5
<b>L3</b>	108	118.5	129	139.5	150	160.5	171	181.5	192
<b>L4</b>	13.5	14.5	15.5	16.5	17.5	12.5	13.5	14.5	15.5


Stations n	11 stations	12	13	14	15	16	17	18	19	20 stations
<b>L1</b>	235.5	248	248	260.5	273	285.5	298	310.5	310.5	323
<b>L2</b>	225	237.5	237.5	250	262.5	275	287.5	300	300	312.5
<b>L3</b>	202.5	213	223.5	234	244.5	255	265.5	276	286.5	297
<b>L4</b>	16.5	17.5	12	13	14	15	16	17	12	13

**SY3000: D-sub Connector/Plug-in**

**SS5Y3-45FD- Stations U-C4, N3**  
C6, N7

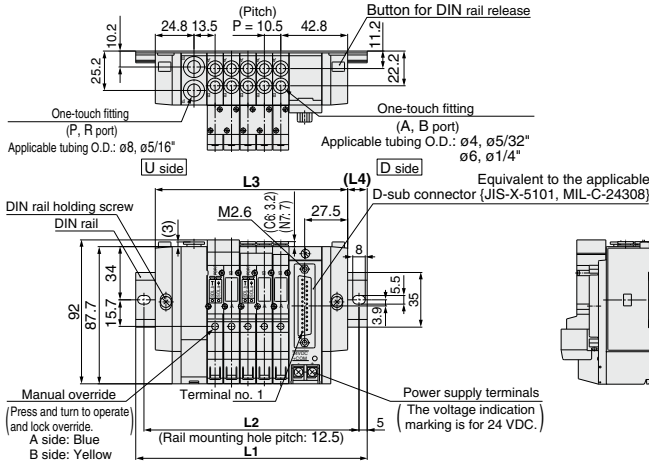


(Note) The L1 to L4 dimensions of **SS5Y3-45FD- Stations D-C4, N3** are identical to those of **SS5Y3-45FD- Stations U-C4, N3**.

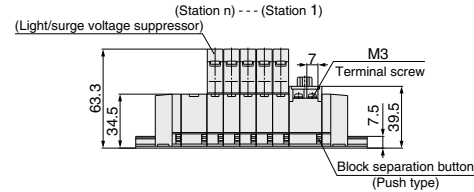

Stations n	2 stations	3	4	5	6	7	8	9	10 stations
<b>L1</b>	123	135.5	148	148	160.5	173	185.5	198	210.5
<b>L2</b>	112.5	125	137.5	137.5	150	162.5	175	187.5	200
<b>L3</b>	91.5	102	112.5	123	133.5	144	154.5	165	175.5
<b>L4</b>	15.5	16.5	17.5	12.5	13.5	14.5	15.5	16.5	17.5

**SS5Y3-45FD- Stations B-C4, N3**  
C6, N7

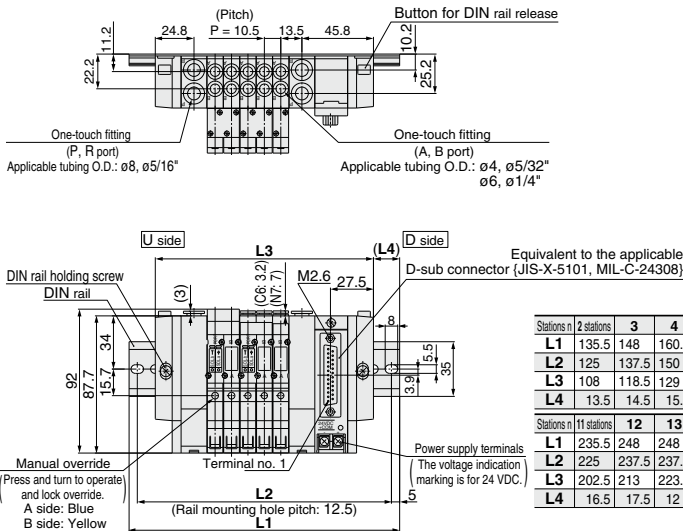

Stations n	2 stations	3	4	5	6	7	8	9	10 stations
<b>L1</b>	135.5	148	160.5	173	185.5	185.5	198	210.5	223
<b>L2</b>	125	137.5	150	162.5	175	175	187.5	200	212.5
<b>L3</b>	108	118.5	129	139.5	150	160.5	171	181.5	192
<b>L4</b>	13.5	14.5	15.5	16.5	17.5	12.5	13.5	14.5	15.5


  

Stations n	11 stations	12	13	14	15	16	17	18	19	20 stations
<b>L1</b>	235.5	248	248	260.5	273	285.5	298	310.5	310.5	323
<b>L2</b>	225	237.5	237.5	250	262.5	275	287.5	300	300	312.5
<b>L3</b>	202.5	213	223.5	234	244.5	255	265.5	276	286.5	297
<b>L4</b>	16.5	17.5	12	13	14	15	16	17	12	13



- SJ
- SY
- SY**
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

**SY5000: D-sub Connector/Plug-in**

**SS5Y5-45FU- Stations D** C4, N3  
C6, N7  
C8, N9

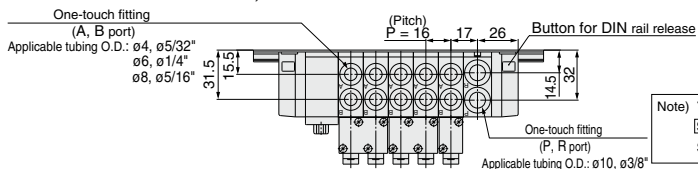


Note) The L1 to L4 dimensions of **SS5Y5-45FU- Stations U** (C4, N3, C6, N7) are identical to those of **SS5Y5-45FU- Stations D** (C4, N3, C6, N7).

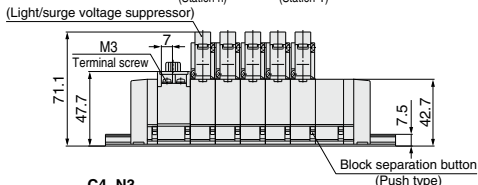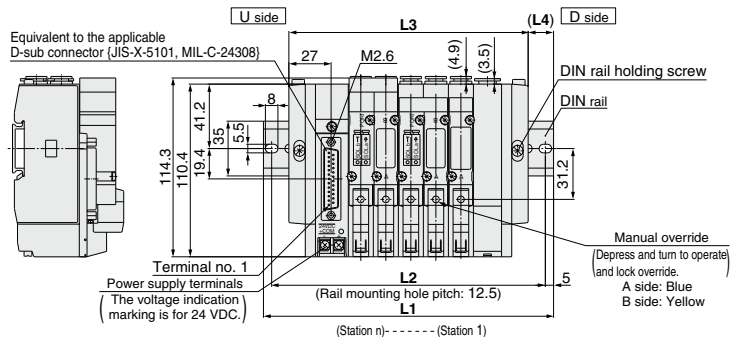


Stations n	2 stations	3	4	5	6	7	8	9	10 stations
<b>L1</b>	135.5	148	160.5	185.5	198	210.5	235.5	248	260.5
<b>L2</b>	125	137.5	150	175	187.5	200	225	237.5	250
<b>L3</b>	105	121	137	153	169	185	201	217	233
<b>L4</b>	15	13.5	11.5	16	14.5	12.5	17	15.5	13.5

**SS5Y5-45FU- Stations B** C4, N3  
C6, N7  
C8, N9

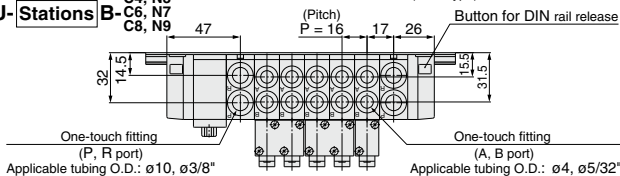

Equivalent to the applicable D-sub connector (JIS-X-5101, MIL-C-24308)

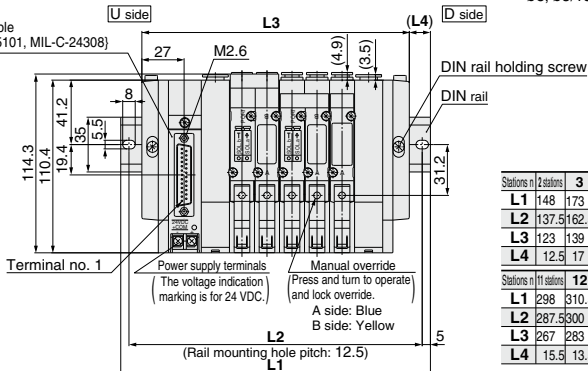


Stations n	2 stations	3	4	5	6	7	8	9	10 stations
<b>L1</b>	148	173	185.5	198	210.5	235.5	248	260.5	285.5
<b>L2</b>	137.5	162.5	175	187.5	200	225	237.5	250	275
<b>L3</b>	123	139	155	171	187	203	219	235	251
<b>L4</b>	12.5	17	15	13.5	11.5	16	14.5	12.5	17


Stations n	11 stations	12	13	14	15	16	17	18	19	20 stations
<b>L1</b>	298	310.5	323	348	360.5	373	398	410.5	423	435.5
<b>L2</b>	287.5	300	312.5	337.5	350	362.5	387.5	400	412.5	425
<b>L3</b>	267	283	299	315	331	347	363	379	395	411
<b>L4</b>	15.5	13.5	12	16.5	14.5	13	17.5	15.5	14	12

**SY5000: D-sub Connector/Plug-in**

**SS5Y5-45FD- Stations U** <sup>C4, N3</sup>  
<sup>C6, N7</sup>  
<sup>C8, N9</sup>


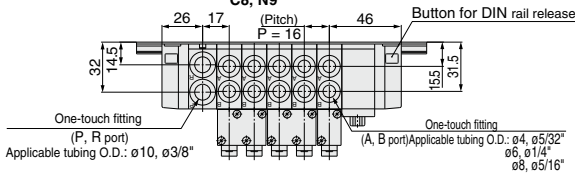


Note) The L1 to L4 dimensions of **SS5Y5-45FD- Stations U** <sup>C4, N3</sup> <sup>C6, N7</sup> are identical to those of **SS5Y5-45FD- Stations U** <sup>C4, N3</sup> <sup>C6, N7</sup> <sup>C8, N9</sup>

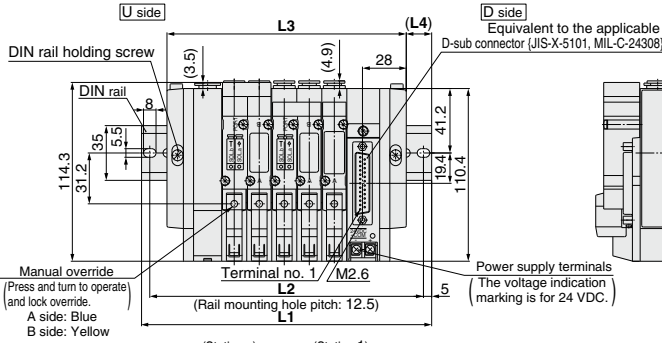

Stations n	2 stations	3	4	5	6	7	8	9	10 stations
<b>L1</b>	135.5	148	160.5	185.5	198	210.5	235.5	248	260.5
<b>L2</b>	125	137.5	150	175	187.5	200	225	237.5	250
<b>L3</b>	105	121	137	153	169	185	201	217	233
<b>L4</b>	15	13.5	11.5	16	14.5	12.5	17	15.5	13.5

**SS5Y5-45FD- Stations B** <sup>C4, N3</sup>  
<sup>C6, N7</sup>  
<sup>C8, N9</sup>

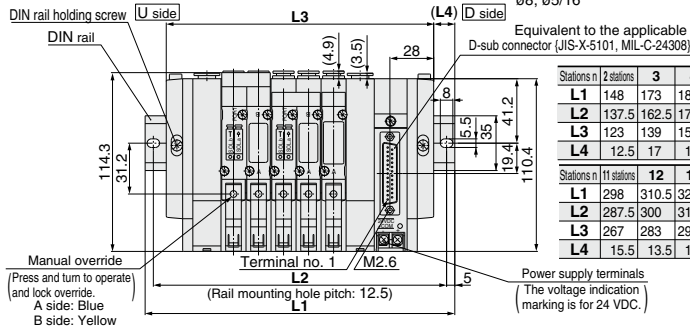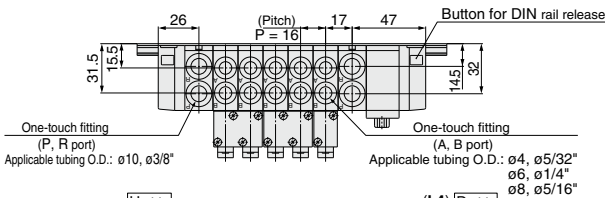


Stations n	2 stations	3	4	5	6	7	8	9	10 stations
<b>L1</b>	148	173	185.5	198	210.5	235.5	248	260.5	285.5
<b>L2</b>	137.5	162.5	175	187.5	200	225	237.5	250	275
<b>L3</b>	123	139	155	171	187	203	219	235	251
<b>L4</b>	12.5	17	15	13.5	11.5	16	14.5	12.5	17

Stations n	11 stations	12	13	14	15	16	17	18	19	20 stations
<b>L1</b>	298	310.5	323	348	360.5	373	398	410.5	423	435.5
<b>L2</b>	287.5	300	312.5	337.5	350	362.5	387.5	400	412.5	425
<b>L3</b>	267	283	299	315	331	347	363	379	395	411
<b>L4</b>	15.5	13.5	12	16.5	14.5	13	17.5	15.5	14	12




- SY
- SY
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

**SY3000: Flat Ribbon Cable/Plug-in**



**SS5Y3-45PU-Stations D-C<sub>4</sub>, N<sub>3</sub>  
C<sub>6</sub>, N<sub>7</sub> (26 pins)**

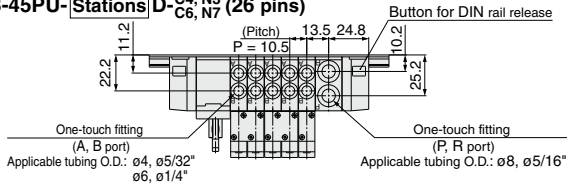

Note) The L1 to L4 dimensions of **SS5Y3-45PU-Stations U-C<sub>4</sub>, N<sub>3</sub>  
C<sub>6</sub>, N<sub>7</sub>** are identical to those of **SS5Y3-45PIU-Stations D-C<sub>4</sub>, N<sub>3</sub>  
C<sub>6</sub>, N<sub>7</sub>**.

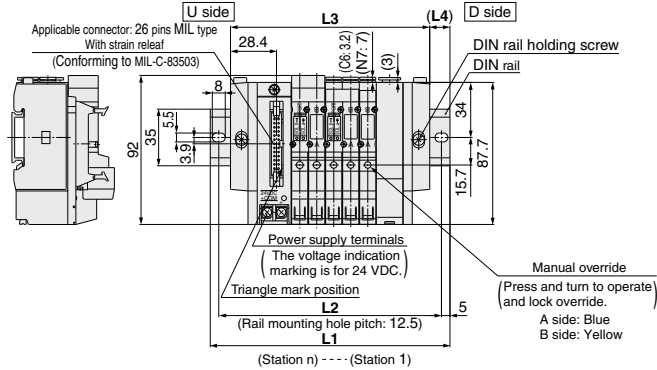

**SS5Y3-45PU-Stations B-C<sub>4</sub>, N<sub>3</sub>  
C<sub>6</sub>, N<sub>7</sub> (26 pins)**

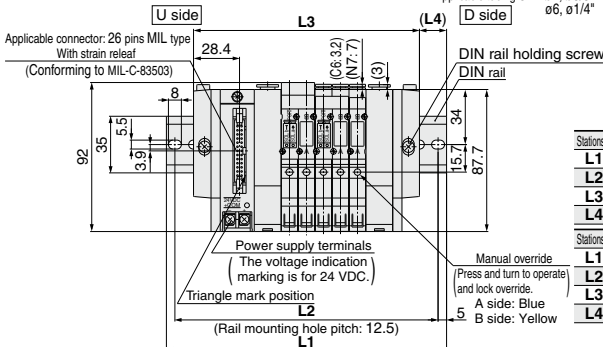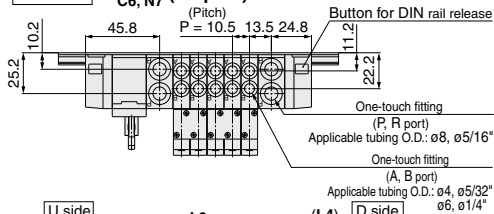

Stations n	2 stations	3	4	5	6	7	8	9	10 stations
L1	123	135.5	148	148	160.5	173	185.5	198	210.5
L2	112.5	125	137.5	137.5	150	162.5	175	187.5	200
L3	91.5	102	112.5	123	133.5	144	154.5	165	175.5
L4	15.5	16.5	17.5	12.5	13.5	14.5	15.5	16.5	17.5


Stations n	2 stations	3	4	5	6	7	8	9	10 stations
L1	135.5	148	160.5	173	185.5	185.5	198	210.5	223
L2	125	137.5	150	162.5	175	175	187.5	200	212.5
L3	108	118.5	129	139.5	150	160.5	171	181.5	192
L4	13.5	14.5	15.5	16.5	17.5	12.5	13.5	14.5	15.5

Stations n	11 stations	12	13	14	15	16	17	18	19	20 stations
L1	235.5	248	248	260.5	273	285.5	298	310.5	310.5	323
L2	225	237.5	237.5	250	262.5	275	287.5	300	300	312.5
L3	202.5	213	223.5	234	244.5	255	265.5	276	286.5	297
L4	16.5	17.5	12	13	14	15	16	17	12	13




**SY3000: Flat Ribbon Cable/Plug-in**

**SS5Y3-45PD- Stations U-C4,N3 (26 pins)**


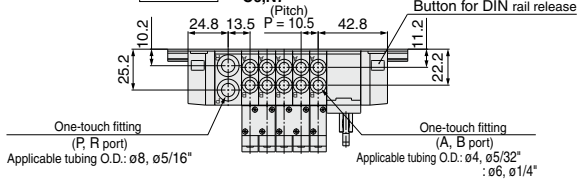


(Note) The L1 to L4 dimensions of **SS5Y3-45P□D-**  
**Stations D-C4,N3** are identical to those of  
**SS5Y3-45P□D- Stations U-C4,N3**.

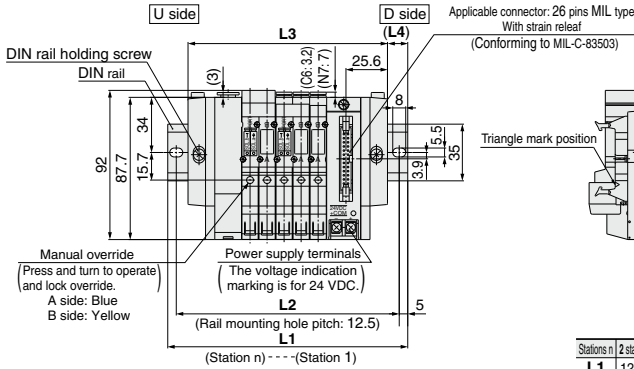

Stations n	2 stations	3	4	5	6	7	8	9	10 stations
<b>L1</b>	123	135.5	148	148	160.5	173	185.5	198	210.5
<b>L2</b>	112.5	125	137.5	137.5	150	162.5	175	187.5	200
<b>L3</b>	91.5	102	112.5	123	133.5	144	154.5	165	175.5
<b>L4</b>	15.5	16.5	17.5	12.5	13.5	14.5	15.5	16.5	17.5

**SS5Y3-45PD- Stations B-C4,N3 (26 pins)**

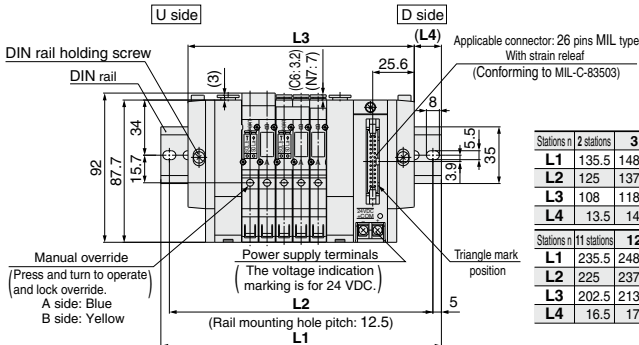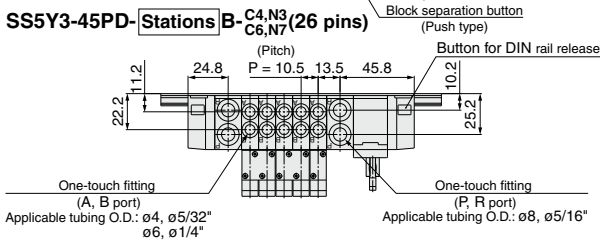


Stations n	2 stations	3	4	5	6	7	8	9	10 stations
<b>L1</b>	135.5	148	160.5	173	185.5	185.5	198	210.5	223
<b>L2</b>	125	137.5	150	162.5	175	175	187.5	200	212.5
<b>L3</b>	108	118.5	129	139.5	150	160.5	171	181.5	192
<b>L4</b>	13.5	14.5	15.5	16.5	17.5	12.5	13.5	14.5	15.5

Stations n	11 stations	12	13	14	15	16	17	18	19	20 stations
<b>L1</b>	235.5	248	248	260.5	273	285.5	298	310.5	310.5	323
<b>L2</b>	225	237.5	237.5	250	262.5	275	287.5	300	300	312.5
<b>L3</b>	202.5	213	223.5	234	244.5	255	265.5	276	286.5	297
<b>L4</b>	16.5	17.5	12	13	14	15	16	17	12	13




- JS
- SY
- SY
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

**SY5000: Flat Ribbon Cable/Plug-in**

**SS5Y5-45PU - Stations D-<sup>C4, N3</sup><sub>C6, N7</sub> (26 pins)**


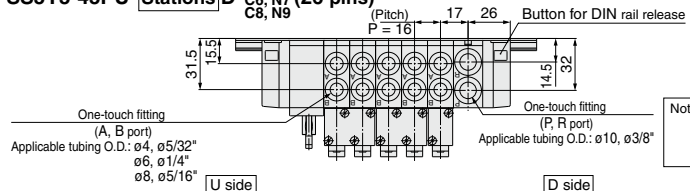


Note) The L1 to L4 dimensions of **SS5Y5-45P□U-** Stations **U-<sup>C4, N3</sup><sub>C6, N7</sub>** are identical to those of **SS5Y5-45P□U-** Stations **D-<sup>C4, N3</sup><sub>C6, N7</sub>**

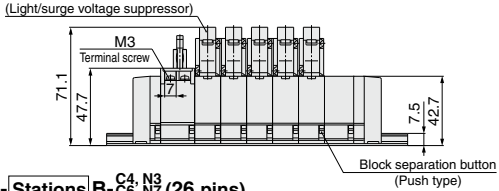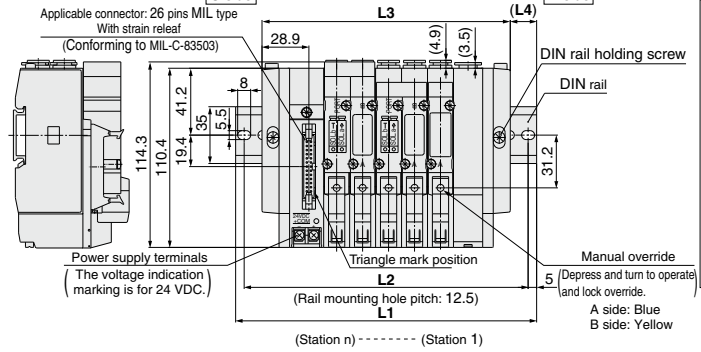

Stations n	2 stations	3	4	5	6	7	8	9	10 stations
L1	135.5	148	160.5	185.5	198	210.5	235.5	248	260.5
L2	125	137.5	150	175	187.5	200	225	237.5	250
L3	105	121	137	153	169	185	201	217	233
L4	15	13.5	11.5	16	14.5	12.5	17	15.5	13.5

**SS5Y5-45PU - Stations B-<sup>C4, N3</sup><sub>C6, N7</sub> (26 pins)**

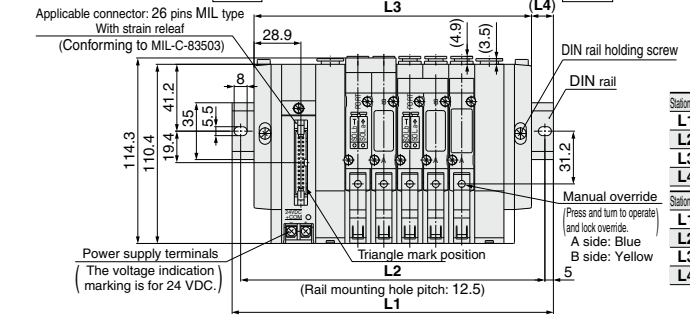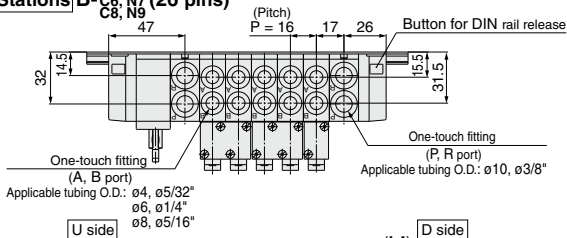


Stations n	2 stations	3	4	5	6	7	8	9	10 stations
L1	148	173	185.5	198	210.5	235.5	248	260.5	285.5
L2	137.5	162.5	175	187.5	200	225	237.5	250	275
L3	123	139	155	171	187	203	219	235	251
L4	12.5	17	15	13.5	11.5	16	14.5	12.5	17


Stations n	11 stations	12	13	14	15	16	17	18	19	20 stations
L1	298	310.5	323	348	360.5	373	398	410.5	423	435.5
L2	287.5	300	312.5	337.5	350	362.5	387.5	400	412.5	425
L3	267	283	299	315	331	347	363	379	395	411
L4	15.5	13.5	12	16.5	14.5	13	17.5	15.5	14	12

**SY5000: Flat Ribbon Cable/Plug-in**

**SS5Y5-45PD-(Stations) U-<sup>C4, N3</sup><sub>C6, N7</sub> (26 pins)**  
<sup>C8, N9</sup>


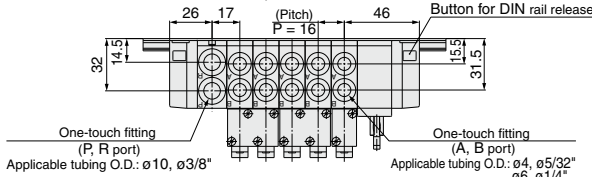


Note) The L1 to L4 dimensions of SS5Y5-45PD-<sup>C4, N3</sup><sub>C6, N7</sub> are identical to those of SS5Y3-45PD-(Stations) U-<sup>C4, N3</sup><sub>C6, N7</sub>

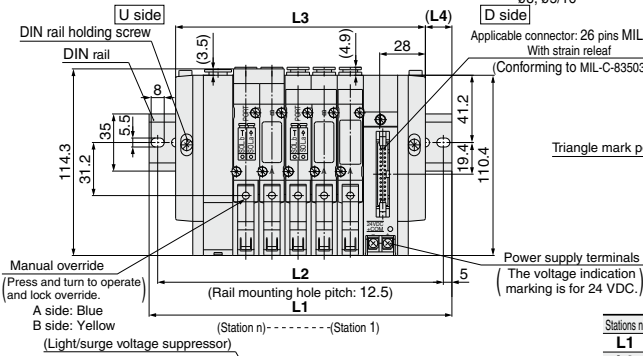

Stations n	2 stations	3	4	5	6	7	8	9	10 stations
L1	135.5	148	160.5	185.5	198	210.5	235.5	248	260.5
L2	125	137.5	150	175	187.5	200	225	237.5	250
L3	105	121	137	153	169	185	201	217	233
L4	15	13.5	11.5	16	14.5	12.5	17	15.5	13.5

**SS5Y5-45PD-(Stations) B-<sup>C4, N3</sup><sub>C6, N7</sub> (26 pins)**  
<sup>C8, N9</sup>

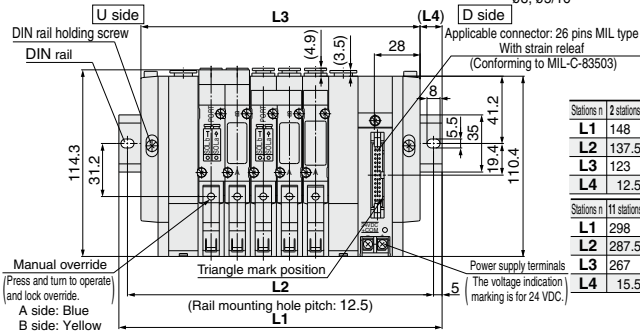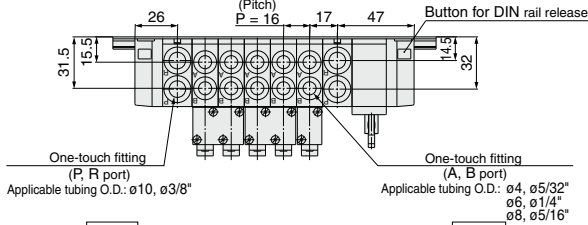


Stations n	2 stations	3	4	5	6	7	8	9	10 stations
L1	148	173	185.5	198	210.5	235.5	248	260.5	285.5
L2	137.5	162.5	175	187.5	200	225	237.5	250	275
L3	123	139	155	171	187	203	219	235	251
L4	12.5	17	15	13.5	11.5	16	14.5	12.5	17

Stations n	11 stations	12	13	14	15	16	17	18	19	20 stations
L1	298	310.5	323	348	360.5	373	398	410.5	423	435.5
L2	287.5	300	312.5	337.5	350	362.5	387.5	400	412.5	425
L3	267	283	299	315	331	347	363	379	395	411
L4	15.5	13.5	12	16.5	14.5	13	17.5	15.5	14	12


- SJ
- SY
- SY
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

**SY3000: 9 Pins Terminal Block/Plug-in**

**SS5Y3-45TU- Stations D-C<sub>4</sub>, N<sub>3</sub> C<sub>6</sub>, N<sub>7</sub> (9 pins)**

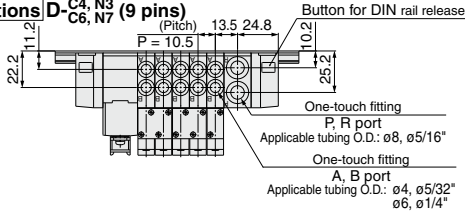

Note) The L1 to L4 dimensions of **SS5Y3-45TU-**  
**[Stations]U-C<sub>4</sub>, N<sub>3</sub> SS5Y3-45TD-[Stations]U-C<sub>4</sub>, N<sub>3</sub>**  
**SS5Y3-45TD-[Stations]D-C<sub>4</sub>, N<sub>3</sub>** are identical  
 those of SS5Y3-45TU-[Stations]D-C<sub>4</sub>, N<sub>3</sub>  
 C<sub>6</sub>, N<sub>7</sub>.

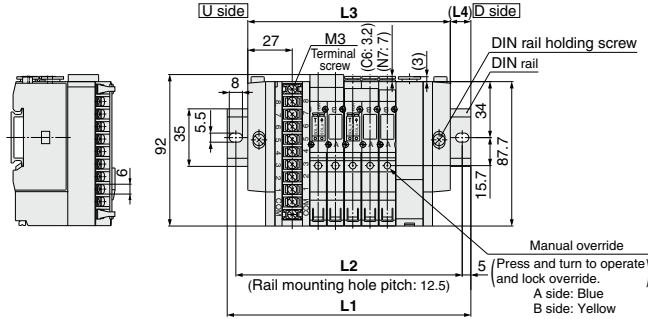


(Light/surge voltage suppressor) (Station n)---(Station 1)




Stations n	2 stations	3	4	5	6	7	8 stations
<b>L1</b>	123	135.5	148	148	160.5	173	185.5
<b>L2</b>	112.5	125	137.5	137.5	150	162.5	175
<b>L3</b>	91.5	102	112.5	123	133.5	144	154.5
<b>L4</b>	15.5	16.5	17.5	12.5	13.5	14.5	15.5

**SS5Y3-45TU- Stations B-C<sub>4</sub>, N<sub>3</sub> C<sub>6</sub>, N<sub>7</sub> (9 pins)**

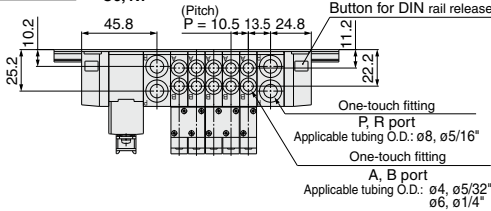


Note) The L1 to L4 dimensions of **SS5Y3-45TD-**  
**[Stations]B-C<sub>4</sub>, N<sub>3</sub>** are identical to those of  
**SS5Y3-45TU-[Stations]B-C<sub>4</sub>, N<sub>3</sub>**.

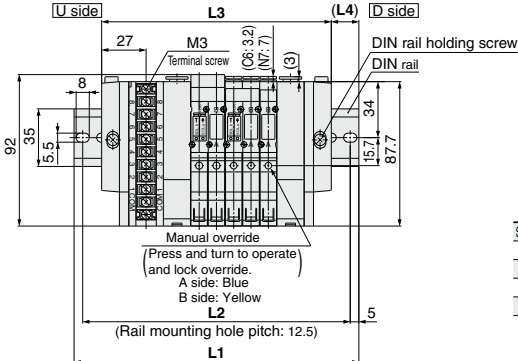

Stations n	2 stations	3	4	5	6	7	8 stations
<b>L1</b>	135.5	148	160.5	173	185.5	185.5	198
<b>L2</b>	125	137.5	150	162.5	175	175	187.5
<b>L3</b>	108	118.5	129	139.5	150	160.5	171
<b>L4</b>	13.5	14.5	15.5	16.5	17.5	12.5	13.5

**SY5000: 9 Pins Terminal Block/Plug-in**


**SS5Y5-45TU-Stations D-<sup>C4, N3</sup><sub>C6, N7</sub> (9 pins)**

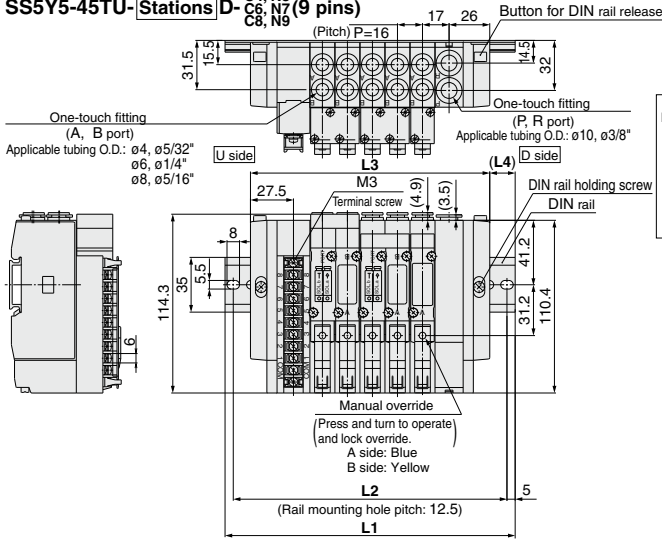

Note) The L1 to L4 dimensions of SS5Y5-45TU-  
**Stations U-<sup>C4, N3</sup><sub>C6, N7</sub> SS5Y5-45TD-Stations U-<sup>C4, N3</sup><sub>C6, N7</sub>**  
**SS5Y5-45TD-Stations D-<sup>C4, N3</sup><sub>C6, N7</sub>** are identical those  
 of SS5Y5-45TU-Stations D-<sup>C4, N3</sup><sub>C6, N7</sub>

Stations n	2 stations	3	4	5	6	7	8 stations
<b>L1</b>	135.5	148	160.5	185.5	198	210.5	235.5
<b>L2</b>	125	137.5	150	175	187.5	200	225
<b>L3</b>	105	121	137	153	169	185	201
<b>L4</b>	15	13.5	11.5	16	14.5	12.5	17

**SS5Y5-45TU-Stations B-<sup>C4, N3</sup><sub>C6, N7</sub> (9 pins)**

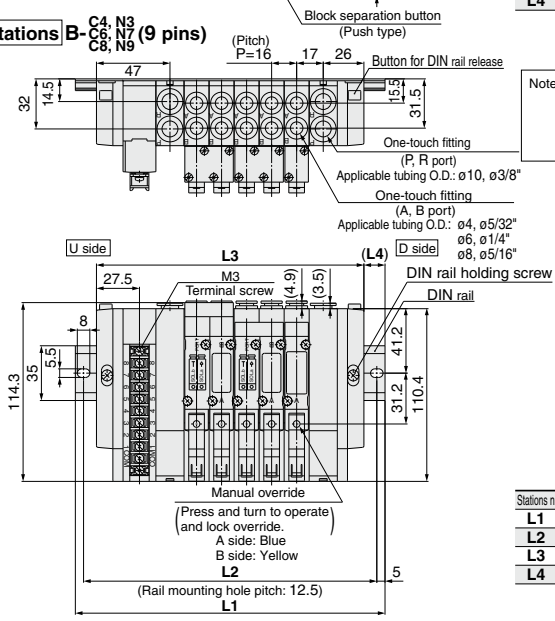


Note) The L1 to L4 dimensions of SS5Y5-45TD-  
**Stations B-<sup>C4, N3</sup><sub>C6, N7</sub>** are identical to those of  
**SS5Y5-45TU-Stations B-<sup>C4, N3</sup><sub>C6, N7</sub>**

Stations n	2 stations	3	4	5	6	7	8 stations
<b>L1</b>	148	173	185.5	198	210.5	235.5	248
<b>L2</b>	137.5	162.5	175	187.5	200	225	237.5
<b>L3</b>	123	139	155	171	187	203	219
<b>L4</b>	12.5	17	15	13.5	11.5	16	14.5

- SJ
- SY
- SY**
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7


**SY3000: 18 Pins Terminal Block/Plug-in**

**SS5Y3-45T1U-(Stations) D-C<sub>4</sub>, N<sub>3</sub> C<sub>6</sub>, N<sub>7</sub> (18 pins)**


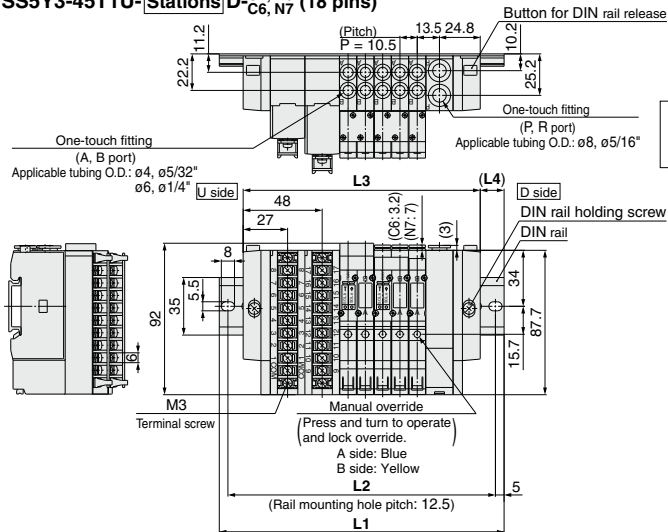


Note) The L1 to L4 dimensions of **SS5Y3-45T1U-(Stations) U-C<sub>4</sub>, N<sub>3</sub> C<sub>6</sub>, N<sub>7</sub>** are identical to those of **SS5Y3-45T1U-(Stations) D-C<sub>4</sub>, N<sub>3</sub> C<sub>6</sub>, N<sub>7</sub>**.

Stations n	2 stations	3	4	5	6	7	8	9	10 stations
<b>L1</b>	148	148	160.5	173	185.5	198	210.5	210.5	223
<b>L2</b>	137.5	137.5	150	162.5	175	187.5	200	200	212.5
<b>L3</b>	112.5	123	133.5	144	154.5	165	175.5	186	196.5
<b>L4</b>	17.5	12.5	13.5	14.5	15.5	16.5	17.5	12	13

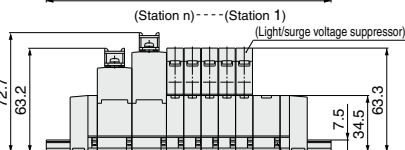

**SS5Y3-45T1U-(Stations) B-C<sub>4</sub>, N<sub>3</sub> C<sub>6</sub>, N<sub>7</sub> (18 pins)**

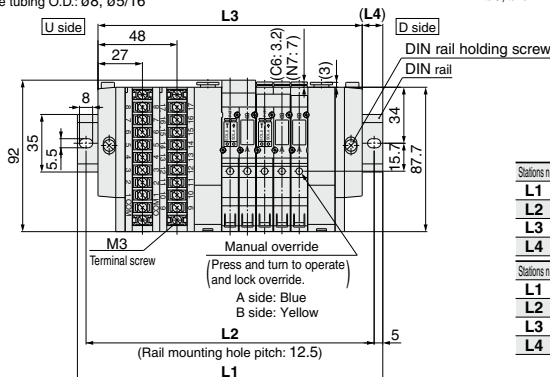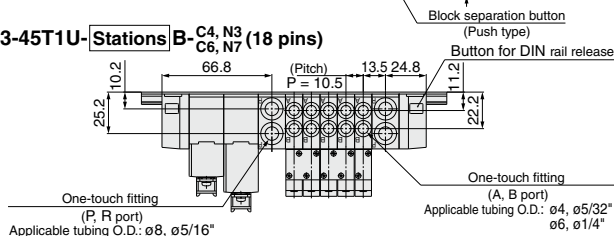


Stations n	2 stations	3	4	5	6	7	8	9 stations
<b>L1</b>	160.5	173	185.5	185.5	198	210.5	223	235.5
<b>L2</b>	150	162.5	175	175	187.5	200	212.5	225
<b>L3</b>	129	139.5	150	160.5	171	181.5	192	202.5
<b>L4</b>	15.5	16.5	17.5	12.5	13.5	14.5	15.5	16.5

Stations n	10 stations	11	12	13	14	15	16	17 stations
<b>L1</b>	248	248	260.5	273	285.5	298	310.5	310.5
<b>L2</b>	237.5	237.5	250	262.5	275	287.5	300	300
<b>L3</b>	213	223.5	234	244.5	255	265.5	276	286.5
<b>L4</b>	17.5	12	13	14	15	16	17	12

**SY3000: 9 Pins Terminal Block/Plug-in**


**SS5Y3-45T1D- Stations U- C4, N3  
C6, N7 (18 pins)**

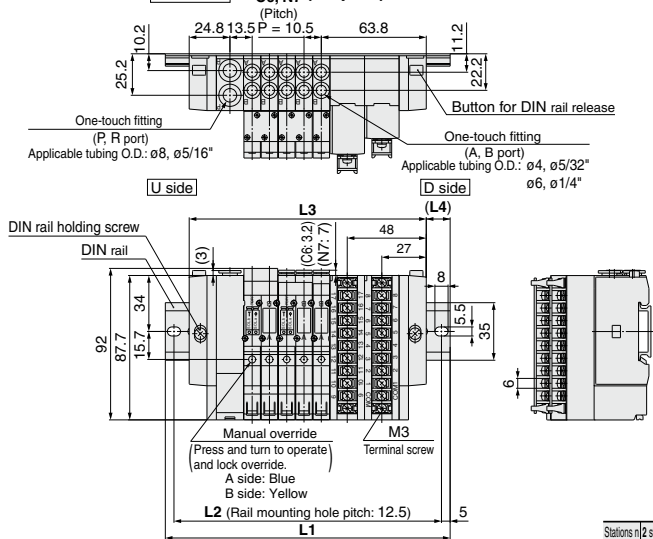

Note) The L1 to L4 dimensions of **SS5Y3-45T1D- Stations U- C4, N3 C6, N7** are identical to those of **SS5Y3-45T1D- Stations U- C4, N3 C6, N7**.

Stations n	2 stations	3	4	5	6	7	8	9	10 stations
<b>L1</b>	148	148	160.5	173	185.5	198	210.5	210.5	223
<b>L2</b>	137.5	137.5	150	162.5	175	187.5	200	200	212.5
<b>L3</b>	112.5	123	133.5	144	154.5	165	175.5	186	196.5
<b>L4</b>	17.5	12.5	13.5	14.5	15.5	16.5	17.5	12	13

**SS5Y3-45T1D- Stations B- C4, N3  
C6, N7 (18 pins)**

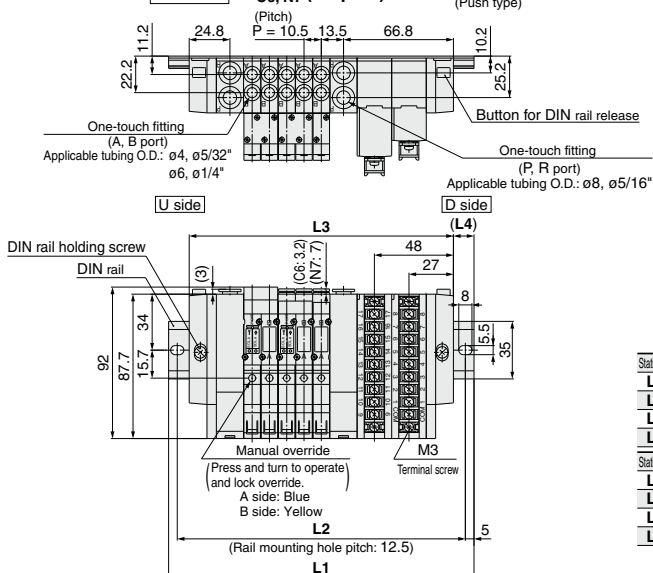

Stations n	2 stations	3	4	5	6	7	8	9 stations
<b>L1</b>	160.5	173	185.5	185.5	198	210.5	223	235.5
<b>L2</b>	150	162.5	175	175	187.5	200	212.5	225
<b>L3</b>	129	139.5	150	160.5	171	181.5	192	202.5
<b>L4</b>	15.5	16.5	17.5	12.5	13.5	14.5	15.5	16.5


  

Stations n	10 stations	11	12	13	14	15	16	17 stations
<b>L1</b>	248	248	260.5	273	285.5	298	310.5	310.5
<b>L2</b>	237.5	237.5	250	262.5	275	287.5	300	300
<b>L3</b>	213	223.5	234	244.5	255	265.5	276	286.5
<b>L4</b>	17.5	12	13	14	15	16	17	12

- JS
- SY
- SY
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

**SY5000: 18 Pins Terminal Block/Plug-in**


**SS5Y5-45T1U- Stations D-C<sub>4</sub>, N<sub>3</sub>, C<sub>6</sub>, N<sub>7</sub>, C<sub>8</sub>, N<sub>9</sub> (18 pins)**

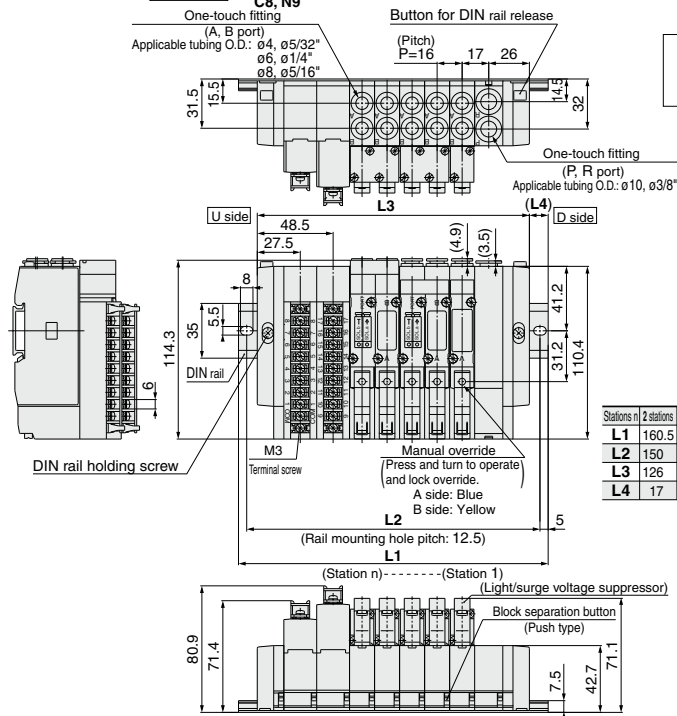

Note) The L1 to L4 dimensions of SS5Y5-45T1U- Stations U-C<sub>4</sub>, N<sub>3</sub>, C<sub>6</sub>, N<sub>7</sub>, C<sub>8</sub>, N<sub>9</sub> are identical to those of SS5Y5-45T1U- Stations D-C<sub>4</sub>, N<sub>3</sub>, C<sub>6</sub>, N<sub>7</sub>, C<sub>8</sub>, N<sub>9</sub>

Stations n	2 stations	3	4	5	6	7	8	9	10 stations
L1	160.5	173	185.5	198	223	235.5	248	273	285.5
L2	150	162.5	175	187.5	212.5	225	237.5	262.5	275
L3	126	142	158	174	190	206	222	238	254
L4	17	15.5	13.5	12	16.5	14.5	13	17.5	15.5

**SS5Y5-45T1U- Stations B-C<sub>4</sub>, N<sub>3</sub>, C<sub>6</sub>, N<sub>7</sub>, C<sub>8</sub>, N<sub>9</sub> (18 pins)**

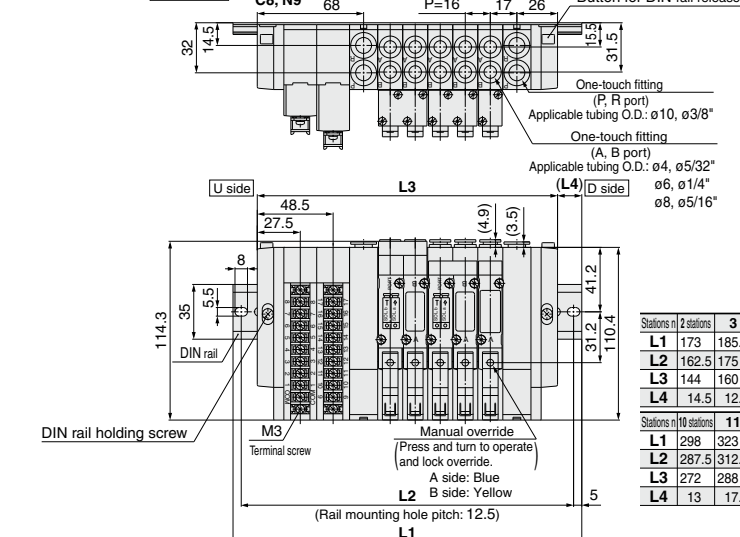

Stations n	2 stations	3	4	5	6	7	8	9 stations
L1	173	185.5	210.5	223	235.5	248	273	285.5
L2	162.5	175	200	212.5	225	237.5	262.5	275
L3	144	160	176	192	208	224	240	256
L4	14.5	12.5	17	15.5	13.5	12	16.5	14.5


  

Stations n	10 stations	11	12	13	14	15	16	17 stations
L1	298	323	335.5	348	360.5	385.5	398	410.5
L2	287.5	312.5	325	337.5	350	375	387.5	400
L3	272	288	304	320	336	352	368	384
L4	13	17.5	15.5	14	12	16.5	15	13





**SY5000: 18 Pins Terminal Block/Plug-in**

**SS5Y5-45T1D- Stations U-<sup>C4, N3</sup><sub>C6, N7</sub> (18 pins)**

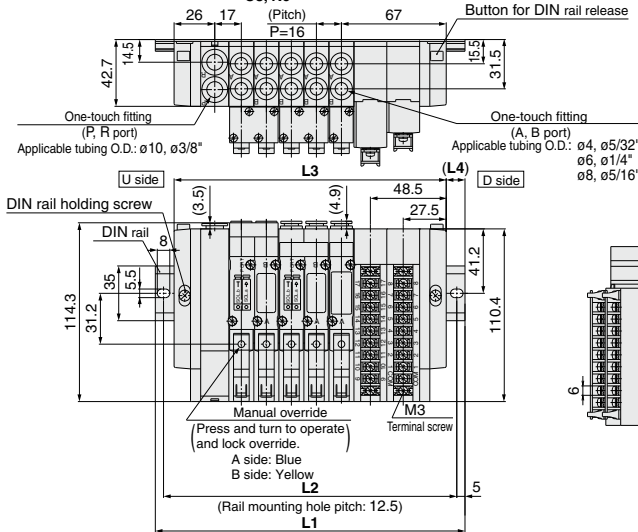


Note) The L1 to L4 dimensions of SS5Y5-45T1D- Stations D-<sup>C4, N3</sup><sub>C6, N7</sub> are identical to those of SS5Y5-45T1D- Stations U-<sup>C4, N3</sup><sub>C6, N7</sub>

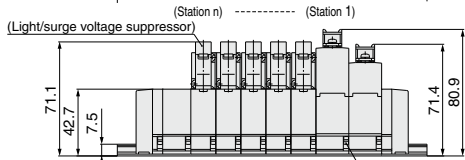

Stations n	2 stations	3	4	5	6	7	8	9	10 stations
L1	160.5	173	185.5	198	223	235.5	248	273	285.5
L2	150	162.5	175	187.5	212.5	225	237.5	262.5	275
L3	126	142	158	174	190	206	222	238	254
L4	17	15.5	13.5	12	16.5	14.5	13	17.5	15.5

**SS5Y5-45T1D- Stations B-<sup>C4, N3</sup><sub>C6, N7</sub> (18 pins)**

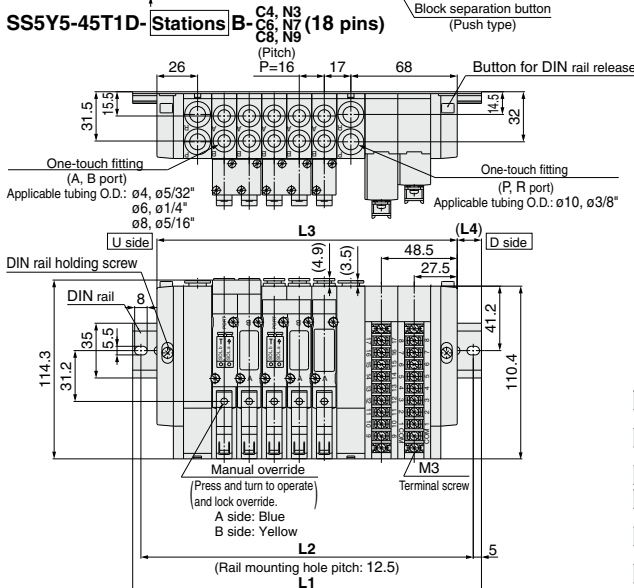

Stations n	2 stations	3	4	5	6	7	8	9 stations
L1	173	185.5	210.5	223	235.5	248	273	285.5
L2	162.5	175	200	212.5	225	237.5	262.5	275
L3	144	160	176	192	208	224	240	256
L4	14.5	12.5	17	15.5	13.5	12	16.5	14.5


  

Stations n	10 stations	11	12	13	14	15	16	17 stations
L1	298	323	335.5	348	360.5	385.5	398	410.5
L2	287.5	312.5	325	337.5	350	375	387.5	400
L3	272	288	304	320	336	352	368	384
L4	13	17.5	15.5	14	12	16.5	15	13

- SY
- SY
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

## SY3000: PC Wiring System Compatible (Flat ribbon cable/Plug-in)


### SS5Y3-45GU-Stations D-C<sub>4</sub>, N<sub>3</sub> C<sub>6</sub>, N<sub>7</sub>

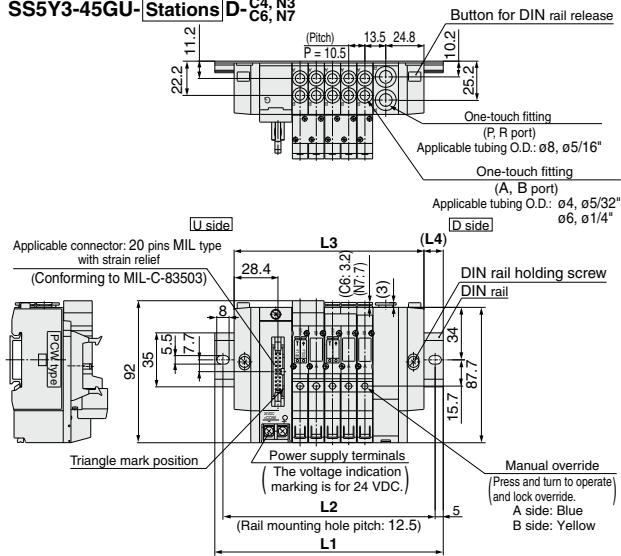

(Note) The L1 to L4 dimensions of **SS5Y3-45GU-Stations U-C<sub>4</sub>, N<sub>3</sub>** are identical to those of **SS5Y3-45GU-Stations D-C<sub>4</sub>, N<sub>3</sub>**.


(Station n) --- (Station 1)

(Light/surge voltage suppressor)

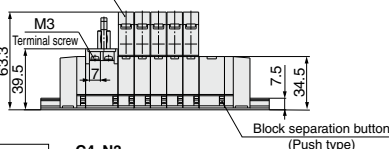

Stations n	2 stations	3	4	5	6	7	8	9	10 stations
L1	123	135.5	148	148	160.5	173	185.5	198	210.5
L2	112.5	125	137.5	150	162.5	175	187.5	200	
L3	91.5	102	112.5	123	133.5	144	154.5	165	175.5
L4	15.5	16.5	17.5	12.5	13.5	14.5	15.5	16.5	17.5

### SS5Y3-45GU-Stations B-C<sub>4</sub>, N<sub>3</sub> C<sub>6</sub>, N<sub>7</sub>



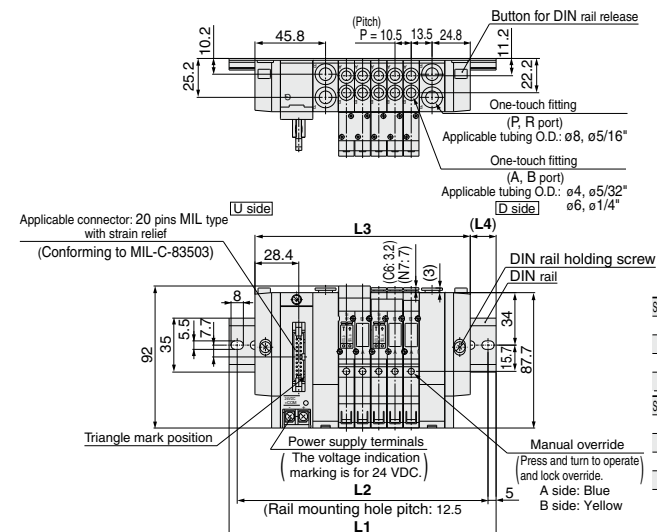


Stations n	2 stations	3	4	5	6	7	8	9	10 stations
L1	135.5	148	160.5	173	185.5	185.5	198	210.5	223
L2	125	137.5	150	162.5	175	175	187.5	200	212.5
L3	108	118.5	129	139.5	150	160.5	171	181.5	192
L4	13.5	14.5	15.5	16.5	17.5	12.5	13.5	14.5	15.5



Stations n	11 stations	12	13	14	15	16 stations
L1	235.5	248	248	260.5	273	285.5
L2	225	237.5	237.5	250	262.5	275
L3	202.5	213	223.5	234	244.5	255
L4	16.5	17.5	12	13	14	15

**SY3000: PC Wiring System Compatible (Flat ribbon cable/Plug-in)**

**SS5Y3-45GD-Stations U-C<sub>4</sub>, N<sub>3</sub>  
C<sub>6</sub>, N<sub>7</sub>**

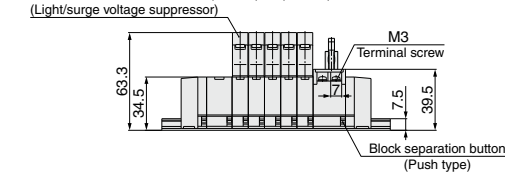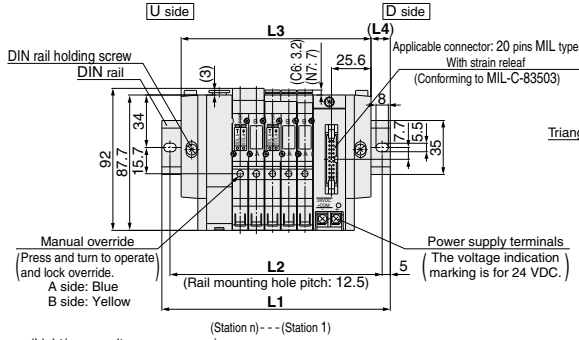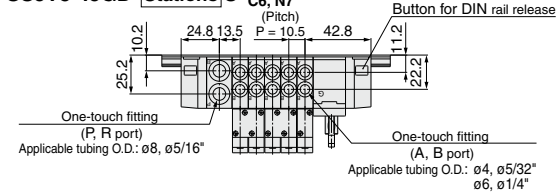

**SS5Y3-45GD-Stations B-C<sub>4</sub>, N<sub>3</sub>  
C<sub>6</sub>, N<sub>7</sub>**

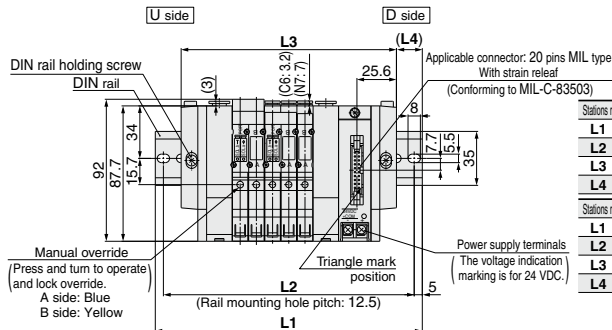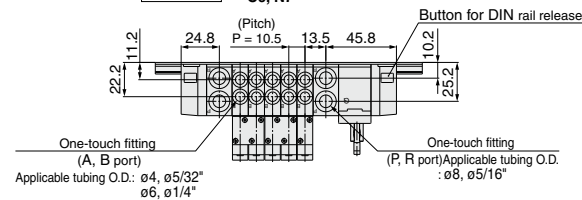

Note) The L1 to L4 dimensions of **SS5Y3-45GD-Stations D-C<sub>4</sub>, N<sub>3</sub>  
C<sub>6</sub>, N<sub>7</sub>** are identical to those of **SS5Y3-45GD-Stations U-C<sub>4</sub>, N<sub>3</sub>  
C<sub>6</sub>, N<sub>7</sub>**.

Stations n	2 stations	3	4	5	6	7	8	9	10 stations
L1	123	135.5	148	148	160.5	173	185.5	198	210.5
L2	112.5	125	137.5	137.5	150	162.5	175	187.5	200
L3	91.5	102	112.5	123	133.5	144	154.5	165	175.5
L4	15.5	16.5	17.5	12.5	13.5	14.5	15.5	16.5	17.5


Stations n	2 stations	3	4	5	6	7	8	9	10 stations
L1	135.5	148	160.5	173	185.5	185.5	198	210.5	223
L2	125	137.5	150	162.5	175	175	187.5	200	212.5
L3	108	118.5	129	139.5	150	160.5	171	181.5	192
L4	13.5	14.5	15.5	16.5	17.5	12.5	13.5	14.5	15.5

Stations n	11 stations	12	13	14	15	16 stations
L1	235.5	248	248	260.5	273	285.5
L2	225	237.5	237.5	250	262.5	275
L3	202.5	213	223.5	234	244.5	255
L4	16.5	17.5	12	13	14	15

- JS
- SY
- SY
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7


**SY5000: PC Wiring System Compatible (Flat ribbon cable/Plug-in)**

**SS5Y5-45GU-Stations D-** <sup>C4, N3</sup>  
<sup>C6, N7</sup>  
<sup>C8, N9</sup>

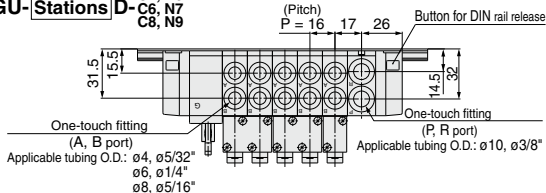


Note) The L1 to L4 dimensions of **SS5Y5-45GU-**

**Stations U-** <sup>C4, N3</sup>  
<sup>C6, N7</sup>  
<sup>C8, N9</sup> are identical to those of **SS5Y5-45GU-Stations D-** <sup>C4, N3</sup>  
<sup>C6, N7</sup>  
<sup>C8, N9</sup>


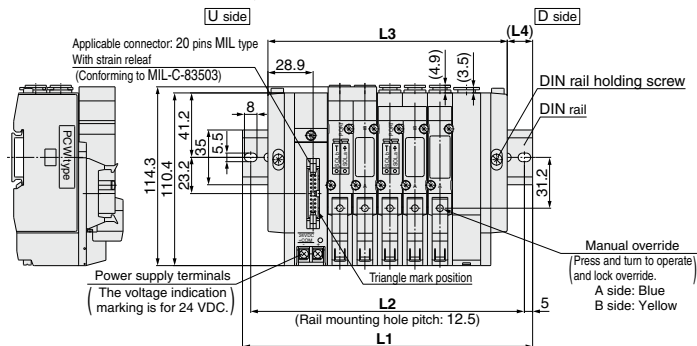


(Light/surge voltage suppressor) (Station n) ----- (Station 1)

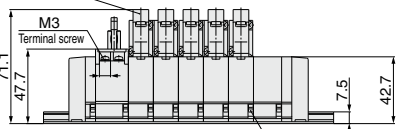

Stations n	2 stations	3	4	5	6	7	8	9	10 stations
<b>L1</b>	135.5	148	160.5	185.5	198	210.5	235.5	248	260.5
<b>L2</b>	125	137.5	150	175	187.5	200	225	237.5	250
<b>L3</b>	105	121	137	153	169	185	201	217	233
<b>L4</b>	15	13.5	11.5	16	14.5	12.5	17	15.5	13.5

**SS5Y5-45GU-Stations B-** <sup>C4, N3</sup>  
<sup>C6, N7</sup>  
<sup>C8, N9</sup>

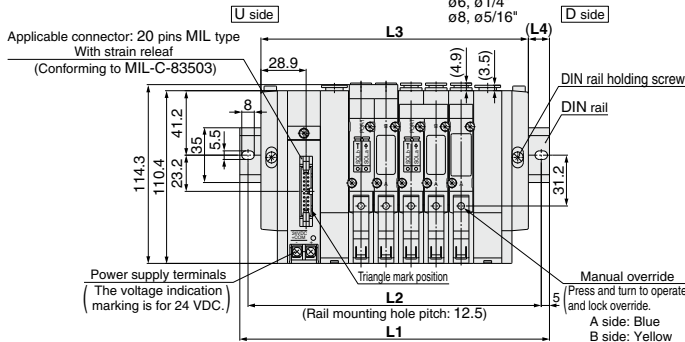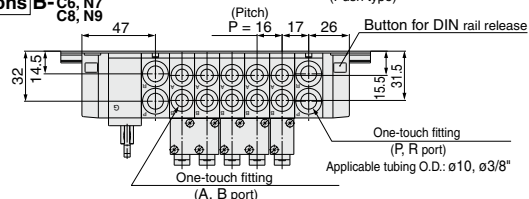


Stations n	2 stations	3	4	5	6	7	8	9	10 stations
<b>L1</b>	148	173	185.5	198	210.5	235.5	248	260.5	285.5
<b>L2</b>	137.5	162.5	175	187.5	200	225	237.5	250	275
<b>L3</b>	123	139	155	171	187	203	219	235	251
<b>L4</b>	12.5	17	15	13.5	11.5	16	14.5	12.5	17


Stations n	11 stations	12	13	14	15	16 stations
<b>L1</b>	298	310.5	323	348	360.5	373
<b>L2</b>	287.5	300	312.5	337.5	350	362.5
<b>L3</b>	267	283	299	315	331	347
<b>L4</b>	15.5	13.5	12	16.5	14.5	13

**SY5000: PC Wiring System Compatible (Flat ribbon cable/Plug-in)**

**SS5Y5-45GD-Stations U-**

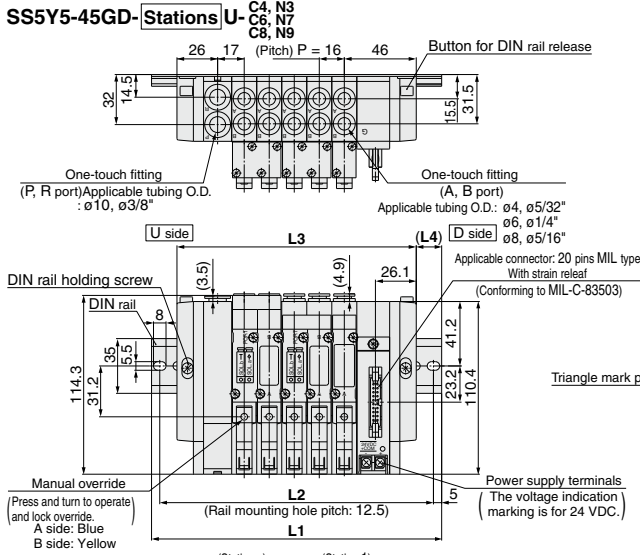


Note) The L1 to L4 dimensions of **SS5Y5-45GD-Stations D** <sup>C4, N3</sup> <sub>C6, N7</sub> are identical to those of **SS5Y5-45GD-Stations U** <sup>C4, N3</sup> <sub>C6, N7</sub> <sup>C8, N9</sup> <sub>C8, N9</sub>



Stations n	2 stations	3	4	5	6	7	8	9	10 stations
<b>L1</b>	135.5	148	160.5	185.5	198	210.5	235.5	248	260.5
<b>L2</b>	125	137.5	150	175	187.5	200	225	237.5	250
<b>L3</b>	105	121	137	153	169	185	201	217	233
<b>L4</b>	15	13.5	11.5	16	14.5	12.5	17	15.5	13.5

**SS5Y5-45GD-Stations B-**

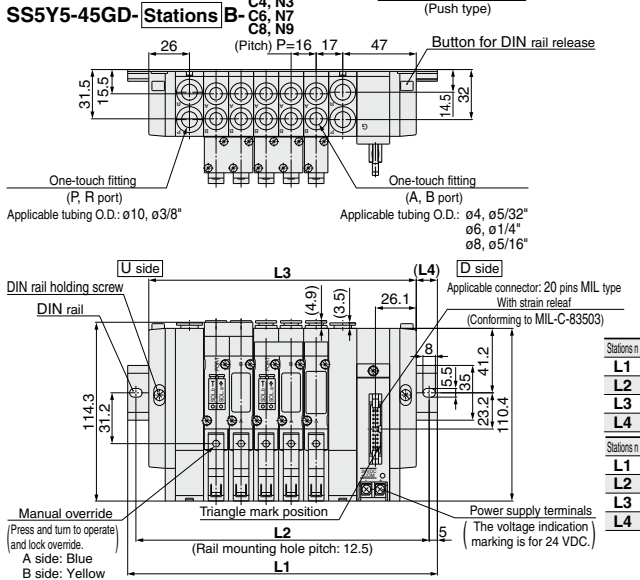


Stations n	2 stations	3	4	5	6	7	8	9	10 stations
<b>L1</b>	148	173	185.5	198	210.5	235.5	248	260.5	285.5
<b>L2</b>	137.5	162.5	175	187.5	200	225	237.5	250	275
<b>L3</b>	123	139	155	171	187	203	219	235	251
<b>L4</b>	12.5	17	15	13.5	11.5	16	14.5	12.5	17

Stations n	11 stations	12	13	14	15	16 stations
<b>L1</b>	298	310.5	323	348	360.5	373
<b>L2</b>	287.5	300	312.5	337.5	350	362.5
<b>L3</b>	267	283	299	315	331	347
<b>L4</b>	15.5	13.5	12	16.5	14.5	13

- SJ**
- SY**
- SY**
- SV**
- SYJ**
- SZ**
- VF**
- VP4**
- S0700**
- VQ**
- VQ4**
- VQ5**
- VQC**
- VQC4**
- VQZ**
- SQ**
- VFS**
- VFR**
- VQ7**

### DIN Rail Manifold Exploded View

#### Type 45F (D-sub Connector) Manifold

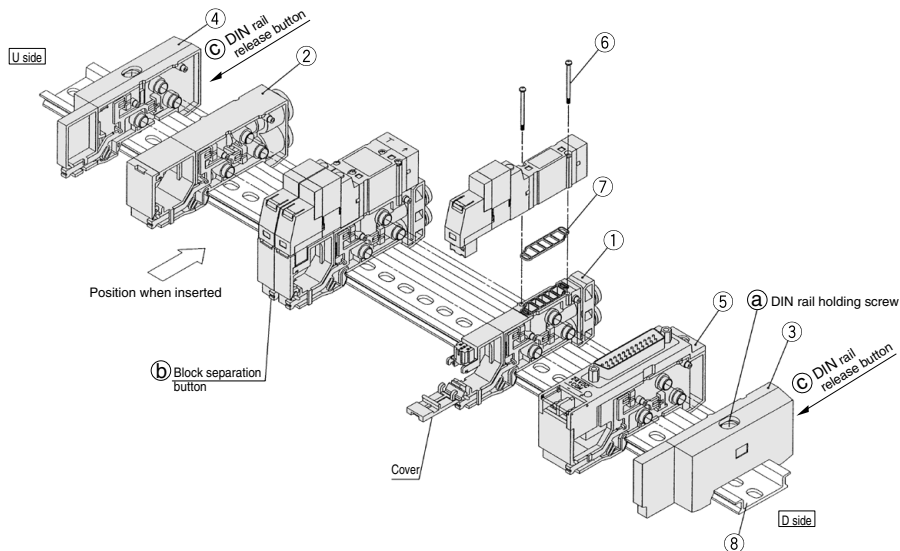

No.	Description	Part no.		Note
		SY3000	SY5000	
1	Manifold block assembly	Manifold block assembly part number differs according to an attached lead wire assembly based on the connector spec. Select an appropriate part number from the table of manifold block assembly part number shown below. (Gasket 7 is supplied as an accessory.)		
2	SUP/EXH block assembly	(Metric size) SX3000-51-2A (Inch size) SX3000-51-16A	(Metric size) SX3000-51-2A (Inch size) SX5000-51-16A	Metric size SY3000: P, R port with One-touch fitting for ø8 Inch size SY5000: P, R port with One-touch fitting for ø $\frac{3}{16}$ "
3	End block assembly	SX3000-52-2A(-Q)	SX5000-52-2A(-Q)	For D side
4	End block assembly	SX3000-53-2A(-Q)	SX5000-53-2A(-Q)	For U side
5-1	Connector block assembly (for D-sub connector)	SX3000-64- <sup>1A</sup> <sub>1NA</sub>	SX5000-64- <sup>1A</sup> <sub>1NA</sub>	-1A: +COM -1NA: -COM
5-2	Connector block assembly (for 26 pins flat cable)	SX3000-64- <sup>2A</sup> <sub>2NA</sub> -26	SX5000-64- <sup>2A</sup> <sub>2NA</sub> -26	Note) For 24 VDC
5-3	Connector block assembly (for 20 pins flat cable)	SX3000-64- <sup>2A</sup> <sub>2NA</sub> -20	SX5000-64- <sup>2A</sup> <sub>2NA</sub> -20	
5-4	Connector block assembly (for 10 pins flat cable)	SX3000-64- <sup>2A</sup> <sub>2NA</sub> -10	SX5000-64- <sup>2A</sup> <sub>2NA</sub> -10	
5-5	Connector block assembly (for 2 to 8 stations (T, T) terminal block)	SX3000-64-3A	SX5000-64-3A	In common between +COM and -COM.
5-6	Connector block assembly (for 3 to 17 stations (T) terminal block)	SX3000-64-8A	SX5000-64-8A	
6	Round head combination screw	SY3000-23-4	AC00077	
	Reference screw size	(M2 x 21)	(M3 x 26)	
7	Gasket	SX3000-57-4	SX5000-57-6	
8	DIN rail	VZ1000-11-1-□□		Refer to page 454.

Note 1) The numbers 5-1 to 4 are for 24 VDC. For 12 VDC, suffix "-12V" to the end of parts number. (Example) SX3000-64-1A-12 V





Note 2) Two manifold block assemblies are necessary for the double, 3 position (Dual body type).

Style of manifold	Manifold block assembly part no.	Note
For 45(N)F (D-sub connector)	SX <sup>3</sup> 000-50-3A-□□(-Q)	<input type="checkbox"/> : AB port SY3000 (metric size) <input type="checkbox"/> : (inch size) A, B port SY5000 (metric size) <input type="checkbox"/> : (inch size)
For 45(N) <sub>PC</sub> (Flat ribbon cable)	SX <sup>3</sup> 000-50-5A-□□(-Q)	
For 45G (Terminal block)	SX <sup>3</sup> 000-50-7A-□□(-Q)	
PC Wiring System compatible		C4: With One-touch fitting for ø4 C6: With One-touch fitting for ø6 N3: With One-touch fitting for ø $\frac{3}{32}$ " N7: With One-touch fitting for ø $\frac{1}{4}$ " C4: With One-touch fitting for ø4 C6: With One-touch fitting for ø6 C8: With One-touch fitting for ø8 N3: With One-touch fitting for ø $\frac{3}{32}$ " N7: With One-touch fitting for ø $\frac{1}{4}$ " N9: With One-touch fitting for ø $\frac{3}{16}$ "

Note) The lead wire assembly is supplied with the manifold block assembly.




### How to Increase Manifold Bases

- 1** Loosen DIN rail holding screw (a) fixing the manifold base until it begins to turn idly. (While pressing DIN rail releasing buttons (c) at two locations, separate the manifold base from the DIN rail.)
- 2** Additional bases are to be added to the U side. Press splitting button (b) of the manifold block assembly on the U side until button (b) locks, and then separate the block assemblies.
- 3** Separate the connector block assembly in the same manner as (2), and remove the connector mounting screw shown in Fig. 1.
- 4** Loosen the valve mounting screw on the U side, remove the valve, and take out the receptacle housing. (Refer to Fig. 2.)
- 5** Insert the common wire (red) of the manifold block assembly to be added into the pin insertion section (N mark) of the receptacle housing that was taken out in (4), mount it on the manifold block, and mount the removed valve.
- 6** As shown in Fig. 3, mount the additional manifold block assembly on the DIN rail on the U side. Refer to the circuit diagram, and insert the lead wire (black) as shown in Fig. 4.
- 7** Press the blocks against each other until a click sound is produced, place the lead wire in the manifold block, and close the lid without pinching the lead wire.
- 8** While lightly holding the blocks together so that there are no gaps between them, secure them to the DIN rail by tightening the DIN rail holding screws (a). Δ (Tightening torque: 1.4 N·m)



**Fig. 4**

D-sub connector (45F)    Flat ribbon cable (45P)    Terminal block (45<sup>T</sup>)



Note)  
After inserting pins, lightly pull lead wires to check that pins are locked.

Note)  
Insert pins after removing the connector from the main unit. After inserting pins, lightly pull lead wires to check that the pins are locked.

Note)  
Insert tab terminals completely.

- ⚠ Caution**
1. Depending on the connector, there is a limit to the number of solenoids that can be used. Manifold bases that can be added cannot exceed the number of usable solenoids.
  2. The manifold block assembly mounting position for additional manifold bases is always on the U side, because wires are connected to respective connectors sequentially from the D side.
  3. When DIN rail holding screw (a) for the end block is not sufficiently tightened during reassembly, air leakage may result. Before supplying air, check that there is no gap between blocks and that the manifold block is firmly fixed to the DIN rail in order to ensure air supply without leakage.

SJ
SY
SY
SV
SYJ
SZ
VF
VP4
S0700
VQ
VQ4
VQ5
VQC
VQC4
VQZ
SQ
VFS
VFR
VQ7

### How to Change Fitting Assembly

Type 45 manifold permits change in the A and B port sizes by changing the manifold block fitting assembly. After removing the valve, remove the clip with a screwdriver, etc. For mounting a new fitting assembly, insert it and then insert a clip until it will not come out of the manifold block.

#### Fitting Assembly Part No.

##### Metric size

SY3000	One-touch fitting for ø4	VVQ1000-50A-C4
	One-touch fitting for ø6	VVQ1000-50A-C6
SY5000	One-touch fitting for ø4	VVQ1000-51A-C4
	One-touch fitting for ø6	VVQ1000-51A-C6
	One-touch fitting for ø8	VVQ1000-51A-C8


##### Inch size

SY3000	One-touch fitting for ø $\frac{5}{16}$ "	VVQ1000-50A-N3
	One-touch fitting for ø $\frac{1}{4}$ "	VVQ1000-50A-N7
SY5000	One-touch fitting for ø $\frac{3}{8}$ "	VVQ1000-51A-N3
	One-touch fitting for ø $\frac{1}{4}$ "	VVQ1000-51A-N7
	One-touch fitting for ø $\frac{5}{16}$ "	VVQ1000-51A-N9

Note 1) P and R ports cannot be changed.

Note 2) Use caution that O-rings must be free from scratches and dust. Otherwise, air leakage may result.

Note 3) Purchasing order is available in units of 10 pieces.



Type **45S**

# SY3000/5000 Base Mounted Manifold

## Stacking Type/DIN Rail Mounted

### EX122 Integrated-type (For Output) Serial Transmission System

Note) Refer to the SI unit part no. for the SI unit comparable with CE. [Option]



#### How to Order Manifold

SS5Y **3** -45S **V** -05 **U** -C6 - -

**Series**

3	SY3000
5	SY5000

**SI unit specifications**

Symbol	Protocol type
0	Without SI unit
F1	NKE Corp.: Fieldbus System
H	NKE Corp.: Fieldbus H System
J1	Panasonic Industrial Devices SUNX Co., Ltd.: S-LINK (16 outputs)
J2	Panasonic Industrial Devices SUNX Co., Ltd.: S-LINK (8 outputs)
Q	DeviceNet
R1	OMRON Corp.: CompoBus/S (16 outputs) compatible
R2	OMRON Corp.: CompoBus/S (8 outputs) compatible
V	CC-LINK
ZB	CompoNet™ (Positive common)
ZBN	CompoNet™ (Negative common)

\* Even though when it is not equipped with SI unit, DIN rail length is long enough for future expectancy of mounting SI unit.

**Valve stations**

Symbol	Stations	Note
02	2 stations	Single wiring spec. (Applicable up to 16 solenoid valves.)
?	?	
16	16 stations	

\* This also includes the number of blanking plate assemblies.  
\* Two stations are necessary for the double, 3 position (Dual body type).

**SUP/EXH block assembly mounting position**

Symbol	Mounting position	Stations
U	U side	2 to 10 stations
D	D side	2 to 10 stations
B	(Both sides)	2 to 16 stations
M	Special specifications	

\* For special specifications, indicate separately by the manifold specification sheet.

**A, B port size**

**One-touch fitting (Metric size)**

Symbol	Port size	Applicable series
C4	One-touch fitting for ø4	SY3000
C6	One-touch fitting for ø6	
M	Mixed	
C4	One-touch fitting for ø4	
C6	One-touch fitting for ø6	SY5000
C8	One-touch fitting for ø8	
M	Mixed	

**One-touch fitting (Inch size)**

Symbol	Port size	Applicable series
N3	One-touch fitting for ø $\frac{5}{16}$ "	SY3000
N7	One-touch fitting for ø $\frac{3}{4}$ "	
M	Mixed	
N3	One-touch fitting for ø $\frac{5}{16}$ "	SY5000
N7	One-touch fitting for ø $\frac{1}{4}$ "	
N9	One-touch fitting for ø $\frac{9}{16}$ "	
M	Mixed	

\* In the case of mixed specifications, indicate separately on the manifold specification sheet.


**SI Unit Part No.**

Symbol	Protocol type	SI unit No.	CE-compliant	Symbol	Protocol type	SI unit No.	CE-compliant
F1	NKE Corp.: Fieldbus System	EX122-SUW1	—	R1	OMRON Corp.: CompoBus/S (16 outputs) compatible	EX122-SCS1	○
H	NKE Corp.: Fieldbus H System	EX122-SUH1	—	R2	OMRON Corp.: CompoBus/S (8 outputs) compatible	EX122-SCS2	○
J1	Panasonic Industrial Devices SUNX Co., Ltd.: S-LINK (16 outputs)	EX122-SSL1	—	V	CC-LINK	EX122-SMJ1	○
J2	Panasonic Industrial Devices SUNX Co., Ltd.: S-LINK (8 outputs)	EX122-SSL2	—	ZB	CompoNet™ (Positive common)	EX122-SCM1	○
Q	DeviceNet	EX122-SDN1	○	ZBN	CompoNet™ (Negative common)	EX122-SCM3	○

Refer to page 2051 and the Operation Manual for the details of EX122 Integrated-type (For Output) Serial Transmission System. Please download the Operation Manual via our website, <http://www.smcworld.com>

#### How to Order Manifold Assembly (Example)

**Example**

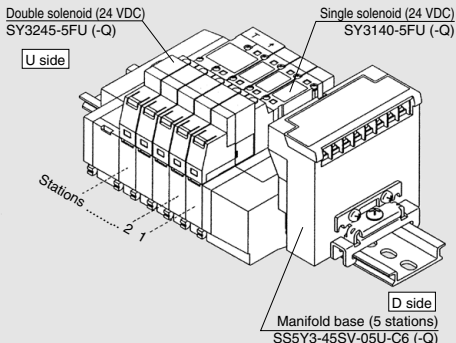


SS5Y3-45SV-05U-C6 (-Q) ..... 1 set (45S with SI unit 5-station manifold base part number)

- \* SY3140-5FU (-Q) ..... 3 sets (Single solenoid part no.)
- \* SY3245-5FU (-Q) ..... 1 set (Double solenoid part no.)

→ The asterisk denotes the symbol for assembly. Prefix it to the part nos. of the solenoid valve, etc.

- \* The valve arrangement is numbered as the 1st. station from D side.
- \* When ordering double solenoid valves/3 position (Dual body type), please keep in mind that they require two manifold stations.
- \* SI unit is available only for the D-side mounting type.

#### How to Order Valve

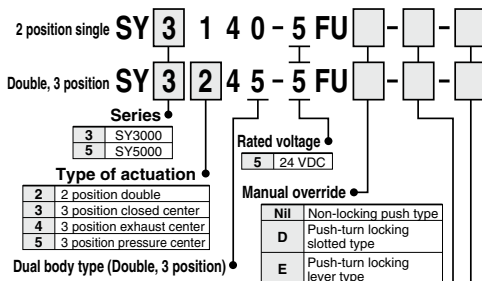

**Made to Order**

Nil	—
X90	Main valve fluororubber (Refer to page 510.)

**CE-compliant**


Nil	—
Q	CE-compliant

\* When ordering plug-in type solenoid valve as a single unit, gaskets are not included. Order them separately, if necessary. (Refer to page 478 for details.)




**Series SY3000: EX122 Integrated-type (For Output) Serial Transmission System/Plug-in**

**SS5Y3-45S** □ - Stations **U-C4, N3**  
**C6, N7**

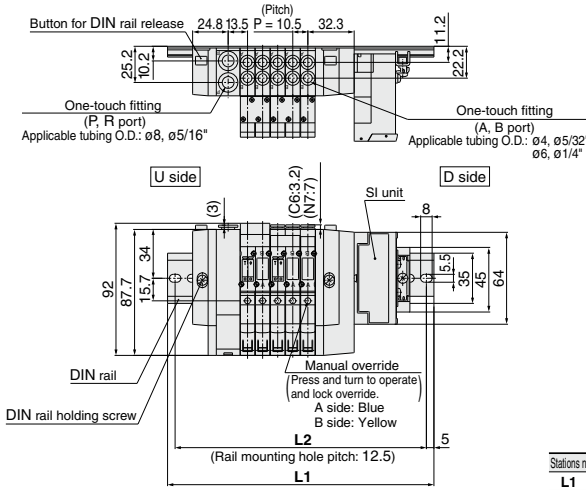


Note) The L1 to L4 dimensions of **SS5Y3-45S** □ - Stations **U-C4, N3** **C6, N7** are identical to those of **SS5Y3-45S** □ - Stations **D-C4, N3** **C6, N7**.



Stations n	2 stations	3	4	5	6	7	8	9	10 stations
<b>L1</b>	148	160.5	173	185.5	185.5	198	210.5	223	235.5
<b>L2</b>	137.5	150	162.5	175	175	187.5	200	212.5	225
<b>L3</b>	81	91.5	102	112.5	123	133.5	144	154.5	165
<b>L4</b>	14.5	15.5	16.5	17.5	12	13	14	15	16

**SS5Y3-45S** □ - Stations **B-C4, N3**  
**C6, N7**

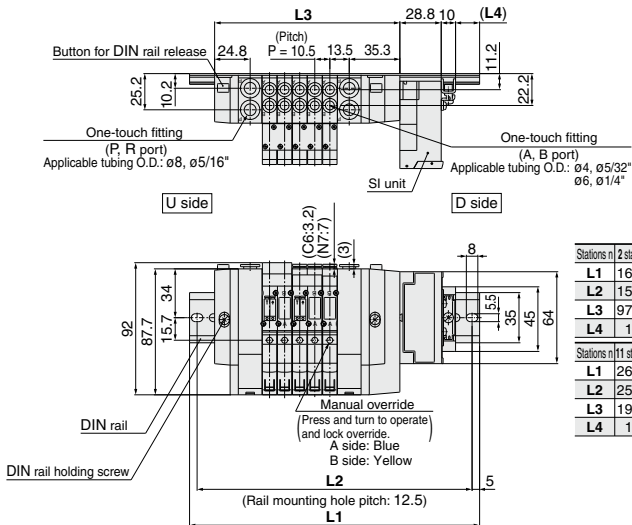


Stations n	2 stations	3	4	5	6	7	8	9	10 stations
<b>L1</b>	160.5	173	185.5	198	210.5	223	223	235.5	248
<b>L2</b>	150	162.5	175	187.5	200	212.5	212.5	225	237.5
<b>L3</b>	97.5	108	118.5	129	139.5	150	160.5	171	181.5
<b>L4</b>	12.5	13.5	14.5	15.5	16.5	17.5	12	13	14

Stations n	11 stations	12	13	14	15	16 stations
<b>L1</b>	260.5	273	285.5	285.5	298	310.5
<b>L2</b>	250	262.5	275	275	287.5	300
<b>L3</b>	192	202.5	213	223.5	234	244.5
<b>L4</b>	15	16	17	12	13	14



- SJ**
- SY**
- SY**
- SV**
- SYJ**
- SZ**
- VF**
- VP4**
- S0700**
- VQ**
- VQ4**
- VQ5**
- VQC**
- VQC4**
- VQZ**
- SQ**
- VFS**
- VFR**
- VQ7**

## Series SY5000: EX122 Integrated-type (For Output) Serial Transmission System/Plug-in

### SS5Y5-45S□-Stations U-<sup>C4, N3</sup><sub>C6, N7</sub><sup>C8, N9</sup>

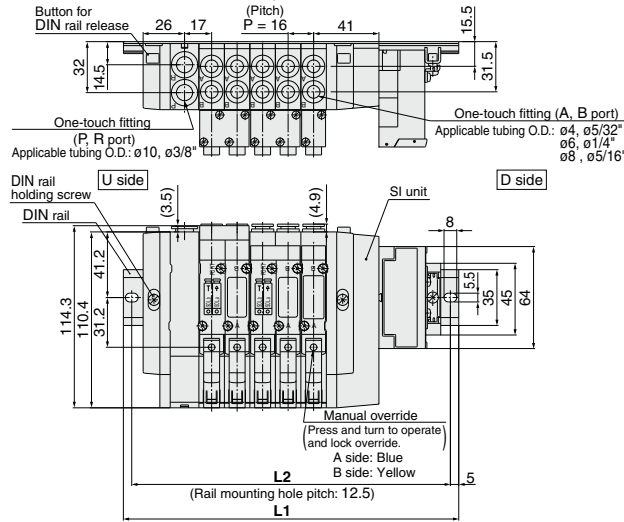


Note) The L1 to L4 dimensions of SS5Y5-45S□-  
**Stations U-<sup>C4, N3</sup><sub>C6, N7</sub><sup>C8, N9</sup>** are identical to those of  
 SS5Y5-45S□-**Stations D-<sup>C4, N3</sup><sub>C6, N7</sub><sup>C8, N9</sup>**

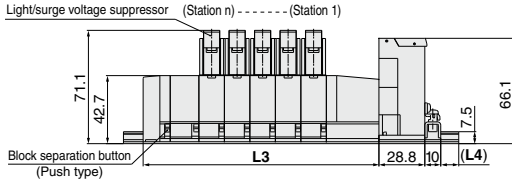

Stations n	2 stations	3	4	5	6	7	8	9	10 stations
<b>L1</b>	173	185.5	198	210.5	235.5	248	260.5	285.5	298
<b>L2</b>	162.5	175	187.5	200	225	237.5	250	275	287.5
<b>L3</b>	100	116	132	148	164	180	196	212	228
<b>L4</b>	17.5	15.5	14	12	16.5	15	13	17.5	16

### SS5Y5-45S□-Stations B-<sup>C4, N3</sup><sub>C6, N7</sub><sup>C8, N9</sup>

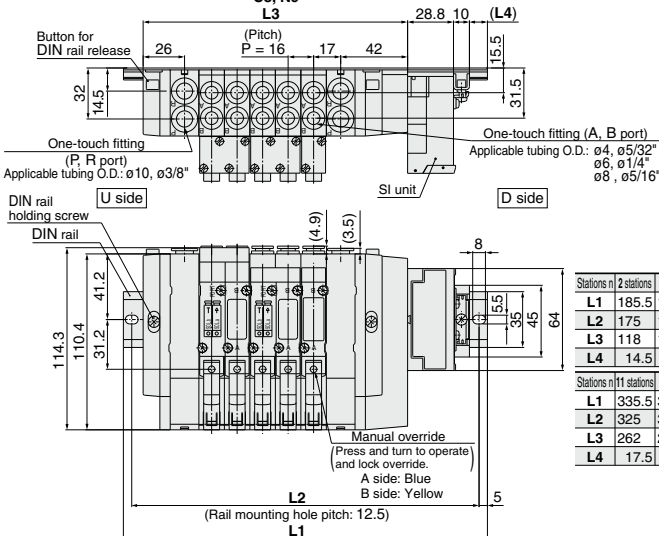

Stations n	2 stations	3	4	5	6	7	8	9	10 stations
<b>L1</b>	185.5	198	223	235.5	248	260.5	285.5	298	310.5
<b>L2</b>	175	187.5	212.5	225	237.5	250	275	287.5	300
<b>L3</b>	118	134	150	166	182	198	214	230	246
<b>L4</b>	14.5	13	17.5	15.5	14	12	16.5	15	13

Stations n	11 stations	12	13	14	15	16 stations
<b>L1</b>	335.5	348	360.5	373	398	410.5
<b>L2</b>	325	337.5	350	362.5	387.5	400
<b>L3</b>	262	278	294	310	326	342
<b>L4</b>	17.5	16	14	12.5	17	15


Type **45S1**

# SY3000/5000 Base Mounted Manifold

## Stacking Type/DIN Rail Mounted

### EX 121 Separate Type (For Output) Serial Transmission System

Note) Refer to the SI unit part no. for the SI unit comparable with CE. **[Option]**



### How to Order Manifold

SS5Y **3** - 45S1 **V D** - 05 **U** - **C4** - [ ] - [ ]

#### Series

3	SY3000
5	SY5000

#### SI unit specifications

Symbol	Protocol type
<b>0</b>	Without SI unit
<b>F1</b>	NKE Corp.: Fieldbus System
<b>H</b>	NKE Corp.: Fieldbus H System
<b>J1</b>	Panasonic Industrial Devices SUNX Co., Ltd.: S-LINK (16 outputs)
<b>J2</b>	Panasonic Industrial Devices SUNX Co., Ltd.: S-LINK (8 outputs)
<b>Q</b>	DeviceNet
<b>R1</b>	OMRON Corp.: CompoBusS (16 outputs) compatible
<b>R2</b>	OMRON Corp.: CompoBusS (8 outputs) compatible
<b>V</b>	CC-LINK
<b>ZB</b>	CompoNet™ (Positive common)
<b>ZBN</b>	CompoNet™ (Negative common)

• Even though when it is not equipped with SI unit, DIN rail length is long enough for future expectancy of mounting SI unit. When a shorter rail is required (same as type 45□), suffix "0" in the optional blank at the end of part number.

#### CE-compliant

<b>Nii</b>	—
<b>Q</b>	CE-compliant

\* Refer to the SI unit part no. for the SI unit compatible with CE.

#### Option

When a longer DIN rail is desired than the specified stations, specify the station number to be required. (Max. 20 stations)

#### A, B port size

##### One-touch fitting (Metric size)

Symbol	Port size	Applicable series
<b>C4</b>	One-touch fitting for ø4	SY3000
<b>C6</b>	One-touch fitting for ø6	
<b>M</b>	Mixed	
<b>C4</b>	One-touch fitting for ø4	SY5000
<b>C6</b>	One-touch fitting for ø6	
<b>C8</b>	One-touch fitting for ø8	
<b>M</b>	Mixed	

##### One-touch fitting (Inch size)

Symbol	Port size	Applicable series
<b>N3</b>	One-touch fitting for ø 5/32"	SY3000
<b>N7</b>	One-touch fitting for ø 1/4"	
<b>M</b>	Mixed	
<b>N3</b>	One-touch fitting for ø 5/32"	SY5000
<b>N7</b>	One-touch fitting for ø 1/4"	
<b>N9</b>	One-touch fitting for ø 9/16"	
<b>M</b>	Mixed	

\* In the case of mixed specifications, indicate separately on the manifold specification sheet.

#### SUP/EXH block assembly mounting position

Symbol	Mounting position	Stations
<b>U</b>	U side	2 to 10 stations
<b>D</b>	D side	2 to 10 stations
<b>B</b>	Both sides	2 to 16 stations
<b>M</b>	Special specifications	

\* For special specifications, indicate separately by the manifold specification sheet.

#### SI unit mounting position

Symbol	Mounting position
<b>U</b>	U side
<b>D</b>	D side

#### Valve stations

Symbol	Stations	Note
<b>02</b>	2 stations	Single wiring spec. (Applicable up to 16 solenoid valves.)
:	:	
<b>16</b>	16 stations	

\* This also includes the number of blanking plate assemblies.

\* Two stations are necessary for the double, 3 position (Dual body type).

#### SI Unit Part No.

Symbol	Protocol type	SI unit No.	CE-compliant	Symbol	Protocol type	SI unit No.	CE-compliant
<b>F1</b>	NKE Corp.: Fieldbus System	EX121-SUW1	—	<b>R1</b>	OMRON Corp.: CompoBusS (16 outputs) compatible	EX121-SCS1	○
<b>H</b>	NKE Corp.: Fieldbus H System	EX121-SUH1	—	<b>R2</b>	OMRON Corp.: CompoBusS (8 outputs) compatible	EX121-SCS2	○
<b>J1</b>	Panasonic Industrial Devices SUNX Co., Ltd.: S-LINK (16 outputs)	EX121-SSL1	—	<b>V</b>	CC-LINK	EX121-SMJ1	○
<b>J2</b>	Panasonic Industrial Devices SUNX Co., Ltd.: S-LINK (8 outputs)	EX121-SSL2	—	<b>ZB</b>	Compo Net™ (Positive common)	EX121-SCM1	○
<b>Q</b>	DeviceNet	EX121-SDN1	○	<b>ZBN</b>	CompoNet™ (Negative common)	EX121-SCM3	○


• For external pilot specifications and built-in silencer, refer to pages 502 to 506.

Refer to page 2051 and the Operation Manual for the details of EX121 Separate Type (For Output) Serial Transmission System. Please download the Operation Manual via our website, <http://www.smcworld.com>

- JS
- SY
- SY**
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

## How to Order Valve Manifold Assembly (Example)

### Example

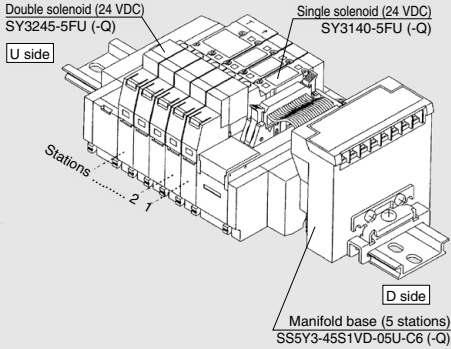

SS5Y3-45S1VD-05U-C6 (-Q) ... 1 set (Type 45S1 with serial unit 5-station manifold base part no.)

- \* SY3140-5FU (-Q) ..... 3 sets (Single solenoid part no.)
- \* SY3245-5FU (-Q) ..... 1 set (Double solenoid part no.)

The asterisk denotes the symbol for assembly.  
Prefix it to the part nos. of the solenoid valve, etc.

- The valve arrangement is numbered as the 1st. station from D side regardless of the mounting position of SI unit.
- When ordering double solenoid valves/3 position (Dual body type), please keep in mind that they require two manifold stations.

## How to Order Valve



2 position single **SY** **3** **1** **40-5 FU**  -

Double, 3 position **SY** **3** **2** **45-5 FU**  -

Series •

3	SY3000
5	SY5000

Type of actuation •

2	2 position double
3	3 position closed center
4	3 position exhaust center
5	3 position pressure center

Dual body type (Double, 3 position) •

Rated voltage •

5	24 VDC
---	--------

Manual override •

Nil	Non-locking push type
D	Push-turn locking slotted type
E	Push-turn locking lever type


CE-compliant •

Nil	—
Q	CE-compliant


- \* When ordering plug-in type solenoid valve as a single unit, gaskets are not included. Order them separately, if necessary. (Refer to page 478 for details.)

**SY3000: EX121 Separate Type (For Output) Serial Transmission System/Plug-in**

**SS5Y3-45S1** □ U- Stations **D-** C4, N3  
C6, N7

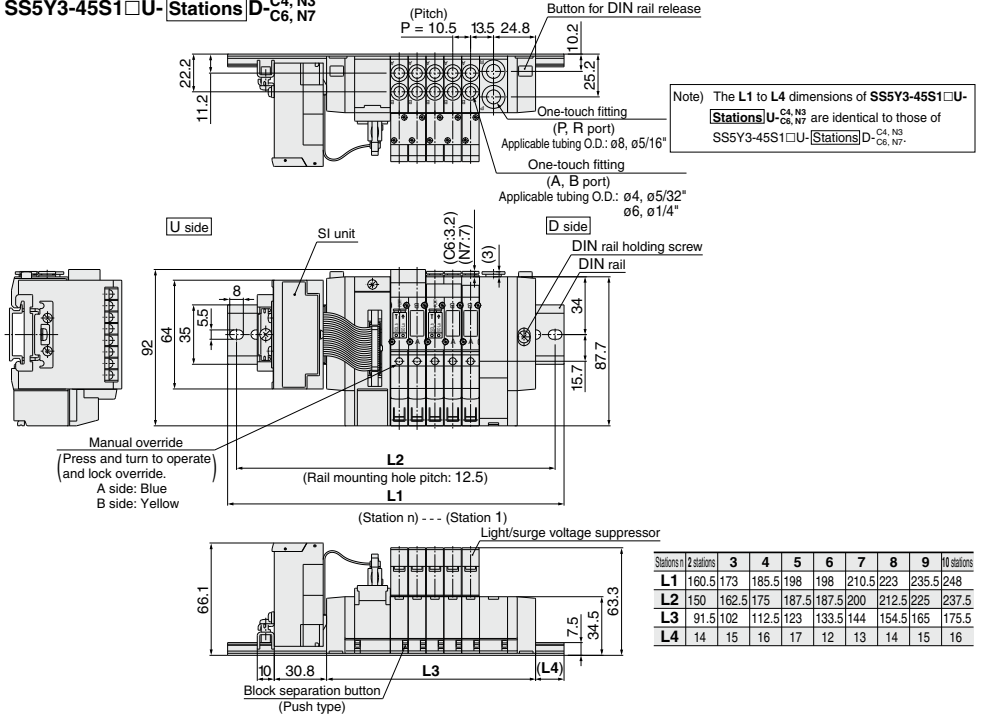


**SS5Y3-45S1** □ U- Stations **B-** C4, N3  
C6, N7

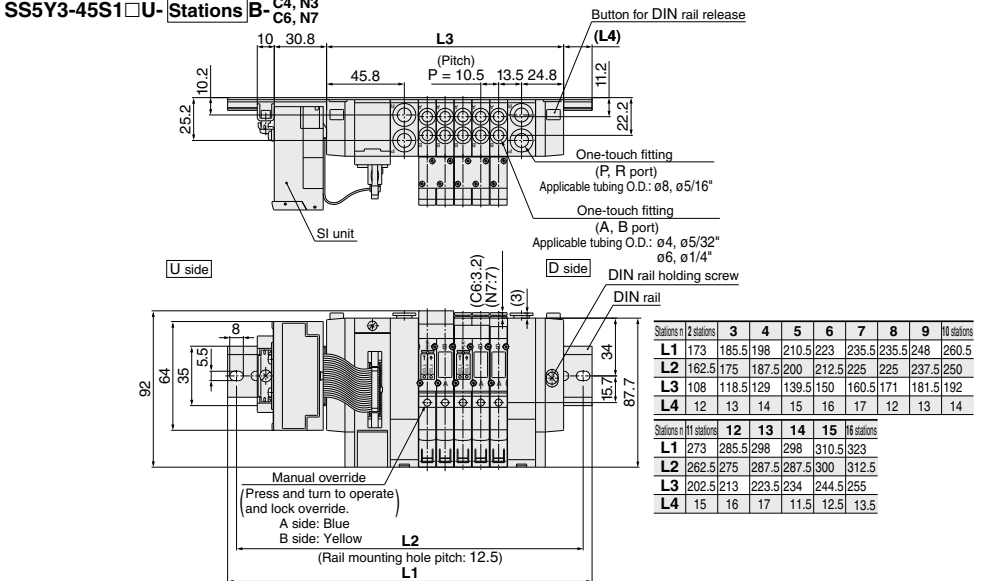




- SJ**
- SY**
- SY**
- SV**
- SYJ**
- SZ**
- VF**
- VP4**
- S0700**
- VQ**
- VQ4**
- VQ5**
- VQC**
- VQC4**
- VQZ**
- SQ**
- VFS**
- VFR**
- VQ7**

## SY3000: EX121 Separate Type (For Output) Serial Transmission System/Plug-in

### SS5Y3-45S1 □ D- Stations U- C4, N3 C6, N7


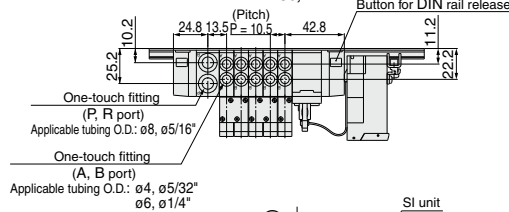


Note) The L1 to L4 dimensions of SS5Y3-45S1 □ D- Stations D- C4, N3, C6, N7 are identical to those of SS5Y3-45S1 □ D- Stations U- C4, N3, C6, N7.

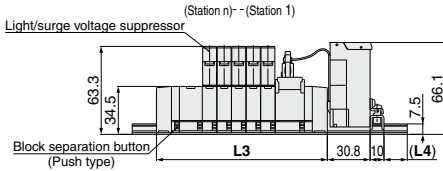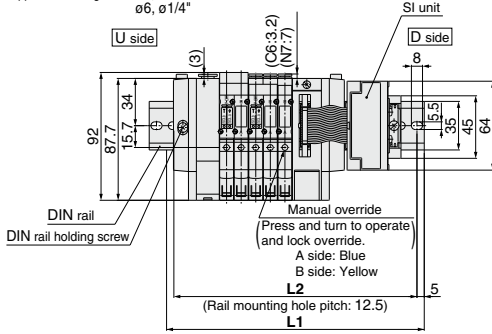

Stations n	2 stations	3	4	5	6	7	8	9	10 stations
L1	160.5	173	185.5	198	198	210.5	223	235.5	248
L2	150	162.5	175	187.5	187.5	200	212.5	225	237.5
L3	91.5	102	112.5	123	133.5	144	154.5	165	175.5
L4	14	15	16	17	12	13	14	15	16

### SS5Y3-45S1 □ D- Stations B- C4, N3 C6, N7

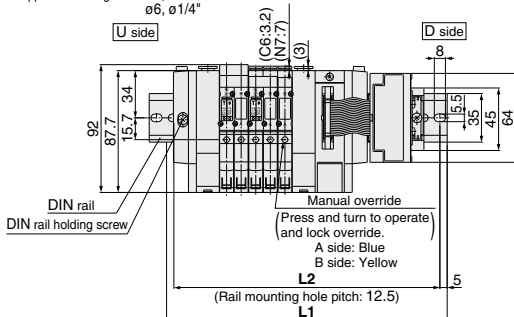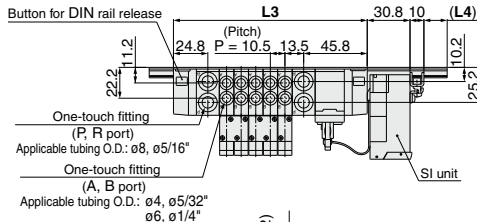


Stations n	2 stations	3	4	5	6	7	8	9	10 stations
L1	173	185.5	198	210.5	223	235.5	248	260.5	260.5
L2	162.5	175	187.5	200	212.5	225	225	237.5	250
L3	108	118.5	129	139.5	150	160.5	171	181.5	192
L4	12	13	14	15	16	17	12	13	14


Stations n	11 stations	12	13	14	15	16 stations
L1	273	285.5	298	298	310.5	323
L2	262.5	275	287.5	287.5	300	312.5
L3	202.5	213	223.5	234	244.5	255
L4	15	16	17	11.5	12.5	13.5

**SY5000: EX121 Separate Type (For Output) Serial Transmission System/Plug-in**


**SS5Y5-45S1□U- Stations D-** C4, N3  
C6, N7  
C8, N9

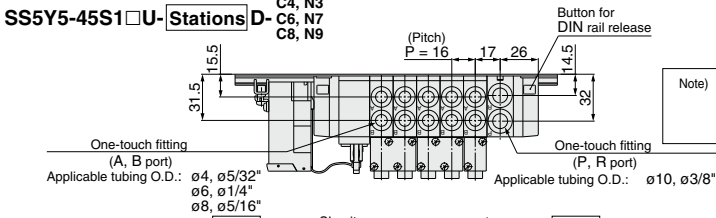


Note) The L1 to L4 dimensions of **SS5Y5-45S1□U- Stations U-** C4, N3  
C6, N7  
C8, N9 are identical to those of **SS5Y5-45S1□U- Stations D-** C4, N3  
C6, N7  
C8, N9.

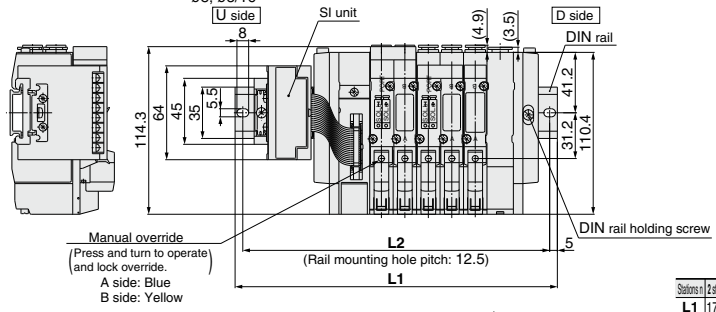

Stations	2 stations	3	4	5	6	7	8	9	10 stations
<b>L1</b>	173	185.5	210.5	223	235.5	260.5	273	285.5	298
<b>L2</b>	162.5	175	200	212.5	225	250	262.5	275	287.5
<b>L3</b>	105	121	137	153	169	185	201	217	233
<b>L4</b>	13.5	12	16.5	14.5	13	17.5	15.5	14	12

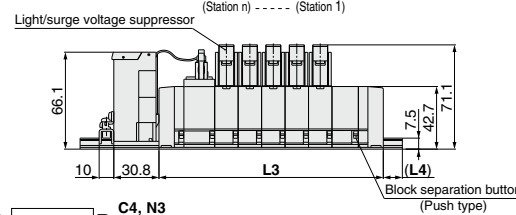


**SS5Y5-45S1□U- Stations B-** C4, N3  
C6, N7  
C8, N9

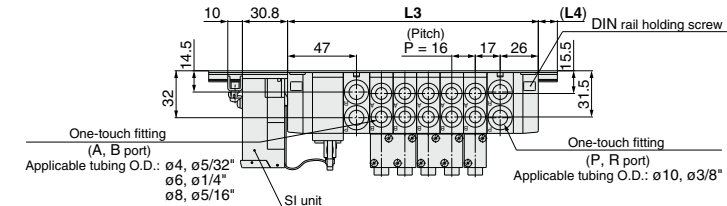

Stations	2 stations	3	4	5	6	7	8	9	10 stations
<b>L1</b>	198	210.5	223	235.5	260.5	273	285.5	310.5	323
<b>L2</b>	187.5	200	212.5	225	250	262.5	275	300	312.5
<b>L3</b>	123	139	155	171	187	203	219	235	251
<b>L4</b>	17	15.5	13.5	12	16.5	14.5	13	17.5	15.5


Stations	11 stations	12	13	14	15	16 stations
<b>L1</b>	335.5	348	373	385.5	398	410.5
<b>L2</b>	325	337.5	362.5	375	387.5	400
<b>L3</b>	267	283	299	315	331	347
<b>L4</b>	14	12	16.5	15	13	11.5

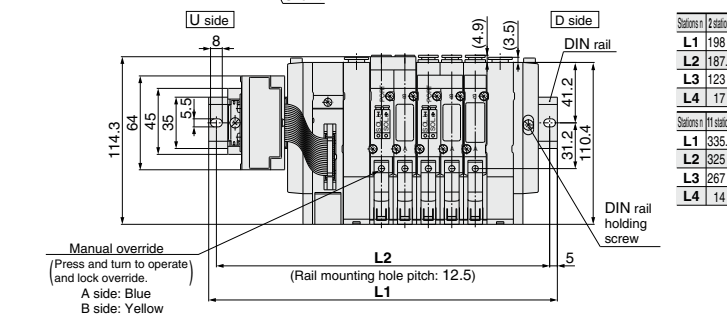




- SJ
- SY
- SY
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

## SY5000: EX121 Separate Type (For Output) Serial Transmission System/Plug-in

### SS5Y5-45S1 □ D - Stations U <sup>C4, N3</sup> <sub>C6, N7</sub> <sub>C8, N9</sub>


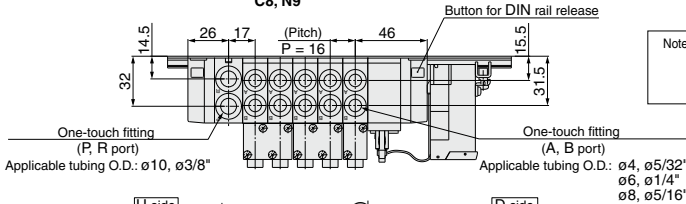


Note) The L1 to L4 dimensions of **SS5Y5-45S1 □ D - Stations U** <sup>C4, N3</sup> <sub>C6, N7</sub> <sub>C8, N9</sub> are identical to those of **SS5Y5-45S1 □ D - Stations J** <sup>C4, N3</sup> <sub>C6, N7</sub> <sub>C8, N9</sub>.

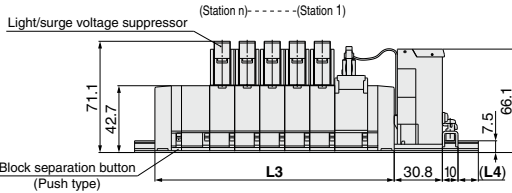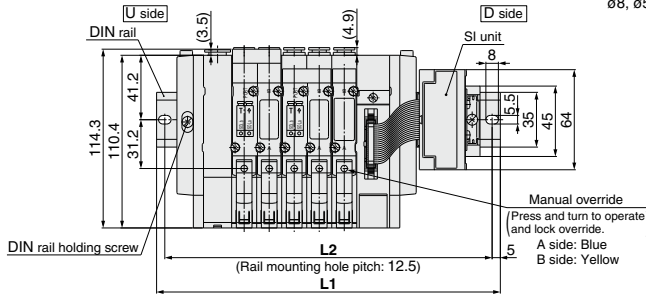

Stations n	2 stations	3	4	5	6	7	8	9	10 stations
<b>L1</b>	173	185.5	210.5	223	235.5	260.5	273	285.5	298
<b>L2</b>	162.5	175	200	212.5	225	250	262.5	275	287.5
<b>L3</b>	105	121	137	153	169	185	201	217	233
<b>L4</b>	13.5	12	16.5	14.5	13	17.5	15.5	14	12

### SS5Y5-45S1 □ D - Stations B <sup>C4, N3</sup> <sub>C6, N7</sub> <sub>C8, N9</sub>

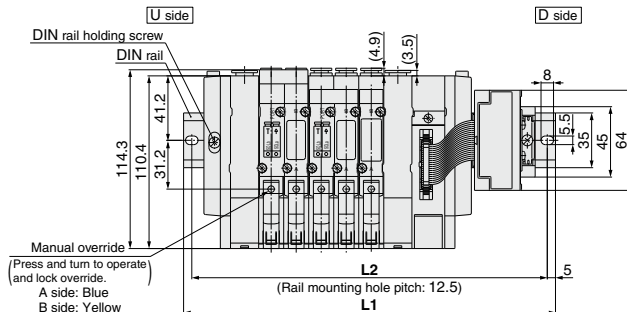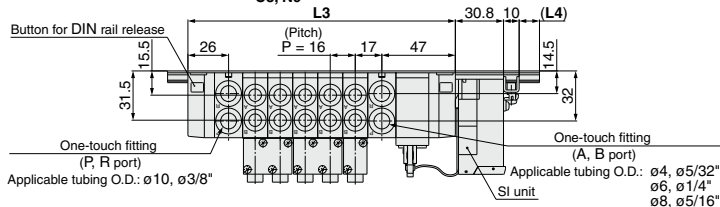

Stations n	2 stations	3	4	5	6	7	8	9	10 stations
<b>L1</b>	198	210.5	223	235.5	260.5	273	285.5	310.5	323
<b>L2</b>	187.5	200	212.5	225	250	262.5	275	300	312.5
<b>L3</b>	123	139	155	171	187	203	219	235	251
<b>L4</b>	17	15.5	13.5	12	16.5	14.5	13	17.5	15.5

Stations n	11 stations	12	13	14	15	16 stations
<b>L1</b>	335.5	348	373	385.5	398	410.5
<b>L2</b>	325	337.5	362.5	375	387.5	400
<b>L3</b>	267	283	299	315	331	347
<b>L4</b>	14	12	16.5	15	13	11.5



<b>SJ</b>
<b>SY</b>
<b>SY</b>
<b>SV</b>
<b>SYJ</b>
<b>SZ</b>
<b>VF</b>
<b>VP4</b>
<b>S0700</b>
<b>VQ</b>
<b>VQ4</b>
<b>VQ5</b>
<b>VQC</b>
<b>VQC4</b>
<b>VQZ</b>
<b>SQ</b>
<b>VFS</b>
<b>VFR</b>
<b>VQ7</b>

# EX510 Gateway-type Serial Transmission System Base Mounted Manifold/Stacking Type/Plug-in Type



Type **45S6B**

# Series SY3000/5000

## How to Order Manifold

**SS5Y 3 - 45S6B - U - 02 U - C4 -**

### Manifold series

3	SY3000
5	SY5000

### SI unit

NII	NPN output (+COM.)
N	PNP output (-COM.)

### SI unit mounting position

U	U side
D	D side

### Valve stations

Symbol	Stations	Note
02	2 stations	Compatible with 16 solenoid valves
⋮	⋮	
16	16 stations	


\*The number of the blanking plate assembly is also included.

### SI unit part no.

Symbol	SI unit specifications	SI unit part no.	Page
NII	NPN output (+COM.)	EX510-S002A	P.2143
N	PNP output (-COM.)	EX510-S102A	

## How to Order Manifold Assembly (Example)

### Example

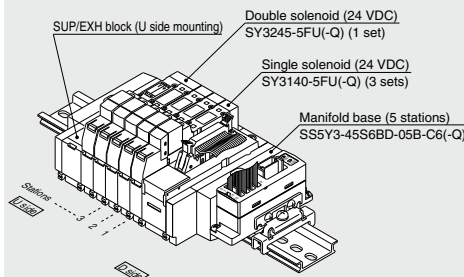

SSSY3-45S6BD-05U-C6(-Q) · 1 set (45S6B type 5-station manifold part no.)  
 · SY3140-5FU(-Q) ······ 3 sets (Single solenoid part no.)  
 · SY3245-5FU(-Q) ······ 1 set (Double solenoid part no.)

\*The asterisk denotes the symbol for assembly. Prefix to the part no. of the solenoid valve, etc.

- They will be assembled in the order listed starting at the first station at the D side whether the connector box is located at either end.
- When ordering double solenoid valves/3 position (dual body style), please keep in mind that they require two manifold stations.

### CE-compliant

NII	—
Q	CE-compliant

### Option

When a DIN rail that is longer than the specified stations is desired, specify the required station number. (Max. 20 stations)

### A, B port size

#### One-touch fitting (Metric size)

Symbol	Port size	Applicable series
C4	One-touch fitting for ø4	SY3000
C6	One-touch fitting for ø6	
M	Mixed	SY5000
C4	One-touch fitting for ø4	
C6	One-touch fitting for ø6	
C8	One-touch fitting for ø8	
M	Mixed	

#### One-touch fitting (Inch size)

Symbol	Port size	Applicable series
N3	One-touch fitting for ø5/32"	SY3000
N7	One-touch fitting for ø1/4"	
M	Mixed	
N3	One-touch fitting for ø5/32"	SY5000
N7	One-touch fitting for ø1/4"	
N9	One-touch fitting for ø5/16"	
M	Mixed	

\* For the mixed specification, indicate separately on a manifold specification sheet.

### Pilot specifications

NII	Internal pilot
S	Internal pilot/built-in silencer
R	External pilot
RS	External pilot/built-in silencer


### SUP/EXH block assembly mounting position

U	U side	2 to 10 stations
D	D side	
B	Both sides	2 to 16 stations
M	Special specifications*	

\*For the special specifications, indicate separately on a manifold specification sheet.

Refer to page 2124 and the Operation Manual for the details of EX510 Gateway-type Serial Transmission System. Please download the Operation Manual via our website, <http://www.smcworld.com>

**How to Order Valves**

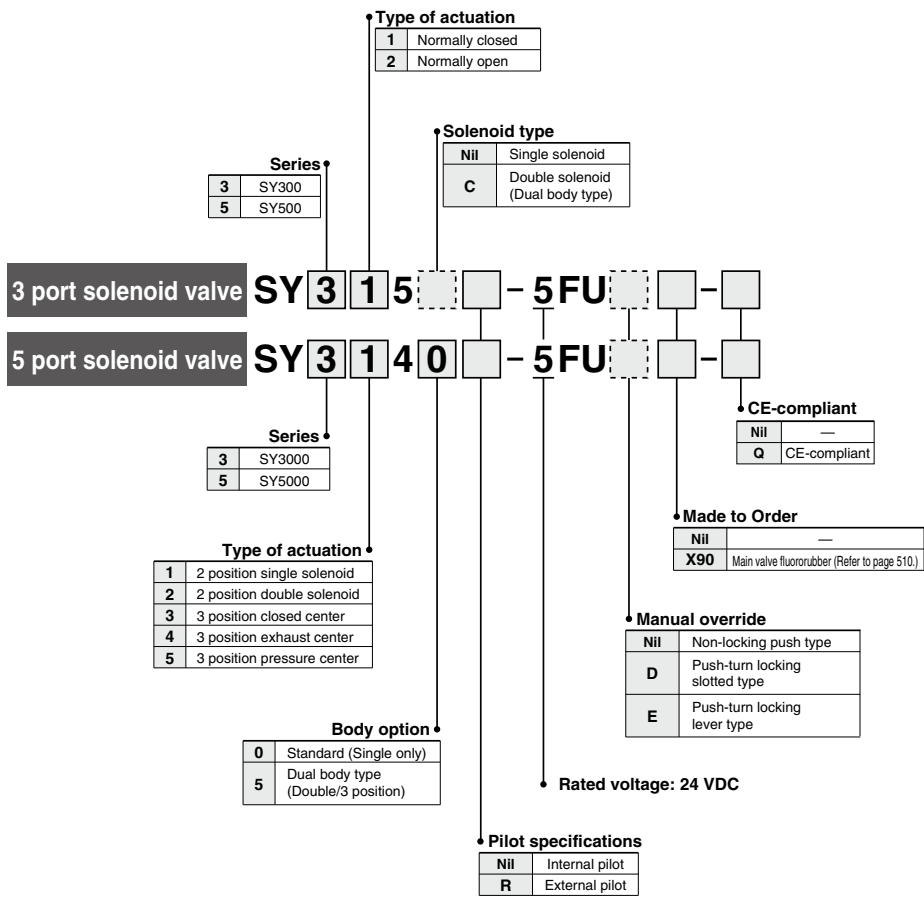

SJ

SY

**SY**

SV

SYJ

SZ

VF

VP4

S0700

VQ

VQ4

VQ5

VQC

VQC4

VQZ

SQ

VFS

VFR





VQ7

\* When ordering plug-in type solenoid valve as a single unit, gaskets are not included. Order them separately, if necessary. (Refer to page 478 for details.)

# Type **45S6B** Series **SY3000/5000**

## Dimensions

SS5Y3-45S6B □ D- Stations U- <sup>C4, N3</sup> <sub>C6, N7</sub>

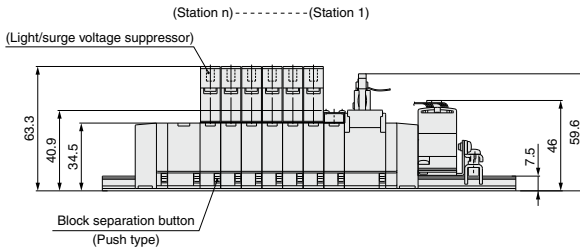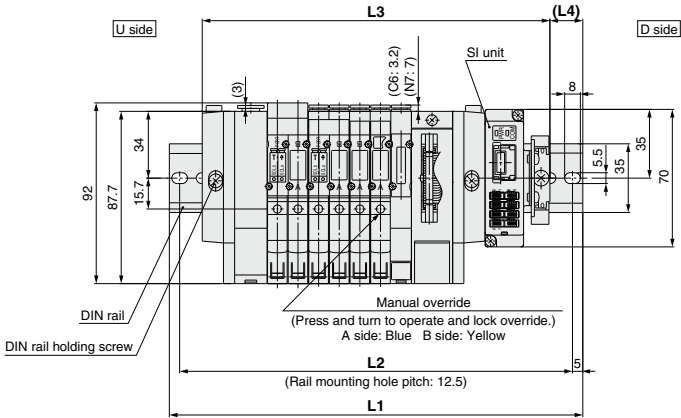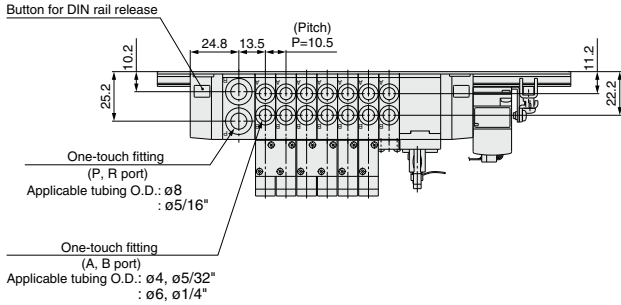


### L: Dimensions

n: Stations

L \ n	2	3	4	5	6	7	8	9	10
L1	148	160.5	173	185.5	198	210.5	223	223	235.5
L2	137.5	150	162.5	175	187.5	200	212.5	212.5	225
L3	124.5	135	145.5	156	166.5	177	187.5	198	208.5
L4	12	13	14	15	16	17	18	12.5	13.5

**Dimensions**

SS5Y3-45S6B U- Stations B- C4, N3  
C6, N7

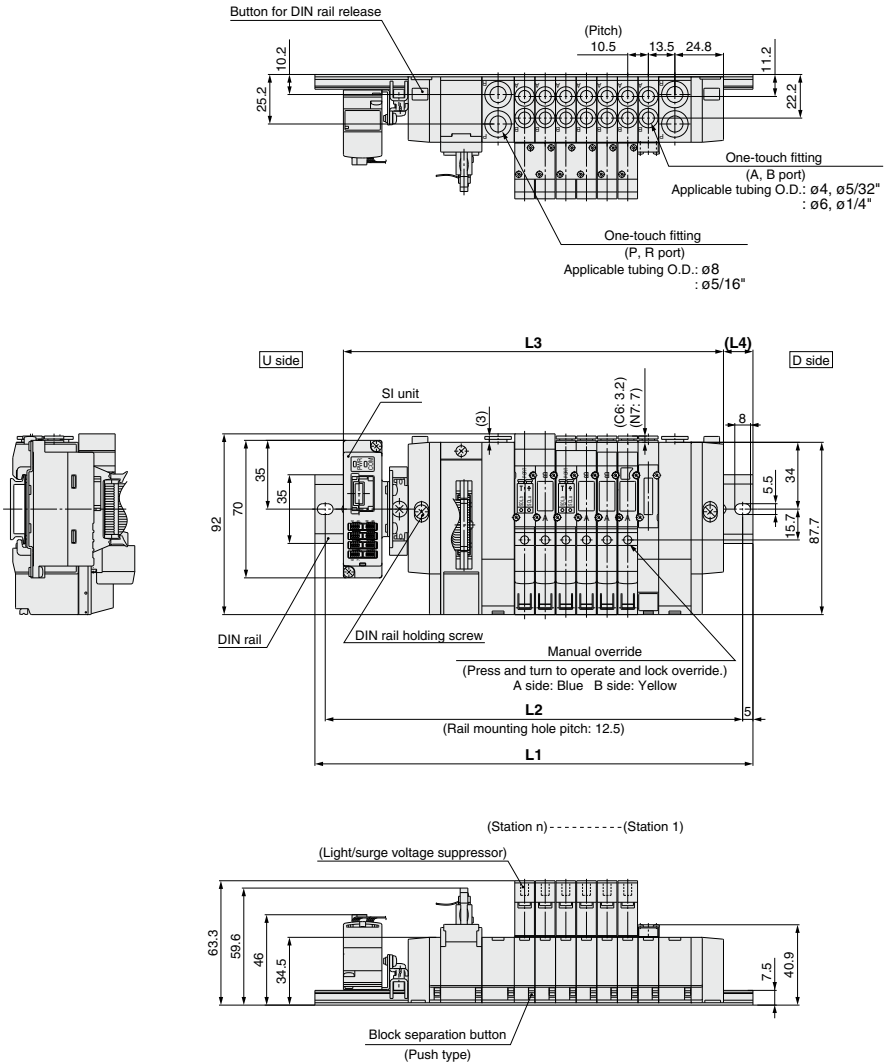

- SJ
- SY
- SY**
- SV
- SYJ
- SZ
- VF
- VP4
- S0700
- VQ
- VQ4
- VQ5
- VQC
- VQC4
- VQZ
- SQ
- VFS
- VFR
- VQ7

**L: Dimensions**





L \ n	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
L1	173	185.5	198	198	210.5	223	235.5	248	260.5	273	273	285.5	298	310.5	323
L2	162.5	175	187.5	187.5	200	212.5	225	237.5	250	262.5	262.5	275	287.5	300	312.5
L3	141	151.5	162	172.5	183	193.5	204	214.5	225	235.5	246	256.5	267	277.5	288
L4	16	17	18	13	14	15	16	17	18	19	13.5	14.5	15.5	16.5	17.5

n: Stations

# Type **45S6B** Series **SY3000/5000**

## Dimensions

SS5Y5-45S6B □ D- Stations U<sup>C4, N3</sup>  
 C6, N7  
 C8, N9

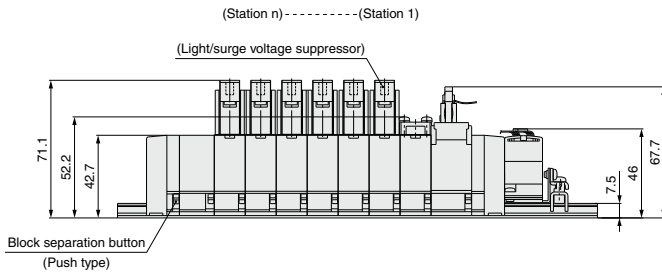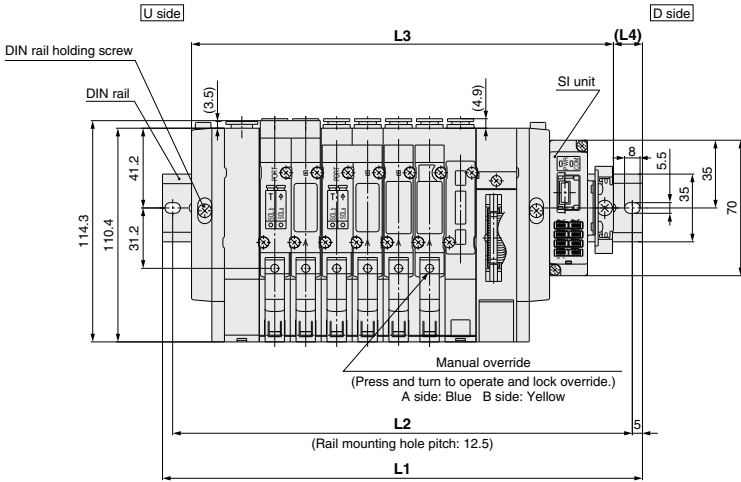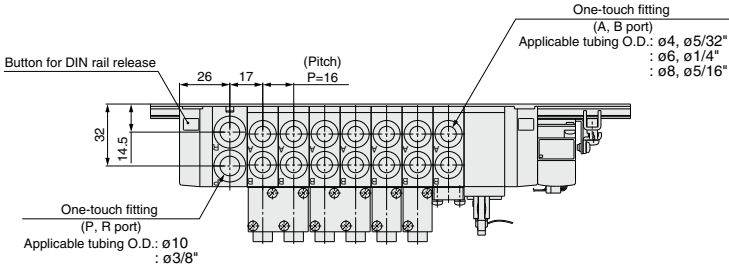


### L: Dimensions

n: Stations

L \ n	2	3	4	5	6	7	8	9	10
L1	173	185.5	198	210.5	235.5	248	260.5	285.5	298
L2	162.5	175	187.5	200	225	237.5	250	275	287.5
L3	138	154	170	186	202	218	234	250	266
L4	17.5	16	14	12.5	17	15	13.5	18	16

## Manifold Option

### ■ Blanking plate assembly



Series	Assembly part no.
<b>SY3000</b>	SX3000-75-2A(-Q)
<b>SY5000</b>	SX5000-76-6A(-Q)

Note) When mounting blanking plate, be sure to mount a short cap.

- Two stations are necessary for the double, 3 position (Dual body type).

### ■ SUP blocking disk

By installing a SUP blocking disk in the pressure supply passage of a manifold valve, it is possible to supply two or more different high and low pressures to one manifold.



Series	Part no.
<b>SY3000</b>	SX3000-77-1A
<b>SY5000</b>	SX5000-77-1A

### ■ EXH blocking disk

By installing an EXH blocking disk in the exhaust passage of a manifold valve, it is possible to divide the valve's exhaust so that it does not affect another valve. (Two blocking disks are needed to divide both exhausts.)




Series	Part no.
<b>SY3000</b>	SX3000-77-1A
<b>SY5000</b>	SX5000-77-1A

### ■ Label for block disk

The labels shown below are used on manifold stations containing SUP/EXH block disk(s) to show their location. (3 pcs. each)  
**VZ3000-123-1A** (In common with SY3000, 5000)


Label for SUP block disk    Label for EXH block disk    Label for SUP/EXH block disk



Note) When a block disk is concurrently ordered by specifying on the manifold specification sheet, etc., a label will be stuck on the position where block disk is mounted.

### ■ Silencer with One-touch fitting


The silencer plugs directly into the One-touch fittings of the manifold.



Series	Model	Effective area mm <sup>2</sup>	A	B	C
For <b>SY3000</b> (ø8)	AN15-C08	20	ø13	20	45
For <b>SY5000</b> (ø10)	AN20-C10	30	ø16.5	30.5	57.5

### ■ Plug (white)

These are inserted in unused cylinder ports and SUP, EXH ports. Purchasing order is available in units of 10 pieces.



### Dimensions

Applicable fittings size $\phi d$	Model	A	L	D
4	<b>KQ2P-04</b>	16	32	6
6	<b>KQ2P-06</b>	18	35	8
8	<b>KQ2P-08</b>	20.5	39	10
10	<b>KQ2P-10</b>	22	43	12
1/8"	<b>KQ2P-01</b>	16	31.5	5
5/32"	<b>KQ2P-03</b>	16	32	6
1/4"	<b>KQ2P-07</b>	18	35	8.5
5/16"	<b>KQ2P-09</b>	20.5	39	10



## ⚠ Caution

### Mounting screw tightening torques

M2: 0.17 N-m  
M3: 0.8 N-m  
M4: 1.4 N-m

### ■ Individual EXH spacer assembly

### ■ Individual SUP spacer assembly



Series	Assembly part no.	Port no.	t
<b>SY3000</b>	SY3000-39-3A(-Q)	M5 x 0.8	11
<b>SY5000</b>	SY5000-39-17A(-Q)	1/8	15

Note) Please be careful because the dual body type (double solenoid, 3-position) requires two pieces. In this case, the exhaust is performed in the direction of the arrow mark indicated on the valve surface.

Series	Assembly part no.	Port no.	t
<b>SY3000</b>	SY3000-38-3A(-Q)	M5 x 0.8	11
<b>SY5000</b>	SY5000-38-17A(-Q)	1/8	15

Note) Please be careful because the dual body type (double solenoid, 3-position) requires two pieces. In this case, both supply ports require the piping.