G3VM-81HR/101HR□

MOS FET Relays SOP 6-pin, High-current and Low-ON-resistance Type

MOS FET Relays in SOP 6-pin packages that achieve the low ON resistance and high switching capacitance of a mechanical relay

- **Load voltage: 80 V/100 V**
- **80-V Relay: Continuous load current of 1.25 A (2.5 A) max. ✻**
- **100-V Relay: Continuous load current of 3 A (6 A) max. ✻**

✻ Values in parentheses are for connection C.

Note: The actual product is marked differently from the image shown here.

SOP

G3VM-81HR/101HR□

■Application Examples

- **Semiconductor test equipment**
- **Communication equipment**
- **Test & Measurement equipment**
- **Security equipment**
- **Industrial equipment**
- **Power circuit**
- **Amusement equipment**

■Package (Unit : mm, Average)

SOP 6-pin



Note: The actual product is marked differently from the image shown here.

■Model Number Legend

G3VM-□□□□□
1 2 3 4 5

1. Load Voltage
8 : 80 V
10 : 100 V

2. Contact form
1 : 1a (SPST-NO)

3. Package
H : SOP 6-pin

4. Additional functions
R: Low ON resistance

5. Other informations
When specifications overlap, serial code is added in the recorded order.

■Ordering Information

Package	Contact form	Terminals	Load voltage (peak value) ✻	Continuous load current (peak value) ✻		Stick packaging		Tape packaging	
				Connection A, B	Connection C	Model	Minimum package quantity	Model	Minimum package quantity
SOP6	1a (SPST-NO)	Surface-mounting Terminals	80 V	1.25 A	2.5 A	**G3VM-81HR**	75	**G3VM-81HR(TR)**	2,500
			100 V	1.4 A	2.8 A	**G3VM-101HR**		**G3VM-101HR(TR)**	
			100 V	2 A	4 A	**G3VM-101HR1**		**G3VM-101HR1(TR05)**	500
			100 V	3 A	6 A	**G3VM-101HR2**		**G3VM-101HR2(TR05)**	

✻ The AC peak and DC value are given for the load voltage and continuous load current.
Note: To order tape packaging for Relays with surface-mounting terminals, add “(TR)”, “(TR05)” to the end of the model number.

■Absolute Maximum Ratings (Ta = 25°C)

Item			Symbol	G3VM-81HR	G3VM-101HR	G3VM-101HR1	G3VM-101HR2	Unit	Measurement conditions
Input	LED forward current		I_F	50	30			mA	
	LED forward current reduction rate		ΔI_F/°C	-0.5	-0.3			mA/°C	Ta ≥ 25°C
	LED reverse voltage		V_R	5			6	V	
	Connection temperature		T_J	125				°C	
Output	Load voltage (AC peak/DC)		V_{OFF}	80	100			V	
	Continuous load current	Connection A	I_O	1.25	1.4	2	3	A	Connection A: AC peak/DC Connection B and C: DC
		Connection B							
		Connection C		2.5	2.8	4	6		
	ON current reduction rate	Connection A	ΔI_O/°C	-12.5	-18.7	-20	-30	mA/°C	G3VM-101HR : Ta ≥ 50°C Others : Ta ≥25°C
		Connection B							
		Connection C		-25.0	-37.3	-40	-60		
	Pulse ON current		Iop	3.75	4	6	9	A	t=100 ms, Duty=1/10
	Connection temperature		T_J	125				°C	
Dielectric strength between I/O ✻			V_{I-O}	1,500				Vrms	AC for 1 min
Ambient operating temperature			Ta	-20 to +85	-40 to +85		-40 to +110	°C	With no icing or condensation
Ambient storage temperature			Tstg	-40 to +125	-55 to +125			°C	
Soldering temperature			–	260				°C	10 s

✻ The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Connection Diagram

Connection A	
Connection B	
Connection C	

■Electrical Characteristics (Ta = 25°C)

Item			Symbol		G3VM-81HR	G3VM-101HR	G3VM-101HR1	G3VM-101HR2	Unit	Measurement conditions
Input	LED forward voltage		V_F	Minimum	1.0	1.18		1.5	V	I_F=10 mA
				Typical	1.15	1.33		1.65		
				Maximum	1.3	1.48		1.8		
	Reverse current		I_R	Maximum	10				μA	V_R=5 V
	Capacitance between terminals		C_T	Typical	15	70			pF	V=0, f=1 MHz
	Trigger LED forward current		I_{FT}	Typical	2	0.4		0.35	mA	G3VM-81HR : I_O=1250 mA Others : I_O=100 mA
				Maximum	5	3				
	Release LED forward current		I_{FC}	Minimum	0.2	0.1			mA	I_{OFF}=10 μA
Output	Maximum resistance with output ON	Connection A	R_{ON}	Typical	0.11	0.1	0.045	0.05	Ω	G3VM-81HR : I_F=5 mA, I_O= Continuous load current ratings Others : I_F=5 mA, I_O= Continuous load current ratings, t < 1 s
		Connection B			0.06	0.05	0.022	0.025		
		Connection C			0.03	0.025	0.011	0.013		
		Connection A		Maximum	0.15	0.2	0.07	0.065		
		Connection B			0.08	0.1	0.035	0.033		
		Connection C			0.04	–	0.018	0.016		
	Current leakage when the relay is open		I_{LEAK}	Typical	1.2	–	–	–	nA	G3VM-81HR : V_{OFF}=20 V, Ta=50°C Others : V_{OFF}= Load voltage ratings
				Maximum	1.5	10	1,000			
	Capacitance between terminals		C_{OFF}	Typical	460	1,000	500	460	pF	G3VM-81HR : V=0, f=100 MHz Others : V=0, f=1 MHz
				Maximum	1,000	–	–	–		
Capacitance between I/O terminals			C_{I-O}	Typical	0.8				pF	f=1 MHz, V_S=0 V
Insulation resistance between I/O terminals			R_{I-O}	Minimum	1,000				MΩ	V_{I-O}=500 VDC, RoH≤60%
				Typical	10^8					
Turn-ON time			t_{ON}	Typical	2.0	1.0	1.1	0.45	ms	I_F=5 mA, R_L=200 Ω, V_{DD}=20 V ✻
				Maximum	3.0	5.0		2		
Turn-OFF time			t_{OFF}	Typical	0.7	0.15	0.1			
				Maximum	1.0			0.5		

✻ Turn-ON and Turn-OFF Times



■Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.

Item	Symbol			G3VM-81HR	G3VM-101HR	G3VM-101HR1	G3VM-101HR2	Unit
Load voltage (AC peak/DC)	V_{DD}	Maximum		64	100	80		V
Operating LED forward current	I_F	Minimum		5				mA
		Typical		–	7.5	10		
		Maximum		30	20	25		
Continuous load current (AC peak/DC)	I_O	Maximum		1.25	1.1	2	3	A
Ambient operating temperature	Ta	Minimum		25	-20			°C
		Maximum		60	65		85	

■Spacing and Insulation

Item	Minimum	Unit
Creepage distances	4.0	mm
Clearance distances	4.0	
Internal isolation thickness	0.1	

■Engineering Data

●LED forward current vs. Ambient temperature

G3VM-81HR/101HR/101HR1

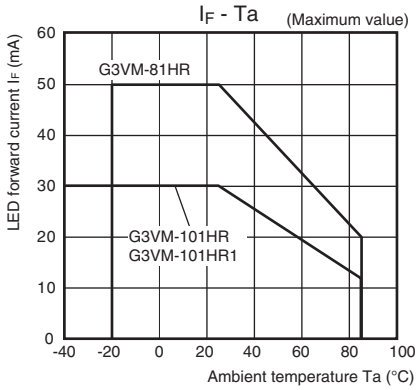

G3VM-101HR2

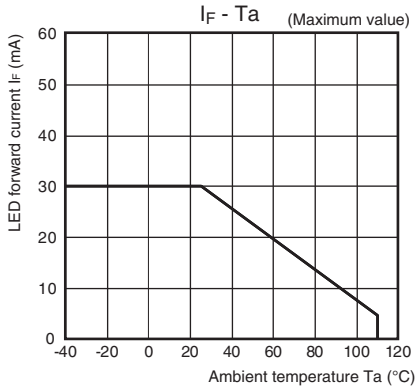

●Continuous load current vs. Ambient temperature

G3VM-101HR/101HR1

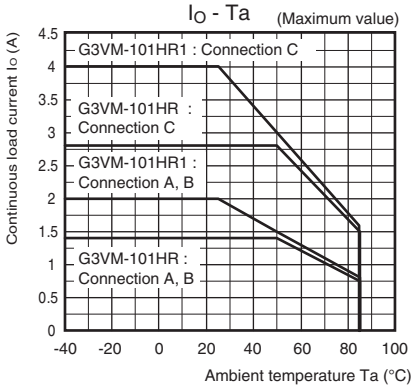

G3VM-81HR

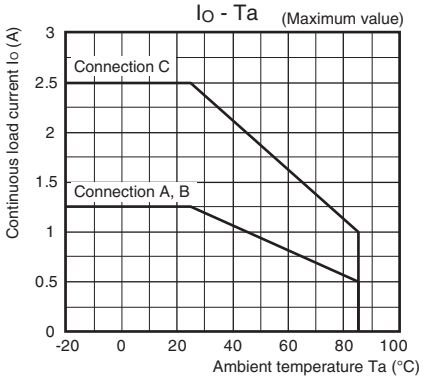

G3VM-101HR2

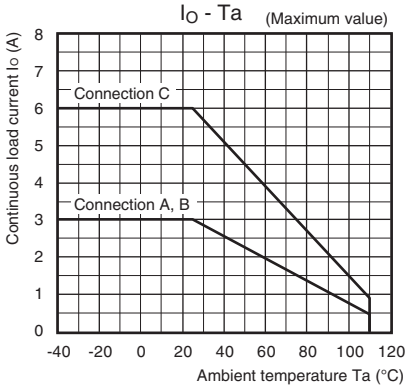

●LED forward current vs. LED forward voltage

G3VM-81HR/101HR/101HR1

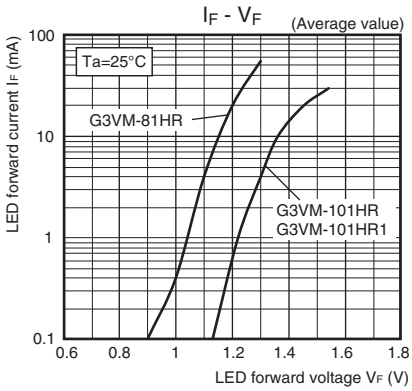

G3VM-101HR2

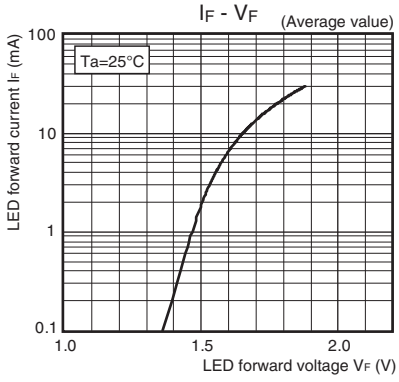

●Continuous load current vs. On-state voltage

G3VM-81HR/101HR/101HR1

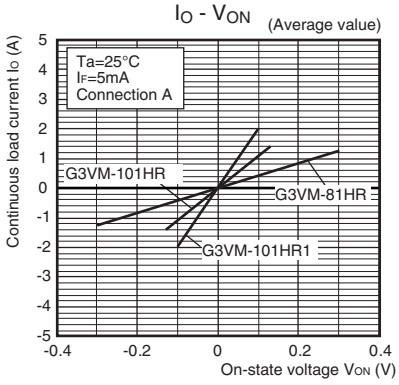

G3VM-101HR2

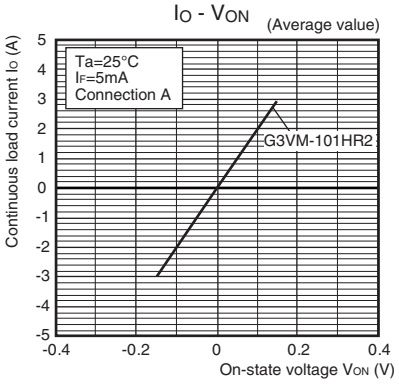

●On-state resistance vs. Ambient temperature

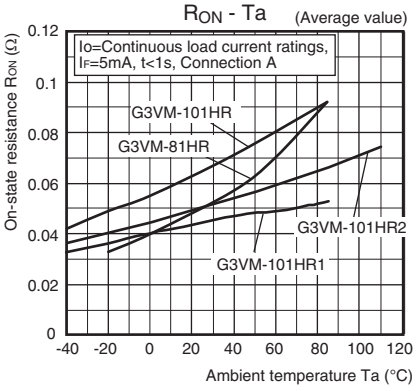

■Engineering Data

● **Trigger LED forward current vs. Ambient temperature**

G3VM-101HR/101HR1/101HR2

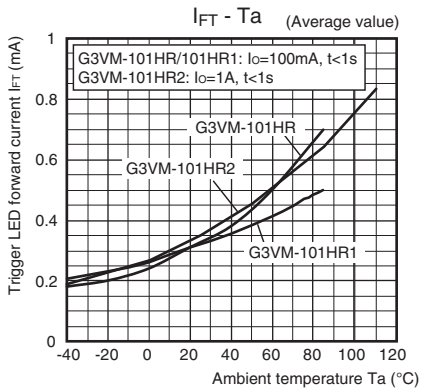

G3VM-81HR

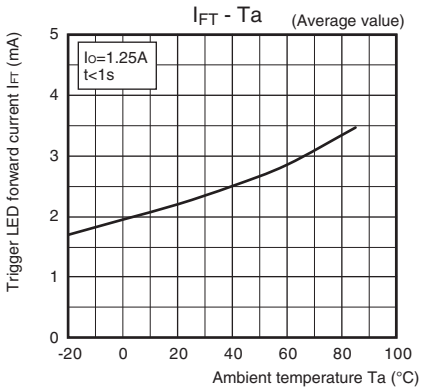

● **Turn ON, Turn OFF time vs. LED forward current**

G3VM-81HR/101HR/101HR1

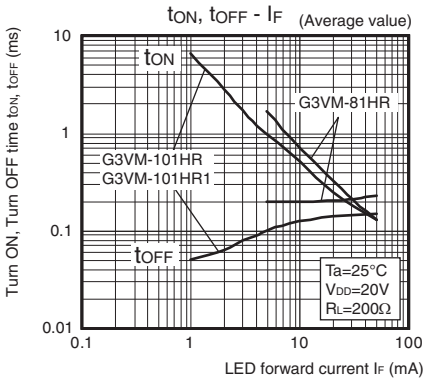

G3VM-101HR2

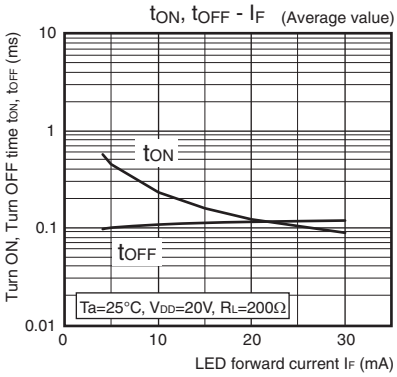

● **Turn ON, Turn OFF time vs. Ambient temperature**

G3VM-81HR/101HR/101HR1

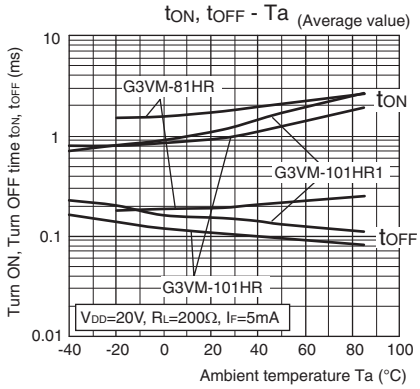

G3VM-101HR2

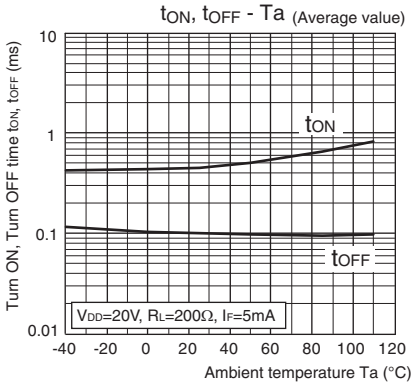

● **Current leakage vs. Load voltage**

G3VM-101HR

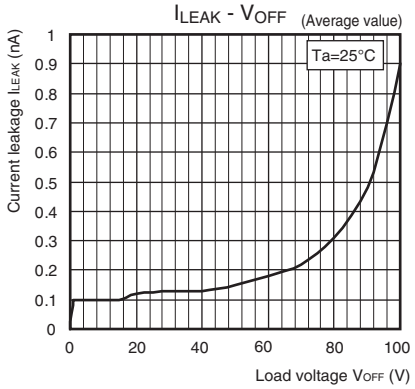

G3VM-101HR2

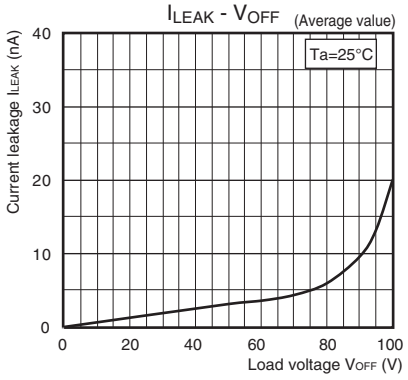

● **Current leakage vs. Ambient temperature**
G3VM-81HR

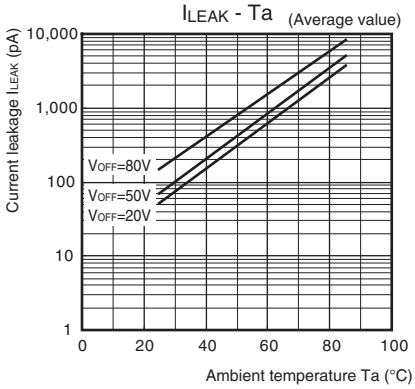

G3VM-101HR1/101HR2

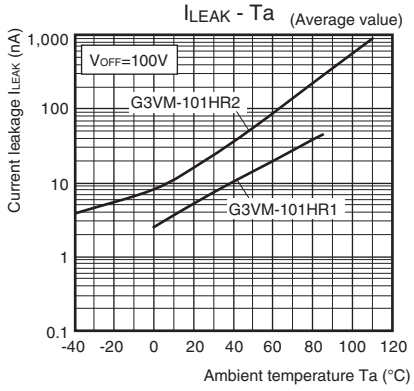

● **Output terminal capacitance vs. Load voltage**
G3VM-101HR/101HR2

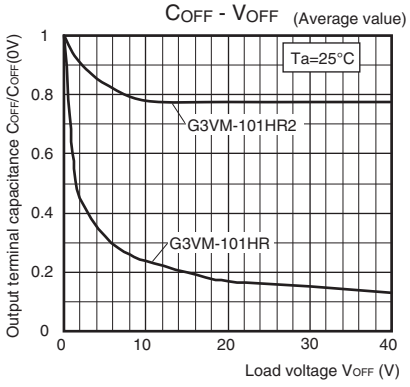

■Appearance / Terminal Arrangement / Internal Connections

●Appearance

SOP (Small Outline Package)

SOP 6-pin

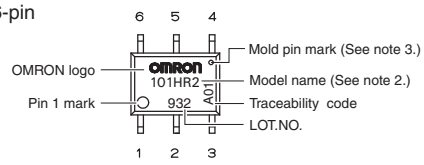

Note: 1. The actual product is marked differently from the image shown here.
Note: 2. "G3VM" does not appear in the model number on the Relay.
Note: 3. The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.

●Terminal Arrangement/Internal Connections (Top View)



■Dimensions (Unit: mm)



Surface-mounting Terminals

Weight: 0.13 g

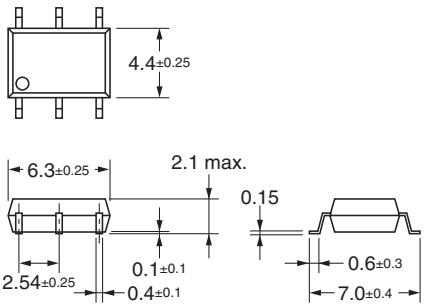

Actual Mounting Pad Dimensions

(Recommended Value, Top View)



Note: The actual product is marked differently from the image shown here.

■Approved Standards

UL recognized

Approved Standards	Contact form	File No.
UL (recognized)	1a (SPST-NO)	E80555

Note: Applying G3VM-101HR2 for UL recognition

■Safety Precautions

• Refer to the *Common Precautions for All MOS FET Relays* for precautions that apply to all MOS FET Relays.

Please check each region's Terms & Conditions by region website.

OMRON Corporation
Device & Module Solutions Company

Regional Contact

Americas
https://components.omron.com/us

Europe
https://components.omron.com/eu

Asia-Pacific
https://components.omron.com/ap

China
https://components.omron.com.cn

Korea
https://components.omron.com/kr

Japan
https://components.omron.com/jp

© OMRON Corporation 2017-2022 All Rights Reserved.
In the interest of product improvement, specifications are subject to change without notice.

Cat. No. K289-E1-07
1122 (0217)