


AI 0,75- 8 GY S1 - Ferrule



1200105

<https://www.phoenixcontact.com/ca/products/1200105>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Taped ferrules, 0.75 mm², sleeve length 8 mm, with plastic collar, according to DIN 46228-4, gray, for processing with the CRIMPFOX 4 IN 1, 10 strips each with 50 sleeves per strip.

Commercial data

Item number	1200105
Packing unit	500 pc
Minimum order quantity	500 pc
Sales key	BH34
Product key	BH3415
Catalog page	Page 415 (C-3-2019)
GTIN	4055626043029
Weight per piece (including packing)	0.089 g
Weight per piece (excluding packing)	0.089 g
Customs tariff number	85369010
Country of origin	DE

AI 0,75- 8 GY S1 - Ferrule

1200105

<https://www.phoenixcontact.com/ca/products/1200105>



Technical data

Product properties


Product type	Cable end sleeve
Conductor category	stranded conductors, class 2, 5, 6 / B, C, K, M

Connection data

Conductor connection

Conductor cross section flexible max.	0.75 mm ²
Conductor cross section AWG max.	18
Stripping length	11 mm

Dimensions

Dimensional drawing	
Sleeve length	8 mm
Maximum stripping length	11 mm
Ferrule diameter	1.3 mm
Sleeve wall thickness	0.15 mm
Insulating collar thickness	0.25 mm
Inner dimensions of the insulating collar	2.8 mm

Material specifications

Color	gray
Material	CU-DHP
Flammability rating according to UL 94	HB
Coating	tin-plated (galvanic)
Components	free from silicone and halogen

Mechanical properties

Technical data

Sleeve length	8 mm
---------------	------

Environmental and real-life conditions

Ambient conditions

Permanent temperature	105 °C (-40 °C no load / 0 °C dynamic load)
Short-term temperature	120 °C

Standards and regulations

AI 0,75- 8 GY S1 - Ferrule



1200105

<https://www.phoenixcontact.com/ca/products/1200105>

Design according to standard	DIN 46228-4, UL 486F-E
------------------------------	------------------------

Al 0,75- 8 GY S1 - Ferrule


1200105

<https://www.phoenixcontact.com/ca/products/1200105>



Drawings

Dimensional drawing

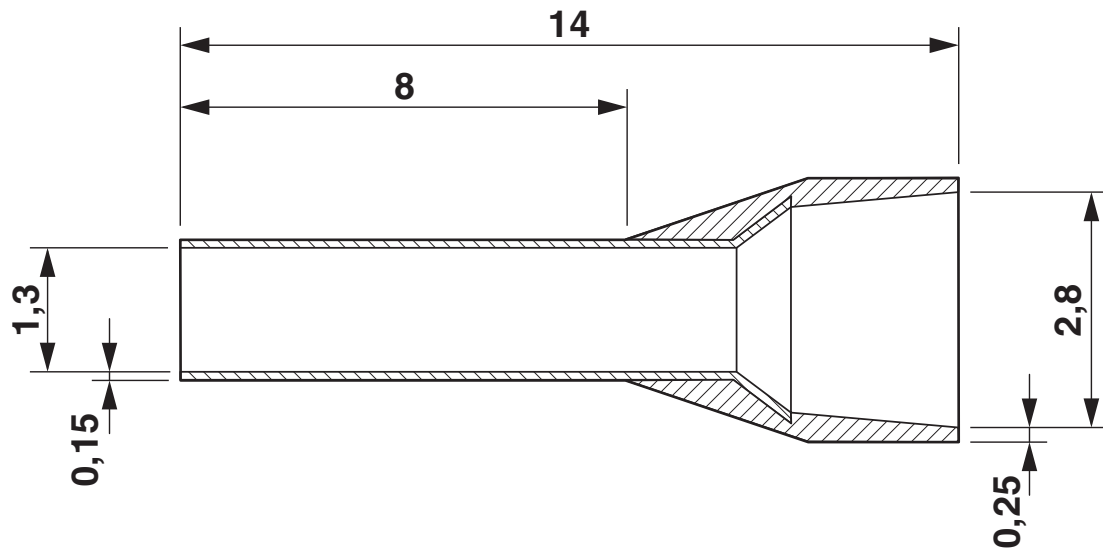

AI 0,75- 8 GY S1 - Ferrule



1200105

<https://www.phoenixcontact.com/ca/products/1200105>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/ca/products/1200105>



UL Listed
Approval ID: E488001



cUL Listed
Approval ID: E488001



cULus Listed
Approval ID: E488001

cULus Listed

AI 0,75- 8 GY S1 - Ferrule



1200105

<https://www.phoenixcontact.com/ca/products/1200105>

Classifications

ECLASS

ECLASS-11.0	27400201
ECLASS-12.0	27400201
ECLASS-13.0	27400201

ETIM

ETIM 9.0	EC000005
----------	----------

UNSPSC

UNSPSC 21.0	27121700
-------------	----------

AI 0,75- 8 GY S1 - Ferrule



1200105

<https://www.phoenixcontact.com/ca/products/1200105>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

AI 0,75- 8 GY S1 - Ferrule

1200105

<https://www.phoenixcontact.com/ca/products/1200105>



Accessories

CRIMPFOX 4 IN 1 - Multifunctional tool

1200101

<https://www.phoenixcontact.com/ca/products/1200101>



Tool for processing ferrules according to DIN 46228-4, 0.5 mm² to 2.5 mm², equipped with pressure lock, magazine, cutting, stripping, twisting, and crimping unit.

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd
8240 Parkhill Drive
Milton, Ontario L9T 5V7
1-800-890-2820
cdinfo@phoenixcontact.ca