

# E/UK 1 - End bracket



1201413

<https://www.phoenixcontact.com/pc/products/1201413>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray

## Your advantages

- Large-surface marking
- With universal foot for NS 35 and NS 32 DIN rails
- Tall and low design

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 1201413             |
| Packing unit                         | 50 pc               |
| Minimum order quantity               | 50 pc               |
| Product key                          | BE7111              |
| Catalog page                         | Page 538 (C-3-2019) |
| GTIN                                 | 4017918017316       |
| Weight per piece (including packing) | 10.806 g            |
| Weight per piece (excluding packing) | 10.2 g              |
| Customs tariff number                | 39269097            |
| Country of origin                    | PL                  |

# E/UK 1 - End bracket

1201413

<https://www.phoenixcontact.com/pc/products/1201413>



## Technical data


### Product properties

|              |             |
|--------------|-------------|
| Product type | End bracket |
|--------------|-------------|

### Connection data

|                   |            |
|-------------------|------------|
| Tightening torque | ... 0.5 Nm |
|-------------------|------------|

### Dimensions

|                     |                                                                                     |
|---------------------|-------------------------------------------------------------------------------------|
| Dimensional drawing |  |
| Width               | 10 mm                                                                               |
| Height              | 55.5 mm                                                                             |
| Depth               | 50 mm                                                                               |
| Depth on NS 35/7,5  | 51.5 mm                                                                             |
| Length              | 55.5 mm                                                                             |

### Material specifications

|                                                                         |        |
|-------------------------------------------------------------------------|--------|
| Color                                                                   | gray   |
| Material                                                                | PA     |
| Flammability rating according to UL 94                                  | V2     |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 125 °C |
| Relative insulation material temperature index (Elec., UL 746 B)        | 125 °C |

### Environmental and real-life conditions

|                                          |                                                                           |
|------------------------------------------|---------------------------------------------------------------------------|
| Ambient conditions                       |                                                                           |
| Ambient temperature (operation)          | -60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)       |
| Ambient temperature (storage/transport)  | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly)           | -5 °C ... 70 °C                                                           |
| Ambient temperature (actuation)          | -5 °C ... 70 °C                                                           |
| Permissible humidity (storage/transport) | 30 % ... 70 %                                                             |

### Mounting

|               |           |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
|               | NS 35/15  |

E/UK 1 - End bracket



1201413

<https://www.phoenixcontact.com/pc/products/1201413>

|  |       |
|--|-------|
|  | NS 32 |
|--|-------|

# E/UK 1 - End bracket


1201413

<https://www.phoenixcontact.com/pc/products/1201413>



## Drawings

Dimensional drawing

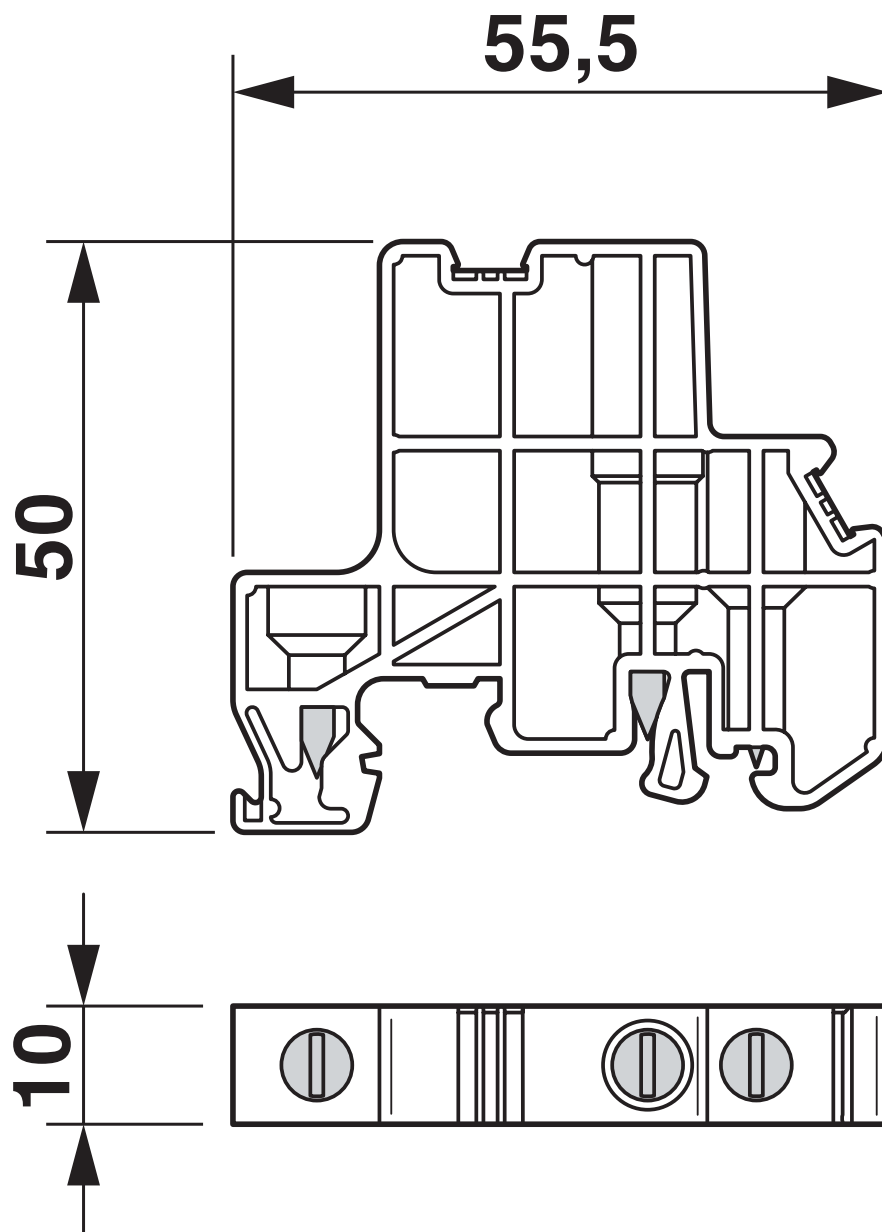

# E/UK 1 - End bracket



1201413

<https://www.phoenixcontact.com/pc/products/1201413>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27141135 |
| ECLASS-12.0 | 27141135 |
| ECLASS-13.0 | 27250302 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC001041 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# E/UK 1 - End bracket



1201413  
<https://www.phoenixcontact.com/pc/products/1201413>

## Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstraße 8  
D-32825 Blomberg  
+49 (0) 5235-3 00  
[info@phoenixcontact.com](mailto:info@phoenixcontact.com)