

Specifications

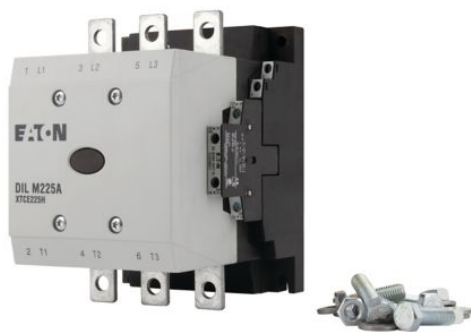


Photo is representative



Eaton 139548

Eaton Moeller® series DILM Contactor, 380 V 400 V 110 kW, 2 N/O, 2 NC, RAC 440: 380 - 440 V 50/60 Hz, AC operation, Screw connection

General specifications

| | |
|-----------------------------|--|
| PRODUCT NAME | Eaton Moeller® series DILM Contactor |
| CATALOG NUMBER | 139548 |
| MODEL CODE | DILM225A/22(RAC440) |
| EAN | 4015081363261 |
| PRODUCT LENGTH/DEPTH | 158 mm |
| PRODUCT HEIGHT | 190 mm |
| PRODUCT WIDTH | 140 mm |
| PRODUCT WEIGHT | 3.54 kg |
| CERTIFICATIONS | IEC/EN 60947 CSA UL 60947-4-1 CE VDE 0660 IEC/EN 60947-4-1 CSA-C22.2 No. 60947-4-1-14 CSA Class No.: 3211-04 UL Category Control No.: NLDX CSA File No.: 2389068 UL File No.: E29096 UL |

CATALOG NOTES

- Contacts according to EN 50012
- Also tested according to AC-3e up to 500 V.
- Also suitable for motors with efficiency class IE3.
- Conventional thermal current I_{th} of main contacts (1-

pole, open) at 60°

GLOBAL CATALOG

139548

Product specifications

| | |
|---|--|
| ACCESSORIES | Fitting options auxiliary contacts: on the side: 2 x DILM1000-XHI(V)11-SI; 2 x DILM1000-XHI11-SA |
| NUMBER OF POLES | Three-pole |
| VOLTAGE RATING | 400 V |
| 10.10 TEMPERATURE RISE | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 SHORT-CIRCUIT RATING | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.12 ELECTROMAGNETIC COMPATIBILITY | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.13 MECHANICAL FUNCTION | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed. |
| 10.2.2 CORROSION RESISTANCE | Meets the product standard's requirements. |
| 10.2.3.1 VERIFICATION OF THERMAL STABILITY OF ENCLOSURES | Meets the product standard's requirements. |
| 10.2.3.2 VERIFICATION OF RESISTANCE OF INSULATING MATERIALS TO NORMAL HEAT | Meets the product standard's requirements. |
| 10.2.3.3 RESIST. OF INSUL. MAT. TO ABNORMAL HEAT/FIRE BY INTERNAL ELECT. EFFECTS | Meets the product standard's requirements. |
| 10.2.4 RESISTANCE TO ULTRA-VIOLET (UV) RADIATION | Meets the product standard's requirements. |
| 10.2.5 LIFTING | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.6 MECHANICAL IMPACT | Does not apply, since the entire switchgear needs to |

Resources

| | |
|-----------------------------------|---|
| CATALOGS | Product Range Catalog Switching and protecting motors |
| CHARACTERISTIC CURVE | eaton-contactors-component-dilm-characteristic-curve-002.eps eaton-contactors-component-dilm-characteristic-curve.eps eaton-contactors-short-time-loading-dilm-characteristic-curve-002.eps eaton-contactors-component-dilm-characteristic-curve-003.eps |
| DECLARATIONS OF CONFORMITY | DA-DC-00004802.pdf DA-DC-00004799.pdf |
| DRAWINGS | eaton-contactors-dilm-dimensions-006.eps eaton-contactors-mounting-dilm-dimensions.eps eaton-contactors-mounting-dilm-dimensions-002.eps eaton-contactors-dilm-3d-drawing.eps |
| ECAD MODEL | DA-CE-ETN.DILM225A_22(RAC440) |
| INSTALLATION INSTRUCTIONS | IL03406001Z |
| MCAD MODEL | eaton-iec-contactors-mcad-drawings-dil-m185-225.dwg eaton-iec-contactors-mcad-3d-models-dil-m185-225.stp |
| WIRING DIAGRAMS | eaton-contactors-contact-dilm-wiring-diagram-004.eps |

| | |
|---|---|
| | be evaluated. |
| 10.2.7 INSCRIPTIONS | Meets the product standard's requirements. |
| 10.3 DEGREE OF PROTECTION OF ASSEMBLIES | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.4 CLEARANCES AND CREEPAGE DISTANCES | Meets the product standard's requirements. |
| 10.5 PROTECTION AGAINST ELECTRIC SHOCK | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.6 INCORPORATION OF SWITCHING DEVICES AND COMPONENTS | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.7 INTERNAL ELECTRICAL CIRCUITS AND CONNECTIONS | Is the panel builder's responsibility. |
| 10.8 CONNECTIONS FOR EXTERNAL CONDUCTORS | Is the panel builder's responsibility. |
| 10.9.2 POWER-FREQUENCY ELECTRIC STRENGTH | Is the panel builder's responsibility. |
| 10.9.3 IMPULSE WITHSTAND VOLTAGE | Is the panel builder's responsibility. |
| 10.9.4 TESTING OF ENCLOSURES MADE OF INSULATING MATERIAL | Is the panel builder's responsibility. |
| FITTED WITH: | Suppressor circuit in actuating electronics |
| OPERATING FREQUENCY | 200 Operations/h 3000 mechanical Operations/h (AC operated) |
| POLLUTION DEGREE | 3 |
| CLIMATIC PROOFING | Damp heat, cyclic, to IEC 60068-2-30 Damp heat, constant, to IEC 60068-2-78 |
| RATED IMPULSE WITHSTAND VOLTAGE (UIMP) | 8000 V AC |
| UTILIZATION CATEGORY | AC-1: Non-inductive or slightly inductive loads, resistance furnaces AC-4: Normal AC induction motors: starting, plugging, reversing, inching AC-3: Normal AC induction motors: starting, switch off during running |

| | |
|---|-----------------------|
| CONNECTION | Screw terminals |
| AMBIENT OPERATING TEMPERATURE - MAX | 60 °C |
| AMBIENT OPERATING TEMPERATURE - MIN | -25 °C |
| AMBIENT OPERATING TEMPERATURE (ENCLOSED) - MAX | 40 °C |
| AMBIENT OPERATING TEMPERATURE (ENCLOSED) - MIN | -25 °C |
| AMBIENT STORAGE TEMPERATURE - MAX | 80 °C |
| AMBIENT STORAGE TEMPERATURE - MIN | -40 °C |
| ASSIGNED MOTOR POWER AT 200/208 V, 60 HZ, 3-PHASE | 60 HP |
| ASSIGNED MOTOR POWER AT 230/240 V, 60 HZ, 3-PHASE | 75 HP |
| ASSIGNED MOTOR POWER AT 460/480 V, 60 HZ, 3-PHASE | 150 HP |
| ASSIGNED MOTOR POWER AT 575/600 V, 60 HZ, 3-PHASE | 200 HP |
| CONVENTIONAL THERMAL CURRENT ITH (1-POLE, ENCLOSED) | 688 A |
| CONVENTIONAL THERMAL CURRENT ITH (3-POLE, ENCLOSED) | 275 A |
| CONVENTIONAL THERMAL CURRENT ITH AT 55°C (3-POLE, OPEN) | 329 A |
| CONVENTIONAL THERMAL CURRENT ITH OF MAIN CONTACTS (1-POLE, OPEN) | 788 A |
| EQUIPMENT HEAT DISSIPATION, CURRENT-DEPENDENT PVID | 0 W |
| HEAT DISSIPATION CAPACITY PDISS | 0 W |
| HEAT DISSIPATION PER POLE, CURRENT-DEPENDENT PVID | 7.67 W |
| APPLICATION | Contactors for Motors |

| | |
|--|---|
| PRODUCT CATEGORY | Contactors |
| PROTECTION | Finger and back-of-hand proof with terminal shroud or terminal block, Protection against direct contact when actuated from front (EN 50274) |
| ELECTRICAL CONNECTION TYPE OF MAIN CIRCUIT | Rail connection |
| SCREWDRIVER SIZE | 2, Terminal screw, Control circuit cables, Pozidriv screwdriver |
| VOLTAGE TYPE | AC |
| DEGREE OF PROTECTION | IP00 |
| NUMBER OF AUXILIARY CONTACTS (NORMALLY CLOSED CONTACTS) | 2 |
| NUMBER OF AUXILIARY CONTACTS (NORMALLY OPEN CONTACTS) | 2 |
| NUMBER OF CONTACTS (NORMALLY CLOSED CONTACTS) | 2 |
| NUMBER OF CONTACTS (NORMALLY CLOSED) AS MAIN CONTACT | 0 |
| NUMBER OF CONTACTS (NORMALLY OPEN CONTACTS) | 2 |
| NUMBER OF MAIN CONTACTS (NORMALLY OPEN CONTACT) | 3 |
| RATED BREAKING CAPACITY AT 1000 V | 760 A |
| RATED BREAKING CAPACITY AT 220/230 V | 2250 A |
| RATED BREAKING CAPACITY AT 380/400 V | 2250 A |
| RATED BREAKING CAPACITY AT 500 V | 2250 A |
| RATED BREAKING CAPACITY AT 660/690 V | 2250 A |
| RATED CONTROL SUPPLY VOLTAGE (US) AT AC, 50 HZ - MAX | 440 V |
| RATED CONTROL SUPPLY VOLTAGE (US) AT AC, 50 HZ - MIN | 380 V |

| | |
|---|--|
| RATED CONTROL SUPPLY VOLTAGE (US) AT AC, 60 HZ - MAX | 440 V |
| RATED CONTROL SUPPLY VOLTAGE (US) AT AC, 60 HZ - MIN | 380 V |
| CONTACT CONFIGURATION | 2 NO, 2 NC |
| DROP-OUT VOLTAGE | AC operated: 0.25 x US max - 0.6 x US min, AC operated AC operated: 0.2 x US max - 0.4 x US min, AC operated |
| OVERVOLTAGE CATEGORY | III |
| DUTY FACTOR | 100 % |
| ELECTROMAGNETIC COMPATIBILITY | Designed for operation in industrial environments. Its use in residential environments may cause radio-frequency interference, requiring additional noise suppression. |
| LIFESPAN, MECHANICAL | 10,000,000 Operations (AC operated) |
| PICK-UP VOLTAGE | 0.8 - 1.15 V AC x Us |
| POWER CONSUMPTION, PICK-UP, 50 HZ | 210 VA, Pull-in power, Coil in a cold state and 1.0 x Us 180 W, Pull-in power, Coil in a cold state and 1.0 x Us |
| SAFE ISOLATION | 1000 V AC, Between coil and contacts, According to EN 61140 |
| POWER CONSUMPTION, PICK-UP, 60 HZ | 210 VA, Pull-in power, Coil in a cold state and 1.0 x Us 180 W, Pull-in power, Coil in a cold state and 1.0 x Us |
| SCREW SIZE | M3.5, Terminal screw, Control circuit cables M10, Terminal screw, Main connections |
| POWER CONSUMPTION, SEALING, 50 HZ | 2.6 VA, Coil in a cold state and 1.0 x Us 2.1 W, Coil in a cold state and 1.0 x Us |
| POWER CONSUMPTION, SEALING, 60 HZ | 2.6 VA, Coil in a cold state and 1.0 x Us |

| | |
|---|--|
| | 2.1 W, Coil in a cold state and 1.0 x Us |
| RATED OPERATIONAL CURRENT (IE) | 133 A at 690 V (Individual compensation, three-phase capacitors, open) 220 A at up to 525 V (Individual compensation, three-phase capacitors, open) |
| INRUSH CURRENT | Max. 30 x Ie (peak) |
| SWITCHING CAPACITY (AUXILIARY CONTACTS, GENERAL USE) | 15 A, 600 V AC, (UL/CSA) 1 A, 250 V DC, (UL/CSA) |
| SWITCHING CAPACITY (AUXILIARY CONTACTS, PILOT DUTY) | A600, AC operated (UL/CSA) P300, DC operated (UL/CSA) |
| LIFESPAN, ELECTRICAL | 100,000 Operations (at Condensor operation) |
| TERMINAL CAPACITY (COPPER BAND) | Fixing with flat cable terminal or cable terminal blocks; See terminal capacity for cable terminal blocks |
| TERMINAL CAPACITY (FLEXIBLE WITH FERRULE) | 1 x (0.75 - 2.5) mm ² , Control circuit cables 2 x (0.75 - 2.5) mm ² , Control circuit cables |
| SHOCK RESISTANCE | 10 g, N/O auxiliary contact, Mechanical, according to IEC/EN 60068-2-27, Half-sinusoidal shock 10 ms 8 g, N/C auxiliary contact, Mechanical, according to IEC/EN 60068-2-27, Half-sinusoidal shock 10 ms 10 g, N/O main contact, Mechanical, according to IEC/EN 60068-2-27, Half-sinusoidal shock 10 ms |
| TERMINAL CAPACITY (SOLID) | 1 x (0.75 - 2.5) mm ² , Control circuit cables 2 x (0.75 - 2.5) mm ² , Control circuit cables |
| TERMINAL CAPACITY (SOLID/STRANDED AWG) | 18 - 14, Control circuit cables 2/0 - 250 MCM, Main cables |
| TERMINAL CAPACITY (BUSBAR) | 32 mm width, Main connection |
| TERMINAL CAPACITY (FLEXIBLE WITH CABLE) | 50 - 185 mm ² |

| | |
|--|--|
| LUG) | |
| SWITCHING CAPACITY (MAIN CONTACTS, GENERAL USE) | 250 A, Maximum motor rating (UL/CSA) |
| TERMINAL CAPACITY (STRANDED WITH CABLE LUG) | 70 - 185 mm ² |
| POWER CONSUMPTION | 110 kW |
| TIGHTENING TORQUE | 1.2 Nm, Screw terminals, Control circuit cables 24 Nm, Main cable connection screw/bolt |
| WIDTH ACROSS FLATS | 16 mm |
| RATED CONTROL SUPPLY VOLTAGE (US) AT DC - MAX | 0 V |
| RATED CONTROL SUPPLY VOLTAGE (US) AT DC - MIN | 0 V |
| RATED INSULATION VOLTAGE (UI) | 1000 V |
| RATED MAKING CAPACITY (COS PHI TO IEC/EN 60947) | 2700 A |
| RATED OPERATIONAL CURRENT (IE) AT AC-3, 1000 V | 76 A |
| RATED OPERATIONAL CURRENT (IE) AT AC-3, 220 V, 230 V, 240 V | 225 A |
| RATED OPERATIONAL CURRENT (IE) AT AC-3, 380 V, 400 V, 415 V | 225 A |
| RATED OPERATIONAL CURRENT (IE) AT AC-3, 440 V | 225 A |
| RATED OPERATIONAL CURRENT (IE) AT AC-3, 500 V | 225 A |
| RATED OPERATIONAL CURRENT (IE) AT AC-3, 660 V, 690 V | 160 A |
| RATED OPERATIONAL CURRENT (IE) AT AC-4, 1000 V | 55 A |
| RATED OPERATIONAL CURRENT (IE) AT AC-4, 220 V, 230 V, 240 V | 164 A |
| RATED OPERATIONAL | 164 A |

| | |
|--|--------|
| CURRENT (IE) AT AC-4, 400 V | |
| RATED OPERATIONAL CURRENT (IE) AT AC-4, 440 V | 164 A |
| RATED OPERATIONAL CURRENT (IE) AT AC-4, 500 V | 164 A |
| RATED OPERATIONAL CURRENT (IE) AT AC-4, 660 V, 690 V | 120 A |
| RATED OPERATIONAL CURRENT FOR SPECIFIED HEAT DISSIPATION (IN) | 225 A |
| RATED OPERATIONAL POWER AT AC-3, 1000 V, 50 HZ | 108 kW |
| RATED OPERATIONAL POWER AT AC-3, 240 V, 50 HZ | 75 kW |
| RATED OPERATIONAL POWER AT AC-3, 380/400 V, 50 HZ | 110 kW |
| RATED OPERATIONAL POWER AT AC-3, 415 V, 50 HZ | 132 kW |
| RATED OPERATIONAL POWER AT AC-4, 1000 V, 50 HZ | 77 kW |
| RATED OPERATIONAL POWER AT AC-4, 220/230 V, 50 HZ | 51 kW |
| RATED OPERATIONAL POWER AT AC-4, 240 V, 50 HZ | 54 kW |
| RATED OPERATIONAL POWER AT AC-4, 380/400 V, 50 HZ | 90 kW |
| RATED OPERATIONAL POWER AT AC-4, 415 V, 50 HZ | 96 kW |
| RATED OPERATIONAL POWER AT AC-4, 440 V, 50 HZ | 102 kW |
| RATED OPERATIONAL POWER AT AC-4, 500 V, 50 HZ | 116 kW |
| RATED OPERATIONAL POWER AT AC-4, 660/690 V, 50 HZ | 110 kW |

| | |
|---|--|
| RATED OPERATIONAL POWER (NEMA) | 111 kW |
| RATED OPERATIONAL VOLTAGE (UE) AT AC - MAX | 1000 V |
| RESISTANCE PER POLE | 0.15 mΩ |
| STATIC HEAT DISSIPATION, NON-CURRENT-DEPENDENT PVS | 2.1 W |
| SWITCHING TIME (AC OPERATED, MAKE CONTACTS, CLOSING DELAY) - MAX | 60 ms |
| SWITCHING TIME (AC OPERATED, MAKE CONTACTS, OPENING DELAY) - MAX | 40 ms |
| SHORT-CIRCUIT CURRENT RATING (BASIC RATING) | 700 A, max. Fuse, SCCR (UL/CSA) 600 A, max. CB, SCCR (UL/CSA) 10 kA, SCCR (UL/CSA) |
| SHORT-CIRCUIT CURRENT RATING (HIGH FAULT AT 480 V) | 600 A, Class J, max. Fuse, SCCR (UL/CSA) 350 A, max. CB, SCCR (UL/CSA) 100 kA, Fuse, SCCR (UL/CSA) 65 kA, CB, SCCR (UL/CSA) |
| SHORT-CIRCUIT CURRENT RATING (HIGH FAULT AT 600 V) | 50 kA, CB, SCCR (UL/CSA) 350 A, max. CB, SCCR (UL/CSA) 100 kA, Fuse, SCCR (UL/CSA) 600 A, Class J, max. Fuse, SCCR (UL/CSA) |
| SHORT-CIRCUIT PROTECTION RATING (TYPE 1 COORDINATION) AT 1000 V | 200 A gG/gL |
| SHORT-CIRCUIT PROTECTION RATING (TYPE 1 COORDINATION) AT 400 V | 400 A gG/gL |
| SHORT-CIRCUIT PROTECTION RATING (TYPE 1 COORDINATION) AT 690 V | 315 A gG/gL |
| SHORT-CIRCUIT PROTECTION RATING (TYPE 2 COORDINATION) | 160 A gG/gL |

| | |
|---|---|
| AT 1000 V | |
| SHORT-CIRCUIT PROTECTION RATING (TYPE 2 COORDINATION) AT 400 V | 315 A gG/gL |
| SHORT-CIRCUIT PROTECTION RATING (TYPE 2 COORDINATION) AT 690 V | 250 A gG/gL |
| SPECIAL PURPOSE RATING OF DEFINITE PURPOSE RATING | <p>2016 A, LRA 480 V 60 Hz 3-ph, 100,000 cycles acc. to UL 1995, (UL/CSA)</p> <p>336 A, FLA 480 V 60 Hz 3-ph, 100,000 cycles acc. to UL 1995, (UL/CSA)</p> <p>1680 A, LRA 600 V 60 Hz 3-ph, 100,000 cycles acc. to UL 1995, (UL/CSA)</p> <p>280 A, FLA 600 V 60 Hz 3-ph, 100,000 cycles acc. to UL 1995, (UL/CSA)</p> |
| CONVENTIONAL THERMAL CURRENT ITH AT 40°C (3-POLE, OPEN) | 386 A |
| CONVENTIONAL THERMAL CURRENT ITH AT 50°C (3-POLE, OPEN) | 345 A |
| CONVENTIONAL THERMAL CURRENT ITH AT 60°C (3-POLE, OPEN) | 315 A |
| RATED OPERATIONAL POWER AT AC-3, 440 V, 50 HZ | 138 kW |
| RATED OPERATIONAL POWER AT AC-3, 500 V, 50 HZ | 160 kW |
| RATED OPERATIONAL POWER AT AC-3, 690 V, 50 HZ | 150 kW |
| ACTUATING VOLTAGE | RAC 440: 380 - 440 V 50/60 Hz |
| ALTITUDE | Max. 2000 m |
| OPERATING VOLTAGE AT AC, 50 HZ - MIN | 380 V |
| OPERATING VOLTAGE AT AC, 50 HZ - MAX | 440 V |
| OPERATING VOLTAGE AT AC, 60 HZ - MIN | 380 V |
| OPERATING VOLTAGE AT AC, 60 HZ - MAX | 440 V |

| |
|-----------------|
| PROJECT NAME: |
| PROJECT NUMBER: |
| PREPARED BY: |
| DATE: |



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2025 Eaton. All Rights Reserved.

Follow us on social media to get the latest product and support information.

