

1402978

<https://www.phoenixcontact.com/pc/products/1402978>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 3-position, PVC, black RAL 9005, free cable end, on Valve connector A,
Wiring: unwired, cable length: 10 m

Your advantages

- Easy and safe: 100 % electrically tested plug-in components

Commercial data

Item number	1402978
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Product key	BF1DAA
Catalog page	Page 239 (C-2-2019)
GTIN	4046356637855
Weight per piece (including packing)	385.2 g
Weight per piece (excluding packing)	367.4 g
Customs tariff number	85444290
Country of origin	PL

SAC-3P-10,0-PVC/A - Sensor/actuator cable



1402978

<https://www.phoenixcontact.com/pc/products/1402978>

Technical data

Product properties

Product type	Sensor/actuator cable with valve connector
Application	Standard
Number of positions	3
No. of cable outlets	1
Shielded	no

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	V0
Seal material	TPU
Material housing valve plug	TPU
Contact material	CuSn
Valve plug contact insert material	PA 6.6
Contact surface material	Sn

Electrical properties

Insulation resistance	$\geq 100 \text{ M}\Omega$
Nominal voltage U_N	230 V AC
	230 V DC
Nominal current I_N	6 A

Valve connector characteristics

Fixing screws	M3 x 29
---------------	---------

Signaling

Status display	no
Status display present	No

Connector

Connection 1

Type	free cable end
------	----------------

Connection 2

Type	Valve connector A
Material	CuSn (Contact)
	Sn (Contact surface)
	PA 6.6 (Contact carriers)
	TPU (Housing)

SAC-3P-10,0-PVC/A - Sensor/actuator cable




1402978

<https://www.phoenixcontact.com/pc/products/1402978>

Cable/line

Cable length	10 m
--------------	------

PVC black [PVC]

Dimensional drawing	
Cable weight	38.6 kg/km
UL AWM Style	2464
Number of positions	3
Shielded	no
Cable type	PVC black [PVC]
Conductor structure signal line	16x 0.20 mm
AWG signal line	20
Conductor cross section	3x 0.5 mm ²
Wire diameter incl. insulation	1.5 mm ±0.05 mm
External cable diameter	4.80 mm ±0.2 mm
Outer sheath, material	PVC
External sheath, color	black RAL 9005
Conductor material	Bare Cu litz wires
Material wire insulation	PVC
Single wire, color	black 1, black 2, green/yellow
Overall twist	3 wires, twisted
Max. conductor resistance	39 Ω/km (at 20 °C)
Insulation resistance	≥ 20 MΩ*km
Nominal voltage, cable	300 V
Test voltage	1200 V
Minimum bending radius, fixed installation	5 x D
Smallest bending radius, fixed installation	24 mm
Flame resistance	DIN VDE 0482 DIN EN 50265-2-1
Resistance to oil	in accordance with DIN EN 60811-2-1
Ambient temperature (operation)	-40 °C ... 80 °C (cable, fixed installation) -5 °C ... 80 °C (Cable, flexible installation)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65
----------------------	------

SAC-3P-10,0-PVC/A - Sensor/actuator cable



1402978

<https://www.phoenixcontact.com/pc/products/1402978>

	IP67
Ambient temperature (operation)	-20 °C ... 85 °C (valve plug)

Standards and regulations

Valve connector	
Standard designation	Valve connector
Standards/specifications	EN 175301-803

SAC-3P-10,0-PVC/A - Sensor/actuator cable

1402978

<https://www.phoenixcontact.com/pc/products/1402978>



Drawings

Dimensional drawing



Valve connector, type A, side view

Dimensional drawing




Valve connector, type A


SAC-3P-10,0-PVC/A - Sensor/actuator cable

1402978

<https://www.phoenixcontact.com/pc/products/1402978>

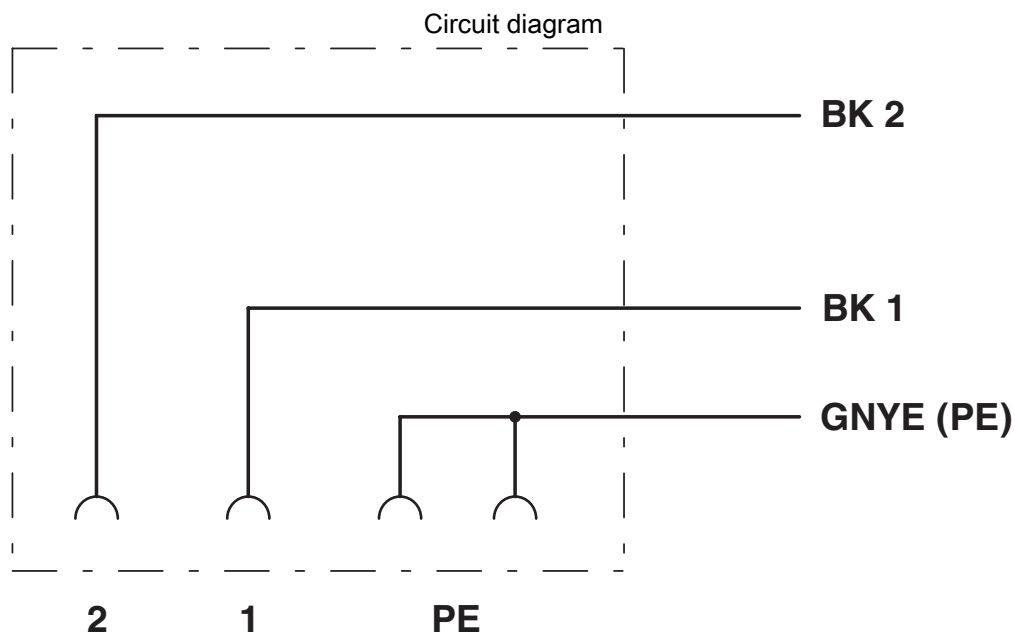

Schematic diagram

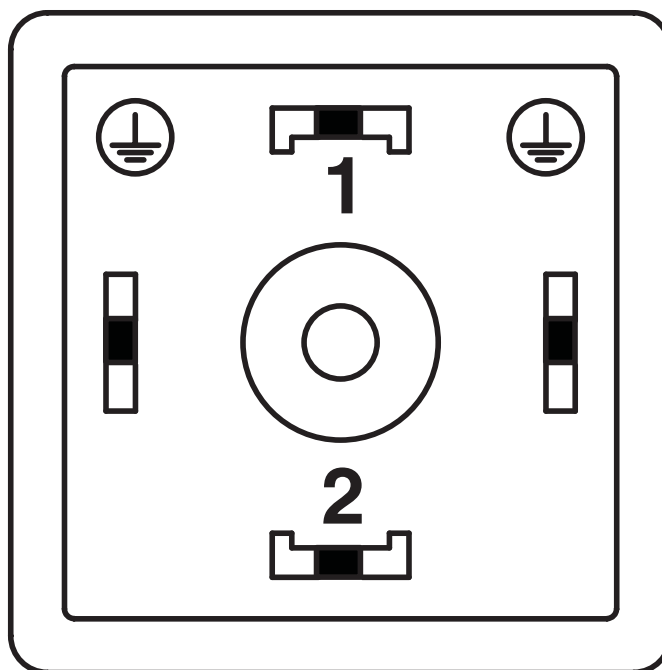

Valve connector pin assignment, type A

SAC-3P-10,0-PVC/A - Sensor/actuator cable



1402978

<https://www.phoenixcontact.com/pc/products/1402978>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/1402978>

	CSA Approval ID: 13631			
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
	230 V	6 A	-	-

	EAC-RoHS Approval ID: RU D-DE.HB35.B.00387			
---	--	--	--	--

	CSAus Approval ID: 13631			
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
	230 V	6 A	-	-

cCSAus

SAC-3P-10,0-PVC/A - Sensor/actuator cable



1402978

<https://www.phoenixcontact.com/pc/products/1402978>

Classifications

ECLASS

ECLASS-11.0	27060312
ECLASS-12.0	27060312
ECLASS-13.0	27060312

ETIM

ETIM 9.0	EC001855
----------	----------

UNSPSC

UNSPSC 21.0	31251500
-------------	----------

SAC-3P-10,0-PVC/A - Sensor/actuator cable



1402978

<https://www.phoenixcontact.com/pc/products/1402978>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol(CAS: 119-47-1)
SCIP	65c03443-92dc-4e71-bbfd-3a77d7b2f5ae

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com