

# SAC-5P-M 8MRB/ 1,5-115 - Sensor/actuator cable



1404465

<https://www.phoenixcontact.com/us/products/1404465>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 5-position, PUR halogen-free, black-gray RAL 7021, Plug angled M8, coding: B, on free cable end, cable length: 1.5 m

## Your advantages

- Easy and safe: 100 % electrically tested plug-in components

## Commercial data

|                                      |                                |
|--------------------------------------|--------------------------------|
| Item number                          | 1404465                        |
| Packing unit                         | 1 pc                           |
| Minimum order quantity               | 1 pc                           |
| Note                                 | Made to order (non-returnable) |
| Sales key                            | BF01                           |
| Product key                          | BF1BDA                         |
| Catalog page                         | Page 200 (C-2-2019)            |
| GTIN                                 | 4046356696845                  |
| Weight per piece (including packing) | 51.2 g                         |
| Weight per piece (excluding packing) | 51.2 g                         |
| Customs tariff number                | 85444290                       |
| Country of origin                    | PL                             |

# SAC-5P-M 8MRB/ 1,5-115 - Sensor/actuator cable



1404465

<https://www.phoenixcontact.com/us/products/1404465>

## Technical data

### Product properties

|                      |                       |
|----------------------|-----------------------|
| Product type         | Sensor/actuator cable |
| Application          | Standard              |
| Number of positions  | 5                     |
| No. of cable outlets | 1                     |
| Shielded             | no                    |
| Coding               | B                     |

### Insulation characteristics

|                      |    |
|----------------------|----|
| Overvoltage category | II |
| Degree of pollution  | 3  |

### Material specifications

|                                        |                                             |
|----------------------------------------|---------------------------------------------|
| Flammability rating according to UL 94 | HB                                          |
| Seal material                          | NBR                                         |
| Material of grip body                  | TPU, hardly inflammable, self-extinguishing |
| Contact material                       | CuSn                                        |
| Contact surface material               | Ni/Au                                       |
| Contact carrier material               | TPU GF                                      |
| Material for screw connection          | Zinc die-cast, nickel-plated                |

### Electrical properties

|                       |                            |
|-----------------------|----------------------------|
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Nominal voltage $U_N$ | 30 V AC                    |
|                       | 30 V DC                    |
| Nominal current $I_N$ | 3 A                        |

### Mechanical properties

#### Mechanical data

|                             |            |
|-----------------------------|------------|
| Insertion/withdrawal cycles | $\geq 100$ |
|-----------------------------|------------|

### Signaling

|                        |    |
|------------------------|----|
| Status display         | No |
| Status display present | No |

### Connection data

#### Conductor connection

|                   |                        |
|-------------------|------------------------|
| Tightening torque | 0.2 Nm (M8 connectors) |
|-------------------|------------------------|

### Connector

#### Connection 1

# SAC-5P-M 8MRB/ 1,5-115 - Sensor/actuator cable



1404465

<https://www.phoenixcontact.com/us/products/1404465>

|                     |                |
|---------------------|----------------|
| Type                | Plug angled M8 |
| Number of positions | 5              |
| Coding type         | B              |

## Connection 2

|      |                |
|------|----------------|
| Type | free cable end |
|------|----------------|

## Cable/line

|              |       |
|--------------|-------|
| Cable length | 1.5 m |
|--------------|-------|

PUR, black, 5th conductor gray [115]

|                                               |                                                                                 |
|-----------------------------------------------|---------------------------------------------------------------------------------|
| Cable weight                                  | 30 kg/km                                                                        |
| UL AWM Style                                  | 20549                                                                           |
| Number of positions                           | 5                                                                               |
| Shielded                                      | no                                                                              |
| Cable type                                    | PUR, black, 5th conductor gray [115]                                            |
| Conductor structure signal line               | 32x 0.10 mm                                                                     |
| AWG signal line                               | 24                                                                              |
| Conductor cross section                       | 0.25 mm²                                                                        |
| Wire diameter incl. insulation                | 1.17 mm ±0.02 mm                                                                |
| External cable diameter                       | 4.70 mm ±0.15 mm                                                                |
| Outer sheath, material                        | PUR                                                                             |
| External sheath, color                        | black-gray RAL 7021                                                             |
| Conductor material                            | Bare Cu litz wires                                                              |
| Material, filler                              | PP                                                                              |
| Material wire insulation                      | PP                                                                              |
| Single wire, color                            | brown, white, blue, black, gray                                                 |
| Thickness, insulation                         | approx. 0.21 mm (Core insulation)<br>approx. 0.70 mm (Outer cable sheath)       |
| Overall twist                                 | 5 cores, twisted                                                                |
| Length of twist, overall twist                | 75 mm                                                                           |
| Max. conductor resistance                     | ≤ 75 Ω/km                                                                       |
| Insulation resistance                         | ≥ 1 GΩ*km                                                                       |
| Nominal voltage, cable                        | ≤ 300 V (AC)                                                                    |
| Test voltage                                  | ≥ 3000 V (AC)                                                                   |
| Smallest bending radius, fixed installation   | 23.5 mm                                                                         |
| Smallest bending radius, movable installation | 47 mm                                                                           |
| Max. bending cycles                           | 4000000                                                                         |
| Halogen-free                                  | in accordance with DIN VDE 0472 part 815<br>in accordance with DIN EN 50267-2-1 |
| Flame resistance                              | according to UL 758/1581 (horizontal)<br>in accordance with UL 758/1581 FT2     |
| Resistance to oil                             | According to DIN EN 60811-2-1, 168 h at 100°C                                   |
| Other resistance                              | hydrolysis and microbe resistant<br>Resistant to salt water                     |

# SAC-5P-M 8MRB/ 1,5-115 - Sensor/actuator cable



1404465

<https://www.phoenixcontact.com/us/products/1404465>

|                                 |                                                 |
|---------------------------------|-------------------------------------------------|
| Ambient temperature (operation) | Low adhesion                                    |
|                                 | abrasion-resistant                              |
|                                 | -40 °C ... 80 °C (cable, fixed installation)    |
|                                 | -25 °C ... 80 °C (Cable, flexible installation) |

## Environmental and real-life conditions

Ambient conditions


|                                 |                                  |
|---------------------------------|----------------------------------|
| Degree of protection            | IP65                             |
|                                 | IP67                             |
|                                 | IP68                             |
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |

## Standards and regulations

|                          |                 |
|--------------------------|-----------------|
| Standard designation     | M8 connector    |
| Standards/specifications | IEC 61076-2-104 |

## Drawings

Schematic diagram

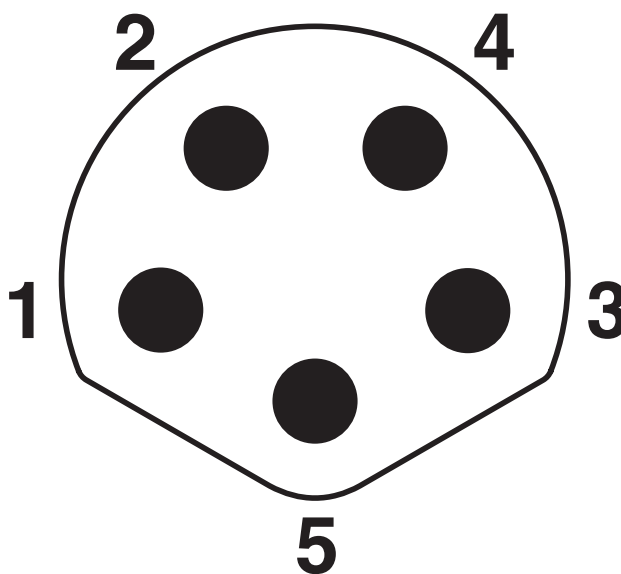

Pin assignment, pin side, M8, 5-pos., B-coded

Circuit diagram




# SAC-5P-M 8MRB/ 1,5-115 - Sensor/actuator cable

1404465

<https://www.phoenixcontact.com/us/products/1404465>

Dimensional drawing

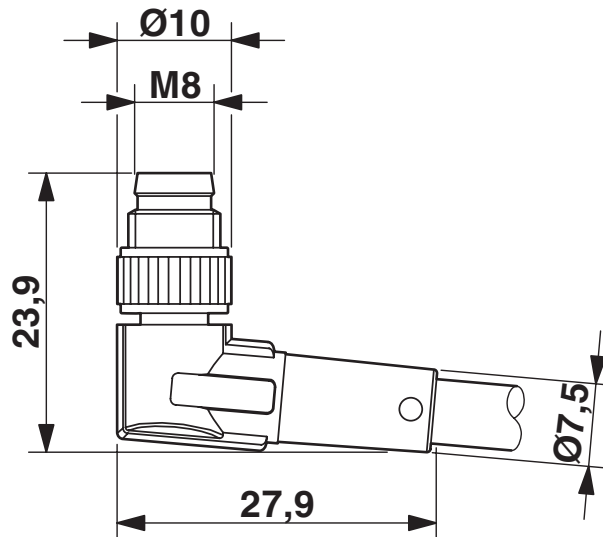

M8 x 1 male plug, angled version

# SAC-5P-M 8MRB/ 1,5-115 - Sensor/actuator cable



1404465

<https://www.phoenixcontact.com/us/products/1404465>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1404465>

|  |                                                |                                |                   |                               |
|--|------------------------------------------------|--------------------------------|-------------------|-------------------------------|
|  | <b>UL Listed</b><br>Approval ID: FILE E 221474 |                                |                   |                               |
|  | Nominal voltage U <sub>N</sub>                 | Nominal current I <sub>N</sub> | Cross section AWG | Cross section mm <sup>2</sup> |
|  | 30 V                                           | 3 A                            | -                 | -                             |

|  |                                                 |                                |                   |                               |
|--|-------------------------------------------------|--------------------------------|-------------------|-------------------------------|
|  | <b>cUL Listed</b><br>Approval ID: FILE E 221474 |                                |                   |                               |
|  | Nominal voltage U <sub>N</sub>                  | Nominal current I <sub>N</sub> | Cross section AWG | Cross section mm <sup>2</sup> |
|  | 30 V                                            | 3 A                            | -                 | -                             |

|  |                                                      |  |  |  |
|--|------------------------------------------------------|--|--|--|
|  | <b>EAC-RoHS</b><br>Approval ID: RU D-DE.HB35.B.00387 |  |  |  |
|  |                                                      |  |  |  |

|                     |  |  |  |  |
|---------------------|--|--|--|--|
| <b>cULus Listed</b> |  |  |  |  |
|---------------------|--|--|--|--|

# SAC-5P-M 8MRB/ 1,5-115 - Sensor/actuator cable



1404465

<https://www.phoenixcontact.com/us/products/1404465>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27060311 |
| ECLASS-12.0 | 27060311 |
| ECLASS-13.0 | 27060311 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC001855 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 26121600 |
|-------------|----------|

# SAC-5P-M 8MRB/ 1,5-115 - Sensor/actuator cable



1404465

<https://www.phoenixcontact.com/us/products/1404465>

## Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

# SAC-5P-M 8MRB/ 1,5-115 - Sensor/actuator cable



1404465

<https://www.phoenixcontact.com/us/products/1404465>

## Accessories

### PROT-M 8 FS-PA-CHAIN - Sealing cap

1430857

<https://www.phoenixcontact.com/us/products/1430857>

M8 sealing cap made of plastic with fixing band for sensor cables, for M8 plugs



---

### UCT-WMT (23X4) - Conductor marker

0801453

<https://www.phoenixcontact.com/us/products/0801453>

Conductor marker, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: insert, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 30



# SAC-5P-M 8MRB/ 1,5-115 - Sensor/actuator cable



1404465

<https://www.phoenixcontact.com/us/products/1404465>

## UC-WMT (23X4) - Conductor marker

0819411

<https://www.phoenixcontact.com/us/products/0819411>



Conductor marker, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: insert, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 24

---

## US-WMT (23X4) - Cable marker

0828769

<https://www.phoenixcontact.com/us/products/0828769>



Cable marker, Card, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: slide-on, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 56

## SAC-5P-M 8MRB/ 1,5-115 - Sensor/actuator cable

1404465

<https://www.phoenixcontact.com/us/products/1404465>



## WMTW (23X4)R - Cable marker

0831004

<https://www.phoenixcontact.com/us/products/0831004>



Cable marker, Roll, white, unlabeled, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMaster 300/600, THERMOMARK X1.2, mounting type: insert, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 3000

---

## WP-CTA POM 13,0 BK - Protective hose adapter

1422884

<https://www.phoenixcontact.com/us/products/1422884>



Protective hose adapter, for corrugated hoses with a nominal size of 13 (10 x 13), corrugated in parallel

# SAC-5P-M 8MRB/ 1,5-115 - Sensor/actuator cable



1404465

<https://www.phoenixcontact.com/us/products/1404465>

## WP-PA HF 13,0 BK - Protective hose

3240681

<https://www.phoenixcontact.com/us/products/3240681>



Protective hose, material: PA 6, UV-resistant: yes, flexible, degree of protection: IP68, color: black, flammability rating in acc. with UL 94: V0, inner diameter: 10 mm, Total length: 50 m

---

## WP-PA HF-HB 13,0 BK - Protective hose

3240839

<https://www.phoenixcontact.com/us/products/3240839>



Protective hose, material: PA 6, UV-resistant: yes, flexible, degree of protection: IP68, color: black, flammability rating in acc. with UL 94: HB, inner diameter: 10 mm, Total length: 50 m

## SAC-5P-M 8MRB/ 1,5-115 - Sensor/actuator cable

1404465

<https://www.phoenixcontact.com/us/products/1404465>



## B-STIFT - Marker pen

1051993

<https://www.phoenixcontact.com/us/products/1051993>



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

---

## CUTFOX-S VDE - Diagonal cutter

1212207

<https://www.phoenixcontact.com/us/products/1212207>



Diagonal cutter for hard (piano wire) and soft wires, VDE 1000 V AC/1500 V DC tested

# SAC-5P-M 8MRB/ 1,5-115 - Sensor/actuator cable



1404465

<https://www.phoenixcontact.com/us/products/1404465>

## WIREFOX SAC-1 - Stripping tool

1212757

<https://www.phoenixcontact.com/us/products/1212757>



Stripping pliers, for halogen-free sensor/actuator cables (SAC cables), with PUR and PVC insulation, from Ø of 3.2 to 4.4 mm, any stripping length

---

## WIREFOX SAC - Stripping tool

1212623

<https://www.phoenixcontact.com/us/products/1212623>



Stripping pliers, for halogen-free sensor/actuator cables (SAC cables), with PUR and PVC insulation, from Ø of 4.4 to 7 mm, any stripping length

# SAC-5P-M 8MRB/ 1,5-115 - Sensor/actuator cable



1404465

<https://www.phoenixcontact.com/us/products/1404465>

## WIREFOX 10 - Stripping tool

1212150

<https://www.phoenixcontact.com/us/products/1212150>



Stripping tool, for cables and conductors from 0.02 - 10 mm<sup>2</sup>, self-adjusting, stripping length of up to 18 mm, cutting capacity of up to 10 mm<sup>2</sup> stranded/1.5 mm<sup>2</sup> solid, replaceable stripping blade

---

## TSD 02 SAC - Torque screwdriver

1208487

<https://www.phoenixcontact.com/us/products/1208487>



Torque screwdriver, with preset torque of 0.2 Nm and 4 mm hexagonal drive for M8 connectors

# SAC-5P-M 8MRB/ 1,5-115 - Sensor/actuator cable



1404465

<https://www.phoenixcontact.com/us/products/1404465>

## SAC BIT M8-D10 - Tool

1208461

<https://www.phoenixcontact.com/us/products/1208461>



Nut for assembling M8 connectors with longitudinal knurl and a knurl diameter of 10 mm, for 4 mm hexagonal drive

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)