

1406397

carrier

https://www.phoenixcontact.com/us/products/1406397

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact carrier, Power, 4-position, Pin, straight, M12, coding: T, PCB mounting, THR solder connection, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1238742

Your advantages

- · For compact devices: transmit high power in a confined space
- · Reduced mounting costs thanks to two-piece device connector
- · Packaging available for automated pick and place assembly
- · All common pin assignments and codings available
- Easy device integration thanks to mechanical port screw connections with threaded attachment, press-in contour or direct integration in the front plate
- · Additional gasket for the device when not plugged in

Commercial data

Item number	1406397
Packing unit	60 pc
Minimum order quantity	60 pc
Sales key	AB23
Product key	ABQAGC
Catalog page	Page 288 (C-2-2013)
GTIN	4046356804356
Weight per piece (including packing)	5.703 g
Weight per piece (excluding packing)	5.69 g
Customs tariff number	85366990
Country of origin	DE



1406397

https://www.phoenixcontact.com/us/products/1406397

Technical data

Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
--------------------	--

Product properties

Product type		Contact insert
Application		Power
Sensor type		Power
Number of po	sitions	4
Seal present		yes
Shielded		yes
Coding		Т
Thread type		M12
Insulation charac	cteristics	
Overvoltage o	ategory	III
Degree of pol	lution	3
Electrical prope	rties	
Rated surge v		1.5 kV
Contact resist	ance	≤ 3 mΩ
Insulation resi	stance	≥ 100 MΩ
Nominal volta	ge U _N	63 V
Nominal curre	nt I _N	12 A
Connection data	а	
Connection m	ethod	THR solder connection
Interfaces		
Signal type/ca	itegory	Power
Material specific	cations	
Flammability	rating according to UL 94	V0
Seal material		FKM
Contact mate	ial	CuZn
Contact surfa	ce material	Au
Contact carrie	er material	PA

Connector



1406397

https://www.phoenixcontact.com/us/products/1406397

Connection 1				
Head design	Pin			
Head cable outlet	straight			
Head thread type	M12			
Coding	Т			
Cable/line				
Signal type/category	Power			
Mechanical properties				
Mechanical data				
Insertion/withdrawal cycles	> 100			
Environmental and real-life conditions Ambient conditions				
Degree of protection (when plugged in)	IP67 (correctly plugged in and locked)			
Degree of protection	IP67 (correctly plugged in and locked)			
	IP67, when plugged in			
Ambient temperature (operation)	-25 °C 105 °C			
	-40 °C 105 °C (without mechanical actuation)			
Standards and regulations				
Standard designation	M12 connector			
Mounting				
Mounting type	PCB mounting			
Packaging specifications				




carrier

1406397

https://www.phoenixcontact.com/us/products/1406397

Drawings

Schematic diagram

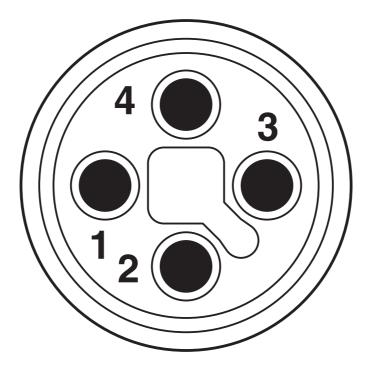

Connector pin assignment of M12 plug, 4-pos., T-coded, view of pin side



carrier

https://www.phoenixcontact.com/us/products/1406397

Approvals

🌣 To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1406397

.91	CUL Recognized Approval ID: E468743-20)190917			
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
		63 V	12 A	16 - 16	-

UL Recognized Approval ID: E468743-20190917				
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
	63 V	12 A	16 - 16	-

cULus Recognized



1406397

https://www.phoenixcontact.com/us/products/1406397

Classifications

ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

ETIM

	ETIM 9.0	EC002635		
UN	UNSPSC			
	UNSPSC 21.0	39121400		



1406397

https://www.phoenixcontact.com/us/products/1406397

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	f5ac9027-d0d1-4a4c-b43a-2c96c43a1219

carrier

1406397

https://www.phoenixcontact.com/us/products/1406397

Accessories

SACC-CI-M12MST-4CON-L180THR SH SP - Sample set

1420413 https://www.phoenixcontact.com/us/products/1420413



Sample set, Universal, 4-position, Pin, straight, M12, coding: T, PCB mounting, THR solder connection, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239309

SACC-M12-SCO PLUG - Housing screw connection

1551493

https://www.phoenixcontact.com/us/products/1551493



Housing screw connection, Pin, M12-SPEEDCON, Front mounting, M12 x 1, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0. 1 %) item no.: 1237430

carrier

1406397

https://www.phoenixcontact.com/us/products/1406397

SACC-DSIV-M12-PLUG - Housing screw connection

1416145

https://www.phoenixcontact.com/us/products/1416145



Housing screw connection, Pin, M12, Rear mounting, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239108

SACC-M12-SCO PLUG L90 - Housing screw connection

1436709

https://www.phoenixcontact.com/us/products/1436709



Housing screw connection, M12-SPEEDCON, Front mounting, M12 x 1, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0. 1 %) item no.: 1239632



1406397

https://www.phoenixcontact.com/us/products/1406397

SACC-BP-M-M12/M15-6-THR - Housing screw connection

1413997

https://www.phoenixcontact.com/us/products/1413997



Housing screw connection, Pin, M12, Rear mounting, M15 x 1, THR solder connection, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239050

SACC-BP-M-M12/M15-7-THR - Housing screw connection

1413996

https://www.phoenixcontact.com/us/products/1413996



Housing screw connection, Pin, M12, Rear mounting, M15 x 1, THR solder connection, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239049

carrier

1406397

https://www.phoenixcontact.com/us/products/1406397

SACC-BP-M-M12/M15-6-THR SCO - Housing screw connection

1413999

https://www.phoenixcontact.com/us/products/1413999



Housing screw connection, Pin, M12-SPEEDCON, Rear mounting, M15 x 1, THR solder connection, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239052

SACC-BP-M-M12/M15-7-THR SCO - Housing screw connection

1413998

https://www.phoenixcontact.com/us/products/1413998



Housing screw connection, Pin, M12-SPEEDCON, Rear mounting, M15 x 1, THR solder connection, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239051



1406397

https://www.phoenixcontact.com/us/products/1406397

SACC-M12 PLUG PRESS - Housing screw connection

1437892

https://www.phoenixcontact.com/us/products/1437892



Housing screw connection, Pin, M12, Front mounting, THR solder connection, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0. 1 %) item no.: 1239688

SACC-DSIV-M12-PLUG-9 THR - Housing screw connection

1417984

https://www.phoenixcontact.com/us/products/1417984



Housing screw connection, Pin, M12, Rear mounting, M14 x 1, THR solder connection, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239180



1406397

https://www.phoenixcontact.com/us/products/1406397

SACC-BP-M-M12-THR PP - Housing screw connection

1027661

https://www.phoenixcontact.com/us/products/1027661



Housing screw connection, Pin, M12-Push-Pull, Rear mounting, M15 x 1, THRund Wellenlötkontakte, Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1 %)

SACC-FP-M-M12-THR PP - Housing screw connection

1027679 https://www.phoenixcontact.com/us/products/1027679



Housing screw connection, Pin, M12-Push-Pull, Front mounting, THR- und Wellenlötkontakte, Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1 %)

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com