

HC-COM-17-ESTC - Contact insert



1408465

<https://www.phoenixcontact.com/sg/products/1408465>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact insert, number of positions: 17+PE, size: COM, power contacts: 0, control contacts: 17, number of connections per position: 1, Pin, Crimp connection, 200 V, 10 A, 0.14 mm² ... 2.5 mm², application: Signal

Product description

Contact insert, incl. 4 mounting screws

Commercial data

Item number	1408465
Packing unit	2 pc
Minimum order quantity	2 pc
Sales key	*****
Product key	BF7ABH
Catalog page	Page 649 (C-2-2017)
GTIN	4046356618175
Weight per piece (including packing)	15.9 g
Weight per piece (excluding packing)	15.9 g
Customs tariff number	85389099
Country of origin	CN

HC-COM-17-ESTC - Contact insert



1408465

<https://www.phoenixcontact.com/sg/products/1408465>

Technical data

Notes

General	For crimp contacts CK 1.6-ED...
General	Connectors may be operated only when there is no load/voltage.

Mounting

Assembly instructions	To ensure correct use, installation in housing with IP54 protection or better is required
-----------------------	---


Product properties

Type	COM
Product type	Contact insert with a fixed no. of positions
Number of positions	17
Connection profile	17+PE
Contact numbering	1 - 17
Application	Signal
Number of connections per position	1
No. of power contacts	0
No. of control contacts	17
Contact material type	turned rolled
Series	HC-COM

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Dimensions

Dimensional drawing	
Width	25.6 mm
Height	38.7 mm
Length	45 mm

Mechanical characteristics

Contact diameter	1.6 mm
------------------	--------

Connection data

Connection technology

Connection technology	Crimp connection
-----------------------	------------------

HC-COM-17-ESTC - Contact insert



1408465

<https://www.phoenixcontact.com/sg/products/1408465>

Number of connections per position	1
Connection in acc. with standard	IEC / EN

Conductor connection

Conductor cross section	0.14 mm ² ... 2.5 mm ²
Connection cross section AWG	26 ... 14
Stripping length of the individual wire	8 mm
	6 mm (at 2.5 mm ²)

Electrical properties

Rated voltage (III/2) contacts	250 V
Rated voltage (III/3)	200 V
Rated voltage for power contacts	200
Rated surge voltage	4 kV
Rated current	10 A

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

Material specifications

Flammability rating according to UL 94	V0
Seal material Profile gasket	NBR
Contact material	Copper alloy
Contact surface material	Ag (alternatively Au)
Contact carrier material	PC

Environmental and real-life conditions

Ambient conditions


Ambient temperature (operation)	-40 °C ... 100 °C (including heating up of contacts)
---------------------------------	--

HC-COM-17-ESTC - Contact insert

1408465

<https://www.phoenixcontact.com/sg/products/1408465>

Drawings

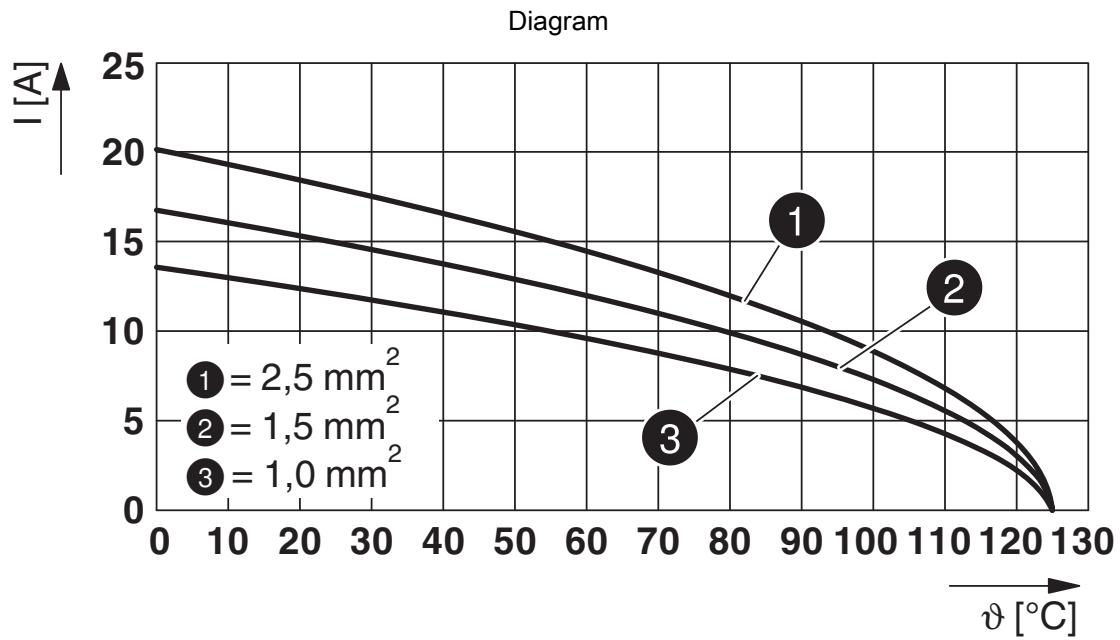

Derating diagram


HC-COM-17-ESTC - Contact insert

1408465

<https://www.phoenixcontact.com/sg/products/1408465>



Schematic diagram

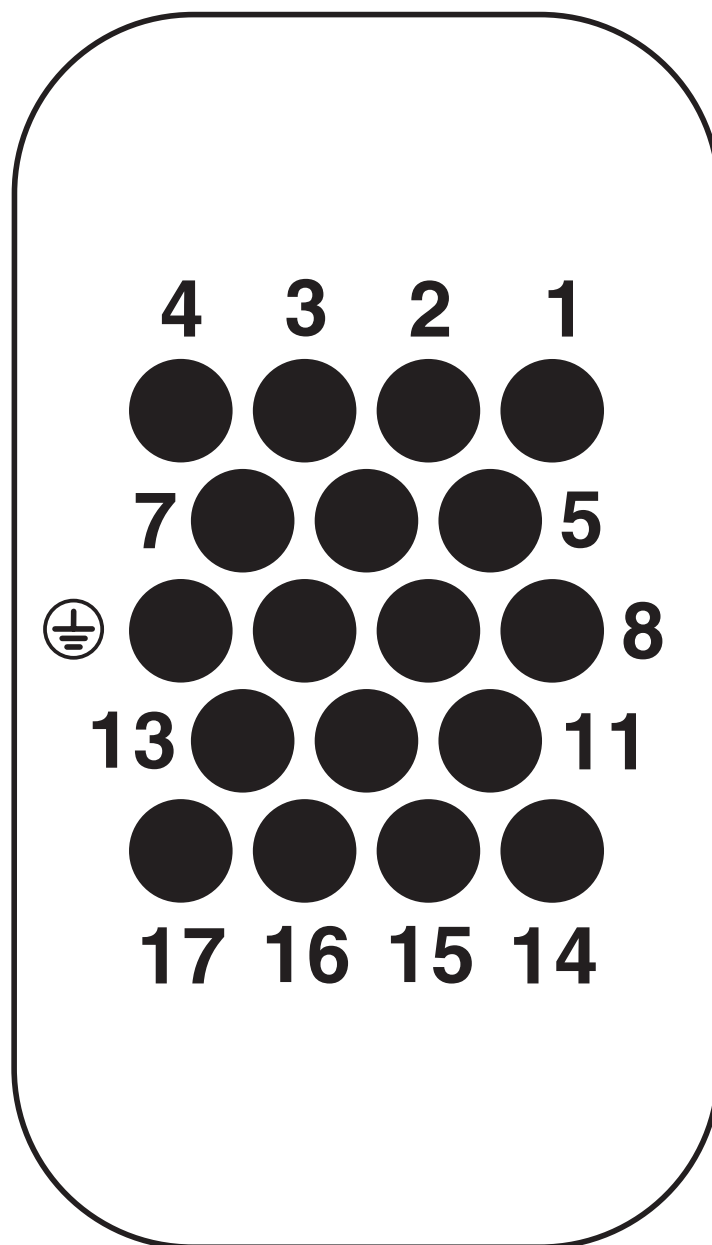

Connector pin assignment, connection side


HC-COM-17-ESTC - Contact insert



1408465

<https://www.phoenixcontact.com/sg/products/1408465>

Dimensional drawing

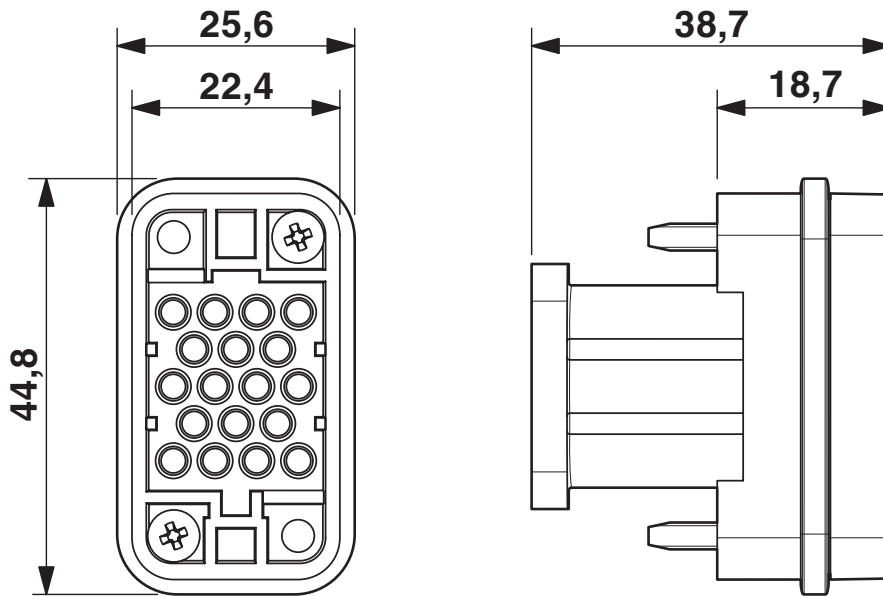

HC-COM-17-ESTC dimensional drawing

HC-COM-17-ESTC - Contact insert





1408465


<https://www.phoenixcontact.com/sg/products/1408465>

Approvals


To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sg/products/1408465>

 CSA Approval ID: 260458				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	600 V	19 A	20 - 12	-

 cUL Recognized Approval ID: FILE E 118976				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	600 V	10.5 A	22 - 14	-

 UL Recognized Approval ID: FILE E 118976				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	600 V	19.5 A	22 - 14	-

 EAC Approval ID: RU C-DE.AI30.B.01102				
---	--	--	--	--

 EAC Approval ID: RU C-DE.BL08.B.00511				
---	--	--	--	--

cULus Recognized				
-------------------------	--	--	--	--

HC-COM-17-ESTC - Contact insert



1408465

<https://www.phoenixcontact.com/sg/products/1408465>

Classifications

ECLASS

ECLASS-11.0	27440205
ECLASS-12.0	27440205
ECLASS-13.0	27440205

ETIM

ETIM 9.0	EC000438
----------	----------

UNSPSC

UNSPSC 21.0	39121500
-------------	----------

HC-COM-17-ESTC - Contact insert



1408465

<https://www.phoenixcontact.com/sg/products/1408465>

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.
105 Eunos Avenue 3, #04-00
Singapore 409836
+65 6228 4900
marketing@phoenixcontact.com.sg