

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Assembled FO cable, round cable, 50/125 µm GOF-MM fiber, M12 to M12, for installation inside buildings



Product description

Assembled FO cable, round cable, 50/125 µm GOF-MM fiber, M12 to M12, for installation inside buildings, length: 1 m

Commercial data

Item number	1408875
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	ABNMAY
Catalog page	Page 349 (C-2-2017)
GTIN	4055626082134
Weight per piece (including packing)	162.8 g
Weight per piece (excluding packing)	2.22 g
Customs tariff number	85447000
Country of origin	DE

FOC-M12-M12-GB02/1 - FO connecting cable



1408875

<https://www.phoenixcontact.com/pc/products/1408875>

Technical data

Product properties

Type	Circular connector
------	--------------------

Connection data

Connection method	M12 circular connector
-------------------	------------------------

Dimensions

External dimensions

External diameter min.	7.5 mm
External diameter max.	8 mm

Mechanical characteristics

Ferrule diameter	2.50 mm
------------------	---------

Material specifications

Flammability rating according to UL 94	V0
Ferrule material	Zirconia ceramics
Outer sheath, material	PUR

Cable/line

Cable weight	46.00 kg/km
Cable type	Outdoor cable
Short symbol	02-G50/FJ(ZN)Z-...22
Cable type	Break-out cable
External cable diameter	7.50 mm
Outer sheath, material	PUR
External sheath, color	black
External sheath, strain relief elements	Non-metallic, aramide fiber
Wire diameter incl. insulation	900 µm
Individual wire diameter	2.2 mm ±0.1 mm
Single wire, color	black/orange
Tensile strength short-term/long-term	2000 N / 1000 N
Lateral pressure short term	600.00 N/cm
Lateral pressure, long-term	200.00 N/cm
Impact strength	2,2 J
Smallest bending radius, fixed installation	25 mm
Smallest bending radius, movable installation	40 mm
Number of bending cycles	100000
Bending radius	70 mm
Traversing rate	0.4 m/s
Cable, attenuation	2.7 dB/km (at 850 nm), 1.0 dB/km (at 1300 nm)
Halogen-free	complying with IEC 60754-1/2

FOC-M12-M12-GB02/1 - FO connecting cable



1408875

<https://www.phoenixcontact.com/pc/products/1408875>

Resistance to oil	very good oil and chemical resistance
Flame resistance	yes

FO cable

Number of fibers	2
Fiber type	Multi-mode 50/125 µm fiberglass

Mechanical properties

Duty cycle testing	suitable for drag chain
Tensile strength short-term/long-term	1000 N / 200 N

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65
	IP67
	IP65/IP67
Impact strength	2 Nm / 10 x
Ambient temperature (operation)	-40 °C ... 80 °C
	-40 °C ... 80 °C
Ambient temperature (storage/transport)	-45 °C ... 85 °C
Resistance to UV radiation	yes

Standards and regulations

Resistance to UV radiation	yes
----------------------------	-----

Testing

Duty cycle testing	suitable for drag chain
--------------------	-------------------------

Mounting

cable layer type	Indoors
------------------	---------

FOC-M12-M12-GB02/1 - FO connecting cable




1408875

<https://www.phoenixcontact.com/pc/products/1408875>

Drawings

Dimensional drawing

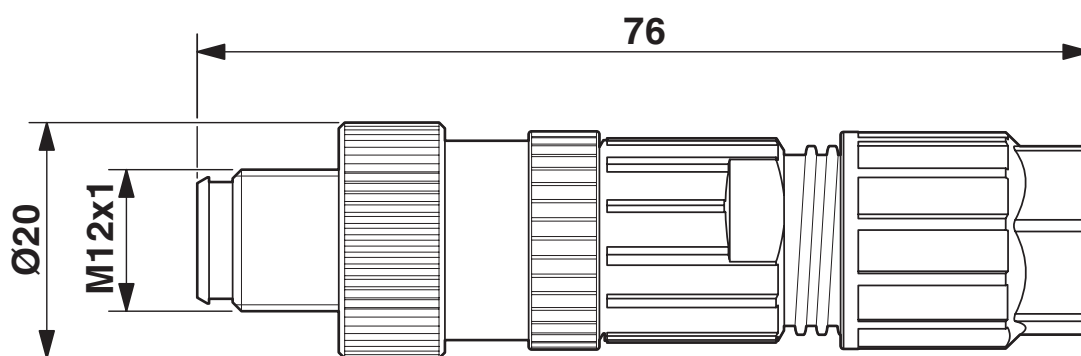

FOC-M12-M12-GB02/1 - FO connecting cable



1408875

<https://www.phoenixcontact.com/pc/products/1408875>

Classifications

ECLASS

ECLASS-11.0	27061003
-------------	----------

UNSPSC

UNSPSC 21.0	26121607
-------------	----------

FOC-M12-M12-GB02/1 - FO connecting cable



1408875

<https://www.phoenixcontact.com/pc/products/1408875>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com