

HC-ADV-B24-SHFH-2STM40-EEE - Housing



1408973

<https://www.phoenixcontact.com/us/products/1408973>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



HEAVYCON ADVANCE B24 box mounting base, for M6 screw locking, salt-water-resistant aluminum, with 2 x M40 thread, without surface coating

Commercial data

Item number	1408973
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	BF58
Product key	BF7AAA
Catalog page	Page 524 (C-4-2013)
GTIN	4046356583626
Weight per piece (including packing)	441.3 g
Weight per piece (excluding packing)	441.3 g
Customs tariff number	85389099
Country of origin	CN

HC-ADV-B24-SHFH-2STM40-EEE - Housing



1408973

<https://www.phoenixcontact.com/us/products/1408973>

Technical data

Notes

General	For contact inserts HC-B24, BB46, D64, DD104, M, K
---------	--

Product properties

Product type	Housing with screw locking
Housing type	Box mounting bases
Application	Offshore
Type	B24
No. of cable outlets	2
Type of the screw connection	2x M40
Shielded	yes
Cable outlet	lateral
Pg screw connection	none

Dimensions

Dimensional drawing	
Width	45 mm
Height	72 mm
Length	152 mm

Material specifications

Housing material	Die-cast aluminum, corrosion resistant
Housing surface material	uncoated

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP66
	IP68 (0.2 bar/24 h)
	IP69K
Enclosure rating (NEMA)	4 (NEMA 250)
	4X (NEMA 250)
	6P (NEMA 250)
	12 (NEMA 250)
Impact strength	IK09
Ambient temperature (operation)	-40 °C ... 125 °C

Mechanical properties

HC-ADV-B24-SHFH-2STM40-EEE - Housing



1408973

<https://www.phoenixcontact.com/us/products/1408973>

Mechanical data

Type of the screw connection	2x M40
Locking type	Nut

Mounting

Assembly note	To ensure optimum shielding, any insulating powder coating must be removed from the housing support area on the control cabinet panel
---------------	---

HC-ADV-B24-SHFH-2STM40-EEE - Housing


1408973

<https://www.phoenixcontact.com/us/products/1408973>



Drawings

Dimensional drawing

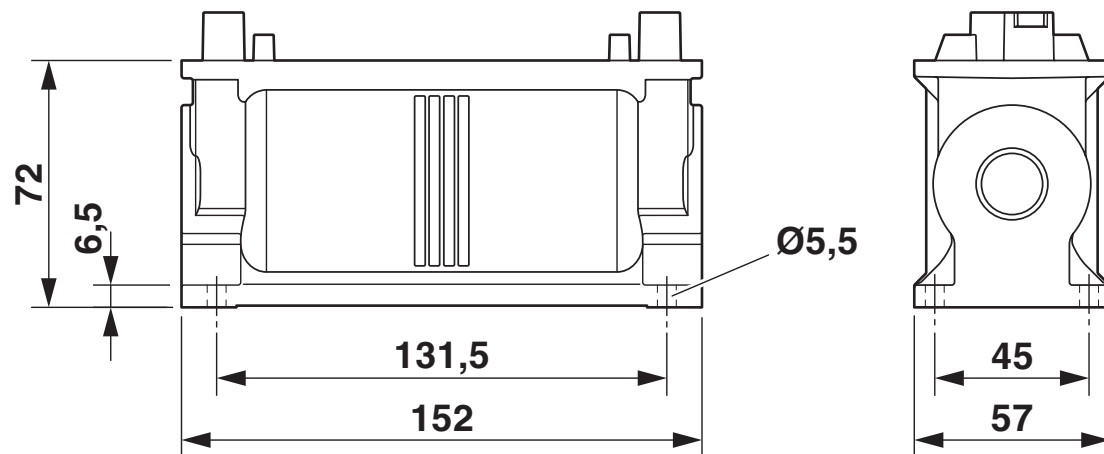

Dimensional drawing

HC-ADV-B24-SHFH-2STM40-EEE - Housing



1408973

<https://www.phoenixcontact.com/us/products/1408973>

Classifications

ECLASS

ECLASS-11.0	27440202
ECLASS-13.0	27440202

HC-ADV-B24-SHFH-2STM40-EEE - Housing



1408973

<https://www.phoenixcontact.com/us/products/1408973>

Environmental product compliance

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

HC-ADV-B24-SHFH-2STM40-EEE - Housing



1408973

<https://www.phoenixcontact.com/us/products/1408973>

Accessories

HC-B 24-TMS-SD-IP65 - Protective cover

1690804

<https://www.phoenixcontact.com/us/products/1690804>



HEAVYCON ADVANCE B24 IP65 protective cover, for panel mounting side, with screw locking, with retaining cord, diameter of retaining cord eyelet: 3 mm

HC-B 24-TMS-SD-IP50 - Protective cover

1690765

<https://www.phoenixcontact.com/us/products/1690765>



Protective cover B24, with clip locking, protective cover material: PA, height: 31.2 mm, seal: no, with lanyard

HC-ADV-B24-SHFH-2STM40-EEE - Housing

1408973

<https://www.phoenixcontact.com/us/products/1408973>



G-INS-M40-M68N-PNES-GY - Cable gland

1411128

<https://www.phoenixcontact.com/us/products/1411128>



Cable gland, material for screw connection: PA, application: Standard, external cable diameter 19 mm ... 28 mm, shielding: no, connecting thread: M40 x 1.5, color: silver-grey RAL 7001

G-INS-M40-M68N-PNES-BK - Cable gland

1411137

<https://www.phoenixcontact.com/us/products/1411137>



Cable gland, material for screw connection: PA, application: Standard, external cable diameter 19 mm ... 28 mm, shielding: no, connecting thread: M40 x 1.5, color: jet black RAL 9005

HC-ADV-B24-SHFH-2STM40-EEE - Housing

1408973

<https://www.phoenixcontact.com/us/products/1408973>



G-INS-M40-M68N-NNES-S - Cable gland

1411167

<https://www.phoenixcontact.com/us/products/1411167>



Cable gland, material for screw connection: Brass, nickel-plated, application: Standard, external cable diameter 19 mm ... 28 mm, shielding: no, connecting thread: M40 x 1.5, color: silver, with O-ring

HC-M-KV-M40(27-34) - Cable gland

1607729

<https://www.phoenixcontact.com/us/products/1607729>



Metal screw connection up to 5 bar, thread length: 8 mm, cable diameter: 27 ... 34 mm, WAF 50, screw connection: M40

HC-ADV-B24-SHFH-2STM40-EEE - Housing

1408973

<https://www.phoenixcontact.com/us/products/1408973>



G-INSEC-M40-M68N-NCRS-S - Cable gland

1411192

<https://www.phoenixcontact.com/us/products/1411192>



Cable gland, material for screw connection: Brass, nickel-plated, application: EMC, external cable diameter 19 mm ... 27 mm, shielding: yes, connecting thread: M40 x 1.5, color: silver, with O-ring

HC-M-KV-Z-M40 - Cable gland

1646175

<https://www.phoenixcontact.com/us/products/1646175>



Metal screw connection with strain relief clamp, thread length: 8 mm, cable sealing area: 24 - 33 mm, clamping area: 26 - 36 mm, SW 50, screw connection: M40

HC-ADV-B24-SHFH-2STM40-EEE - Housing

1408973

<https://www.phoenixcontact.com/us/products/1408973>



REDUC-M-KV-M40/M32 - Reducing adapter

1647640

<https://www.phoenixcontact.com/us/products/1647640>

Reducing adapter, connecting thread: M40 x 1.5, color: silver, with O-ring



HC-M-BS-M40 - Screw plug

1645875

<https://www.phoenixcontact.com/us/products/1645875>

Screw plug, material for screw connection: Brass, nickel-plated, connecting thread: M40 x 1.5, color: silver



Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com