

# Product data sheet

Specifications



## analog input module Modicon Quantum - 8 I multirange

140ACI03000

⚠ Discontinued on: Jan 15, 2023

⚠ To be end-of-service on: Dec 31, 2030

⚠ Discontinued - Service only

Product availability: Non-Stock - Not normally stocked in distribution facility

### Main

Range Of Product	Modicon Quantum automation platform
Product Or Component Type	Analogue input module
Type Of Filter	Single pole low pass - 3 dB at 15 Hz +/- 20 %

### Complementary

Analogue Input Number	8
Input Type	Differential
Addressing Requirement	9 input words
Analogue Input Resolution	12 bits
Linear Measuring Range	1...5 V 4...20 mA
Absolute Maximum Input	50 V DC 25 mA
Input Impedance	250 Ohm current +/- 0.01 % > 20 MOhm voltage
Absolute Accuracy Error	+/- 0.05 % of full scale +/- 0.1 % of full scale maximum
Linearity Error	+/- 0.04 %
Accuracy Drift According To Temperature	+/- 0.0025 % of full scale/°C <= 0.005 % of full scale/°C
Common Mode Rejection	> - 72 dB 60 Hz
Isolation Between Channels And Bus	1000 V DC 3000 V DC 60 s
Isolation Between Channels	30 V DC
Update Time	5 ms
Fault Type	Broken wire 4...20 mA Undervoltage range 1...5 V
Marking	CE
Local Signalling	for bus communication is present (Active) 1 LED (green) for external fault 1 LED (red) for channel is turned on 8 LEDs (green) for channel fault 8 LEDs (red)
Bus Current Requirement	240 mA
Power Dissipation In W	2 W

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Module Format	Standard
Net Weight	0.66 lb(US) (0.3 kg)

## Environment

Standards	UL 508 CSA C22.2 No 142
Product Certifications	FM Class 1 Division 2 cUL
Resistance To Electrostatic Discharge	4 kV contact IEC 801-2 8 kV on air IEC 801-2
Resistance To Electromagnetic Fields	9.14 V/m (10 V/m) 80...1000 MHz IEC 801-3
Ambient Air Temperature For Operation	32...140 °F (0...60 °C)
Ambient Air Temperature For Storage	-40...185 °F (-40...85 °C)
Relative Humidity	95 % without condensation
Operating Altitude	<= 16404.2 ft (5000 m)

## Ordering and shipping details

Category	US1PC2118155
Discount Schedule	PC21
Gtin	3595861126565
Returnability	Yes
Country Of Origin	US

## Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	1.89 in (4.8 cm)
Package 1 Width	6.50 in (16.5 cm)
Package 1 Length	12.20 in (31.0 cm)
Package 1 Weight	15.87 oz (450.0 g)

## Contractual warranty

Warranty	18 months
----------	-----------

# Sustainability



**Green Premium™ label** is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)

## Well-being performance

 Mercury Free	
 Rohs Exemption Information	<a href="#">Yes</a>
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
China Rohs Regulation	<a href="#">China RoHS declaration</a>
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
Circularity Profile	<a href="#">End of Life Information</a>
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="#">www.P65Warnings.ca.gov</a>

Dimensions Drawings

Racks for Modules Mounting

Dimensions of Modules and Racks




- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

Connections and Schema

Analog Input 8-Channel Unipolar Module

Wiring Diagram

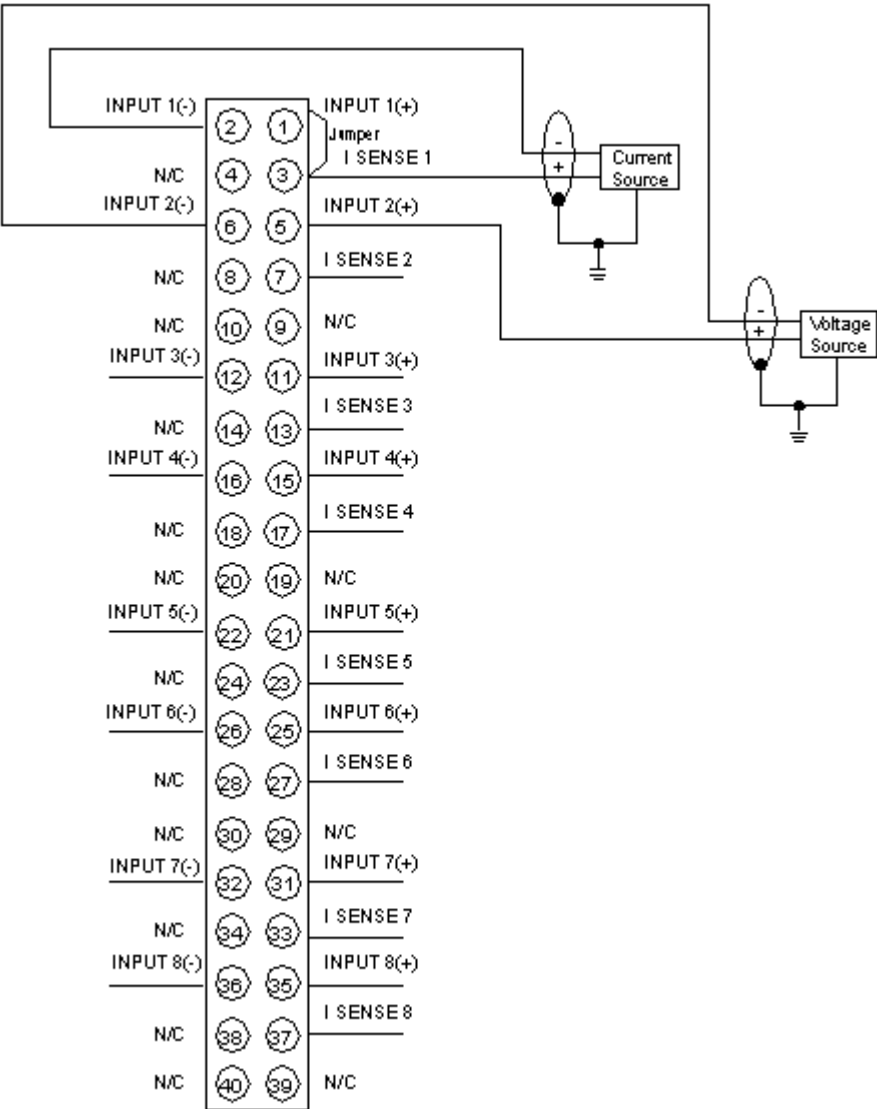

N/C Not Connected

The maximum channel to channel working voltage cannot exceed 30 Vdc.