

G-INSEC-M40-M68N-NCRS-S - Cable gland



1411192

<https://www.phoenixcontact.com/us/products/1411192>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable gland, material for screw connection: Brass, nickel-plated, external cable diameter 19 mm ... 27 mm, shielding: yes, connecting thread: M40 x 1.5, color: silver, with O-ring

Commercial data

Item number	1411192
Packing unit	5 pc
Minimum order quantity	5 pc
Sales key	BF68
Product key	BF7DBX
Catalog page	Page 690 (C-2-2019)
GTIN	4046356923231
Weight per piece (including packing)	175.96 g
Weight per piece (excluding packing)	172.04 g
Customs tariff number	74198090
Country of origin	DE

G-INSEC-M40-M68N-NCRS-S - Cable gland




1411192
<https://www.phoenixcontact.com/us/products/1411192>

Technical data

Product properties

Product type	Cable screw gland
No. of conductors	1
Manufacturer	Jacob
Manufacturer Designation	50.640 M/EMVD
Shielded	yes
Execution of the strain relief	A

Dimensions

Dimensional drawing	
Length	41 mm
Length of the connecting thread	8 mm
Hole diameter	40.1 mm ... 40.3 mm
Wrench size, union nut	43 mm
Wrench size, support	43 mm
Hexagon angular dimension	46 mm
Thread type connection side	M40 x 1.5
Thread pitch	1.5 mm

Material specifications

Color	Brass
Material Compression ring	PA 6
Seal material O-ring	Perbunan
Seal material Cable seal	CR/NBR
Material for screw connection	Brass, nickel-plated

Cable/line

External cable diameter (Cable 1)	19 mm ... 27 mm
Halogen-free	no

Characteristics

Category of shock impact	7
Design, Strain relief	A

Environmental and real-life conditions

Ambient conditions	
Degree of protection	IP68 (5 bar, 30 minutes)

G-INSEC-M40-M68N-NCRS-S - Cable gland



1411192

<https://www.phoenixcontact.com/us/products/1411192>

Ambient temperature (operation)	-40 °C ... 100 °C (static)
---------------------------------	----------------------------

Mounting

Assembly instructions	<p>Method 1</p> <p>Cut the outer sheath, but do not remove it. Feed the cable through the screw connection and then remove the outer sheath. Now pull the cable back until the connection is established between the cable shield and the contact spring.</p> <p>Method 2</p> <p>Push the braided shield back around 15 ... 20 mm over the outer sheath. Insert the cables into the screw connection until the connection is established between the cable shield and the contact spring.</p>
-----------------------	---


G-INSEC-M40-M68N-NCRS-S - Cable gland

1411192

<https://www.phoenixcontact.com/us/products/1411192>


Drawings

Dimensional drawing

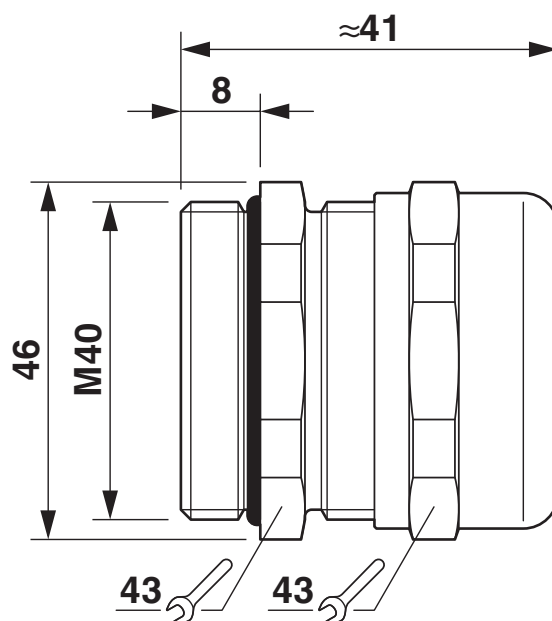

Dimensional drawing

Functional drawing

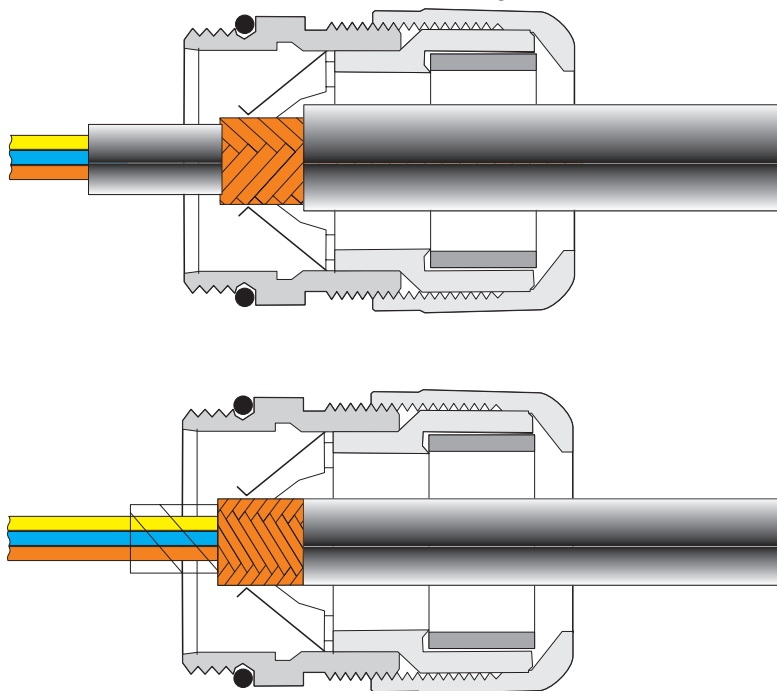

See assembly instruction

G-INSEC-M40-M68N-NCRS-S - Cable gland




1411192


<https://www.phoenixcontact.com/us/products/1411192>

Approvals


To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1411192>




cUL Recognized
Approval ID: QCRV8.E140310



UL Recognized
Approval ID: QCRV2.E140310



UL Listed
Approval ID: QCRV.E140310



cUL Listed
Approval ID: QCRV7.E140310

cULus Recognized

cULus Listed

G-INSEC-M40-M68N-NCRS-S - Cable gland



1411192

<https://www.phoenixcontact.com/us/products/1411192>

Classifications

ECLASS

ECLASS-11.0	27144432
ECLASS-12.0	27140801
ECLASS-13.0	27140801

ETIM

ETIM 9.0	EC000441
----------	----------

UNSPSC

UNSPSC 21.0	39121300
-------------	----------

Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

G-INSEC-M40-M68N-NCRS-S - Cable gland

1411192

<https://www.phoenixcontact.com/us/products/1411192>



Accessories

A-INLE-M40-N-S - EMC nut

1411272

<https://www.phoenixcontact.com/us/products/1411272>

EMC nut, for threads M40 x 1.5, color: silver



SEALING PLUG 25X30 RD - Closing cap

1421863

<https://www.phoenixcontact.com/us/products/1421863>

Closing cap, color: red



Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA

586 Fulling Mill Road

Middletown, PA 17057, United States

(+717) 944-1300

info@phoenixcon.com