

# HC-EVO-D15-BWS-PLR-BK - Housing



1411336

<https://www.phoenixcontact.com/sg/products/1411336>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Panel mounting base D15, with single locking latch, material: PA, height: 26 mm, cable gland: none, Standard, with flat gasket

## Your advantages

- Lower costs than metal version
- Low weight
- Lower risk of condensation

## Commercial data

Item number	1411336
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	*****
Product key	BF7APN
Catalog page	Page 526 (C-2-2019)
GTIN	4046356929080
Weight per piece (including packing)	47.5 g
Weight per piece (excluding packing)	46.3 g
Customs tariff number	85389099
Country of origin	PL

# HC-EVO-D15-BWS-PLR-BK - Housing



1411336

<https://www.phoenixcontact.com/sg/products/1411336>

## Technical data

### Notes

General	For contact inserts HC-D15, A10
---------	---------------------------------


### Product properties

Product type	Housing with locking latch
Housing type	Panel mounting base
Product family	HC-EVO-D
Application	Standard
Type	D15
Pg screw connection	none

### Data management status

Article revision	02
------------------	----

### Dimensions

Dimensional drawing	
Width	39 mm
Height	26 mm
Length	82 mm
Drill hole distance, horizontal	70 mm
Drill hole distance, vertical	17.5 mm
Hole diameter	3.3 mm

### Installation dimensions

Width of the assembly cutout	24 mm
Length of the assembly cutout	58 mm

### Material specifications

Flammability rating according to UL 94	V0 (Housing)
	V0 (Interlock)
Seal material	NBR
Housing material	PA
Locking latch material	PA

### Mechanical properties

#### Mechanical data

Locking type	Latch
--------------	-------

### Connection data

# HC-EVO-D15-BWS-PLR-BK - Housing



1411336

<https://www.phoenixcontact.com/sg/products/1411336>


Tightening torque	0.5 Nm ... 0.8 Nm (For M3 mounting screws on the panel-mount base)
-------------------	--

## Environmental and real-life conditions

Ambient conditions	
Degree of protection	IP66
Enclosure rating (NEMA)	12 (UL 50e)
Impact strength	IK08
Ambient temperature (operation)	-40 °C ... 125 °C


## Drawings

Dimensional drawing

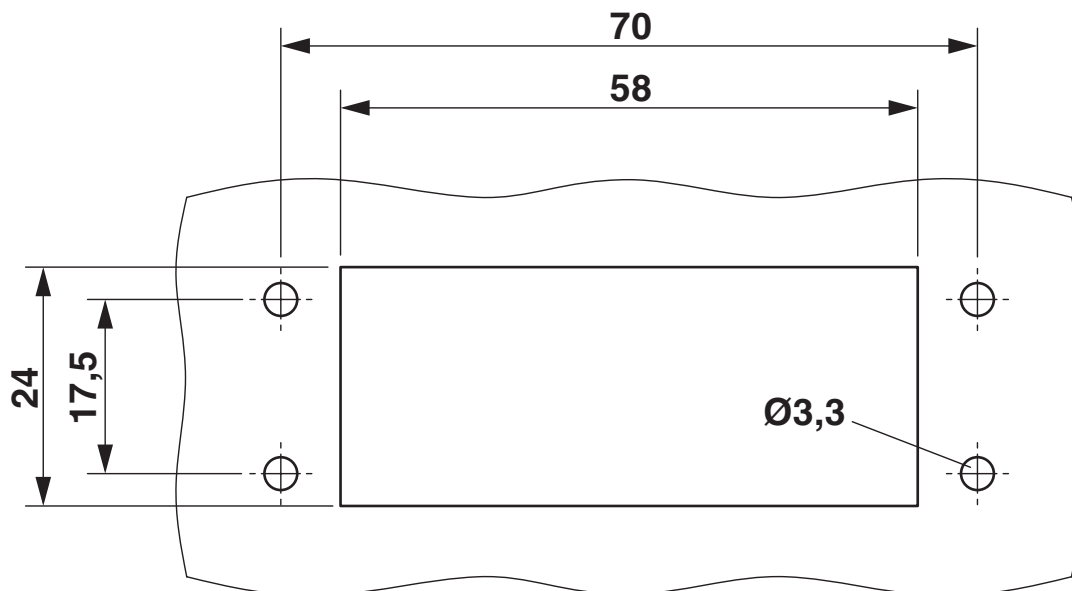

Mounting cutout

Dimensional drawing

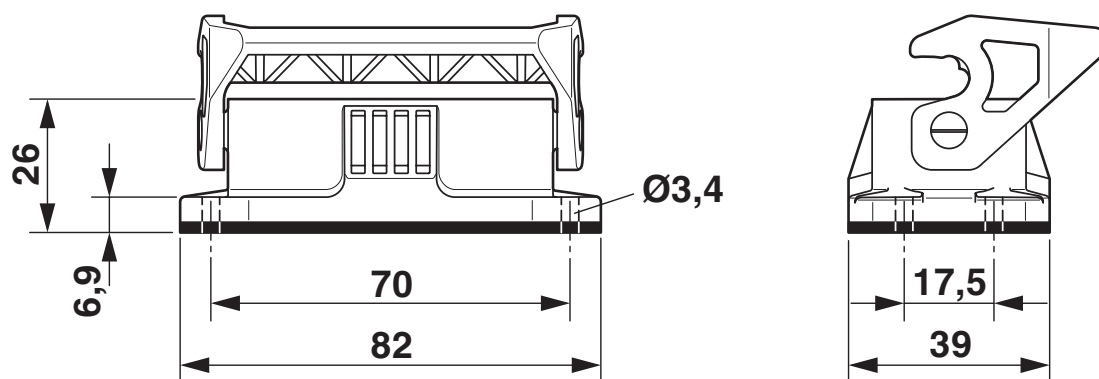

Dimensional drawing

# HC-EVO-D15-BWS-PLR-BK - Housing



1411336

<https://www.phoenixcontact.com/sg/products/1411336>

## Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sg/products/1411336>

### DNV

Approval ID: TAE000037S



### EAC

Approval ID: RU C-DE.BL08.B.00511

# HC-EVO-D15-BWS-PLR-BK - Housing



1411336

<https://www.phoenixcontact.com/sg/products/1411336>

## Classifications

### ECLASS

ECLASS-11.0	27440202
ECLASS-12.0	27440202
ECLASS-13.0	27440202

### ETIM

ETIM 9.0	EC000437
----------	----------

### UNSPSC

UNSPSC 21.0	31261500
-------------	----------

# HC-EVO-D15-BWS-PLR-BK - Housing



1411336  
<https://www.phoenixcontact.com/sg/products/1411336>

## Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.  
105 Eunos Avenue 3, #04-00  
Singapore 409836  
+65 6228 4900  
[marketing@phoenixcontact.com.sg](mailto:marketing@phoenixcontact.com.sg)