#### 1411439

https://www.phoenixcontact.com/nz/products/1411439

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



EVO EMC cable gland with bayonet locking, B series, size M20, cable diameter: 9 ... 13 mm

## Commercial data

Item number	1411439
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF7APM
Product key	BF7APM
Catalog page	Page 605 (C-2-2019)
GTIN	4046356932370
Weight per piece (including packing)	75.9 g
Weight per piece (excluding packing)	75.9 g
Country of origin	DE

PHENIX

1411439

https://www.phoenixcontact.com/nz/products/1411439



## Technical data

#### **Product properties**

Product type	Cable gland with bayonet locking
Application	EMC
No. of conductors	1
Type of the screw connection	M20
Shielded	yes

#### Dimensions

Dimensional drawing	
Width	54 mm
Height	54.8 mm
Depth	54.8 mm
Wrench size, union nut	22 mm

#### Material specifications

Color	aluminum
Material Pressure screw	Brass, nickel-plated
Seal material O-ring	NBR
Seal material Cable seal	NBR
Material for screw connection	Aluminum
Housing material	Die-cast aluminum, corrosion resistant

#### Cable/line

External cable diameter (Cable 1)	9 mm 12 mm
Tightening torque, union nut	7.50 Nm

#### Mechanical properties

#### Mechanical data

Type of the screw connection	M20
------------------------------	-----

#### Environmental and real-life conditions

Ambient conditions

Degree of protection	IP66
	IP67
Enclosure rating (NEMA)	4 (UL 50e)
	4X (UL 50e)
	12 (UL 50e)



#### 1411439

https://www.phoenixcontact.com/nz/products/1411439




Ambient temperature (operation)

-40 °C ... 125 °C (static)

1411439

https://www.phoenixcontact.com/nz/products/1411439

## Drawings

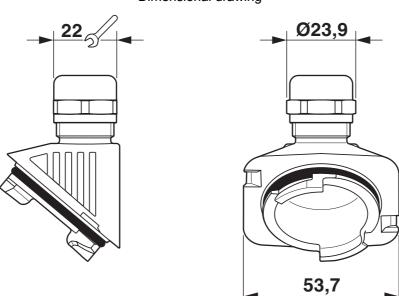

Dimensional drawing

## Dimensional drawing

PHŒNIX

1411439

https://www.phoenixcontact.com/nz/products/1411439

# 

## Approvals

🌣 To download certificates, visit the product detail page: https://www.phoenixcontact.com/nz/products/1411439

<b>LR</b> :	CUL Recognized Approval ID: E255026
<b>7</b>	UL Recognized Approval ID: E255026
ERC	EAC Approval ID: RU C-DE.AI30.B.01102
ERC	EAC-RoHS Approval ID: RU D-DE.HB35.B.00387
cL	JLus Recognized



1411439

https://www.phoenixcontact.com/nz/products/1411439




## Classifications

#### ECLASS

ECLASS-12.0 27140801	ECLASS-11.0	27144432
ECLASS-13.0 27140801	ECLASS-12.0	27140801
	ECLASS-13.0	27140801

#### ETIM

	ETIM 9.0	EC000441
U	NSPSC	
	UNSPSC 21.0	39121300



1411439

https://www.phoenixcontact.com/nz/products/1411439



## Environmental product compliance

REACh SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT Ltd Unit 15C, 906-930 Great South Road, Penrose Auckland 1061 0508 474 636 sales@phoenixcontact.co.nz