

1411653

https://www.phoenixcontact.com/us/products/1411653

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector rear mounting, Universal, 3-position, Pin, straight, M12-Standard, coding: S, on free cable end, Rear mounting, M16 x 1.5, Individual wires, cable length: 0.5 m,  $1.31 \text{ mm}^2$ , UL/cUL stranded hook-up wire, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1238907

#### Your advantages

- · For compact devices: transmit high power in a confined space
- · For industrial infrastructure applications
- · Protection against mismatching thanks to S-coding
- · Preassembled with litz wires for immediate use
- · Customer-specific assemblies and litz wire lengths available
- · Sealed on the litz wire side for optimum leak-tightness
- For high transmission safety: shield connection to the housing with optional EMC nut

#### Commercial data

Item number	1411653
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB24
Product key	ABQCGG
Catalog page	Page 281 (C-2-2019)
GTIN	4046356937405
Weight per piece (including packing)	54.3 g
Weight per piece (excluding packing)	43.7 g
Customs tariff number	85444290
Country of origin	DE



1411653

https://www.phoenixcontact.com/us/products/1411653

#### Technical data

#### Notes

General	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
General	Lock nut is included in the scope of delivery
General	Contact connection method: Crimp connection

#### Safety note

Sa	tety	no	te

WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.

- WARNING: Commission properly functioning products only.
   The products must be regularly inspected for damage.
   Decommission defective products immediately. Replace damaged products. Repairs are not possible.
- WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.
- The products are suitable for applications in plant, controller, and electrical device engineering.
- When operating the connectors in outdoor applications, they must be separately protected against environmental influences.
- Assembled products may not be manipulated or improperly opened.
- Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).
- When using the product in direct connection with third-party manufacturers, the user is responsible.
- For operating voltages > 50 V AC, conductive connector housings must be grounded
- Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.
- Observe the corresponding technical data. You will find information:
- o On the product
- o On the packing label
- o In the supplied documentation
- o Online at phoenixcontact.com/products under the product
- · Only use tools recommended by Phoenix Contact
- Use a protective cap to protect connectors that are not in use.



1411653

https://www.phoenixcontact.com/us/products/1411653

	The suitable accessories are available online in the accessory section of the product at phoenixcontact.com/products
	• Ensure that the protective or functional ground has been properly connected.
	VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector
	• The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).
Mounting	
Mounting type	Rear mounting M16 x 1.5 With flat nut
Assembly instructions	With flat nut
Product properties	
Product type	Circular connectors (device side)
Sensor type	Universal
Number of positions	3
No. of cable outlets	1
Shielded	no
Coding	S
Thread type	M12
Insulation characteristics	WIL
Overvoltage category	III
Degree of pollution	3
Degree of polition	
Material specifications	
Flammability rating according to UL 94	V0
Seal material	FKM
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA
Material for screw connection	CuZn alloy, nickel-plated
Conductor material	Bare Cu litz wires
Electrical properties	
Rated voltage in acc. with IEC 61076-2-101	630 V
Rated surge voltage	6 kV
Contact resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U <sub>N</sub>	630 V
Nominal current I <sub>N</sub>	16 A
Test voltage	6 kV



1411653

https://www.phoenixcontact.com/us/products/1411653

#### Connection data

#### Conductor connection

Connection method	Individual wires
Contact connection type	Pin
Conductor cross section	1.31 mm²
Tightening torque	3 Nm 4 Nm (M12 connector)

#### Mechanical properties

#### Mechanical data

Insertion/withdrawal cycles	> 100

#### Connector

#### Connection 1

Head design	Pin
Head cable outlet	straight
Head thread type	M12
Head locking type	Standard
Coding	S

#### Connection 2

Head design free	ee cable end
------------------	--------------

#### Cable/line

Cable length	0.5 m
Cable type	UL/cUL stranded hook-up wire
Signal type/category	Universal
Wire diameter incl. insulation	2.2 mm
Single wire, color	black 1, black 2, green/yellow
Cable cross section	1.31 mm²
Conductor material	Bare Cu litz wires
AWG signal line	16
Material wire insulation	mPPE
Halogen-free	yes
Flame resistance	in acc. to UL 1581 VW1
Ambient temperature (operation)	-40 °C 85 °C (without mechanical actuation)
	-40 °C 85 °C (without mechanical actuation)
	-25 °C 105 °C (Cable, flexible installation)

#### Environmental and real-life conditions

<b>Ambient</b>	conditions
AIIIDICIIL	COHUMICIONS

IDCC
1205



1411653

https://www.phoenixcontact.com/us/products/1411653


Degree of protection	IP67
	IP65/IP67
Ambient temperature (operation)	-25 °C 85 °C (Plug / socket)
	-40 °C 85 °C (without mechanical actuation)
	-25 °C 105 °C (Cable, flexible installation)
	-40 °C 105 °C (cable, fixed installation)
Standards and regulations  Flame resistance	in acc. to UL 1581 VW1
Traine resistance	III acc. to or 1301 VVVI
M12	
M12 Standard designation	M12 connector
	M12 connector IEC 61076-2-111



1411653


https://www.phoenixcontact.com/us/products/1411653

## Drawings

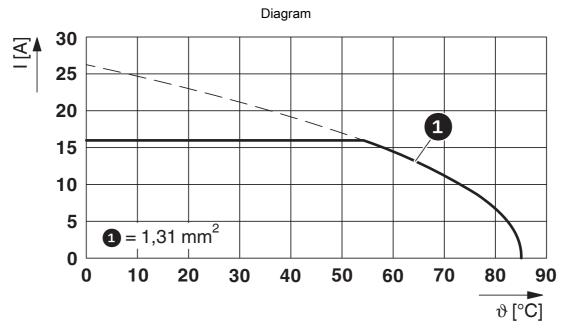

I = current strength, T = ambient temperature

Circuit diagram

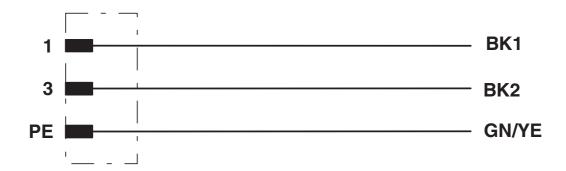




1411653

https://www.phoenixcontact.com/us/products/1411653

### Schematic diagram

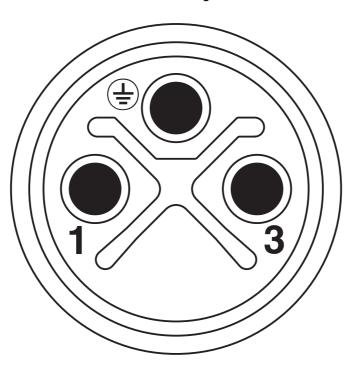

Pin assignment of M12 plug, 3-pos., S-coded, view of pin side



1411653

https://www.phoenixcontact.com/us/products/1411653

### Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1411653

<i>1</i> <b>.</b>	cUL Recognized Approval ID: E468743-20190917					
		Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>	
		600 V	12 A	16 - 16	-	

71	UL Recognized Approval ID: E468743-20190917					
		Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>	
		600 V	12 A	16 - 16	-	

cULus Recognized



1411653

https://www.phoenixcontact.com/us/products/1411653

### Classifications

#### **ECLASS**

201.00			
	ECLASS-11.0	27440102	
	ECLASS-12.0	27440116	
	ECLASS-13.0	27440116	
ETIM			
	ETIM 9.0	EC002635	
UNSPSC			
	UNSPSC 21.0	39121400	



1411653

https://www.phoenixcontact.com/us/products/1411653

## Environmental product compliance

REACh SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com