

# HC-STA-B10-CHWS-1TTP16-ELC-AL - Housing



1412587

<https://www.phoenixcontact.com/pc/products/1412587>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Coupling housings B10, with single locking latch, material: Die-cast aluminum, salt water resistant, cable outlets: 1, straight, 1x Pg16, height: 73 mm, cable gland: none, Standard

## Your advantages

- Good shielding in the event of electromagnetic interference

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 1412587             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Product key                          | BF7APB              |
| Catalog page                         | Page 607 (C-2-2019) |
| GTIN                                 | 4055626030623       |
| Weight per piece (including packing) | 211.4 g             |
| Weight per piece (excluding packing) | 211.4 g             |
| Customs tariff number                | 85389099            |
| Country of origin                    | PL                  |

# HC-STA-B10-CHWS-1TTP16-ELC-AL - Housing



1412587

<https://www.phoenixcontact.com/pc/products/1412587>

## Technical data

### Notes

|         |                                                  |
|---------|--------------------------------------------------|
| General | For contact inserts HC-B10, BB18, DD42, M, K8/24 |
|---------|--------------------------------------------------|


### Product properties

|                              |                            |
|------------------------------|----------------------------|
| Product type                 | Housing with locking latch |
| Housing type                 | Coupling housings          |
| Application                  | Standard                   |
| Type                         | B10                        |
| No. of cable outlets         | 1                          |
| Type of the screw connection | 1x Pg16                    |
| Type                         | Tall design                |
| Cable outlet                 | straight                   |
| Pg screw connection          | none                       |

### Data management status

|                  |    |
|------------------|----|
| Article revision | 02 |
|------------------|----|

### Dimensions

|                     |                                                                                      |
|---------------------|--------------------------------------------------------------------------------------|
| Dimensional drawing |  |
| Width               | 44 mm                                                                                |
| Height              | 73 mm                                                                                |
| Length              | 73 mm                                                                                |

### Material specifications

|                                        |                                         |
|----------------------------------------|-----------------------------------------|
| Flammability rating according to UL 94 | V0 (Interlock)                          |
| Seal material                          | NBR, conductive                         |
| Housing material                       | Die-cast aluminum, salt water resistant |
| Housing surface material               | uncoated                                |
| Locking latch material                 | PA                                      |

### Mechanical properties

#### Mechanical data

|                              |         |
|------------------------------|---------|
| Type of the screw connection | 1x Pg16 |
| Locking type                 | Latch   |

### Environmental and real-life conditions

#### Ambient conditions

# HC-STA-B10-CHWS-1TTP16-ELC-AL - Housing




1412587

<https://www.phoenixcontact.com/pc/products/1412587>

|                                 |                   |
|---------------------------------|-------------------|
| Degree of protection            | IP66              |
|                                 | IP67              |
| Enclosure rating (NEMA)         | 4 (UL 50e)        |
|                                 | 4X (UL 50e)       |
|                                 | 12 (UL 50e)       |
| Impact strength                 | IK08              |
| Ambient temperature (operation) | -40 °C ... 125 °C |

## Drawings

Dimensional drawing

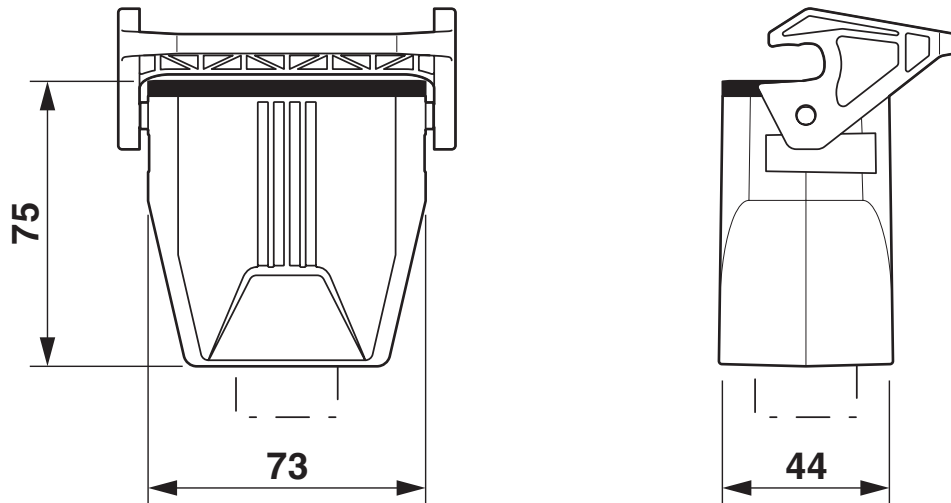

Dimensional drawing

# HC-STA-B10-CHWS-1TTP16-ELC-AL - Housing



1412587

<https://www.phoenixcontact.com/pc/products/1412587>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/1412587>

**DNV**

Approval ID: TAE000037S



**cUL Recognized**

Approval ID: E255026



**UL Recognized**

Approval ID: E255026



**EAC**

Approval ID: RU C-DE.AI30.B.01102



**EAC**

Approval ID: RU C-DE.BL08.B.00511

**cULus Recognized**

1412587

<https://www.phoenixcontact.com/pc/products/1412587>

Classifications

ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27440202 |
| ECLASS-12.0 | 27440202 |
| ECLASS-13.0 | 27440202 |

ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC000437 |
|----------|----------|

UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 31261500 |
|-------------|----------|

Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |